

POPULARSM SCIENCE^M

MONTHLY



MAR.

20¢


How We Save Torpedoed Seamen

PG.
84

Copyrighted material

**THIS COMPLETE, SIMPLE, PRACTICAL COURSE
FOR SELF-INSTRUCTION WILL QUICKLY GIVE YOU**

a complete mastery of
Mathematics

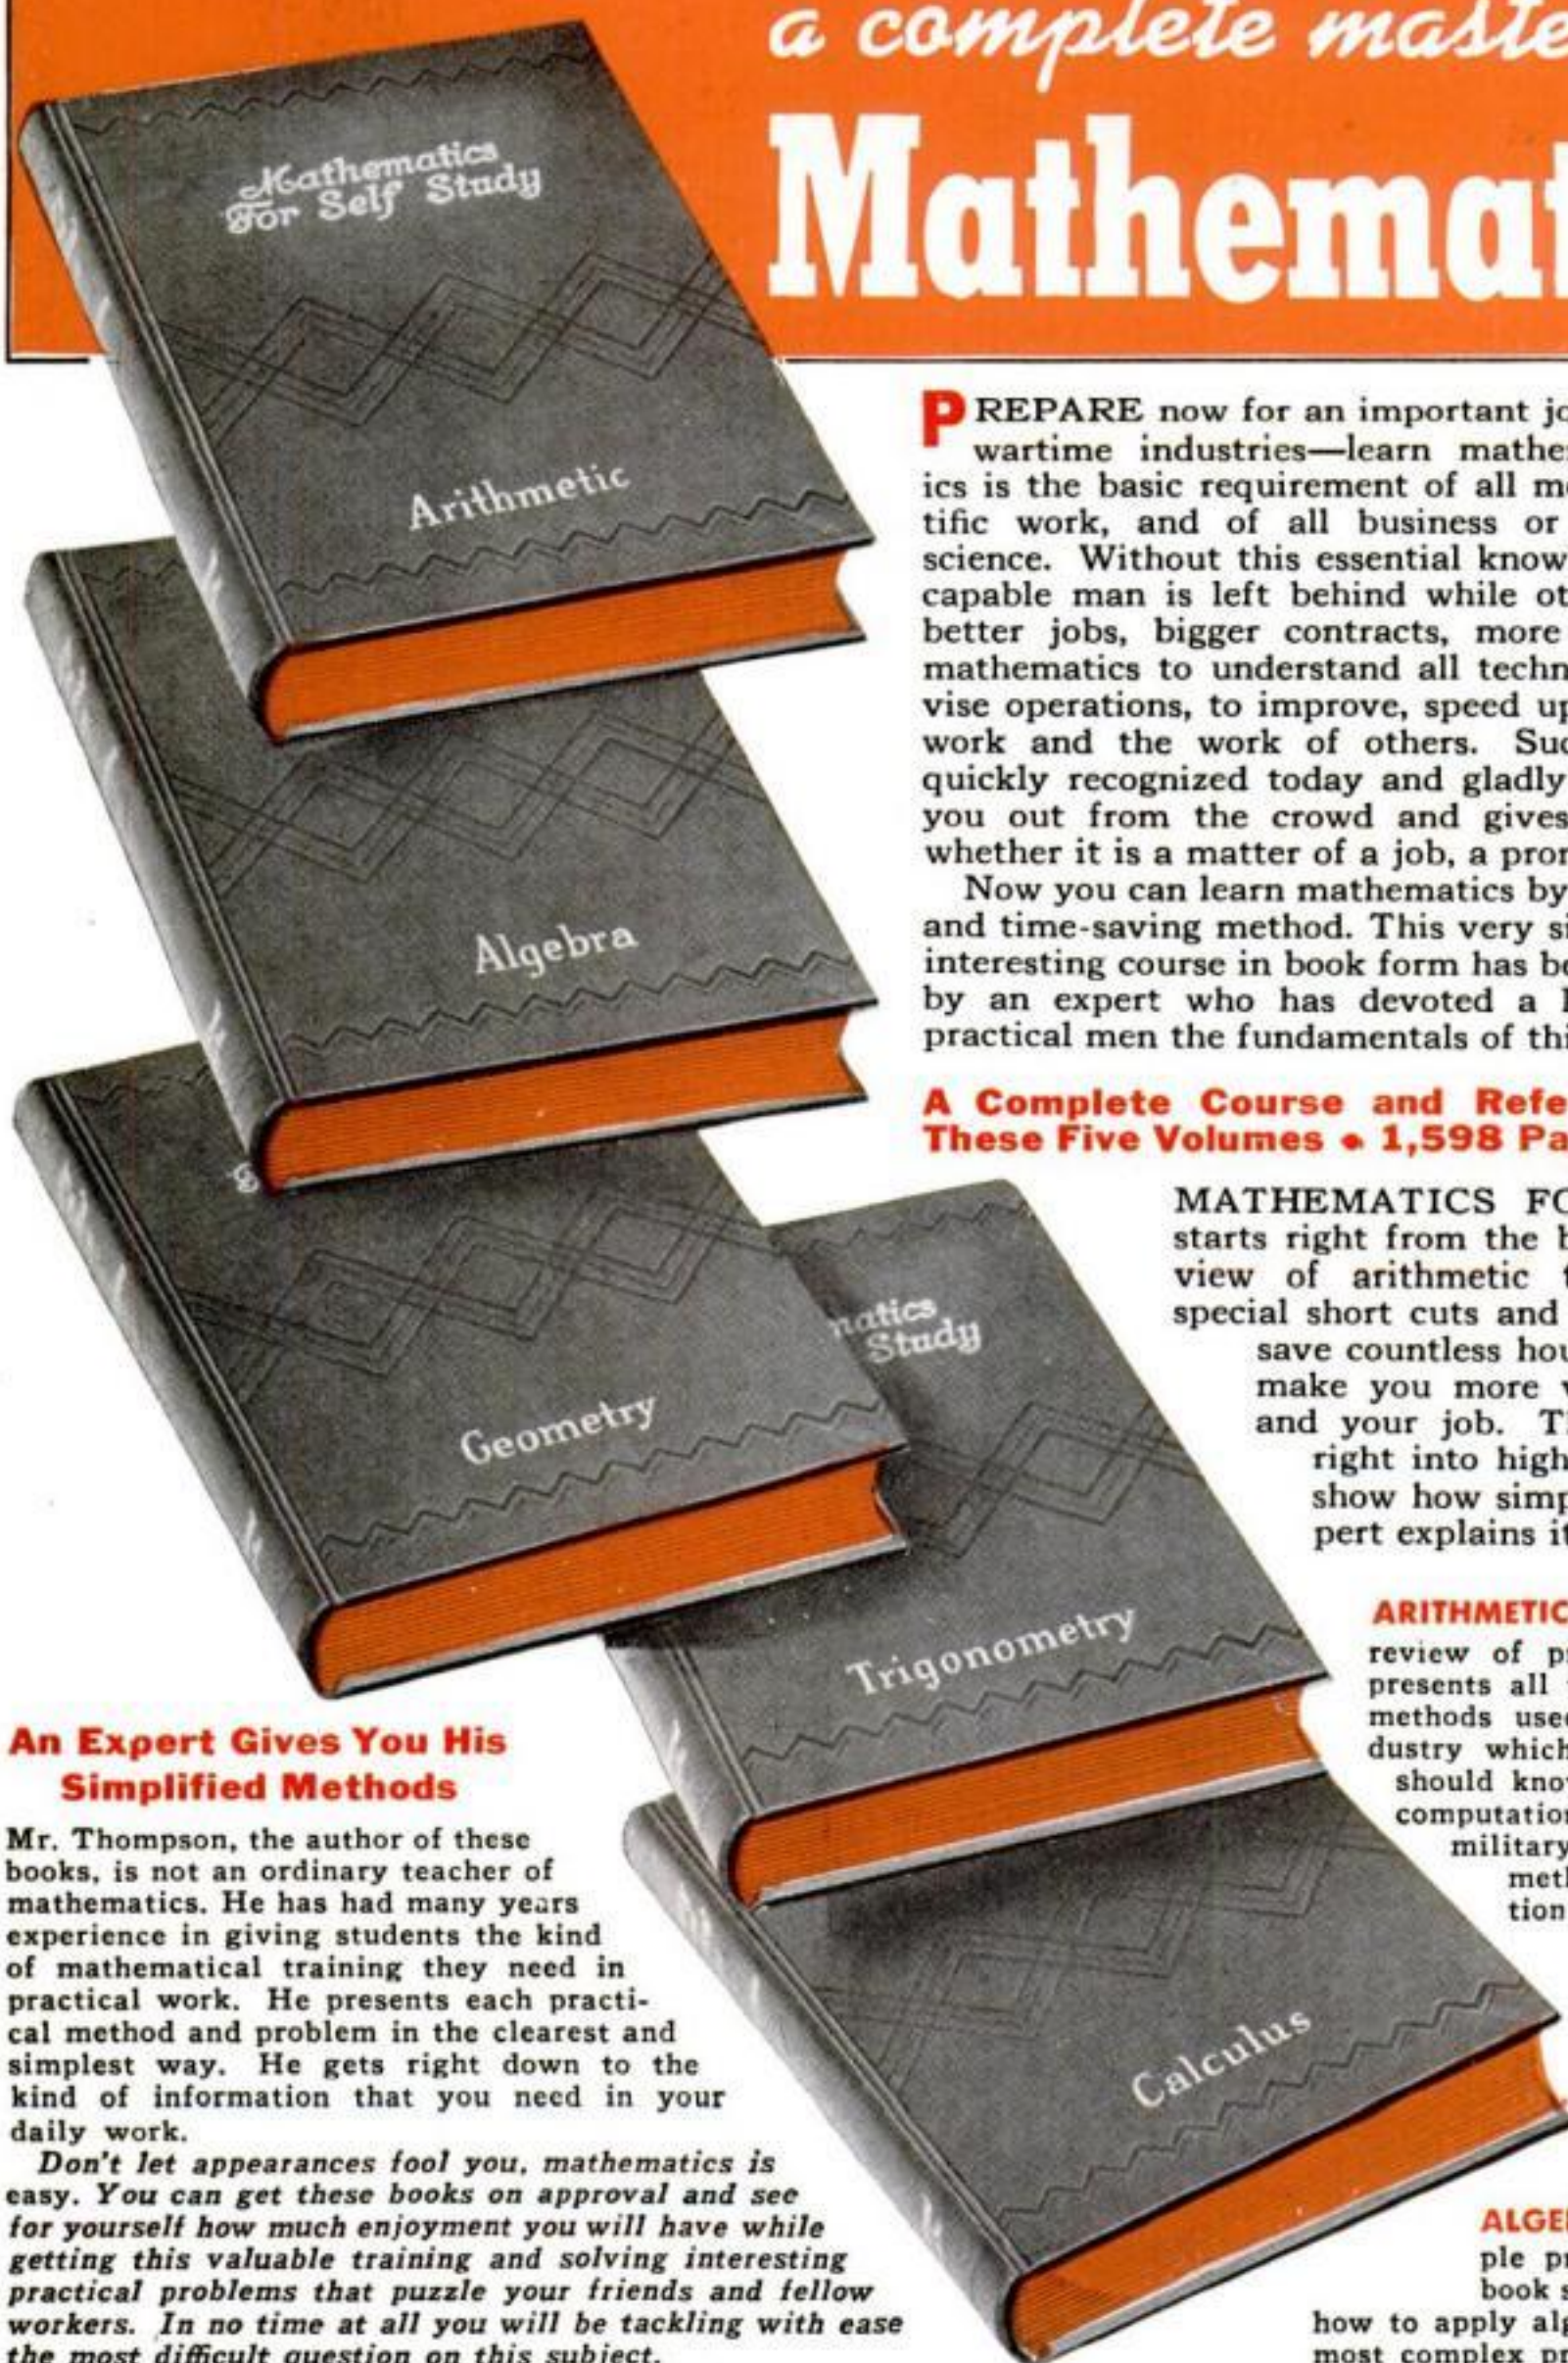

**An Expert Gives You His
Simplified Methods**

Mr. Thompson, the author of these books, is not an ordinary teacher of mathematics. He has had many years experience in giving students the kind of mathematical training they need in practical work. He presents each practical method and problem in the clearest and simplest way. He gets right down to the kind of information that you need in your daily work.

Don't let appearances fool you, mathematics is easy. You can get these books on approval and see for yourself how much enjoyment you will have while getting this valuable training and solving interesting practical problems that puzzle your friends and fellow workers. In no time at all you will be tackling with ease the most difficult question on this subject.

PREPARE now for an important job in America's busy wartime industries—learn mathematics. Mathematics is the basic requirement of all mechanical and scientific work, and of all business or industry based on science. Without this essential knowledge even the most capable man is left behind while others forge ahead to better jobs, bigger contracts, more money. You need mathematics to understand all technical work, to supervise operations, to improve, speed up and check on your work and the work of others. Such basic training is quickly recognized today and gladly paid for. It singles you out from the crowd and gives you an advantage whether it is a matter of a job, a promotion or a contract.

Now you can learn mathematics by an easy inexpensive and time-saving method. This very simple and extremely interesting course in book form has been prepared for you by an expert who has devoted a lifetime to teaching practical men the fundamentals of this important subject.

**A Complete Course and Reference Library in
These Five Volumes • 1,598 Pages • Illustrated**

MATHEMATICS FOR SELF STUDY starts right from the beginning with a review of arithmetic that gives you all special short cuts and trick problems that save countless hours of your time and make you more valuable to yourself and your job. Then these books go right into higher mathematics and show how simple it is when an expert explains it for you.

ARITHMETIC: Starting with a quick review of principles, this volume presents all the special calculation methods used in business and industry which every practical man should know. Fundamental in all computations in engineering, both military and civilian. Essential methods for rapid calculation such as is needed in firing guns, setting lathes, etc. Systems of measurement and their computation required in machine work. Hundreds of other applications to technical work.

ALGEBRA: Starting with simple practical problems, this book shows you, step by step, how to apply algebraic methods to the most complex problems. Shows how to
(Continued on next page)

MATHEMATICS IS THE INDISPENSABLE FOUNDATION KNOWLEDGE FOR TODAY'S NEW *technical & mechanical* **War Jobs**



THOUSANDS of new jobs are calling for trained men! Every industry is rapidly expanding to meet the needs of our gigantic wartime program. Trained mechanics and technicians are in urgent demand. In many lines there are more jobs than men prepared to fill them.

And in the best of these jobs, the jobs which offer the highest pay and the greatest assurance of steady employment, a knowledge of mathematics is required, because mathematics is the foundation of all technical work. Give yourself this basic preparation now by this quick, inexpensive home-study method—a complete mathematics course in five volumes.

MATHEMATICS for Self Study

by J. E. Thompson, B.S. in E.E., A.M., Dept. of Mathematics, Pratt Institute

(Continued from facing cover)

solve problems which are involved in all military and industrial work, relating to machines, engines, projectiles, ships, planes, etc. Logarithms and slide rule, and many other practical applications.

GEOMETRY: States clearly all needed facts about plane figures, circles, polygons, etc. Covers all the topics essential in drafting and engineering. It deals at length with angles, triangles, circles, and the many other geometric figures that are basic to engineering design. Sheet metal work, so important in airplane construction, is a direct application of these principles. So also is the laying out of ship hulls, which is the major activity in ship construction. The properties of circles and spheres explained in this volume also apply directly in navigation.

TRIGONOMETRY: This volume makes easy the principles of angles and triangles, shows you how to use tables that explain their functions. Practically every problem in machine work, land surveying, mechanics, astronomy, navigation and range finding is solved by methods of trigonometry. These methods are explained here in the most simple way with actual examples of calculations of height and distance as they are applied directly to the sighting of guns and the determination of the position of a ship at sea, the construction of buildings and fortifications, the cutting of gears, etc., etc. All necessary tables for making these computations are furnished in this book as they are in all the other volumes of this series.

CALCULUS: You will enjoy mastering calculus in this interesting new way and will find it will enable you to solve problems that can be solved in no other way. This branch of mathematics deals with rate problems. It is essential in computation involving objects moving with varying rates of speed. It also enables us to find the most efficient design for any kind of mechanism, engine, or moving vehicle. Typical problems included in this book are the calculation of the velocity with which a man supported by a parachute strikes the ground, the path of a bullet or shell, the work done by expanding gas or steam (which is applied directly in the design of rifles and cannon).

These are but a few of the hundreds of subjects simplified and explained in this complete reading course in mathematics.

Free Examination Coupon

D. Van Nostrand Co., 250 Fourth Ave.,
New York, N. Y.

Send me **MATHEMATICS FOR SELF STUDY** in 5 volumes. Within 10 days I will either return the books or send you \$2.95 as first payment and \$2.00 per month for three months until the total price of \$8.95, plus a few cents postage, is paid.

(If you send \$8.95 payment in full with this order, we will pay postage. Same return privilege.)

Name.....

Address.....

City and State.....

Reference.....

Address.....

☐ FOR FREE CATALOG of best books of practical instruction and technical information, check here.
POP. SCIENCE 3-43

Examine These Books FREE

Send no money now. The coupon brings you the 5 books for 10 days' trial. After 10 days return the books to us without obligation or send us the small down payment of \$2.95, balance in three monthly payments. Mail the coupon today. D. VAN NOSTRAND COMPANY, Publishers, 250 Fourth Avenue, New York, N. Y.

POPULAR SCIENCE

FOUNDED 1872

MONTHLY

VOL. 142 NO. 3

Mechanics & Handicraft

A TECHNICAL JOURNAL OF SCIENCE AND INDUSTRY

CONTENTS *for* MARCH, 1943

News

Hints for Lost Jungle Fighters.....	49
Microscopic Plants of the Arctic.....	56
Polarized Light Aids the Army.....	58
When Kaiser Builds a Ship.....	64
Health Exercises for War Workers.....	68
Miracle Bomber: the B-26.....	70
Science Changes Your Clothes.....	78
Cheating the Axis Torpedoes.....	84
Mystery Material of a Thousand Uses	90
Typical American Flyer.....	96
Studios on the Battlefield.....	108
Spotter's Guide for Cleaning Clothes..	116
Why America's Tanks Are Best.....	120

Home and Workshop

Projecting Black and Whites.....	138
Modern Kitchen Storage Units.....HW	8
Lengthening Leather's Life.....HW	16
Turning Work of Two Diameters.....HW	22
Using Circular-Saw Blades.....HW	32
Experimenting with Sulphur.....HW	41
Caring for Electric Motors.....HW	47
First Steps in Electronics.....HW	50
Condensation Damages Homes.....HW	61


Departments

Cover: Kodachrome by Robert F. Smith	
Our Readers Say.....	18

Automobiles

Putting a Stop to Brake Troubles.....	129
Useful Auto Hints.....	134
Gus Wilson's Model Garage.....	135

(Contents continued on page 4)

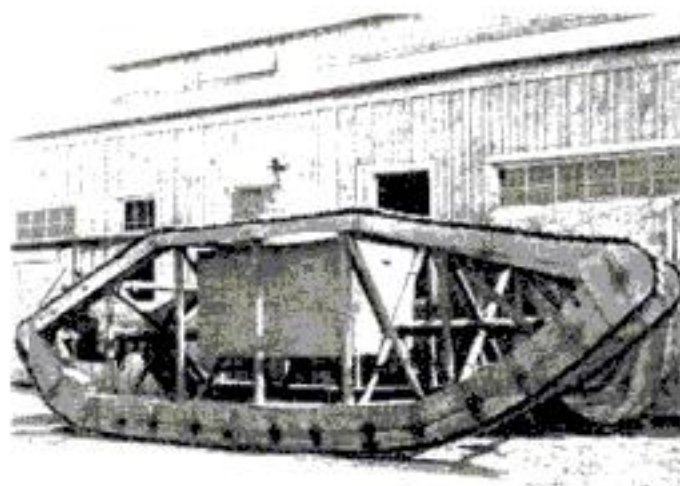

U. S. TANK? Yes, indeed! This mechanical monstrosity is one of the ancestors of the M-3's and M-4's that are now knocking the daylights out of Hitler's vaunted Panzer divisions. Appropriately called "The Skeleton," it was one of many experimental models built by our Ordnance experts near the end of the first World War. Freakish as it looks today, it marks a stage in the patient development work that has given us the best tanks in the world. See page 120.

EDITOR • • • • • Charles McLendon
HOME & WORKSHOP EDITOR Arthur Wakeling
ART EDITOR • • • • • Carsten Grande

EDITORIAL ASSOCIATES: Fred O. Newman, Alden P. Armagnac, B. T. Richards, Harry Samuels, Michele de Santis, Harry Walton, Don Romero, Bernard Wolfe, Peter A. Baumann.

ART ASSOCIATES: Stewart Rouse, Wayne Smith, Michael Cerniello.

PHOTOGRAPHY: William W. Morris, Robert F. Smith.

Published monthly at 353 Fourth Avenue, New York, N. Y., by Popular Science Publishing Co., Inc. Godfrey Hammond, President and Treasurer; R. C. Wilson, Raymond J. Brown, Vice-Presidents; F. W. Briggs, Secretary. Entered as second-class matter Dec. 28, 1918, at the Post Office at New York under the act of March 3, 1879; additional entry as second-class matter at Dayton, Ohio. Entered as second-class matter at the Post Office Department, Canada. Printed in U.S.A. Copyright, 1943, by Popular Science Publishing Co., Inc. All rights reserved in the United States, Great Britain, and in all countries participating in the International Copyright Convention and the Pan American Copyright Convention. Yearly subscriptions to United States and its possessions, \$2.00; Canada, \$2.50; foreign countries, excepting Canada, \$3.00. Subscribers must notify us of change of address four weeks in advance of the next publication date. Be sure to give both old and new address.



"Take it easy, Prince; we'll give you a run in London tonight!"

It's a short, short way to Tipperary as the Ferry Command flies today. It will be even shorter tomorrow.

For the hearts and hands now building planes to destroy our enemies will be turned to the creation of a new and better world.

If you could only sit down and talk to the men in the aviation division of B. F. Goodrich, your imagination would be stirred by the miracles which are going to take place after this war.

They'd be able to tell you about the weather five miles up and the fight they've been waging to tame it. They could tell you hair-raising stories of what ice did to planes before B. F. Goodrich De-Icers were developed.

They could tell you of a type of brake (called the B. F. Goodrich Expander Tube) which does wonders stopping the lightning-fast fighter planes we're building today, and they'd add, "We think your plane-of-

tomorrow will have this new kind of smooth-stopping brake."

They could show you tires used on bombers, like the Flying Fortress, that are taller than you are and can absorb the 30-ton shock of landing one of these giants. You'd recognize the name of these tires from your own driving experience, because it's "Silvertown."

These are only a few of more than 80 natural and synthetic rubber products which B. F. Goodrich is turning out to hasten the day of victory. They'll be here *after* victory, too . . . so the airliner you hop for Europe will be that much more comfortable—that much safer.



Here are some giant American cargo planes that are supplied with B. F. Goodrich equipment!



DOUGLAS B-19



MARTIN MARS





Contents [CONTINUED]

Automobiles

Giant Trailer Trucks.....	132
Dim-Out Headlight Hoods.....	132
Neglected Puncture Holes.....	132
Adapter for Oversize Tires.....	134
Removing Broken-Off Keys.....	134
Bottle-Feeding a Motor.....	134
Zero-Weather Priming	134

Aviation

Pup Tents for Army Flyers.....	54
Why Planes Leave Vapor Trails....	55
Truck Trailers Haul Planes.....	62
Floating Antiaircraft Fortress.....	63
"Sentinel" Liaison Plane.....	104
Underground Plane Factory.....	104

Facts and Ideas

Wired Rockets Guard Convoys.....	63
Power Houses Below the Sea.....	67
Army Command Boats.....	104
Nature's "Modern" War Weapons..	105
War Drafts Young Scientists.....	107
Fighting Explosive Incendiaries....	115

Inventions


Phantom Ships for Convoys.....	76
Oarlocks Row in Reverse.....	77
"Hurry Huts" for Fighters.....	77
Stitcher for Surgical Sutures.....	106
Direct-Reading Caliper.....	114
Hacksaw Changes Blades Easily....	114
Magnetic Holder for Welding.....	114

Photography

Projecting Black and Whites.....	138
Plastic Reel for Home Movies.....	143

(Contents continued on page 6)

IMPORTANT NOTICE: The contents of this magazine must not be reprinted without permission. The editors are not responsible for unsolicited contributions, and cannot guarantee the return of such material or insure against its loss. Contributions not accompanied by sufficient postage will not be returned. In presenting numerous stories of new products of applied science, Popular Science Monthly does not underwrite the business methods of the individuals or concerns producing them. To avoid liability for patent infringement, readers should investigate before making, using, or offering for sale any of the devices, machines, or processes described; Popular Science Monthly takes no responsibility. The use of Popular Science Monthly articles for stock-selling schemes is never authorized.

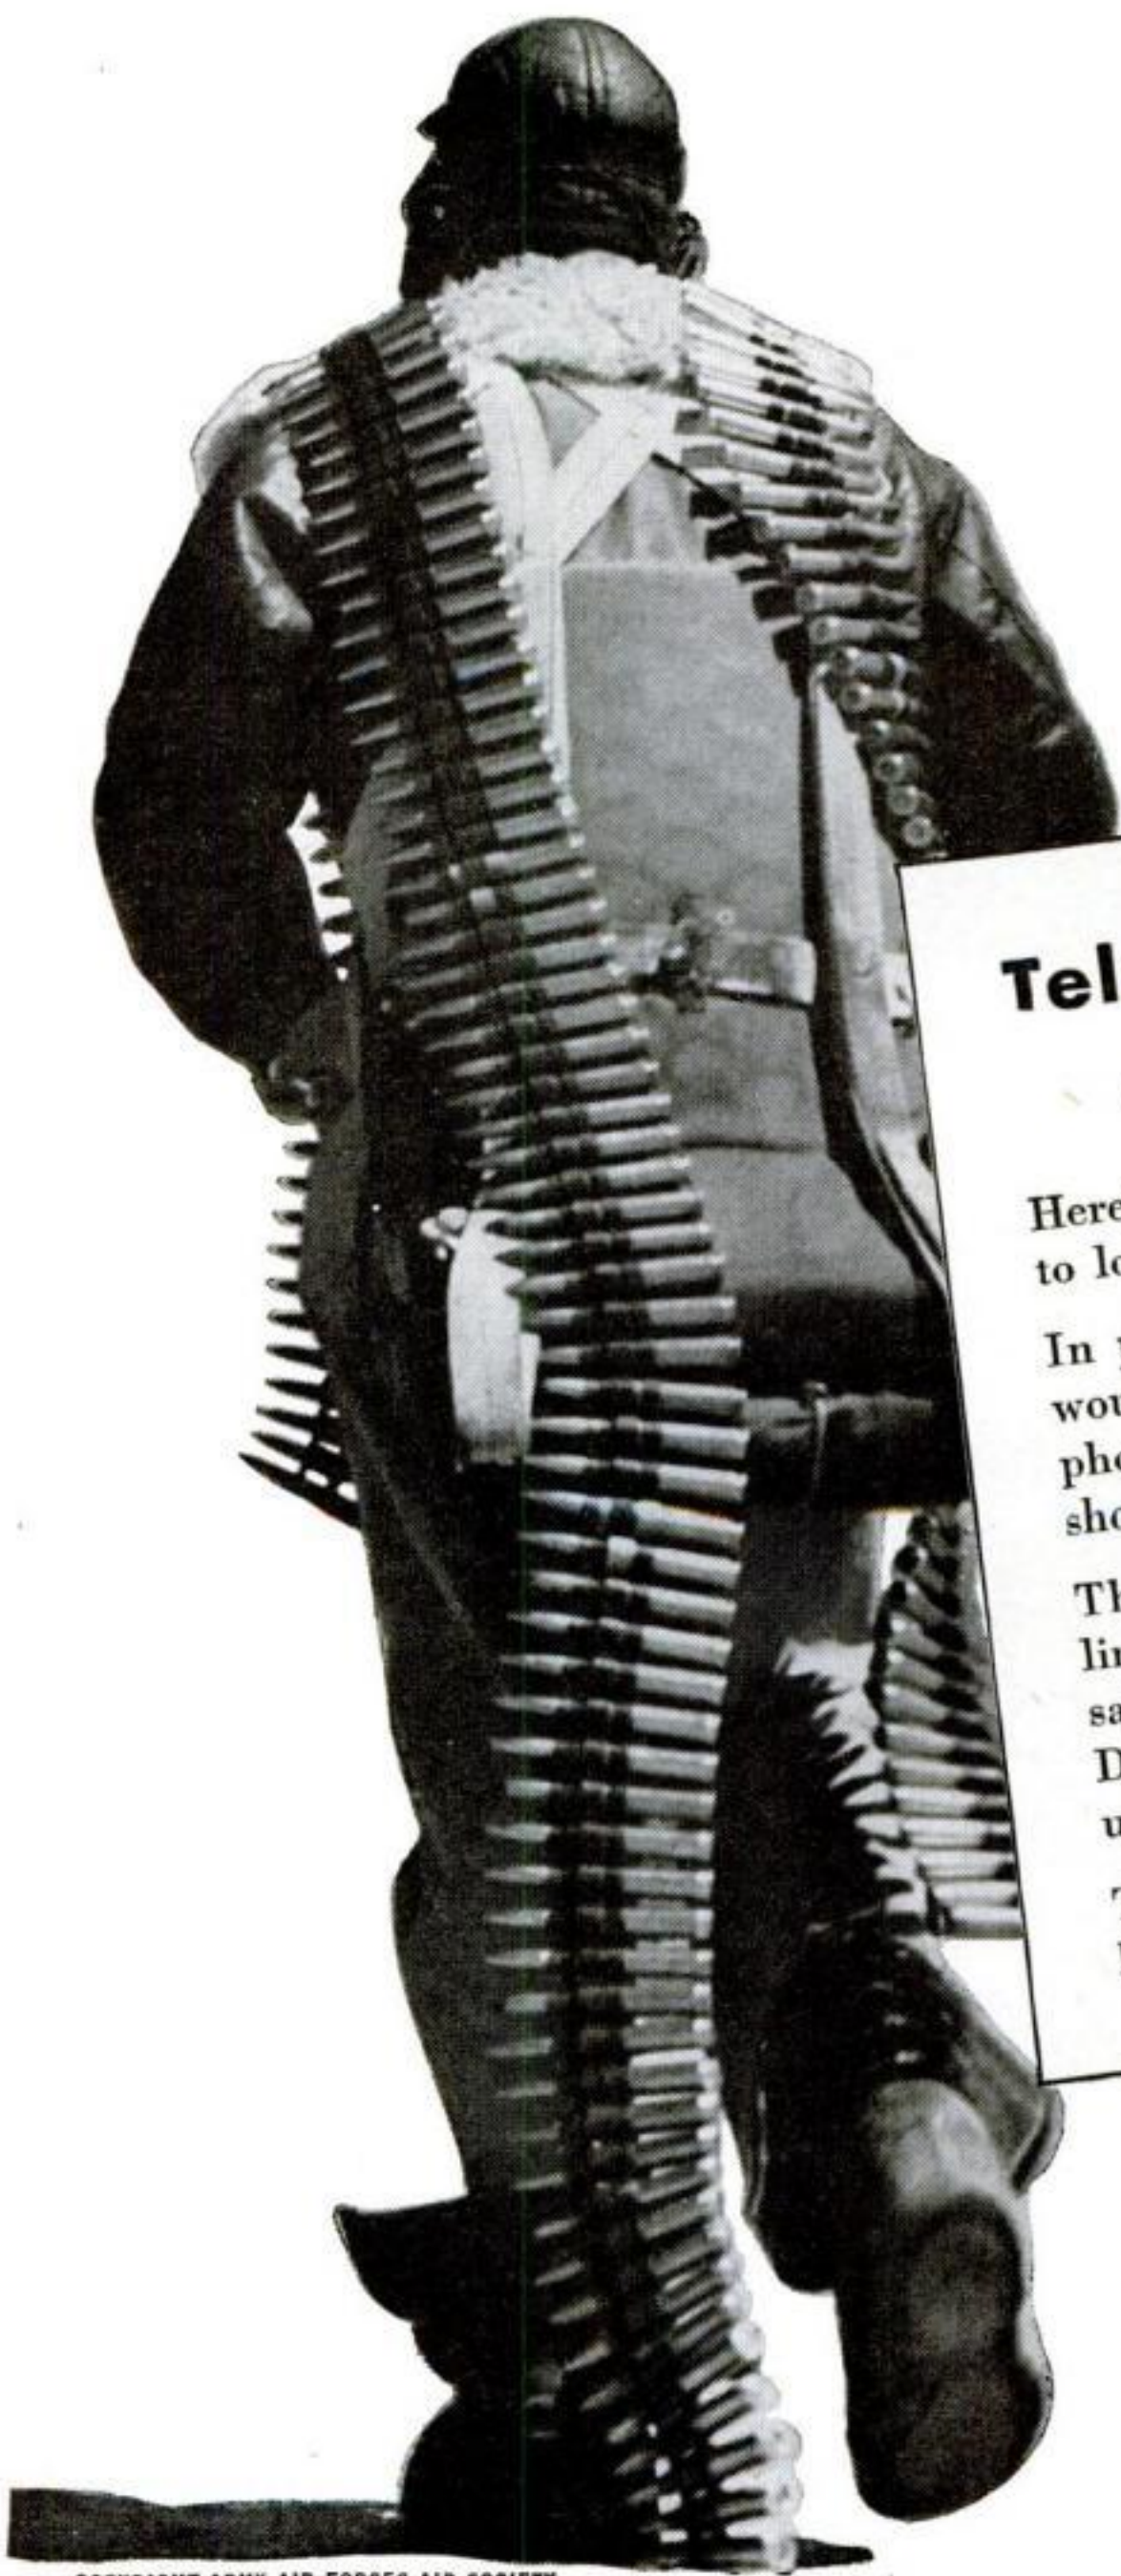

Telephone wire coming up

Here's a bomber-gunner hurrying to load his 50-calibre gun. . . .

In peace, a lot of that copper would have gone into new telephone lines. Now it's needed for shooting and winning the war.

That's why we can't build new lines right now. That's why we're saying—"Please don't place Long Distance calls to war-busy centers unless it's absolutely necessary."

Thanks for all your help and we hope you will keep remembering.

BELL TELEPHONE SYSTEM

**WAR CALLS
COME FIRST**



COPYRIGHT ARMY AIR FORCES AID SOCIETY

MARCH, 1943

Please mention POPULAR SCIENCE MONTHLY when writing to advertisers.

5

Copyrighted material

Contents [CONTINUED]

Handy Exposure-Meter Manual.....	143
New Triple-Purpose Projector.....	143
Pen Scoop for Photo Chemicals.....	143
Fluorescent Enlarger Lamp.....	144
Flash Guns Fit Standard Plugs.....	145
Box Used as Spotting Palette.....	145

Craftwork

Model Planes Without Balsa.....	HW 1
Ivy Holders from Wooden Bowl.....	HW 10
Modern Three-Shelved Mirror.....	HW 11
Victory Service Plaques.....	HW 12
Popcorn Cart with Four Scoops.....	HW 20
Cigarette Box of Clear Plastic.....	HW 28
Plastic Vase Holds Three Buds.....	HW 29
Memo Pad for Office or Home.....	HW 30
Signaling Two-Rail Layouts.....	HW 38

Electrical

Repairing Heating Elements.....	HW 21
Electric Soldering-Iron Stand.....	HW 21
Thermostat for Hot-Water Tank.....	HW 37
Home Electrical Experiments.....	HW 44
Caring for Electric Motors.....	HW 46
First Steps in Electronics.....	HW 50

Home Building

Bathtubs Built on the Job.....	HW 6
Clear Film Protects Walls.....	HW 6
Decorative Blackout Shades.....	HW 6
Door Stop Attached to Hinge.....	HW 6
Honeycomb-Grid Flush Doors.....	HW 7
Condensation Damages Homes.....	HW 61

Miscellaneous

Wooden Furniture Springs.....	HW 7
Lengthening Leather's Life.....	HW 16
Workers Paint Welding Masks.....	HW 31
Ice Trays Kept from Sticking.....	HW 36
Reinforcing Window Shades.....	HW 36
Tea Ball Aids in Using Garlic.....	HW 36
Wood Scraper for Cleaning Pots.....	HW 36
Hints on Laundering Sweaters.....	HW 36
Paraffin Lessens Shoe Friction.....	HW 37
Repairing Fountain-Pen Threads.....	HW 37
Experimenting with Sulphur.....	HW 41
Can You Name These Knives?.....	HW 55
Fire-Cart Cover Is Stretcher.....	HW 57
Making Your Iron Last Longer.....	HW 58
All-Glass Preserving Jars.....	HW 58

(Continued on page 8)

3¢ A DAY

HOSPITALIZATION PLAN



*Your Hospital
and Doctor Bills
PAID!*

SICKNESS or ACCIDENT

Insure NOW, before it's too late! Protect your savings against Hospital expense. Here's an amazing offer of safe, dependable coverage under America's most popular Hospitalization Plan. Family or individual eligible. No Medical Examination. When sickness or accident strikes, you may go to any Hospital in U. S. or Canada under any Doctor's care. YOUR EXPENSES WILL BE PAID exactly as Policy specifies. WAR coverage included. The Company under supervision of the Insurance Dept. No agent will call.

POLICY PAYS
Hospital Expenses
for Sickness or
Accident up to
\$54000
Doctor Expense to
\$13500
Time Lost from
Work up to
\$30000
Loss of Life
\$100000
War Coverage
...and other
valuable benefits.

MAIL COUPON AT ONCE!

NORTH AMERICAN MUTUAL INSURANCE CO.
Dept. PS3-3, Wilmington, Del.

Please send me, without obligation, details about your "3c A Day Hospitalization Insurance Plan".

Name.....

Address.....

City..... State.....

"THAT NEW MAN CERTAINLY 'CATCHES ON' QUICKLY!"



• EMPLOYERS are quick to notice when a new employee "knows his business"—when he is obviously an I. C. S.-trained man, who understands what makes the wheels go round!

• Such men get off to a good start—and are most likely to really "go places." (That's true, too, if they enter the Armed Forces—where trained men get higher rating, higher pay, and more interesting assignments!)

• Would YOU like to become a trained man—in a few months time, at the cost of a few dollars a week? Then mail this coupon, and learn how an I. C. S. Course in your line of work, studied at home in your spare time, can lay the foundation for a successful career!

• The worth of I. C. S. training is proved by 51 years of service to nearly five million ambitious men—thousands of whom are today top-flight leaders in business and industry! For complete information, mail this coupon *today!*

INTERNATIONAL CORRESPONDENCE SCHOOLS

HELPING TO TRAIN AMERICANS FOR VICTORY

BOX 7646-K, SCRANTON, PENNA.

Without cost or obligation, please send me booklet and full particulars about the course *before* which I have marked X:

TECHNICAL AND INDUSTRIAL COURSES

- | | | | |
|--|---|---|--|
| <input type="checkbox"/> Air Brake | <input type="checkbox"/> Contracting and Building | <input type="checkbox"/> Management of Inventions | <input type="checkbox"/> Sanitary Engineering |
| <input type="checkbox"/> Air Conditioning | <input type="checkbox"/> Cotton Manufacturing | <input type="checkbox"/> Marine Engines | <input type="checkbox"/> Sheet Metal Work |
| <input type="checkbox"/> Airplane Drafting | <input type="checkbox"/> Diesel Engines | <input type="checkbox"/> Mechanical Drafting | <input type="checkbox"/> Ship Drafting |
| <input type="checkbox"/> Architectural Drafting | <input type="checkbox"/> Electrical Drafting | <input type="checkbox"/> Mechanical Engineering | <input type="checkbox"/> Shipfitting <input type="checkbox"/> Shop Practice |
| <input type="checkbox"/> Architecture | <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> Mine Foreman | <input type="checkbox"/> Steam Electric <input type="checkbox"/> Steam Engines |
| <input type="checkbox"/> Auto Engine Tune-up | <input type="checkbox"/> Electrician | <input type="checkbox"/> Navigation <input type="checkbox"/> Patternmaking | <input type="checkbox"/> Steam Fitting |
| <input type="checkbox"/> Auto Technician | <input type="checkbox"/> Electric Lighting | <input type="checkbox"/> Plastics <input type="checkbox"/> Plumbing | <input type="checkbox"/> Structural Drafting |
| <input type="checkbox"/> Aviation <input type="checkbox"/> Aviation Mechanic | <input type="checkbox"/> Foundryman <input type="checkbox"/> Heating | <input type="checkbox"/> Public Works Engineering | <input type="checkbox"/> Structural Engineering |
| <input type="checkbox"/> Blueprint Reading | <input type="checkbox"/> Heat Treatment of Metals | <input type="checkbox"/> Pulp and Paper Making | <input type="checkbox"/> Surveying and Mapping |
| <input type="checkbox"/> Boilermaking | <input type="checkbox"/> Highway Engineering | <input type="checkbox"/> Radio, General | <input type="checkbox"/> Telegraphy <input type="checkbox"/> Telephony |
| <input type="checkbox"/> Bridge Engineering | <input type="checkbox"/> House Planning | <input type="checkbox"/> Radio Operating | <input type="checkbox"/> Textile Designing |
| <input type="checkbox"/> Chemistry <input type="checkbox"/> Coal Mining | <input type="checkbox"/> Industrial Metallurgy | <input type="checkbox"/> Radio Servicing | <input type="checkbox"/> Toolmaking <input type="checkbox"/> Tool Design |
| <input type="checkbox"/> Civil Engineering | <input type="checkbox"/> Locomotive Engineer | <input type="checkbox"/> R. R. Section Foreman | <input type="checkbox"/> Welding, Gas and Electric |
| <input type="checkbox"/> Concrete Engineering | <input type="checkbox"/> Machinist <input type="checkbox"/> Inspector | <input type="checkbox"/> R. R. Signalman <input type="checkbox"/> Refrigeration | <input type="checkbox"/> Woolen Manufacturing |

BUSINESS COURSES

- | | | | | |
|--|--------------------------------------|--|--|---|
| <input type="checkbox"/> Accounting | <input type="checkbox"/> Advertising | <input type="checkbox"/> College Preparatory | <input type="checkbox"/> First Year College | <input type="checkbox"/> Railway Postal Clerk |
| <input type="checkbox"/> Bookkeeping | | <input type="checkbox"/> Commercial | <input type="checkbox"/> Foremanship <input type="checkbox"/> French | <input type="checkbox"/> Salesmanship |
| <input type="checkbox"/> Business Correspondence | | <input type="checkbox"/> Commercial Illustrating | <input type="checkbox"/> Good English | <input type="checkbox"/> Secretarial <input type="checkbox"/> Spanish |
| <input type="checkbox"/> Business Management | | <input type="checkbox"/> Cost Accounting | <input type="checkbox"/> High School | <input type="checkbox"/> Showcard and Sign Lettering |
| <input type="checkbox"/> Cartooning <input type="checkbox"/> Civil Service | | <input type="checkbox"/> C. P. Accounting | <input type="checkbox"/> Managing Men at Work | <input type="checkbox"/> Traffic Management |

HOME ECONOMICS COURSES

- | | | |
|---|---|---|
| <input type="checkbox"/> Advanced Dressmaking | <input type="checkbox"/> Home Dressmaking | <input type="checkbox"/> Tea Room and Cafeteria |
| <input type="checkbox"/> Foods and Cookery | <input type="checkbox"/> Professional Dressmaking and Designing | <input type="checkbox"/> Management, Catering |

Name.....Age.....Address.....

City.....State.....Present Position.....

Canadian residents send coupon to International Correspondence Schools Canadian, Limited, Montreal, Canada
British residents send coupon to I. C. S., 71 Kingway, London, W. C. 2, England

SPECIAL
TUITION RATES
FOR MEMBERS
OF THE
ARMED FORCES





AVIATION offers you unlimited opportunities to serve your country and assures you a bright and successful peacetime future!

Prepare now! Study aviation! Ask your local airport authorities about getting mechanical training. When peacetime comes, see your Piper Dealer and take flight instruction. You can learn to fly with as little as 8 hours of dual instruction in the famous Piper Cub Trainer, whether you're 16 or 60!

Send Today for Your "HOW TO FLY" Booklet!

Prepared by a certified flight instructor. Clearly explains basic flight principles. Send 10c for booklet and Piper catalog to cover postage-handling.



TEACHERS (Grades 7-12). Write for new, helpful Teacher's Kit of Junior Aviation Instruction Material. Send \$1 bill or check.



PIPER

AIRCRAFT CORPORATION

Dept. PS33 ★ Lock Haven, Penna.

Contents (CONTINUED)

New Dial-Type Recipe File.....	HW 58
Wood Polish Hides Scratches.....	HW 58
Stainless-Steel Corn Scraper.....	HW 59
Air Purifier Dispels Odors.....	HW 59
Traveling Bags for Officers.....	HW 59
Plastic Telephone-Cord Jacket....	HW 59
New Type of Cleaning Sponge....	HW 59

New Shop Ideas

Quick-Glance Speed Charts.....	HW 21
Cleaning Welding-Torch Tips.....	HW 21
Turning Work of Two Diameters..	HW 22
Cutting Oils Aid Shop Work.....	HW 31
How to Adjust Cut-Off Tool.....	HW 31
Adjustable Angle Paint Brush....	HW 60

Radio

What's Wrong with This Radio?..	HW 53
Repair Kit of Radio Parts.....	HW 53
How to Install Pilot Lights.....	HW 54
Replacing Defective Condensers...	HW 54
Test for a Shorted Condenser.....	HW 54
Increasing Heater Voltage.....	HW 54

Shop Data

Changing Decimals to Fractions...	HW 4
Drawing a Five-Pointed Star.....	HW 12
Laying Out Ellipses to Size.....	HW 19
Plating Nonmetallic Work.....	HW 30
Removing Upper Window Sash....	HW 60

The Handy Man

Mounting Stripped Bike Pedals....	HW 19
Hair Dryer Thaws Frozen Pipes..	HW 37
Garden-Hose Rack of Tin Cans....	HW 37
Roller for Painting Screens.....	HW 37
Shop Apron Held with Spring.....	HW 57
Bag Catches Workbench Litter....	HW 57
Pulling Wire Screening Taut.....	HW 60

Woodworking

Easily Folded Clothes Hamper....	HW 5
Modern Kitchen Storage Units....	HW 8
Folding Stand for Luggage.....	HW 14
Using Circular-Saw Blades.....	HW 32
Parallel Jig Speeds Tenoning.....	HW 35
Clothes Tree for Child's Use.....	HW 36
Simple Ski Storage Rack.....	HW 40
Pine Rack Holds Shop Lumber....	HW 56

INTERNATIONAL CORRESPONDENCE SCHOOLS

OFFER YOU LOW-COST

SPECIAL TRAINING

FOR SUCCESS IN MODERN
BUSINESS AND INDUSTRY

TECHNICAL COURSES

Air Conditioning Schools

Air Conditioning
Heating
Plumbing
Refrigeration
Steam Fitter

Chemistry Schools

Chemical Engineering
Chemistry, Analytical
Chemistry, Industrial
Chemistry,
Mfg. Iron and Steel
Mfg. of Pulp and Paper

Civil, Architectural and Structural Engineering Schools

Architecture
Architectural Drafting
Bridge and Building
Foreman
Bridge Engineering
Building Estimating
Civil Engineering
Concrete Engineering
Contracting and Building
Highway Engineering
Retail Lumberman
Structural Drafting
Structural Engineering
Surveying and Mapping

Electrical Schools

Electrical Engineering
Electric Wiring
Gas and Electric Welding
Industrial Electrician
Lighting Technician

Power House
Practical Telephony
Radio, General
Radio Operating
Radio Servicing
Telegraph Engineering

Internal Combustion Engines Schools

Automobile Technician
Aviation
Diesel—Electric
Diesel Engines
Gas Engines

Mechanical Schools

Airplane Drafting
Foundry Work
Heat Treatment of Metals
Inventing and Patenting
Machine Shop Practice
Mechanical Drafting
Mechanical Engineering
Metal Pattern Drafting
Mold Loft Work
Reading Shop Blueprints
Sheet Metal Worker
Ship Drafting
Ship Fitting
Shop Practice
Steel Mill Workers
Tool Designing
Wood Pattern Making

Railroad Courses

Air Brake
Car Inspector
Locomotive Engineer
Locomotive Fireman
Railroad Car Repairer
Railroad Section Foreman

Steam Engineering Schools

Boiler Making
Combustion Engineering
Engine Running
Marine Engines
Petroleum Refining Plant

Steam Electric
Steam Engines

Textile Schools

Cotton Manufacturing
Textile Designing
Woolen Manufacturing

BUSINESS and ACADEMIC COURSES

Academic Schools

Arithmetic
College Preparatory
First Year College
High School
Higher Mathematics
Illustrating

Business Schools

Accounting
Advertising
Bookkeeping
Business Correspondence
Business Management
C. P. Accounting
Commercial

Cost Accounting
Foremanship
Salesmanship
Secretarial
Stenography
Traffic Management

Civil Service Schools

City Letter Carrier
Post Office Clerk
Railway Postal Clerk

Language Schools

French
Good English
Spanish

If you can read and write,
and are willing to study,

WE CAN TEACH YOU!

Our aim is to explain every-
thing so clearly that the sub-
ject is made easy to understand,
easy to remember, and the
principles are easy to apply.

• **Special service and atten-
tion are always given to the
student who may need extra
help in order to understand.**

REASONABLE TERMS
MAY BE ARRANGED



The successful man DOES today what the failure
INTENDS to do tomorrow. Mail this coupon NOW!

INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 7645-K, Scranton, Penna.

Please send complete information on following subject:

(Write above Technical, Business or General Educational Subject
in which you are interested.)

Name _____ Age _____

Address _____

City _____ State _____

Employed by _____

Present Position _____



J. E. SMITH, President, National Radio Institute, Established 28 years. He has directed the training of more men for the Radio Industry than anyone else.

I WILL SEND A SAMPLE to PROVE I can Train You BE A RADIO

These are Just a FEW of the Radio Subjects My Course Teaches!

Included are hundreds of Pictures, Diagrams, Drawings—Extra Money Job Sheets—Radio Dictionary—35 Lesson Texts in Fundamental Radio—30 Advanced Lesson Texts in Radio Servicing or Radio Communications—6 Reference Texts—Examination, Consultation Service, etc., etc.!

Radio Terms, Symbols, Abbreviations
How to Analyze Receiver Diagrams
How to Use Radio Meters, Testers
Cause, Remedy of Radio Receiver Troubles
Superheterodyne Receivers
F.M. Receivers, Transmitters
R.F. Amplifiers, A.F. Oscillators
How to Start a Spare Time Radio Business
High Frequency Transmission, Antennas
Photocells
Frequency Converters, Voltage Doublers
Filters; By-Passing; Shielding
High Fidelity (Broad Band) Circuits
Electronic Controls
Loudspeakers—"Woofers," "Tweeters," "Sound Boxes"
Detectors; Rectifiers
Power Supply Systems
Inverse Feedback; Phase Inversion
Resistors, Condensers, Coils, Vacuum Tubes
Series, Parallel Resonant Circuits, Q Factor
Sensitive, Power Relays
Cathode Ray Oscilloscopes
Automatic Frequency Controls
Essentials of Television
Public Address Systems

ACT NOW! MORE RADIO TECHNICIANS ARE MAKING \$30, \$40, \$50 A WEEK THAN EVER BEFORE!

Mail the Coupon for a FREE Lesson from my Radio Course. It shows you how practical and easy to understand my lessons are—and why N.R.I. training offers a *quick way to more pay*. And with this Sample Lesson I'll send my 64-page book, **RICH REWARDS IN RADIO**. It describes many fascinating types of Radio jobs, tells how N.R.I. trains you at home in spare time, explains the unique training method which I have developed and perfected during my 28 years of teaching Radio.

You'll see why my thorough, practical Lessons have paved the way to good pay for hundreds of beginners. But even if you never go any farther, this Sample Lesson is worth having. It is a real introduction to the wonders and opportunities of Radio. I will send it to you without obligation. **MAIL THE COUPON!**



Radio Servicing (above) pays Technicians good money, spare or full time. **Radio Operators** (at right) find interesting work in 915 U. S. Broadcasting Stations, etc.



EXTRA PAY IN ARMY, NAVY, TOO

Men likely to go into military service, soldiers, sailors, marines, should mail the coupon now! Learning Radio helps men get extra rank, extra prestige, more interesting duties, **MUCH HIGHER PAY**. Also prepares for good Radio jobs after service ends. Over 1,700 service men now enrolled.



A TESTED WAY TO

LESSON FREE

at Home in Spare Time to

TECHNICIAN



Many Beginners Quickly Learn to Make \$5, \$10 a Week Extra in Spare Time

Many N.R.I. Students make extra money fixing Radios in spare time while learning. I send EXTRA MONEY JOB SHEETS that tell how to do it!

"The N.R.I. Method" takes you step-by-step along the path others have followed to security and good pay. I give you thorough training in Radio Theory . . . show you how to use your knowledge. I train you from the ground up—cover Fundamentals thoroughly. The panel at left shows just a FEW of the subjects you'll master before you finish my Course!

Notice that N.R.I. gives you training in Fundamentals plus specialized training in Radio Servicing or Radio Communications. Notice that N.R.I. goes into many branches of Radio: Servicing, Frequency Modulation, Electronics, Television, Public Address Systems, Photocells, High Fidelity Circuits, etc.

Big Demand Now for Trained Radio Technicians, Operators

Right now, probably in your own neighborhood, there's room for more spare and full time Radio Technicians. Many spare time Technicians are stepping into FULL time Radio jobs, or are starting their own shops and making \$30, \$40, \$50 a week!

Other Radio Technicians and Operators take good-pay jobs with Broadcasting Stations. Hundreds more are needed for Government jobs as Civilian Radio Operators, Technicians. Radio Manufacturers, rushing to fill Government orders, need trained men. Aviation, Police, Commercial Radio and Loudspeaker Systems are live, growing fields. And think of the NEW jobs Television, Frequency Modulation and other Radio developments will open after the war! I give you the Radio knowledge required for these fields. At right are just a few of the hundreds of men N.R.I. started toward good pay in Radio.

A Great School Helps You Toward The Rich Rewards in Radio

Throughout your training, the staff and resources of the world's largest private home study institution devoted entirely to training men for Radio will be squarely behind you. N.R.I. has stuck to the one job of teaching Radio for 28 years. My entire staff devotes full time to Radio training. Our combined efforts have made the Course so interesting, with hundreds of pictures, charts, and diagrams—so easy-to-grasp, with special teaching methods designed especially for home training—that we believe you will be "old friends" with Radio almost before you know it.

START NOW Toward Radio's Rich Rewards!

MAIL THE COUPON. I'll send you the FREE Lesson and my valuable, 64-page illustrated book, RICH REWARDS IN RADIO. They're packed with Radio facts, things you never knew about opportunities in Broadcasting, Radio Servicing, Manufacturing, other Radio fields.

You'll read a complete description of my Course—Extra Money Job Sheets—Consultation Service—other special N.R.I. training features. You'll see the fascinating jobs Radio offers and how to learn Radio at home. You'll read many letters from men I trained, telling what they are doing, earning. No obligation. Just MAIL THE COUPON.—J. E. SMITH, President, National Radio Institute, Dept. 3CP3, Washington, D. C.

TRAINING MEN FOR VITAL RADIO JOBS

Men I Train at Home Win Good Jobs Like These



\$10 a Week in Spare Time

"I repaired some Radios when I was on my tenth lesson. I made \$600 in a year and a half, and have made an average of \$10 a week—just spare time." JOHN JERRY, 1337 Kalamath Street, Denver, Colorado.



\$200 a Month in Own Business

"For several years I have been in business for myself making around \$200 a month. Business has steadily increased. I have N. R. I. to thank for my start." A. J. FROEHNER, 300 W. Texas Ave., Goose Creek, Texas.



Lieutenant in Signal Corps

"I cannot divulge any information as to my type of work, but I can say that N.R.I. training is certainly coming in mighty handy these days." (Name, address omitted for military reasons.)



Chief Operator Broadcasting Station

"Before I completed your lessons, I obtained my Radio Broadcast Operator's license and immediately joined Station WMPC where I am now Chief Operator." HOLLIS F. HAYES, 327 Madison St., Lapeer, Michigan.

GOOD FOR BOTH 64 PAGE BOOK SAMPLE LESSON FREE

Mr. J. E. Smith, President, Dept. 3CP3
NATIONAL RADIO INSTITUTE, Washington, D. C.

Mail me FREE, without obligation, your Sample Lesson and 64-page book, "Rich Rewards in Radio." (No Salesman will call. Please write plainly.)

Name Age

Address

City State 4FR-2




GOOD PAY

Here's the Greatest BILLFOLD BARGAIN in all America

**Your LODGE Emblem or ARMY or NAVY Insignia
and Name Engraved in 23K. Gold
Absolutely FREE**

Special Introductory Offer

\$1⁹⁸

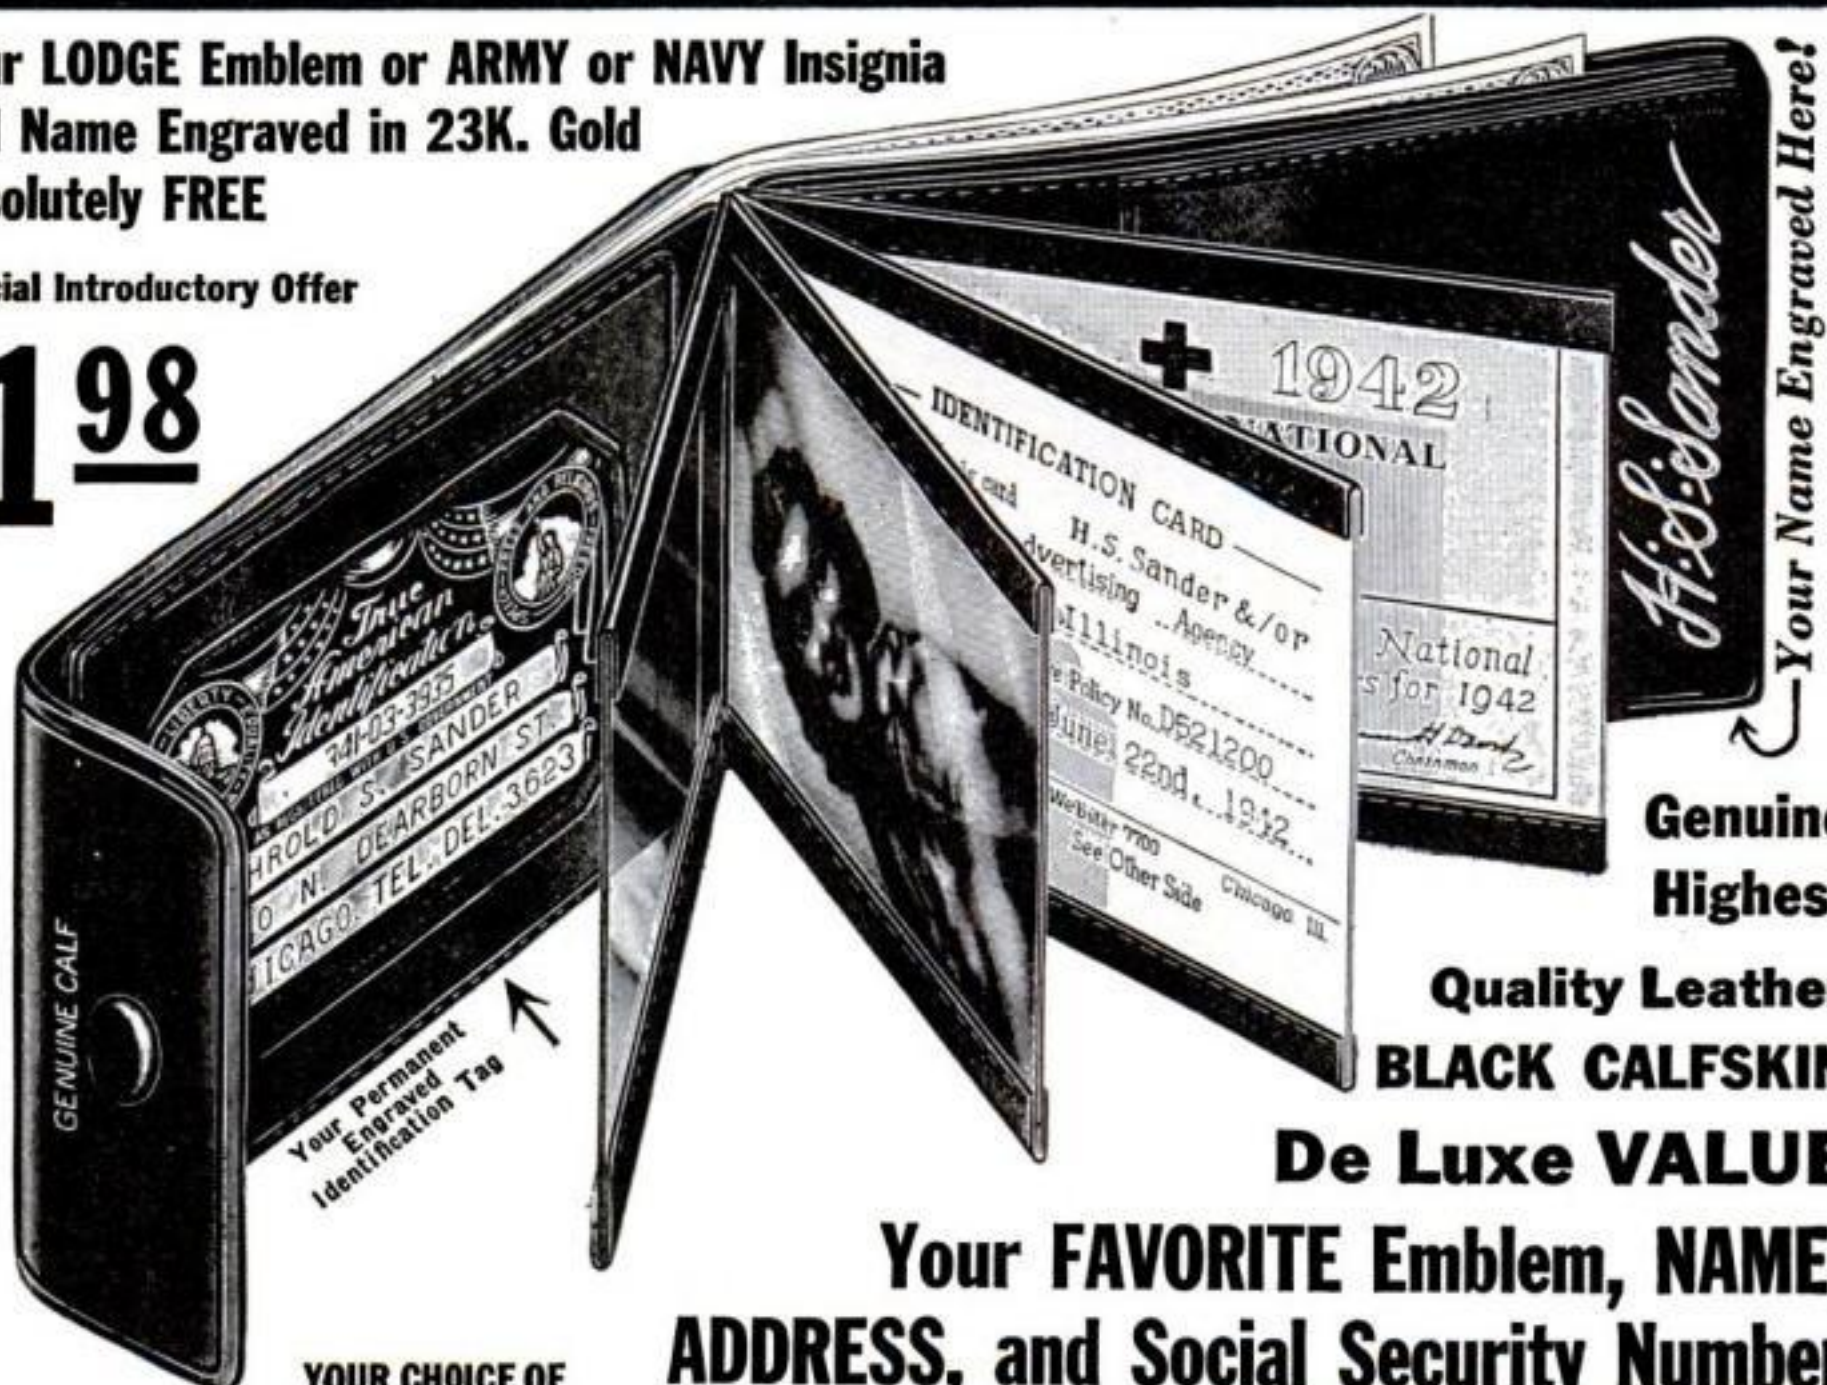

**Genuine
Highest**

**Quality Leather
BLACK CALFSKIN**

De Luxe VALUE

**Your FAVORITE Emblem, NAME,
ADDRESS, and Social Security Number
Engraved in GOLD—FREE!**

Men:—Here, without a doubt, is positively the greatest Billfold and Pass Case Bargain that you'll be likely to see for a good many years to come. For a high quality Calfskin Billfold, beautifully engraved in gold, with your LODGE Emblem or Army or Navy Insignia and Name, you would expect to pay up to \$4.50 and consider it a marvelous buy. If you take advantage of this sensational introductory offer, you can get this superb genuine Calfskin Wallet and Pass Case for only \$1.98, and we will send you absolutely free a specially designed three color lifetime Identification Plate, which carries your Social Security Number, your Name and Address or your Army Draft Number. This fine grain calfskin Billfold must actually be seen to be fully appreciated. Besides the spacious compartment at the back which can be used for currency, checks, papers, etc., it has four pockets each protected by celluloid to prevent the soiling of your valuable membership and credit cards.

When closed, this handsome Billfold has the soft velvety feel you find only in quality Calfskin. Your choice of Emblems and Initials, are beautifully embossed in 23 karat gold on the face of the Billfold. Due to difficulty in obtaining choice leather because of war conditions, the supply of these Billfolds is limited. Remember if you send your order promptly, we will include absolutely FREE, a beautiful identification Key Tag and Gilt Chain to match, all hand engraved with your Name, Address, City and State. If after receiving your Billfold and Free Gift, you don't positively agree that this is the most outstanding bargain you have ever come across, return them to us and your money will be cheerfully refunded in full. Send your order today, without fail so you won't be disappointed.



**YOUR
INITIALS
HERE
FREE!**



This beautiful three-color life-time Identification Plate carries your full name, address and social security or draft number.



Also FREE—If you order at once we will send you this beautiful Identification Key Tag and Gilt Chain to match, hand engraved with your name, address, city and state. Will last a lifetime.

Rush This Coupon For This Once-In-A-Lifetime Bargain!

**ILLINOIS MERCHANDISE MART,
Dept. 282-A, 54 W. Illinois St., Chicago,**

If you want a LODGE, ARMY, NAVY, MARINE or AIR CORPS INSIGNIA, state name here
Gentlemen: I enclose \$1.98. Please send me a Genuine Calfskin Billfold with my name
and choice of Emblems engraved in 23k gold. Include absolutely free a life-time Identification
Plate carrying my full name and Social Security Number, or Draft Number. Also
include FREE an Identification Key Tag and Gilt Chain to match, all hand-engraved with
my Name, Address, City and State.

My Full Name.....
(Please print clearly)

Address

City State.....

Social Security Number.....Army Draft Number.....

☐ Please ship the above C.O.D. for \$1.98 plus a few pennies postage and C.O.D. charges.

Don't Look Now!

but if you want to see a real
HE-MAN BODY...



WHAT do people say when they see you on the beach? Then you show what you **REALLY** are—a **HE-MAN** or a weakling! Do girls' eyes give you the silent "ha-ha"? Or can you **FEEL** their admiring glances?

And don't think *clothes* can cover a flat chest, skinny arms, pipestem legs **EITHER!** People **KNOW** when a man's got a puny build like Caspar Milquetoast—or when his personality glows with smashing strength, rippling muscles, tireless energy! A fellow like that is **BOUND** to be the life of the party! Do **YOU** want to be that kind of a man? Then listen to **THIS—**

In Just 15 Minutes a Day I'll Prove I Can Make YOU a New Man Too! *Charles Atlas*

That's what I said—*15 minutes a day!* That's all I need to **PROVE**—regardless of how old or young you are, or how ashamed you may be of your present physique—that I can give you a body men envy and women admire. Biceps that can dish it out, and a muscle-ridged stomach that can take it. A full, deep barrel-chest. Legs that never tire. A tough, sinewy back. An all-around physique that can laugh at **ANY** kind of rough going.

Today, a wave of **FITNESS** is surging over America! Suppose **YOU** are called to the colors! Will your body be the laughing-stock of the company or will it command the envy of your buddies! Why **RIGHT NOW** many soldiers and sailors *in active service* are using my methods. They know that a **MAN'S** body means "easier going", more fun and quicker promotion!

Would You Believe

I Was Once a 97-lb. Weakling?

Yes, I was—a miserable 97-pound bag of skin and bones! But you'd never believe it to look at me now, would you? Through my discovery of "*Dynamic Tension*" I changed myself into "*The World's Most Perfectly Developed Man.*" I'm **LIVING PROOF** of the miracles "*Dynamic Tension*" can perform—right in the privacy of your own home! **NOW**—will you give my method 15 minutes a day to get the kind of **HE-MAN** build you have always longed to have?

My FREE BOOK "*Everlasting Health and Strength*" TELLS HOW!

Just a postage stamp will bring you your copy of my famous book, "*Everlasting Health and Strength*," absolutely free. No wonder nearly 2,000,000 men have sent for this big 48-page story of "*Dynamic Tension*"—illustrated with action photos of myself and some of my pupils. You'll not only read about my secret of "*Dynamic Tension*"—but you **SEE PROOF** of it! **CHARLES ATLAS**, Dept. 13, 115 East 23rd Street, New York, N. Y.



Charles Atlas

An actual, untouched photo of "*The World's Most Perfectly Developed Man*"

Here's PROOF Right Here!

"Feel like million dollars; have a 44" normal chest."
—**L.A.S., Illinois**

"My doctor thinks your course is fine. In 15 days have put 2" on my chest and 1/2" on my neck."
—**B.L., Oregon**

"My muscles are bulging. I feel like a new man. Chest measures 38", an increase of 5", my neck increased 2".
—**G.M., Ohio**

"Your book opened my eyes . . . 1 1/4" gain on biceps and 1" more on chest in two weeks!"
—**J.F., Penna.**

CHARLES ATLAS, Dept. 13, 115 East 23rd Street, New York, N. Y.

I want the proof that your system of "*Dynamic Tension*" will help make a New Man of me—give me a healthy, husky body and big muscular development. Send me your free book, "*Everlasting Health and Strength*".

Name.....
(Please print or write plainly)

Address.....

City..... State.....

☐ Check here if under 16 for booklet A.

AUDELS SHEETMETAL WORKERS HANDY BOOK\$1

Practical inside information. Fundamentals of Sheet Metal Layout Work. 388 pages. Fully illustrated. 11 sections. Clearly written. Essential and important facts, figures, pointers in everyday language. Ready Reference Index.

AUDELS WELDERS GUIDE.....\$1

A concise, practical text on operation and maintenance of all welding machines for all mechanics. Over 400 pages, fully illustrated. Covers all methods of electric and acetylene welding including airplane work. Every welder should own this guide.

AUDELS ANSWERS ON BLUE PRINT READING.....\$2

Covers all types of blue print reading including ship and airplane for mechanics and builders. 376 pages, very fully illustrated. No other trade book like it—new, complete.

AUDELS NEW MACHINISTS & TOOLMAKERS HANDY BOOK.....\$4

Covers modern machine shop practice in all its branches. 5 practical books in 1. New from cover to cover. Tells how to set up & operate lathes, screw and milling machines, shapers, drill presses and all other machine tools. 1600 pages, fully illustrated, 5 x 6 1/2 x 2. Indexed. 5 sections. 1—Modern Machine Shop Practice. 2—Blue Print Reading & How to Draw. 3—Calculations & Mathematics for Machinists. 4—Shop Physics. 5—How to Use the Slide Rule. 60 chapters. Easy to read and understand. A shop companion that answers your questions.

AUDELS MATHEMATICS & CALCULATIONS FOR MECHANICS.....\$2

Mathematics for home study or reference. 700 pages, 550 illustrations. Practical mathematics from the beginning. How to figure correctly. New, easy, correct methods covering a complete review of practical arithmetic. Illustrated with examples. Includes mensuration—plane and solid geometry—trigonometry—algebra—calculus—electrical & mechanical shop calculation—practical tests—reference tables and data. How to use the slide rule. A real help.

AUDELS SHIPFITTERS HANDY BOOK.....\$1

288 pages of information, instruction, pictures and reference charts, together with many short cuts and trouble savers for shipfitters in their daily routine. No other trade book like it. Every shipfitter needs this book.

AUDELS AUTOMOBILE GUIDE.....\$4

A practical quick ready reference book for auto mechanics, service men, trainees and owners. Explains theory, construction and servicing of modern motor cars, trucks, buses & auto type Diesel engines. 1540 pages, fully illustrated. 55 chapters. Indexed. A standard book for mechanics and operators.

AUDELS RADIOMANS GUIDE.....\$4

A key to the practical understanding of radio including Frequency Modulation, Television, etc., Aircraft and Marine Radio. For radio engineers, servicemen, amateurs. 772 pages. 400 Illustrations and Diagrams. Photos. Review Questions and Answers. Ready Reference Index. Authentic, clear, concise.

AUDELS MECHANICAL DICTIONARY.....\$4

950 pages. Over 17,000 new and standard mechanical terms, words, phrases, tables, formulas, helps, hints, short-cuts and practical suggestions. The right word when needed most.



Information in a Handy Form!

AN AUDEL GUIDE IS A GOOD FRIEND!

Use the brains and experience of others in these Guides of the Trades. Save time and money with right methods, short cuts, labor-saving ideas—"Learn more to earn more." Use our generous 7-day free examination privilege and our dollar a month payment plan. Become a Master in your Trade, and understand the Trades that tie into yours.

How to obtain these Guides for examination

Mark X on the order blank the Guides desired. Every Audel Guide is complete, up-to-date, easily understood with Questions and Answers, fully illustrated and indexed. They speak for themselves. Send for yours today at our risk and expense. Ask to see them.

AUDELS HANDY BOOK OF PRACTICAL ELECTRICITY\$4

For maintenance engineers, electricians and all electrical workers. 1440 Pages, 2600 Illustrations. Covers important electrical information in handy form—including Marine Wiring, Radio Principles, Welding, Ready Reference Index. The key to a practical understanding of electricity.

AUDELS CARPENTERS & BUILDERS GUIDES—4 Vols......\$6

A practical illustrated trade assistant on modern construction for carpenters, joiners, builders, mechanics and all woodworkers. 4 vols., 1600 pages, 3700 illustrations, flexible covers. Each volume pocket size. Sold separately \$1.50 a vol.

AUDELS DIESEL ENGINE MANUAL.....\$2

A practical, concise treatise with questions and answers on the theory, operation and maintenance of modern diesel engines, including General Motors 2 cycle Diesel. 384 pages, fully illustrated, flexible binding, pocket size. All details plainly brought out, this book is of extreme value to engineers, operators & students.

AUDELS PLUMBERS & STEAMFITTERS GUIDES—4 Vols.\$6

A Practical Trade Assistant & Ready Reference. Explaining in plain language & by clear illustrations, diagrams, charts, graphs, pictures the principles of modern plumbing practice including Air Conditioning. 4 Vols.—1670 Pages—3642 Diagrams. Each Vol. Pocket Size. Sold Separately \$1.50 a Vol.

AUDELS WIRING DIAGRAMS FOR LIGHT & POWER.....\$1

210 Pages, Illustrated. Gives practical facts on wiring of electrical apparatus. It explains clearly in simple language how to wire apparatus for practically all fields of electricity. Each diagram is complete and self-explanatory.

AUDELS ELECTRIC DICTIONARY\$2

For Every Worker Who Has To Do With Electricity. Enables you to understand and explain electrical problems. Defines more than 9000 words, terms & phrases in plain, unmistakable language, compiled with accuracy & thoroughness. Valuable as an Encyclopedia of Electricity & as a Dictionary. Alphabetically arranged, ready reference index.

AUDELS MILLWRIGHTS & MECHANICS GUIDE\$4


Practical up-to-date Information on Plant Installation, Operation and Maintenance. 1200 pages completely illustrated, fully indexed. 1000 facts at your fingertips in 6 convenient sections with ready reference.

GUETHS MECHANICAL DRAWING.....\$1

A Concise Drawing Course. 150 pages, 50 plates. A complete instructor and reference work. Gives many helpful hints and suggestions on How to Draw.

AUDELS ELECTRONIC DEVICES.....\$2

Tells What You Want to Know About the Electric Eye. Easily Understood. Covering photo-electric cells and their applications. Amplifiers, illumination, frequencies, voltage, photocell, tubes, Ohm's Law, wiring diagrams, etc.

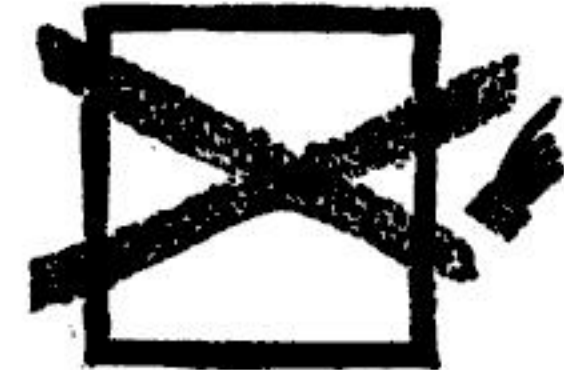

Check NOW!

You Can Look Over Any Guide In Your Own Home — Start the Easy Payments If Satisfied

MAIL THIS TODAY

MAIL ORDER

THEO. AUDEL & CO., 49 West 23d Street, New York

Please mail me for 7 days' free examination the books marked (X) below. I agree to mail \$1 in 7 days on each book or set ordered, and to further mail \$1 a month on each book or set ordered until I have paid purchase price.

If I am not satisfied with Guides I will return them.

- ☐ Audels SHEET METAL WORKERS Handy Book . . . \$1.
- ☐ Audels WELDERS GUIDE . . . 1.
- ☐ Audels ANSWERS ON BLUEPRINT READING . . . 2.
- ☐ Audels MACHINISTS & TOOLMAKERS Handy Book . . . 4.
- ☐ Audels MATHEMATICS and CALCULATIONS. . . 2.
- ☐ Audels SHIPFITTERS Handy Book . . . 1.
- ☐ Audels AUTO GUIDE . . . 4.
- ☐ Audels RADIOMANS GUIDE . . . 4.
- ☐ Audels MECHANICAL Dictionary . . . 4.
- ☐ Audels Handy Book of PRACTICAL ELECTRICITY . . . 4.
- ☐ Audels CARPENTERS and Builders Guides (4 vols.) . . . 6.
- ☐ Audels DIESEL ENGINE MANUAL . . . 2.
- ☐ Audels PLUMBERS and Steamfitters Guides (4 vols.) . . . 6.
- ☐ Audels WIRING DIAGRAMS . . . 1.
- ☐ Audels MILLWRIGHTS and Mechanics Guide . . . 4.
- ☐ Gueths Mechanical DRAWING Course . . . 1.
- ☐ Audels ELECTRONIC DEVICES . . . 2.
- ☐ Audels MARINE Engineers Guide . . . 3.
- ☐ Rogers Mechanical DRAWING and Design . . . 2.
- ☐ Rogers MACHINIST GUIDE. . . 2.
- ☐ Audels MASONS and Builders Guides (4 vols.) . . . 6.
- ☐ Audels ENGINEERS and Mechanics Guides . . . 12.
- ☐ Nos. 1, 2, 3, 4, 5, 6, 7 and 8 complete . . . 1.
- ☐ Audels Answers on Practical ENGINEERING . . . 2.
- ☐ Audels ELECTRICAL POWER CALCULATIONS . . . 2.
- ☐ Hawkins ELECTRICAL Guides at \$1. each
- ☐ Nos. 1, 2, 3, 4, 5, 6, 7, 8, 9 and 10
- ☐ Audels Answers on REFRIGERATION . . . 2.
- ☐ Hawkins Aids to ENGINEERS EXAMINATION. . . 2.
- ☐ Master PAINTER and DECORATOR . . . 2.
- ☐ Audels GARDENERS & GROWERS GUIDES \$1.50 a Vol. . . 4.
- ☐ Audels Sheet Metal Pattern Layouts . . . 4.
- ☐ Audels NEW ELECTRIC LIBRARY at \$1.50 a Volume
- ☐ Vols. I, II, III, IV, V, VI, VII, VIII, IX, X, XI, XII

Name.....

Address.....

Occupation.....

Employed by..... PSM

Your future

May Be
Inside
These
Pages!

One has only to study the news about business expansions, war production, new taxes and regulations to see that wherever business is busy accountants are busy. For remember: this is the profession back of the financial success and progress of all other enterprises. And accountancy incomes of \$2,000 to \$5,000, or more, yearly, certainly aren't earnings to be dismissed lightly!

WHAT ARE MY OPPORTUNITIES?

Frankly, they are important ones—and numerous. Beginning opportunities as bookkeeper, cost clerk, billing clerk, time clerk. Advanced opportunities to serve in big and small business firms; advising on finance, analyzing costs, helping to shape policies. Opportunities to qualify in the Governmental accounting jobs that are opening up more and more. Opportunities in private practice, as a cost consultant or C.P.A.

THE BEST ANSWER OF ALL

These are facts that invite your thorough investigation as to what LaSalle Training for this profession of many opportunities has in store for you.

Complete information—a survey covering this subject from different angles—is what you should have now, before making any final decision. You'll find it in this 48-page book. And it is aptly titled "The Profession That Pays" . . . for, as the official Journal of Accountancy has pointed out: "If there be a profession in which the average compensation is higher, it is not known to us." So, if you really are in earnest—and willing to study seriously—fill in and mail the coupon for your copy today. Your future may lie inside its pages!

LASALLE EXTENSION UNIVERSITY
A Correspondence Institution
Dept. 383-H Chicago, Ill.

I want to see what Accountancy offers for my future. Please send me your FREE 48-page booklet, "Accountancy, the Profession That Pays," and full information about your economical, spare time training.

Name.....Age.....

Address.....

Present Position.....



Coming Next Month

WELDING IS A WAR BABY that came along just in time to carry a big share of the arms-production load. Maybe you know all about welding already. If not, you'll be interested in an article that explains how the man (or woman) in the mask is putting new strength into our sinews of war.

AMERICAN BOYS just out of flying school are meeting the seasoned pilots of the Axis air forces and knocking them out of the sky. What makes our relatively inexperienced flyers a match for their battle-hardened adversaries? You'll understand after you read about the rigorous training that prepares our airmen to enter the arena of aerial warfare.

BE A BOMBARDIER! Even if you can't actually ride the nose of a B-17, you can get some of the thrill by playing the "Bombsight" game. You build your own bomber—a miniature plane with a real bombsight that shows you when to release your "eggs" to score a "considered sunk" on a model Jap warship.


SHARPSHOOTERS OF THE SKY are the men who man the machine guns of our war-planes. Americans are good shots by tradition, and our boys have proved apt pupils in the highly specialized art of winging enemy planes from a skyrocketing turret or gun position. Follow them through the training course that gives them their deadly skill.

AFTER YOU HAVE READ "First Steps in Electronics," on page HW 50 in this issue, you'll be ready and anxious to read the second article of this informative series. The April installment will describe the application of electronics to radio, explaining how electrons are harnessed to create the magic of modern communication and entertainment.

TAKE CARE OF YOUR CLOTHES! It's going to get harder and harder to buy new ones. In order to get maximum mileage out of the garments you have, you must give them proper care. Timely repairs and alterations, too, will add months of wear. An article filled with practical suggestions helps you take that stitch in time.

ELECTRICIANS

and those who want to know Electricity — Here are the books you have been looking for

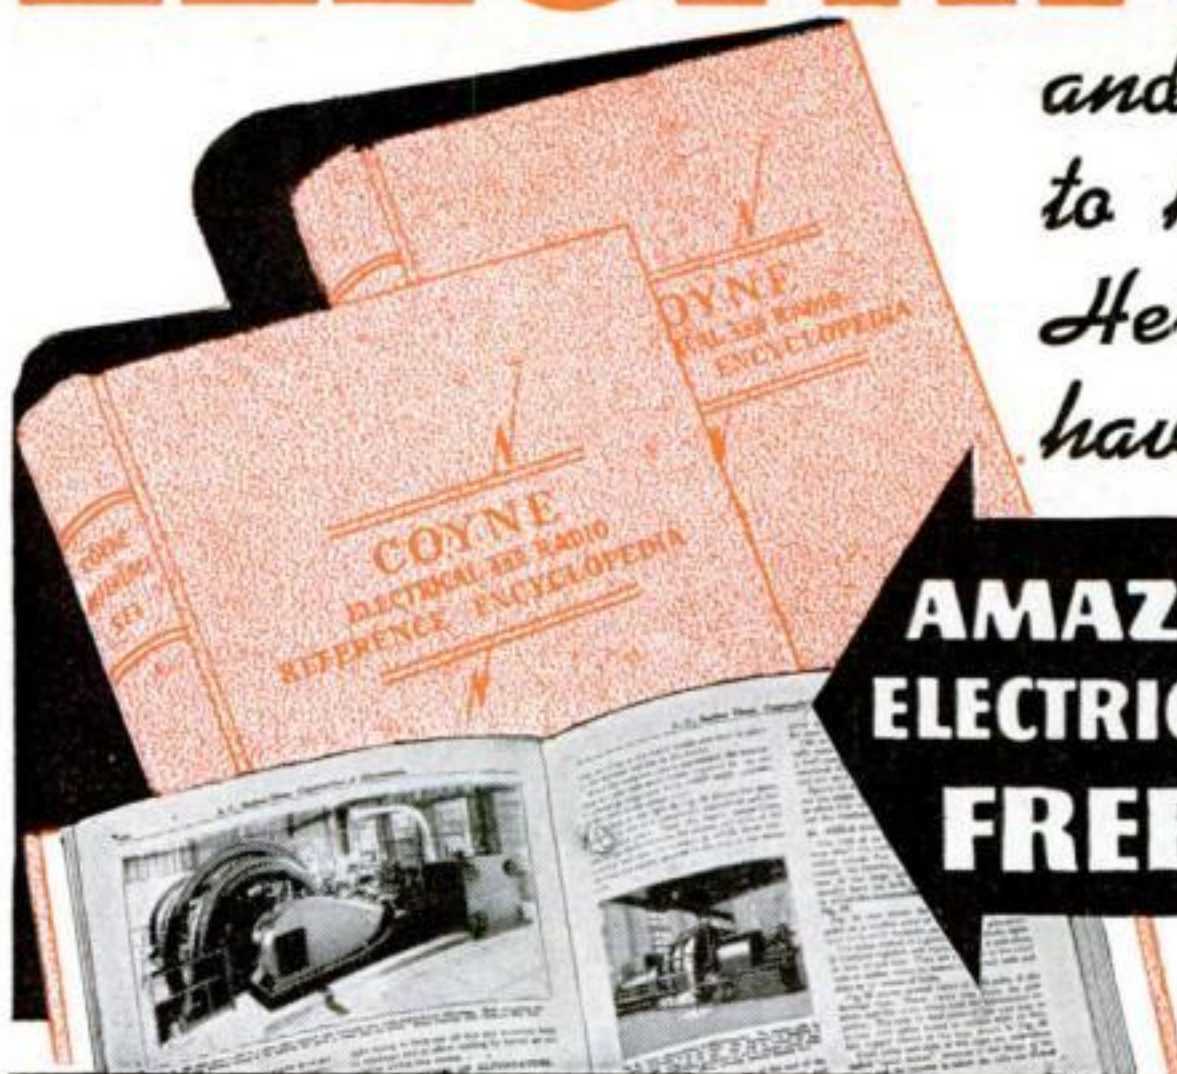

AMAZING 3 VOLUME ELECTRICAL ENCYCLOPEDIA FREE 7 DAY TRIAL

3 BIG VOLUMES 1200 PAGES

2000 PICTURES and DIAGRAMS

8½ x 11 in. Over 2000 subjects. All plainly indexed so you can QUICKLY LOCATE any subject. Handsomely bound in Harvard Red and Gold.

FREE WITH ENCYCLOPEDIA

One year of personal technical advice included with this set.

This means you can write to Coyne and receive advice from our staff of instructors at no charge for a period of one year, should you desire special information on any electrical or radio subject.

This service is included at no extra charge for one year after you purchase this set.

H. C. LEWIS
President

COYNE ELECTRICAL SCHOOL
500 South Paulina Street
Dept. 33-R8, Chicago, Illinois

SEE THEM RISK FREE

You don't have to risk a penny. To get your set promptly, just mail coupon. Examine books 7 days risk free. Mail coupon now.

Here at last! What every Electrician, service man, radio man, maintenance man, in fact, any man interested in Electricity, has long needed!

AUTHORITATIVE. PRACTICAL— prepared by experts. Used regularly on the job by hundreds of Electricians, service men, radio men, air cadets, students, maintenance men, etc. **EASY. COMPLETE.** Covers everything Electrical: Armature winding, A.C. and D.C. Motors, generators, electronics, automotive electricity, refrigeration, etc., etc. Answers your electrical questions quickly, clearly, completely. Also includes Radio, Television.

Send for your set today. You will be proud to own them and will find them one of your most prized possessions. If I'm wrong and you don't find them all I claim them to be, then return them within 7 days.

H. C. LEWIS, Pres., COYNE ELECTRICAL SCHOOL
500 South Paulina Street, Dept. 33-R8, Chicago, Ill.

Send me the big NEW EDITION of the Coyne Electrical Reference and Instruction Encyclopedia. Within 7 days after receiving the books, I'll either return them or send you \$3, and \$3.65 a month until advertised price of \$13.95, is paid. We pay the shipping charges.

NAME.....

ADDRESS.....

CITY.....STATE.....

OCCUPATION.....AGE.....

SAVE 10% Send cash price, \$12.55, with order if preferred—you save \$1.40. Same 7-day free trial and return privilege.

Readers Say:

Two "Pipe Up" on Air Piped Down

HAVE just finished reading in your January issue the idea that A. H. W. of Phoenix, Ariz.,

HEY, MOUNTAIN AIR
PRODUCES YODELING
HILLBILLIES SO PIPE
DOWN!



dreamed up for using light Pikes Peak air to fill balloons and dirigibles. It reminds me of a fellow up here who, in order to spare himself the expense of the antifreeze he needed for the cooling system of his car, rowed several miles out into Lake Michigan to get some of "that blue water that never freezes."—T. E. W., Manitowoc, Wis.

A. H. W.'s notion of piping Pikes Peak air down the side of the mountain for use in dirigibles is impractical. But it does give me an idea. Why not run a lot of pipe lines down into our cities and smoky industrial centers and let the hard-working people there enjoy the benefits of the healthful and invigorating mountain air? For many years I have been a reader of your magazine which has supplied me with much interesting information, the value of which far exceeds the cost of the magazine.—E. G., Brooklyn, N. Y.

One Thing We Won't Stand For Is a Slipshod Answer

REPLYING to R. P. S. of Bakersfield, California, here is the answer to his bouncing-ball problem. He states that the ball was dropped from a height of 16 feet, rebounded half that distance, and continued to rebound half the distance of each preceding drop. Treating the problem as a purely theoretical case, the ball would travel a total of 48 feet. In an actual experiment the ball would cease to rebound after only 12 or 14 bounces, or when the distance of rebound and the compression of the ball against the ground became approximately equal. The actual calculations for this experiment indicate that on the twentieth bounce, the ball would rise .0000152587890625 of a foot from the ground.

If the original drop of the exact center of the ball was precisely 16 feet, then in 20 rebounds the ball would travel 47.999969482421875 feet.—G. K. C., Ganado, Ariz.

They're Working For the Old Man With the Beard

IN "READERS SAY" of your December issue I found a letter from T. F. of Beaver Dam, Wisconsin, who owns a garage with his brother. He asks for suggestions on how they can increase their income now that the war has left them only an occasional job of repair work to do. Here is the answer. The U. S. Civil Service is employing plenty of garage men and mechanics as inspectors of motor vehicles. The base pay is \$2,000 a year. In the plant where I work are nearly 80 former garage men who have closed their shops, and are now working for Uncle Sam for the duration.—H. O. W., Detroit, Mich.

P.S.M. Herewith Takes Another Modest Bow

AS PRESIDENT of the New Jersey Mineralogical Society I am happy to tell you that I think your magazine is deserving of a lot of commendation for its excellence. I have been a reader of the magazine for many years and have often felt you should be advised that it makes the best scientific presentations of them all. I am particularly pleased to see that you always have a fine article on minerals, and that it is presented in such a simple, accurate and interesting manner. This has been mentioned particularly by many members of our society. Again, congratulations, and may you continue your fine work.—Joseph D'Agostino, Plainfield, N. J.

A Beef That We Haven't Got Enough Meat in Our Problems

THE MAGAZINE continues to be swell, but my beef is directed at the readers who contribute to this department. What's happened to the fine series of problems that they were turning in a few months back—particularly those that are of real value to a workshop nut who needs that kind of wit sharpening to improve his layout and design technique? Let's have some more that are really worthwhile—G. L., Denver, Col.





This is the way to win a battle in the desert

Libya and North Africa made it clearer than ever:
THIS IS A WAR OF SUPPLY.

In 1918, an American soldier could be equipped and maintained on 5 tons of supplies each year.

But today, for every soldier sent abroad, $10\frac{1}{2}$ tons of shipping space must be provided for *equipment alone*. And it takes an additional 18 tons of shipping to supply a single soldier for a year!

Supply is a matter of *ships*.

And ships need *electricity*.

Vast quantities of electric power, for a thousand vital tasks that must be done to take a convoy safely across the seas . . .

Electricity to steer the vessels and operate the radios and signal lights.

Electricity to detect the approach of enemy subs and planes, to sound the alarm, to organize the defense.

Electricity to power great cargo winches, and delicate navigating instruments.

Electricity to make magnetic mines harmless, to provide invisible "black light" for reading

charts at night. Electricity to keep food fresh, to cook it, to ventilate the ships, to provide comfort for the crews.

Electricity in every freighter, every tanker, every Navy escort vessel—to help win the war of supply!

We of Westinghouse take tremendous pride in building so much of the electrical equipment, so many of the great turbines and gears and electric drives, for the ships of America's Navy and Merchant Marine.

Into every piece of that equipment go all our "know-how," all our skill, all our determination to *do our share* in this war—and if possible, a little more.

Westinghouse Electric & Manufacturing Company, Pittsburgh, Pennsylvania.

Westinghouse

PLANTS IN 25 CITIES—OFFICES EVERYWHERE

Tune in the Westinghouse Program starring John Charles Thomas—NBC Network, Sunday, 2:30 P. M., Eastern War Time.

SPRAYBERRY RADIO TRAINING *includes* FULL EQUIPMENT

Experience Easily Acquired
at Home



You Do Practice-
Giving Experiments,
Many Special Features . . .
ALL Designed to Help You
Make Fast Progress.

SPRAYBERRY Training starts right at the beginning of Radio . . . unfolds each subject in a simplified, logical, understandable style. You easily learn Television, Frequency Modulation, Signal Tracing, Mobile Radio (Auto-Tank), Aviation, Radio, Electronics, Facsimile Radio, Radio Set Repair and Installation work.

Training Prepares You for a
Business of Your Own . . . or
Good Radio Jobs—Civilian or
Military

The important and fascinating field of Radio offers many opportunities to the man who wants to get ahead. My Training will help you win quick promotion in the Army or Navy . . . will fit you for a bright civilian career. SPRAYBERRY Methods are thorough and practical. Your Training will not interfere with your present duties.

You Get a Dual-Purpose Radio Set

I supply you with Radio Parts which you use to gain pre-experience in Repair work. These same Parts are used as a Modern Signal Generator and for Signal Tracing, etc. You'll find my Course and Equipment fully described in the catalog offered below.



No Previous Experience Needed

It makes no difference what your education has been. I can fit you quickly for a good-paying Radio job. I make it easy for you to grasp Radio principles and remember them. Your success is my full responsibility.

Earn While You Learn

My BUSINESS BUILDERS show you how to put your equipment to actual use in handling Money-making Radio Service Jobs shortly after you begin Training.

THE SPRAYBERRY COURSE IS SOLD
UNDER MONEY-BACK AGREEMENT

RUSH COUPON for BIG FREE BOOK

SPRAYBERRY ACADEMY OF RADIO

F. L. Sprayberry, President
655-C University Place, N. W.
Washington, D. C.

Please rush my FREE copy of "HOW TO MAKE MONEY IN RADIO"

Name.....Age.....

Address.....

City.....State.....


(Mail in envelope or paste on penny postcard)



Readers Say:

This Puzzler Will Have You Going 'Round in Circles

HERE is one of my favorite problems which I think some of your readers might be interested in trying to figure out. You start with

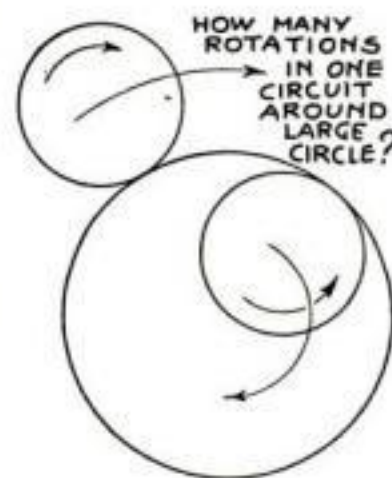

two circles, the radius of one being exactly twice that of the other. Now if you place the two circles together as shown in diagram at left and roll the smaller circle around the outer circumference of the larger circle, how many rotations on its own axis will the smaller circle make in completing one full trip.

Now if you place the smaller circle inside the larger, and roll it around the inner circumference until it completes one full trip, how many rotations on its own axis will it make this time? I'm only 16 years old—but I don't think your readers are going to find this problem too easy. Incidentally, A. W. H. of Phoenix, Ariz., certainly appears to have forgotten his physics or he would remember that a balloon filled with thin high-altitude air would very quick collapse when it was brought down to sea level. —E. A. B., Floral Park, N. Y.

We're Happy To Give Credit Where Credit is Due

ON PAGE 99 of your December issue, you carried a short article on the Bantam B-24 Bomber, a dummy plane only one-third actual size, yet complete in every detail except for engines. You stated that this plane is being manufactured in the Douglas Aircraft Company's training school at Tulsa, Oklahoma, for the purpose of instructing workers in the manufacture and repair of airplanes. May I therefore advise you that this training program has been instituted not by the Douglas Company but by the Tulsa Public Schools Vocational Educational Department. The training, however, is being conducted to meet the standards of the Douglas Aircraft Company.—R. B. McHenry, Director of Industrial and Adult Education, Tulsa, Okla.

INVENTORS

NOW Is the Time to PATENT and SELL Your Invention

Get
**FREE
COPY**

Now, more than ever before, is the right time to patent your invention. Why? Because manufacturers everywhere presently engaged in war production are looking ahead to the future by buying up patent rights now, so they will have new and attractive items to make and sell for civilian consumption as soon as the war is over. This is what happened during and after the last war. Hence, the smart thing for you to do is to look ahead to the future too. Protect your invention by applying for a patent now, so you will be in position to cash in on an outright sale, or on the royalties your invention will bring.

Patent Guide Shows What To Do

Our "Patent Guide for the Inventor" answers many important questions concerning Patents that inventors constantly ask. It tells what facts, details, drawings, sketches, etc. are necessary to apply for a Patent; how to protect your invention through dated and witnessed disclosure; how to do this AT ONCE to safeguard your rights; how Patent Office Records can be checked to determine whether the invention is probably patentable before filing fees need be paid, discusses costs involved and a practical way these can be paid as the application progresses. It tells how some inventors secured financial backing; how many simple inventions have proved large commercial successes; how Patents covering improvements also can be profitably utilized and marketed; tells countless other facts of interest.


Why You Need Expert Assistance

The Patent Laws were enacted for your benefit—to give you protection for the features of your invention which are Patentable. But these features must be legally and concisely set forth in the form of "claims." This phase of the procedure is so complex that the Patent Office advises the Inventor to engage a competent Registered Patent Attorney. We maintain a large staff—carefully trained registered patent attorneys—expert draftsmen—experienced searchers—to serve you. We have been serving inventors for more than 20 years.

Take First Step Now

With the Patent Guide you will receive also Free a "Record of Invention" form which will enable you at once to establish the date of your invention, before you file your Patent application. This step costs you nothing yet may be vital to your success. Remember—in Patent Matters, ACTION is IMPORTANT. Delay can be costly. Mail the coupon in an envelope, or paste it on a penny postcard NOW.

CLARENCE A. O'BRIEN
and
HARVEY B. JACOBSON
"Worthy of Your Trust"
Registered Patent Attorneys
32-C Adams Building
Washington, D. C.

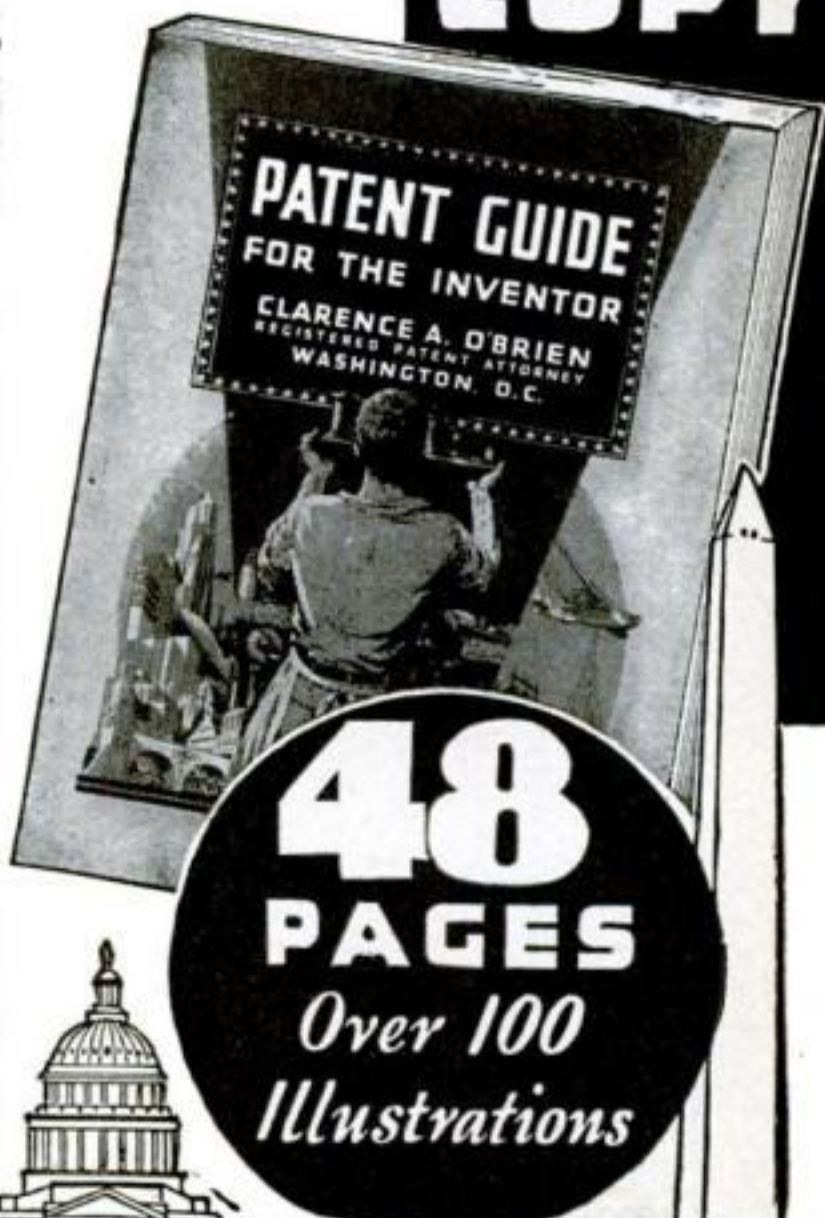

CLARENCE A. O'BRIEN
and **HARVEY B. JACOBSON**

CLARENCE A. O'BRIEN and HARVEY B. JACOBSON
Registered Patent Attorneys before the United States Patent Office
32-C Adams Building, Washington, D. C.

Please send me your 48-Page "Patent Guide for the Inventor" and your specially prepared "Record of Invention" form FREE. This request does not obligate me.

Name.....

Address.....

City..... State.....
(Please write or print plainly.)

Get This
FREE BOOK
IMMEDIATELY MAIL COUPON TODAY!

Free 7-Day Offer!

AUTO MECHANICS!

REPAIR ANY MAKE CAR—

TODAY!



Explains Every Repair Job on Every Model of All These Cars—1935 through 1942!

American	La Salle
—Bantam	Lincoln
Auburn	Lincoln
Austin	—Zephyr
Buick	Mercury
Cadillac	Nash
Chevrolet	Oldsmobile
Chrysler	Overland
Cord	Packard
De Soto	Pierce Arrow
Dodge	Plymouth
Ford	Pontiac
Graham	Reo
Hudson	Studebaker
Hupmobile	Terraplane
Lafayette	Willys

And major data needed to service 405 models of trucks Nearly 200,000 Vital Facts on Every Phase of Tune-Up and Repair • Over 450 Charts, Tables • More than 900 Photos, Drawings, Diagrams • Over 600 Big Pages—Size 8 1/4 x 11 inches. Published by MoToR, The Leading Automotive Business Magazine, 572 Madison Ave., New York, N.Y.

Helps EVERY Mechanic—even experts—do repair jobs easier, quicker

Explains every auto repair operation STEP-BY-STEP. Easy-to-use! Hundreds of photographs, diagrams, drawings, show exact "how to do it" of repairs, adjustments, replacements. All jobs on every model since 1935—plus 405 truck models! Engine; Electric, Fuel, Cooling, Lubrication Systems; Clutch, Transmission; Universals; Rear End; Wheels, Brakes; Knee Action, Shock Absorbers, Springs; Body; Free Wheel, Overdrive, Fluid Coupling!

150 FACTORY BOOKS IN ONE!

Imagine a COMPLETE COLLECTION of ALL official shop procedure manuals, prepared by each car manufacturer's own engineers! That's what you GET in this book! Open the manual to the car you want—you'll find everything to show the right way to do the job.

AUTO MECHANICS, INSTRUCTORS AND STUDENTS:

This is the factory shop manual used by the U. S. Army, trade, technical, and vocational schools for training auto mechanics.

SEND NO MONEY

Simply fill out coupon below. Mail it today and a copy of MoToR's up-to-the-minute New Factory Shop Manual will be sent to you at once for 7 days Free Examination.

7 DAY TRIAL

MoToR BOOK DEPT., Desk 23, 572 Madison Ave., New York, N.Y.

Rush me MoToR's Factory Shop Manual. If O.K. I will remit \$1 in 7 days, and \$1 monthly for 4 months plus 35c shipping charge with final payment. (\$5.35 in all.) Otherwise I will return book in 7 days. (Foreign price \$6, cash with order.)

NAME _____ AGE _____

ADDRESS _____

CITY _____ STATE _____

OCCUPATION & EMPLOYER _____

☐ **SAVE 35c!** Check here if you enclose \$5.00. We will then pay postage. Same 7-day return privilege applies.

Readers Say:

Dad Gets His Orders on Holding the Home Front

MY SON, Roy, is at present in the Army, and therefore not in a position to answer the inquiry that you recently sent to him. However,

his most specific request just before leaving was that we take good care of every copy of P.S.M., and that under no circumstances are we to allow the subscription to expire.—F. C. U., Muncie, Ind.

THAT GIVES ME AN IDEA!
I'M GOING TO HAVE 'EM
BOUND FOR MY BOY
IN THE SERVICE!



Thanks, F. C. U. Roy's letter made us feel mighty proud. We would appreciate

it if you'd tell him that we, too, are looking forward to his enjoying those back copies.—Ed.

Credit the Italians. They Always Come to a Fast Stop

IN "READERS SAY" of your January issue you published a letter from W. Y. of Hayden, Arizona, who outlined his idea for an airplane propeller whose pitch could be reversed to bring the plane to a quick stop. In this connection, I think you might be interested to know that back in 1939 the Italians carried out extensive experiments on seaplanes with just such a propeller. As soon as the plane touched the water, the propeller pitch was reversed and the plane came to a stop almost immediately. Credit for the invention, however, should not go to the Italians, for the idea originated in this country.—J. R. D.

But What if a Dog Just Doesn't Like to Keep House?

Do you mean to infer by your statement in Un-Natural History of the October issue that a dog does not know why he turns around several times before he lies down? How idiosyncratic of you! It is entirely obvious, and common sense will tell you, that he turns around to make his bed and to pat it to suit his shape, just as a woman makes and pats a bed.—A. H. T., North Platte, Neb.

Get Ahead Faster in **RADIO** COMMUNICATIONS • CODE • ELECTRONICS

BY THE PRACTICAL DeFOREST'S
TRAINING THREE-WAY METHOD




Above: DR. LEE DeFOREST—one of the world's greatest scientists and inventors in Radio and Electronics—supervised the preparation of DeForest's Training.

Quick THREE-WAY METHOD for Better Training

You receive a time-tested proved combination of

1. Modern, loose-leaf lesson material
2. Visual training by means of motion pictures in your own home.
3. The privilege of additional practical training on various types of commercial equipment in our Chicago laboratory.



DeFOREST'S TRAINING, INC.

Occupies and owns this modern, well-equipped building and laboratory in Chicago, where ambitious men and women are also securing Residential Training. DeForest's training is affiliated with the DeVry Corporation, internationally known manufacturers of high grade Sound Motion Picture and Electronic equipment. This affiliation is valuable from a practical industrial slant — helping to keep training up to industry's needs and changes.

BUY U. S. WAR BONDS

Trained men and women ARE NEEDED in the Radio-Electronics field . . . probably as never before! Earn good money . . . in this interesting industry which is so busy today and which should develop many new opportunities after the war. Find out what WE CAN DO to help you get into this fascinating work quickly. See for yourself what some of these opportunities are in War Production, Military Service, Broadcasting, Aviation Radio, a business of your own, etc. Our new booklet "Victory for You" will give you this information. Mail the coupon today for your copy.

IF YOU ARE SUBJECT TO MILITARY SERVICE: By all means, find out what DeForest's Training can do to help you get into Radio Communications work with its advantages. Many of the thousands of DeForest's students serving Uncle Sam are enjoying better pay and higher ranking in this extremely interesting . . . desirable branch of the Service. "Victory for You" will give you further details.

IF YOU ARE NOT SUBJECT TO MILITARY SERVICE: DeForest's Training can prepare you quickly for Radio and Electronics—in your spare time at home—then give you the benefit of our time-tested EMPLOYMENT SERVICE to help you actually GET STARTED in the Radio-Electronics field. If you are between 17 and 45, here is a real opportunity to cash in on today's great industrial activity—at the same time get established in a field with a real peacetime future.

WOMEN: 18 to 50—married or single. Uncle Sam needs you in industry. Get into the fascinating Radio Communications Equipment field. Enjoy pleasant work and good pay in one of the most appealing of all timely opportunities for women. DeForest's Training offers you a special preparation in this work designed especially for women. Upon completing it, our Employment Service will help you to make your start. Write for details.

DeForest's Training Enables You to Learn RADIO Faster ... Easier ... with the Aid of MOTION PICTURES in Your Own Home

As part of your preparation, DeForest's Training furnishes you with a 16 mm. motion picture projector, including a series of films loaned to you for study purposes. You "learn by seeing!"

Both our great war industries and our armed forces are using motion pictures on a wide scale to train men quicker . . . better. Many educators in schools and colleges have long praised "visual training" by motion pictures. "Seeing is knowing." This is one of the important reasons why DeForest's Training is so interesting . . . practical . . . effective and easy to understand.

Send TODAY for Valuable New Booklet "Victory for You" in RADIO

COMMUNICATIONS . . . CODE . . . ELECTRONICS
This handsomely illustrated, up-to-the-minute new book will bring you a timely picture of these many opportunities, both in industry and military service, and show you how to make your start with the aid of valuable "Visual Training."



MAIL THIS COUPON TODAY!

DeFOREST'S TRAINING, INC.

2535 North Ashland Avenue, Dept. H., Chicago, Illinois

Please send me free illustrated book entitled "Victory for You" in Radio. No obligation, of course.

Name Age

Address

City State

Paste coupon on penny postcard or mail in envelope

From the
News Editor's
Desk

EVERY MILITARY COMMANDER should have a psychiatrist on his staff, according to Dr. Emilio Mira, of the University of Buenos Aires. Under the terrific strain of seemingly unending battles that seldom gives them a chance to rest, Dr. Mira says, military leaders are very apt to push themselves far past the limits of their nervous endurance. The result may be a bad emotional crack-up symptomized by smoldering resentment, drunkenness, or sudden explosive behavior. To prevent this dangerous situation, Dr. Mira has devised a simple 10-minute test called a Myokinetic Psychodiagnosis by which, he says, an officer's mental and emotional fitness can be precisely determined at any given moment.

PREVENTION OF SABOTAGE is no longer exclusively the happy hunting ground of Edgar Hoover's ever-alert agents. Mechanical "detectives" are now ferreting out trouble spots in power-generating equipment and are saving machines from breakdowns which might seriously hamper production. One of these instruments recently gave warning of unusual vibration in a generator shaft. Inspection revealed an incipient crack which, if it had been neglected, would have crippled the plant for weeks.

A SURGICAL DRESSING for wounds and burns that looks like wax paper, but which carries a germicidal Sunday punch in its 30 to 50-percent content of sulfadiazine, has been developed by Dr. Kenneth Pickrell of Johns Hopkins. In the treatment of burns, the sulfa drug film is placed over the scorched area, and on top of that is applied a smooth, firm-pressure gauze dressing. New skin usually begins to form after three to five days. Most unusual feature of the treatment, however, is that the sulfa film is translucent, which allows the surgeon to inspect the burn without removing the film.

OF THE MANY FREAK ACCIDENTS that the war has produced to date, the leading candidate for believe-it-or-not honors took place when a British aviation student fell out of a training plane at 500 feet. He appeared to be on his way to oblivion when suddenly something struck him on the head. Snatching at it frantically, he found himself clutching the tail of his plane. He climbed aboard and landed unhurt.

SPECIALIZATION IN WAR has now reached an all-time high with the announcement that a new type of diet for aviators has eliminated a major source of aviation accidents. A Canadian company confirms the premise by revealing that highly nutritious lunches for its employees have resulted in increased production. England adds to the evidence with the statement that a special diet for nursing babies and pregnant women has reduced infant mortality 20 percent.

In Your Mind's Eye

The Secret of MENTAL CREATING

IF you just like to dream, read no further. There comes a time when your fancies *must be* brought into light—and stand the test of every-day, hard realities. Are you one of the thousands—perhaps millions—whose thoughts never get beyond the stage of *wistful wishing*? Do you often come to from a daydream with the sigh, "If only I could bring it about—*make it real*?"

All things begin with thought—it is what follows that may take your life out of the class of those who hope and dream. Thought energy, like anything else, can be dissipated—or it can be made to produce actual effects. *If you know how to place your thoughts* you can stimulate the creative processes within your mind—through them you can assemble things and conditions of your world into a happy life of accomplishment. *Mental creating* does not depend upon a magical process. It consists of *knowing how* to marshal your thoughts into a power that draws, compels and organizes your experiences into a worth-while design of living.

ACCEPT THIS *Free* BOOK

Let the Rosicrucians tell you how you may accomplish these things. The Rosicrucians (not a religious organization), a world-wide philosophical fraternity, have preserved for centuries the ancients' masterful knowledge of the functioning of the inner mind of man. They have taught men and women how to use this knowledge to *recreate their lives*. They offer you a free copy of the fascinating book, "The Mastery of Life." It tells how you may receive this information for study and use. Use coupon opposite.

The ROSICRUCIANS
(AMORC)

SAN JOSE

CALIFORNIA

SCRIBE: Q. S. Y.
The Rosicrucians (AMORC),
San Jose, California.
Please send free copy of "The Mastery of Life,"
and I shall read it as directed.

Name.....

Address.....

City.....

HAVE THIS STAFF OF SPECIALISTS HELP YOU PATENT your IDEA

NO MATTER HOW GOOD your invention may be, the commercial value of your patent protecting that invention depends upon the careful preparation of strong claims covering it. This firm of Registered Patent Attorneys has helped and wisely advised individual inventors for almost half a century. Our staff is made up of specialists—men who are intimately familiar with those particular classes of inventions to which they devote their entire time. The object of this organization is to secure for its clients the strongest possible patents which their inventions warrant.

Present Defense Production A GOLDEN OPPORTUNITY for Inventors

Don't forget—your patent will give you 17 years "exclusive right to make, use and sell". Inventions adopted now as substitutes for materials and equipment not obtainable will have become regular articles of our daily lives when this emergency is over. The time to act—to protect your idea for immediate and future commercialization—is NOW!



Send at once for these Books

FREE Here are two plainly written books which tell you, step by step, how to safeguard your invention—give you valuable ideas on commercializing your patent. With these two helpful books, we will send you also an all-important "Evidence of Invention" form. Don't delay. Get the coupon below into the mail AT ONCE!

VICTOR J. EVANS & Co.

Merlin M. Evans

REGISTERED PATENT ATTORNEYS
MAIN OFFICE: 740-C MERLIN BLDG.
WASHINGTON, D. C.

Please send me your books, "Patent Protection" and "How to Sell an Invention" without cost or obligation.

NAME.....

ADDRESS.....

CITY AND STATE.....

Please mention POPULAR SCIENCE when writing to advertisers.

"N. Y. I. Photo-Training Was Most Exciting Event In My Life"

Says Frank Turgeon, Jr., A.R.P.S.



Who, Without Previous Experience, Won Fame and Fortune Through N. Y. I. Course

"Though inexperienced when I en-



Photo by Turgeon

rolled, my N. Y. I. Course made me a competent photographer. One advantage was the school's individual instruction, to which I owe both the versatility and ability of my methods. Another was the personal attention of its faculty of experts, correcting my weak points and enabling me to master every phase. And, what was important, I earned while I learned."

Fascinating Opportunities for Both Men and Women

Mr. Turgeon is but one of hundreds of successful N. Y. I. graduates. Never before such an urgent demand for trained men and women photographers! Opportunities everywhere for immediate earnings and sound future careers. Wartime positions plentiful—both civilian and military. Our Employment Service far ahead of last year in job placements. N. Y. I. graduates in Armed Forces winning "non com" and "petty officer" ratings and commissions, with increased pay. Start NOW! No classes. Courses in Commercial, Advertising, News, Portrait, Motion Picture and COLOR. At our N. Y. studios, or at home in spare time. Special short and "pre-induction" courses. Write for big FREE Book today.

33rd
YEAR

NEW YORK INSTITUTE OF PHOTOGRAPHY

Dept. 5

10 West 33 Street

New York, N. Y.

Learn to Speak



SPANISH
FRENCH, GERMAN OR ITALIAN

This Quick, Easy Way

ONLY 15 MINUTES A DAY. Know a second language for better business or social position; read foreign books; really enjoy travel. Speak like a native. Learn quickly, easily at home just "by listening" to CORTINA RECORDS as thousands have! Cortina-phone Method famous for 60 years. Write today for FREE book "The Cortina Short-Cut." State language interested in.

CORTINA ACADEMY, Suite 123, 105 West 40th St., New York, N. Y.



MONEY IN RABBITS-CAVIES

WE BUY and put you in touch with other markets. Catalog and copy of magazine 10c. Or send 25c for Book Catalog and Price List and 6 mo.'s Subscription to the AMERICAN SMALL STOCK FARMER. OUTDOOR ENTERPRISE CO., BV922, PEARL RIVER, N. Y.

Get into the BAKING BUSINESS

Bakers make good money! Now 7th Industry in wages! Nearly depression-proof. New home study Baking Course qualifies you. Common school education sufficient. If you're ambitious, write for FREE BOOK, "Opportunities in Baking." National Baking Institute, 1315 Michigan, Dept. 1363, Chicago

LEARN MONEY-MAKING CARTOONING

Same simplified method that has helped train creators of "Terry & Pirates," "Wash Tubbs," "Out Our Way," "Winnie Winkle," "Reg'lar Fellers," "Strange As It Seems," "Secret Agent X-9," and many others. Earn while learning. Rush 10c for Picture Chart (to test your ability.) and full details. (State age.) THE LONDON SCHOOL, 4323 National Building, Cleveland, Ohio

MONEY for MEN ALL DATA FREE

THE PLASTEX Industry needs manufacturers on small scale and for big production of Lamp and Clock Stands, Art Goods and Novelties in Plastex and Marble imitation. Experience unnecessary. 1/2c material makes regular 10c store sellers. Rubber moulds furnished for speed production. Small investment brings good returns. Big chain store orders now being placed. Ambitious men have chance for real prosperity. Our Free booklet will interest and benefit you.

PLASTEX INDUSTRIES, Dept. 2, 1085 Washington Ave., New York, N. Y.

Get into **RADIO** *now!*

SHOP METHOD HOME TRAINING
fully qualifies you for bigger pay jobs



More than 50,000,000 radios in use. They need servicing. Over 800 Broadcasting Studios employ trained radio technicians. The movie industry and thousands of theatres employ Sound Experts. Factories are adopting audible address systems. The Air Lines and Government need Trained Men. Here is your opportunity to get into a permanent, profitable field of enjoyable work.

BIG OPPORTUNITY FOR NATIONAL GRADUATES

Shortages in trained, skilled men run into the hundreds of thousands. One of the biggest fields is **Radio**, with its many fascinating branches. War-time demands for Radio men are tremendous and will continue unabated after the war. That's important to you. You want training in a field that will continue to advance. National Schools offers you a time-tested method of Home Training which has helped thousands of men to more pay, and unlimited opportunity in the growing RADIO Industry. You can actually start earning in Spare Time, even while you are training for a good permanent job as a RADIO Technician. You need training. National can definitely help you. Simply send the Coupon and we will mail you a FREE Specimen Lesson and Big Opportunity Book so you can judge for yourself just how you can be helped to bigger pay and a Life Career of Success.

COMMAND ANY OF THESE JOBS
Radio Expert
Radio Broadcasting
Sound
Industrial Electronics
Studio Technician
Television Technician

**Step up in life!
Be independent!
Insure your success!**

Keep your present job while learning. National brings to you the same proven instruction methods as used at the School. No dull text books.

YOU GET HOME TRAINING FROM A REAL, ESTABLISHED TECHNICAL TRADE SCHOOL

For 38 years National Schools has trained ambitious men for Top Pay trades. Squarely behind you are the modern, completely-equipped Training Shops of National where we **pre-test and prove** every instruction sent to you. Every phase of your training is **personally supervised** by an established Faculty of practical, experienced instructors and engineers. They have developed progressive methods of training you in your home comparable to actual shop practice. Unique training facilities give you Home Training based on Resident School Shop principles—**methods not available from any other source**, to our knowledge. You'll be amazed when you receive our Complimentary Lesson and full details. **Send the coupon at once.**

NATIONAL SCHOOLS

Los Angeles, California
Established 1905



"I will train you in your spare time to qualify as a Radio Expert."

J. A. ROSENKRANZ
President

MAIL COUPON FOR LESSON & BOOK

National Schools, Dept. P5-3.
4000 So. Figueroa, Los Angeles, Calif.

(Mail in envelope or paste on a Penny Postal.)

Mail me **FREE**, without obligation, one Lesson and Opportunity Book, with full details about Radio Training.

NAME _____ AGE _____

ADDRESS _____

CITY _____ STATE _____

MEN SUBJECT TO MILITARY SERVICE AIDED BY TRAINING



Radio Training helps men get extra rank, extra pay in war service. Every man eligible for service should mail coupon. Many Service Men now enrolled.

DUPLICATE THE SUCCESS OF THESE GRADUATES WITH U. S. GOVT.

"I have been accepted by the U. S. Federal Communications Commission at a starting salary of \$1800.00 per year, thanks to National Training."

PRICE G. GARNER
San Diego, Calif.

\$3000.00 PER YEAR

"I am married now. Just going fine. My pay this year is over the \$3000.00 mark."

LEO BROMBEREK
Lomont, Ill.


WITH BIG CONCERN

"I got a job with International Telephone & Radio Co. It's a good, straight salary position. Delighted with your training."

DOUGLAS NIELSEN
Jamaica, N. Y.

THOUSANDS OF GRADUATES ATTRIBUTE THEIR SUCCESS TO NATIONAL TRAINING

FREE LESSON and OPPORTUNITY BOOK

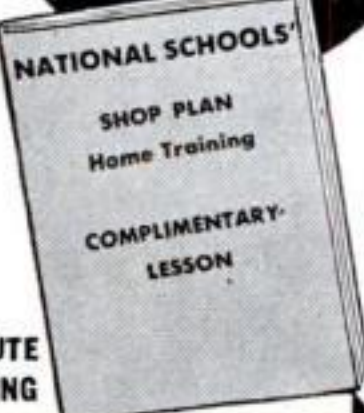

REQUEST FULL DETAILS

NEWS

Increased production
means

MORE JOBS for MACHINISTS and bigger pay for men who know their work

This big home-study and reference course gives you the practical facts on machines and methods you need to advance in machine shop work. Take advantage of the other man's experience as found in books, to solve your problems, increase your efficiency, with

The AMERICAN MACHINISTS' LIBRARY

6 volumes—2368 pages—2516 illustrations
(A combined home-study course and reference library)

This library of machine shop practice was written for practical men. It gives you the best methods for every kind of machine shop work. It fully explains lathes, drills, and other machine tools and their operation, automatic screw machines, speeds and feeds, gear design and production, jigs and fixtures, punch and die work, metal surfacing, etc., etc. Plainly written—completely illustrated—the best kind of help to the machine shop man who wants to advance himself.

No money down—special price—easy payments.

EXAMINATION COUPON

McGRAW-HILL BOOK CO., 330 W. 42nd St., New York

Send me for ten days' examination the American Machinists' Library. If satisfactory I will send you \$1.50 in 10 days and \$3.00 monthly until the price of \$19.50 is paid. If not wanted, I will return the books postpaid. (To insure prompt shipment write plainly and fill in all lines.)

Name.....
Home Address.....
City and State.....
Position.....
Name of Company..... PSM-3-43

WE ASKED 817 MEN TO NAME THE BEST RADIO TRAINING THEY KNOW!



Unusual Survey Reveals What RADIO MEN Think of RADIO COURSES

Here's your chance to get started right in your study of Radio—without guesswork, and without investing a lot of money!

Recently, we asked a mixed group of 817 Radio instructors, students, servicemen, Radio men in the U. S. Armed Forces, in manufacturing plants, etc. to tell us just what they think of the books and courses offered for Radio beginners. NINE OUT OF TEN—728 to be exact—wrote that Ghirardi's RADIO PHYSICS COURSE is their FIRST CHOICE as the easiest-to-learn, most thorough and inexpensive Radio book.

Radio Physics Course Tops All Others

No wonder then that RADIO PHYSICS COURSE has given more people their basic radio training than any other! It takes no previous knowledge for granted. Step by step—at home, in spare time—it gives you the scope of 36 courses—combined in one big 972 page book, with 508 illustrations, and 856 self-testing review questions—for only \$5 complete!

36 Courses in
One...for only
\$5 Complete

Compare with any other at any price! You be the judge. Our 5-Day Money-Back Guarantee protects you fully. You've everything to gain—nothing to lose!

5-DAY FREE TRIAL

RADIO & TECHNICAL PUBL. CO.,
Dept. PS-33, 45 Astor Place, New York, N. Y.
Rush me your RADIO PHYSICS COURSE BOOK. ☐ \$5 enclosed. ☐ Send C.O.D. for \$5 plus postage. In either case, I may return book within 5 days for refund.

NAME.....
ADDRESS.....
CITY.....STATE.....



The only book
of its kind—
972 big pages





"MY JOB'S IMPORTANT! IS YOURS?
AIRCRAFT INSTRUMENT
MEN NEEDED AT ONCE!"

PREPARE in AVIATION'S
MOST VITAL BRANCH

AIRCRAFT INSTRUMENTS

HOME STUDY—LEARN BY DOING!

Practical, complete training—on actual instruments furnished by the school—qualifies you for well-paying positions with manufacturers, airlines and instrument service and repair stations.
Send for CATALOG today...

EASTERN AIRCRAFT INSTRUMENT SCHOOL

"Largest in the East"

DEPT. SR 116 NEWARK AVENUE JERSEY CITY, N. J.



TRI-STATE COLLEGE

B. S. Degree in 27 Months

Distinguished for technical 2 1/4-year courses in Civil, Electrical, Mechanical, Chemical, Radio, Aeronautical Engineering; Business Administration, Accounting, and Secretarial Science.

MEN AND WOMEN—3 yr. high school students with good record admitted. Special Preparatory Department. Short diploma courses (36 weeks) in Surveying, Drafting. Low tuition. Low living costs. Cosmopolitan student body. 60th year. Enter March, June, September, January. Write for catalog. 533 College Ave., ANGOLA, INDIANA.

Get this Book Free if you

STAMMER

Every stammerer should have the new 128 page book "Stammering, Its Cause and Correction". Sent free to stammerers. It describes the Bogue Unit Method for the scientific correction of stammering and stuttering. Method successfully used at Bogue Institute for 42 years—since 1901. Endorsed by physicians. Write for full information. No obligation.

Benjamin N. Bogue, Dept. 997 Circle Tower, Indianapolis, Indiana

Learn CARTOONING

FREE TRIAL LESSON! Cash in on your sense of humor—AT HOME—BY MAIL. Have fun! Make money! No experience needed to start. Write today for FREE LESSON, mailed postpaid. No obligation.

Moon Gag-Cartoon School, Dept. S, Argyle, Wis.

STUDY AT HOME

With A Chartered Educational Institution

Courses in ENGINEERING: Electrical, Civil, Mechanical, Drafting, Architectural, Steam, Aeronautical, Radio, Structural, Mining, Industrial, Highway, Petroleum, Marine, Chemical.

Courses in ARTS AND SCIENCES: Philosophy; Education; Letters; Public Health; Medical Jurisprudence; Psychology; Sociology; Physics; Chemistry; Geology; Pol. Science; Theology; Law; Business and Commerce; Accounting; Mathematics; Statistics; Agriculture.

MCKINLEY-ROOSEVELT INCORPORATED, 4610-AC, Sheridan Road, Chicago

LAW

STUDY AT HOME for PERSONAL SUCCESS and LARGER EARNINGS. 31 years expert instruction—over 106,000 students enrolled. LL.B. Degree awarded. All texts furnished. Easy payments. Send for FREE BOOK—"Law and Executive Guidance".

AMERICAN EXTENSION SCHOOL OF LAW
Dept. 27-S 8 East Huron St., Chicago, Ill.

New Catalog

GENUINE U. S. BARGAINS

- O. D. Wool Blankets (used) ... \$2.95
- U. S. Army Ration Bags (New)49
- U. S. Army Pup Tents (used) ... 3.50
- Aluminum Mess Pans (used)35

Thousands of other bargains in military, outdoor & sport goods for hunter, farmer, scout. Send 10c for 32 page catalog returned with first order.

A and N SUPPLY CO.
4784 LESTER ST. RICHMOND, VA. EST. 1868



THERE'S MONEY IN CARTOONS!

RAYE BURNS will teach you HOW to CREATE ORIGINAL CARTOONS at home that you may SELL! Course contains 26 lessons and over 600 illustrations. All for Only... \$2.85

Send name and address for free details.

RAYE BURNS SCHOOL, Dept. S, Box 1298, CLEVELAND, OHIO

Please mention POPULAR SCIENCE when writing to advertisers.



ELECTRICIANS

URGENTLY NEEDED NOW!

Whether you are 16 or up to 50
Prepare for a Good War-Time Job..
with a PEACE-TIME FUTURE!

"LEARN BY DOING"—in 12 Short Weeks

You don't need much money. I'll Finance Your Training!

Serve Your Country!

Every true American wants to help WIN THE WAR. If you're not in line for active duty because of dependents, physical handicaps, or age—ELECTRICITY offers the greatest chance to serve! Skilled Electricians are in demand for airplane factories, shipyards, defense plants. Decide NOW to "enlist" in this vital, big-pay field—Then too, those who may be called to service can best serve their country and themselves if they are trained men. The armed forces need thousands of trained Electricians.

Insure Your Future!

Countless new electrical opportunities will develop after the war. New inventions are waiting to be brought out. Aviation, television, electronics are on the threshold of amazing growth. Get your Electrical Training NOW. Be ready for a great future when Peace comes.

Training by Actual Work

Coyne Training is practical, you don't need advanced education or previous experience. You learn by doing—on real motors and apparatus, not by correspondence. You get personal, individual attention. In only 90 days at Coyne you can master this training and be ready for a good job—a Coyne-trained Electrician!

Get Ready for a VICTORY JOB

Here are a few of hundreds of positions that must be filled by trained Electrical men, now and after the war.

ARMATURE EXPERT
AVIATION ELECTRICIAN
MAINTENANCE ENGINEER
ILLUMINATING EXPERT
POWER PLANT OPERATOR
AUTOMOTIVE ELECTRICIAN
SIGNAL AND ALARM WORK
WIRING CONTRACTOR
MOTOR TESTER
ELECTRONICS TECHNICIAN
AIR CONDITIONING WORK

START NOW—PAY LATER

Don't let lack of money hold you back. I have helped lots of fellows to complete my training with very little cash. We'll help you get a part-time job so you can "earn while learning". You can pay tuition in easy monthly payments AFTER YOU GRADUATE.

LIFETIME JOB SERVICE

My Graduate Employment Service is yours for the asking, when you complete your Coyne Training. Many leading industries ask us to send Coyne graduates to them. You'll find this service a big help now and in later years.

44 YEARS OF SUCCESS

Founded in 1899, Coyne has trained thousands of ambitious men to hold important electrical jobs. The Coyne Shops occupy an entire modern 5-story building in Chicago, the heart of vast war industries. It contains one of the finest, most complete layouts of electrical equipment found anywhere—including A.C. and D.C., house wiring, power plant and switchboard, electric refrigeration and air conditioning, auto and airplane ignition, Diesel engine. All shown in my big book—send coupon today. It's FREE.



H. C. LEWIS
President

COYNE ELECTRICAL SCHOOL

500 So. Paulina St. Dept. 33-73, Chicago, Ill.



**TIME IS SHORT!
ACT NOW!**

Don't delay. Mail the coupon for my big, free Coyne book. It's full of pictures and proof that I can help you get the training you need for a good job in Electricity. This does not obligate you. No salesman will call. So act now. Get the facts—MAIL COUPON TODAY.

H. C. LEWIS, Pres., COYNE ELECTRICAL SCHOOL
500 S. Paulina Street, Dept. 33-73, Chicago, Ill.

Without obligating me in any way, send me your FREE BOOK and explain your plans to help me get into Electricity.

NAME.....

ADDRESS.....

CITY.....STATE.....

OCCUPATION.....AGE.....

EXTRA! 4 Weeks course in RADIO now included

Do you want

- ..to go to College?
- ..or to enter a Profession?

(Such as Accounting, Architecture, Nursing, Dentistry, Teaching, Social Work, Osteopathy, Beauty Culture, Optometry, Embalming, Chiropody, Law, Medicine, etc.)

- ..or get an Office Position?

To get anywhere, you practically MUST finish High School FIRST. You can complete our simplified High School Course in SPARE time at home, as FAST as your time and abilities permit. Equivalent to resident school work—prepares you for college, pre-professional examinations, business, industry. Standard texts furnished. Diploma. Credit for H.S. subjects already completed. Single subjects if desired. Low tuition, easy terms. American School, Chicago, est. 1897—endorsed by educators. Finish your high school education NOW. Write TODAY!

High School Course at Home

Many Finish in 2 Years

American School, Dept. AH346, Drexel Ave. at 58th St., Chicago, Ill.

Gentlemen: Send me FREE information covering special training in subjects checked below. No obligation on my part.

- | | |
|--|--|
| <input type="checkbox"/> High School Course | <input type="checkbox"/> Diesel Engineering |
| <input type="checkbox"/> Cost Accounting for Manufacturing | <input type="checkbox"/> Drafting and Design for Men and Women |
| <input type="checkbox"/> Architecture and Building | <input type="checkbox"/> Plastics |
| <input type="checkbox"/> Automotive Engineering | <input type="checkbox"/> Private Secretary |
| <input type="checkbox"/> Business Management | <input type="checkbox"/> Mechanical Engineering |
| <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> Aviation <input type="checkbox"/> Radio |
| <input type="checkbox"/> Elec. and Gas Refrigeration | <input type="checkbox"/> Salesmanship |
| <input type="checkbox"/> Air Conditioning | <input type="checkbox"/> Shipbuilding |

Name

Address

WANTED Radio Men for BIG PAY JOBS



Thousands of Radio Technicians needed for industry and our Armed Forces—NOW. This home study book—the "Radio Men's Bible"—will enable you to qualify for advancement and big pay.

Here is a complete course in Radio and Electronics—written in simple, non-technical language—easy to understand.

COMPLETELY REVISED INCLUDES

FREQUENCY MODULATION

Covers radio transmission and reception—sound pictures—short wave—public address systems—television—photo cells. More than 500 articles, complete in themselves—over 1,100 additional definitions and references. Each section divided with cross references to related subjects. 1,000 pages—1,178 illustrations—130 tables—105 graphs.

5 DAY EXAMINATION

PAY AS YOU LEARN

Start to-day to qualify for a bigger, better job and real money.

MAIL THE COUPON NOW!

Drake Publishing Co., Dept. PS-3, 600 W. Van Buren St., Chicago, Ill.

Send me Drake's Cyclopedia of Radio and Electronics, price \$5.00. I will pay postman \$1.00 plus charges, (postage paid if cash in advance) and remit \$1.00 per month until full price, \$5.00, is paid. If not satisfied I will return book within 5 days and my \$1.00 will be refunded.

Name.....

Address.....

City..... State.....

Position.....

Company.....

Please mention POPULAR SCIENCE when writing to advertisers.

PARKS AIR COLLEGE

PARKS AIRPORT

EAST ST. LOUIS, ILL.

Offers YOU COLLEGE and PROFESSIONAL TRAINING Majoring in AVIATION

Accredited by the Illinois Superintendent of Public Instruction. Included since 1938 in The Directory of Colleges and Universities, issued by the U. S. Office of Education. U. S. approved as a Commercial Ground and Flying School and Mechanics' School. Accredited by and cooperating with the United States Army Air Corps in giving flight and mechanical training. Open to high school graduates. FOUR courses lead to B.S. degrees in Professional Piloting, Aviation Operations, Maintenance Engineering, Aeronautical Engineering.

TWENTY-TWO TRAINING PLANES are used in professional flight training which prepares graduates for airline flight operations. FACULTY of 104 specialists in various fields of aviation.

Enrollment limited to a total of 300 commercial aviation students. Capacity enrollment of 870.

Airport, 25 buildings devoted to school purposes exclusively. Dormitories and dining hall at the College.

Spring term March 29. Send postcard for new 64-page catalog.

16th YEAR REGISTRAR, DEPT. PS-3 PARKS AIR COLLEGE, East St. Louis, Ill.

ENGINEERING DEGREE IN 27 MONTHS

INDIANA TECHNICAL COLLEGE

Courses in Aeronautical, Chemical, Civil, Electrical, Mechanical, and Radio Engineering. One-year courses in Radio and Drafting. Approved by C.A.A. Prep courses without added cost. Low tuition. Large industrial center. Opportunity to earn part living expenses. Enter March, June, September, December. Catalog. 633 E. Washington Blvd., Ft. Wayne, Ind.

JIU-JITSU

By Frederick P. Lowell, noted instructor. 61 lessons, 150 clear photos now make Jiu-Jitsu easier than ever to master. How to defend yourself against person larger than you, even if he is armed; then throw him! Ideal for men and women, civilian defense workers, Army, Navy, etc. Only \$1—money back if not delighted! Send now to:

A. S. BARNES & CO.

ONLY \$1.00 Dept. 33, 67 West 44th Street, New York, N.Y.

Correspondence Courses In RADIO and ELECTRICAL ENGINEERING LOW AS \$25

ELECTRICAL ENGINEERING. Get good grasp of wide electrical field. Modern. Very understandable. Theory made easy.

RADIO ENGINEERING. Extra fine course in radio, public address, photo-electric work. Trains you to be super-service man, real vacuum tube technician. Tuition ONLY \$25, either course. Deferred payment plan. Experiment kits furnished.

FREE Write for free copies of school catalogs, student magazines, etc. LINCOLN ENGINEERING SCHOOL, Box 931-551, Lincoln, Neb.

Learn MECHANICAL DENTISTRY AT HOME!

To make Crowns, Plates, Bridgework, etc., for Dentists. Easy practical way to learn mechanical dentistry at home in spare time. FULL EQUIPMENT OF TOOLS AND MATERIALS INCLUDED WITH COURSE. Low tuition. Easy terms. Write for FREE BOOK about this money making profession that is not affected by machine age.

McCARRIE SCHOOL OF MECHANICAL DENTISTRY 207 N. Broad St. Dept. 812 Philadelphia, Pa.

RADIO ENGINEERING

broadcasting, aviation and police radio, servicing, marine and Morse telegraphy taught thoroughly. 48 weeks' engineering course equivalent to three years' college radio work. School established 1874. All expenses low. Catalog free.

The Dodge Institute, 503 Monroe St., Valparaiso, Ind.

HAVE A PAYING HOBBY

Raise Bob-White Quail at home. Fascinating and profitable. Complete information how to raise, and where to buy them, \$1.

PAUL PERKINS GRAYSLAKE, ILL.

Learn PHOTOGRAPHY at Home

Splendid opportunities. Prepare in spare time. Easy plan. No previous experience needed, common school education sufficient. Send for free booklet "Opportunities in Photography", particulars and requirements.

American School of Photography 1315 Michigan Ave., Dept. 1363, Chicago, Ill.

Learn Profitable Profession in 90 days at Home

Earnings of Men and Women in the fascinating profession of Swedish Massage run as high as \$40 to \$70 per week but many prefer to open their own offices. Large incomes from Doctors, hospitals, sanitariums and private patients come to those who qualify through our training. The Army and Navy need hundreds trained in massage. Write for Anatomy Charts and booklet—They're FREE.

THE COLLEGE OF SWEDISH MASSAGE 100 E. Ohio St., Dept. 370, Chicago

EVERY DEFENSE WORKER SHOULD
KNOW THESE

ENGINE LATHE OPERATIONS

GO TO THE TOP IN YOUR JOB

For Shop Supervision — Training — Inspection, You Should Know These Set-Ups and Operations in Detail.

For Increased Production and individual rate of earning, work faster — better, by understanding these precision manufacturing practices.

For Promotions and Higher Pay Master all these Operations and Procedures for using every kind of lathe and attachment.

**COMPLETE TECHNICAL, ENGINEERING AND MECHANICAL
DATA FOR EVERY KIND OF LATHE SET-UP AND OPERATION**

**Detailed Instruction with Illustrations
and Charts Make It Easy for
All to Understand and Master**

How to Locate Centers with the Hermaphrodite Caliper
How to Locate Centers with the Center Square
How to Locate Centers with Dividers and Surface Plate Gage
How to Locate Centers with Surface Plate and Surface Gage
How to Locate Centers with a Bell Center Punch
How to Test Accuracy of Center Punch Marks
How to Drill Center Holes with Work in a Chuck



How to Drill Center Holes with Work Supported on the Dead Center
How to Drill Center Holes with the Drill Press
How to Grind and Set a Rough Turning Tool
How to Rough Turn Stock between Centers
How to Transfer Dimensions with Calipers
Steel Rules and Scales



How to Read a Micrometer Caliper
How to Read the Vernier Scale
Systems of Fitting Gaging
How to Grind and Set a Facing Tool
How to Face Ends of Stock
How to Grind and Set a Finishing Tool
How to Finish Turn to $\pm .001$
How to Lay Off Lengths with Hermaphrodite Caliper
How to Lay Off Lengths with Scriber and Scale
How to Grind and Set a Parting Tool
How to Lay Off Length with Parting Tool and Scale
How to Grind and Set a Round Nose Turning Tool
How to Turn to Filleted Shoulders
How to Accurately Align Lathe Centers
How to Turn to Square Shoulders with Parting Tool and Round Nose Tool

How to Center Work from the Exterior in an Independent Chuck
How to Center Work from the Bore in an Independent Chuck
How to Cut Off Work with a Parting Tool
Drilling in the Lathe
How to Grind a Twist Drill
How to Drill with the Drill in the Lathe Tailstock
How to Drill with the Drill in the Lathe Headstock
How to Ream in the Lathe
How to Grind and Set a Boring Tool
How to Bore in the Lathe
How to Turn Tapers and Angles with the Compound Rest



How to Turn Taper with the Tailstock Offset
How to Turn to Square Shoulders with Shoulder Turning Tool

**AND MANY OTHER IMPORTANT
PRECISION OPERATIONS.**

MAIL THIS COUPON TODAY!

WILCOX & FOLLETT CO.
1255 So. Wabash Ave., Dept. PS-3
Chicago, Illinois

Please send me postpaid your new book, "Engine Lathe Operations" and a FREE Protractor Scale and Rule. Enclosed is check or money order for \$1.98 to cover complete payment. I can return the book in 5 days if I am not completely satisfied.

NAME

ADDRESS

CITY STATE

☐ Check here if you wish book to be sent C.O.D. (Postage and C.O.D. charges extra.)

HOW TO GET THE JOB YOU WANT

Prove your ability by knowing every operation, every function and every procedure for precision production with all kinds of lathes. Be able to set-up and operate lathes for any kind of work—be able to supervise and instruct others on Engine Lathe Operations.

THIS ONE COMPLETE BOOK TEACHES ALL

In your spare time you can master the operations and methods employed for every conceivable type of production work with lathes. Order your copy today. Money-Back Guarantee!!

AMERICA'S LARGEST EDUCATIONAL BOOK HOUSE SAVES YOU MONEY ON TECHNICAL EDUCATIONAL BOOKS

Deal direct with America's Largest Educational Book Company and save on all Technical Books—complete prices as low as most "down payments." Authentic books written by Authoritative authors.

BOTH FREE IF YOU ORDER NOW!

This Precision made
Machinists Protractor
Scale and Rule with
both English and Metric
readings sent free with
your copy of "Engine
Lathe Operations."



Better model-making- better arts and crafts- WITH THIS REVOLUTIONARY KNIFE

The very knife-design makes you do a better job. The handles make your fingers deft. Super-keenness makes effortless cutting on hard woods, cardboards or plastics. Special blade-shapes make X-ACTOS

follow guide lines easily; and surgical sharpness minimizes splitting. NOW, at first sign of dulling, instant change to a new blade renews the surgical keenness. Re-blade to re-sharpen.

GET FREE BOOK, TELLS "HOW"

to build Model Planes prepared by experts. Profusely illustrated, simple, easy to follow instructions. Build solid models for Army and Navy spotter planes. Write for FREE "How to build Model Planes." Send 5c to cover handling and postage. At your local Hobby Shop, Hardware or Department Store or order direct. Extra Blades 50c for pack of 5.

X-ACTO
CRESCENT PRODUCTS CO.
440 Fourth Ave., New York, N.Y.



No. 1 X-ACTO knife for light, delicate work. 3 styles of blades. Complete with one blade. 50c. With 5 extra assorted blades. \$1.00

No. 2 X-ACTO knife for heavy carving—5 styles of blades. Complete with one blade. 50c. With 5 extra assorted blades. \$1.00

No. 42 Double Set 2 handles 12 blades. \$2.00.

No. 82 Fitted wooden chest 3 handles, 12 blades. \$3.50.

X-ACTO Knife

RE-blade to RE-sharpen



"It is the BEST Handy-Sized Dictionary!"

ACTUAL use proves that WEBSTER'S COLLEGIATE defines all the most commonly used words—IS the BEST. 1,300 pages; 110,000 entries; 1,800 pictures. \$3.50 to \$8.75 depending on bindings. Buy of your dealer or direct from publishers. Mail coupon for FREE Quiz and Picture Game. G. & C. Merriam Company, 295 Federal Street, Springfield, Massachusetts.



G. & C. Merriam Co., 295 Federal St., Springfield, Mass.

Please send me FREE Quiz and Picture Game, also full information about Webster's Collegiate Dictionary, Fifth Edition.

Name.....

Address.....

Please mention POPULAR SCIENCE when writing to advertisers.

"YOU ARE UNDER ARREST!"



There's a Thrill in Bringing a Crook to Justice Through Scientific

CRIME DETECTION!

I have taught thousands this exciting, profitable, pleasant profession. Let me teach you, too, in your own home. Learn Finger Printing, Firearms Identification, Police Photography and Secret Service Methods thoroughly, quickly and at small cost.

43% of All American Bureaus

of Identification are headed by students and graduates of I. A. S. You, too, can fit yourself to fill a responsible crime detection job with good pay and steady employment. But don't delay—get the details now. Let me show you how easily and completely I can prepare you for this fascinating work, during spare time, in your own home. You may pay as you learn. Write today . . . Now . . . Be sure to state age.

Be A
**FINGER
PRINT
Expert**

FREE!!!

Send for Thrilling
"BLUE BOOK
OF CRIME"

INSTITUTE OF APPLIED SCIENCE
1920 Sunnyside Ave., Dept. 1363, Chicago, Ill.

New York Electrical School

Established 1902

Ask for free
illustrated booklet

40 West 17th St., N. Y. C.

High School Course at Home Many Finish in 2 Years

Go as rapidly as your time and abilities permit. Course equivalent to resident school work—prepares for college entrance exams. Standard H.S. texts supplied. Diploma. Credit for H. S. subjects already completed. Single subjects if desired. High school education is very important for advancement in business and industry and socially. Don't be handicapped all your life. Be a High School graduate. Start your training now. Free Bulletin on request. No obligation.

American School, Dpt. H346, Drexel at 58th, Chicago

Learn TOOL DESIGN

Qualify quickly as a Machine or Tool Designer by home study in spare time. Many now making \$100 to \$125 a week. Rapidly expanding industry calling for more machine and tool designers than available. Rush name and address today for facts on Machine or Tool Design. State age. A penny postal will do—but hurry.

OHIO INSTITUTE OF TECHNOLOGY Box 93, Greenville, Ohio

FOUND YOURSELF?



The Mind Stimulator is a Rapid System of Mind Training. Creative Thinking, Self Discovery, Self Advancement. INDIVIDUAL HELP—6th year. Free Mind Power Test and Literature.

Frank L. Tibolt, Ph. D. 99 A Fern Street, Philadelphia

ARTISTS MAKE MONEY

Find out your ability. Send name, age, occupation and address for Free Vocational Art Test.

ART INSTRUCTION, INC., 3143 Art Instruction Bldg., Minneapolis, Minn.
(Formerly Federal Schools, Inc.)



Pins and Rings

Class pins, club pins, rings and emblems. Finest quality. Reasonable prices from 55c up. Write today. Department O, Metal Arts Co., Rochester, N. Y.

**FREE
CATALOG**

Learn To MOUNT BIRDS

Tan SKINS, Make Up FURS

Be a Taxidermist. Double your hunting fun. We teach you at Home. Mount Birds, Animals, Pets, Heads and Fish. Save your hunting trophies; decorate home and den. MAKE MONEY. Mount and Krome-tan for others. Big sparetime profits. INVESTIGATE TODAY.

FREE BOOK with 100 game pictures. 48 pages. Hunters, get yours! It's Now Free. Send postal card TODAY -- This Minute! State your AGE.

NORTHWESTERN SCHOOL OF TAXIDERM: Dept. 3393, Omaha, Nebr.



AVIATION CAREER



Offers You
A GREAT FUTURE!

Complete Aeronautical Engineering or Master Aviation Mechanics training in the heart of the Aircraft industry. Graduates obtaining immediate employment. No flying involved. Aviation's foremost school, established in 1929. Located on Grand Central Air Terminal. For full information, address Department PS-3



CURTISS TECHNICAL WRIGHT INSTITUTE

GRAND CENTRAL AIR TERMINAL
GLENDALE (LOS ANGELES) CALIF.

THIS TOWER OVERLOOKS AVIATION'S MOST DISTINGUISHED SCHOOL OF AERONAUTICS

Make BIG MONEY AT HOME!
NEW Invention Electroplates by BRUSH



Now Plates CHROMIUM!

ALSO GOLD, SILVER, NICKEL, COPPER, ETC.

War Increases Demand—You Profit!

New, patented invention makes possible big earnings AT HOME. Replate auto-parts—worn articles in homes, stores, hotels, restaurants, etc., with durable, sparkling, new coat of metal—with stroke of brush. Easy, simple, quick. Genuine Gold, Silver, Nickel, Cadmium, etc. Everything furnished. Outfit complete, ready for use. No shop required. Clear from \$2 to \$5 an hour in lifetime business. Small investment starts you in business. Steady repeat. Machine can pay for itself in week. Send TODAY for FREE SAMPLE and illustrated BOOKLET how you can have a life income from a business of YOUR OWN built upon satisfied customers. Act at once!

WARNER ELECTRIC COMPANY

215 W. Ohio St., Chicago, Ill., Dept. 228

FREE BOOK & SAMPLE

WARNER ELECTRIC CO., 215 W. Ohio St., Chicago, Ill., Dept. 228
Gentlemen: Send me Free Sample and Illustrated Booklet.

Name _____

Address _____

City _____ State _____

INVENTORS

This
BOOK



and
INVENTION RECORD
(Cost You Nothing)
FREE BOOK

HOW TO PROTECT, FINANCE and SELL YOUR INVENTION

Our FREE BOOK and other literature available to our clients—gives you complete details on how to "ready" your invention for money-making. It tells you how others did it—who they went to for finances—how they arranged partnerships—how they made contacts with manufacturers—how they dictated royalty arrangements—how much money they made—how you can find a market. Our new FREE BOOK discloses sources of quick revenue if your invention is patentable and saleable with profit possibilities.

THE FIRST STEP

The first step in getting your invention ready for market is to make a dated record of it on our "Invention Record" Form. This Form properly filled out and witnessed will be invaluable to you later in establishing the date of your invention should need for such evidence arise. We will be glad to send you our "Invention Record" and have it witnessed in this office when you return it with disclosure of your device. This service costs you nothing—and it immediately puts you on record as the originator of your device.

Protect Your Invention NOW!

We have many letters in our files from manufacturers requesting inventions. Today's demand for new devices is tremendous—added to by emergency needs. Protect your invention now with a U. S. Patent. By acting promptly you may prevent another inventor getting in ahead of you at the Patent Office here in Washington. The first step is to make a sketch and description of your invention on our "Invention Record", have it witnessed and mail it to us. We will then make a Search of the U. S. Patent Office files to ascertain whether we can get patent protection for you. This is a step you should make NOW—before another steps in ahead of you and walks away with a patent.

MAIL

COUPON
TODAY!

McMORROW & BERMAN
REGISTERED PATENT ATTORNEYS BEFORE U.S. PATENT OFFICE
142-B Albee Building
Washington, D. C.

Send me your NEW FREE Book "How to Protect, Finance and Sell Your Invention" and specially prepared "Invention Record" form at once. I understand that this request does not obligate me.

NAME _____

ADDRESS _____

CITY _____ STATE _____

Write or Print Name Clearly

WAR STAMPS and PRIZES FOR BOYS



HERE'S your opportunity to earn your choice of over 200 swell prizes. And besides earning all the prizes you want, you can make MONEY.

Don't wait! Begin piling up cash profits right away. It's easy! All you need to do is deliver Collier's Magazine (one of the most popular weeklies in America) to regular customers whom you obtain in your neighborhood. Will not interfere with school. Mail the coupon today and we'll start you.

GET THESE PRIZES WITHOUT COST

Mr. Jim Thayer, Dept. 968
The Crowell-Collier Publishing Co., Springfield, Ohio
Dear Jim: Start me earning MONEY and PRIZES.

NAME.....AGE.....
ADDRESS.....
CITY.....STATE.....

ELECTRICAL BOOKS

shipped
FREE



**FOR EXAMINATION
MODERN
ELECTRICITY
INCLUDING RADIO
AND REFRIGERATION**

Here's great news for anybody interested in Electricity. NEW 18th edition of Applied Electricity brought right down to date with NEW Electrical subjects fully covered, including Electrical Blue Print Reading. 10 big Volumes and all shipped **FREE** for examination.

New Edition FOR BEGINNERS AND EXPERTS

over 3,000 pages—hundreds of illustrations—the most complete work of its kind we have ever published. Dynamos, motors, power stations, wiring, radios, everything electrical explained so anyone can understand it.

BIG FIELD! Big Demand! Big Pay!

Men who understand electricity are urgently needed in thousands of war production industries. Airplanes, shipbuilding, arms plants, machine shops—practically every industry depends on electricity and men who know this subject make big money. Pleasant, fascinating work, easy to learn and do; learn with these books. Send coupon for a set for **FREE** examination and see for yourself.

**SEND
NOW**

[A year's consulting privileges with our engineers now given to all buyers of this famous Cyclopedia of Electricity.]

AMERICAN TECHNICAL SOCIETY
Vocational Publishers since 1898

American Technical Society, Dept. E320, Drexel at 58th St., Chicago
Send for 10 days' free use. 10 volume set of New 18th Edition Applied Electricity, including a certificate entitling me to consulting privileges for one year. I will pay the delivery charges only on the books. If I wish I may return them in 10 days and owe you nothing, but if I keep them, I will send \$2.00 after 10 days, then \$3.00 a month until the total price of only \$29.80 is paid.

NAME.....
ADDRESS.....
CITY.....STATE.....
Please attach letter stating age, occupation and name and address of employer and give at least one business man as reference.

AGENTS!

Glass Enclosed
Fluorescent
Fixture
with Two
14 Watt Lamps



Make big money selling this sturdy Glass Enclosed 2-light 14 watt Fluorescent Fixture. G. E. Ballasts, Hygrade Lamps. Nicely packed. This will be the last lot "for the Duration." Every sale puts \$4.55 in your pocket. Finest value in our history! **HURRY!** We pay Transportation on all orders for FOUR or more fixtures! Sent C. O. D.

Glass Enclosed
Fixture sells
for \$9.50 Retail

\$4.95
C.O.D.
to You

AGENTS

Make money selling Fluorescent Lamps
15-20-30 watt High Grade
Fluorescent Lamps..... **50c**
40 watt Lamps..... **68c**
IN WHITE OR DAYLIGHT sent C.O.D.

— FOR —

Dens—Halls—Dinettes
Small Stores—Kitchens
Offices etc.

THE RONLITE CO. DEPT. 100 Fifth Ave., N.Y. City

Do You Make Mistakes in English?

EVERY time you speak or write you show just what you are. Mistakes in English reveal you as a person who lacks education and refinement. Lack of language power prevents you from presenting your thoughts in the strongest possible way. No matter what you do, real command of English will help you to your goal. Stop making mistakes in spelling, punctuation, pronunciation. Increase your vocabulary.



WONDERFUL INVENTION

Only 15 minutes a day with Sherwin Cody's new invention—and you can actually SEE your English improve. It teaches by HABIT—makes it easier to do the RIGHT way. Wonderful self-correcting lessons include spelling, punctuation, grammar and expression.

FREE BOOK ON ENGLISH Lack of language power may easily be costing you thousands of dollars every year. See what Mr. Cody can do for you; it costs nothing to find out. Mail a postal card or letter this very minute for free book, "How You Can Master Good English in 15 Minutes a Day". It will prove a revelation to you. **WRITE NOW.** Address:

Sherwin Cody School of English, 183 Searle Bldg., Rochester, N. Y.

STUDY ENGINEERING AT HOME

With A Chartered Educational Institution

Courses in **ENGINEERING**: Electrical, Civil, Mechanical, Drafting, Architectural, Steam, Aeronautical, Radio, Structural, Mining, Industrial, Highway, Petroleum, Marine, Chemical.
Courses in **ARTS AND SCIENCES**: Philosophy; Education; Letters; Public Health; Medical Jurisprudence; Psychology; Sociology; Physics; Chemistry; Geology; Pol. Science; Theology; Law; Business and Commerce; Accounting; Mathematics; Statistics; Agriculture.
McKinley-Roosevelt Incorporated, 4610-BC, Sheridan Road, Chicago

NAVIGATION

Study at Home. Easy "How To Do It" Data. Problem Homework, school corrected. Pay as you learn. No "Math" required. Navigators urgently needed for Air and Surface by Navy, Coast Guard, Army, Merchant Marine, now and for post war. Complete, Refresher, Specially Arranged and Teacher Courses. Resident Courses. Textbooks included, which are Navy Publications. Navy methods used. Certificates to those passing final exam. Start NOW. Write TO-Day.

COAST SCHOOL OF NAVIGATION
305 Bond Street Asbury Park, N. J.

ELECTRICITY MEN NEEDED

Electricians are needed everywhere. Hollywood studios alone claim shortage 200 men. This is a live money making profession. Learn at home, spare time. Easy payments. Selective Employment service. Write for **FREE Bulletin**. No obligation.

AMERICAN SCHOOL

Dept. EE346 Drexel at 58 St., Chicago

only
\$1
full price

NEVER BEFORE SUCH AN AMAZING BOOK!



286
Pages—
Hundreds of
Illustrations—
Hard Cover!

Here for the first time in ONE-BIG-BOOK, are all the exciting, zestful Activities—Sports—Hobbies—Games—Magic—Art—Puzzles—Acrobatics—Stunts—Craftsmanship—Money-Making Plans, etc., which are part of every energetic, regular fellow!

A WHOLE LIBRARY OF FASCINATING FACTS, FUN & FROLICS

There is no end to the things to do and fun to enjoy with this tremendously interesting, entertaining and informative book! You can learn a Cowboy Roping routine; become a "whiz" at Ping-Pong; learn to draw Funny Cartoons; build your own equipment and furniture for games, your "den" or home; teach your dog tricks; learn scientific Boxing and Wrestling; defend yourself with Jiu Jitsu; develop a "Magic-Show" act; learn to "Spot" airplanes; become powerful and develop Mighty Muscles; learn to become a "Ventriloquist", etc. THE FUN BOOK gives you a million things to do and enjoy—for indoors and outdoors—winter or summer—alone or with your crowd!

Actually 18 WONDER BOOKS IN-ONE! It's the Biggest, Best-Value Book Imaginable! 286 THRILL-PACKED PAGES of Description, Ideas, Secrets, Suggestions, Surprises—HUNDREDS of Illustrations, Drawings and Pictures! Never before such an amazing book—never before such a remarkable value!

ALL THIS IN ONE
**MARVELOUS
BOOK**
18
COMPLETE
SECTIONS

How To Handle
A ROPE
Like a Cowboy



A Champion teaches you tricks with a Lariat!

Playing Winning
PING-PONG



Lessons on strokes, position, serve, and every element for perfection!

How to Train
YOUR DOG



Dogs, their care and training; technique for teaching obedience and tricks.

It's Fun To
BUILD THINGS



Complete plans and directions for making many useful articles!

Building Model
PLANES



Full instructions for building a Glider, Solid Model, and Flying Model!

Spotting
Planes



Learning to spot and recognize enemy and friendly planes.

Boxing
for Self-Defense



A complete course in tactics, blows and strategy to become a skillful boxer!

The Science of
WRESTLING



Wrestle your weight in wildcats after learning these holds and techniques.

How To Be A
Ventriloquist



It's easy to learn to "throw your voice" with these simple instructions.

The Secrets of
CARTOONING



8-Lesson Course on Drawing Cartoons, Art, Caricatures & Lettering!

Money-Making
Plans



101 Spare and Full Time money-making plans for every fellow!

Develop
Powerful Muscles



Keeping Strong and Healthy plus exercises for developing strength and power!

Tumbling and
Acrobatics



A simple program to give you skill and dexterity in this art!

Indoor & Outdoor
GAMES



A selection of party, humorous and athletic games and contests!

Protect Yourself
with JIU JITSU



Fear no attack, if you'll learn these amazing grips as taught to Marines, Soldiers and G-Men!

Indoor & Outdoor
GAMES



Contains a group of Magic Tricks to amuse and mystify all!

Recommended
Stories & Reading



A collection of famous stories and literature!

How To
Punch a Bag



Learn to punch the bag faster than the eye can follow!

KNICKERBOCKER PUB. CO.
Dept. B-332
92 Liberty St., New York, N. Y.

Rush me a copy of THE FUN BOOK. I am enclosing \$1.00 in full payment. If it isn't as wonderful and thrilling as I expect it to be—I can return book and get my money back at once.

Name _____

Address _____

City & State _____

☐ Check here if you desire book to come C.O.D. and will pay \$1.20 on delivery. Same money back guarantee.

Send For This Book Under Our MONEY-BACK GUARANTEE! Just mail the coupon—and if you enclose \$1.00 (stamps, money order, check or cash) we will pay the postage. If you prefer C.O.D. it will come plus 20c postage and delivery charges. If not completely satisfied, you can return book and get your money back at once. You risk nothing, so MAIL THE COUPON NOW!

KNICKERBOCKER
PUBLISHING CO. DEPT. B-332
92 Liberty St. New York, N.Y.

MARCH, 1943

Please mention POPULAR SCIENCE MONTHLY when writing to advertisers.

**HELP YOURSELF GET
THE JOB YOU WANT
IN THE ARMY!**


**PASS HIGH
ON THE
INDUCTION
"I.Q." TEST**



Everyone entering the Service must take a General Classification "Intelligence" Test. A high mark on this test helps you toward the **JOB YOU WANT** and **OFFICER TRAINING**.

"PRACTICE FOR THE ARMY TESTS"

is a book containing complete and simplified material along the lines of the questions given on the test... tells how to answer them quickly, easily—costs only \$1.50. Get a thorough preparation **RIGHT AWAY** if you're about to enter the Service.

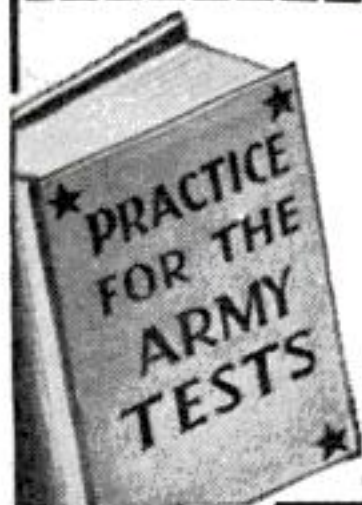

Free Trial Coupon

ARCO PUBLISHING CO.
480 Lexington Ave.
Dept. 2603, New York, N. Y.

Please rush copy of "Practice for the Army Tests" to me. If I am not satisfied after 5 days, I will return book for a full refund.

- ☐ I will pay postman \$1.50 plus postage, on arrival.
☐ I enclose \$1.50 (Postage is free)

NAME

ADDRESS

CITY..... STATE.....

**PATENT YOUR IDEAS
SEND FOR FREE BOOK**

**HOW
TO OBTAIN A
PATENT**

Written by Former Member Examining Corps (1922-24) U.S. Patent Office.

CARL MILLER, Registered Patent Attorney
Former Member Examining Corps U. S. Patent Office

Woolworth Bldg., Dept. 33C, New York—Bond Bldg., Dept. 33C, Washington, D. C.

LAW

STUDY AT HOME for **PERSONAL SUCCESS** and **LARGER EARNINGS**. 31 years expert instruction—over 106,000 students enrolled. LL.B. Degree awarded. All texts furnished. Easy payments. Send for **FREE BOOK**—"Law and Executive Guidance".

AMERICAN EXTENSION SCHOOL OF LAW
Dept. 27-S, 8 East Huron St., Chicago, Ill.



**"Get A
Government
Job"**

**\$1700 to \$2100
Railway Postal Clerks**

First Year
Many other
Positions
Mail Carriers
Postoffice
Clerks, etc.
Mail coupon
Today Sure

FRANKLIN INSTITUTE
Dept. A252, Rochester, N. Y.

Sirs: Rush to me without charge (1) 32 page book describing Government jobs. (2) List of U. S. Government jobs for men and women. (Tell me how to qualify for a position.)

Name

Address

**BE A GOVERNMENT LICENSED
AIRPLANE AND ENGINE MECHANIC**
Train Now **at LINCOLN**



You can prepare at this **Lincoln Government Approved School** to earn up to \$3600 a yr. as a Government Licensed Airplane & Engine Mechanic. Exceptional opportunities in civilian war service positions with Airlines, Airport Operators and Aircraft Factories. Men interested in foreign service positions can earn up to \$6000 per year. High School education sufficient. We train you and assist Graduates in locating positions.

WRITE TODAY for complete information.
LINCOLN AERONAUTICAL INSTITUTE
723 Aircraft Bldg., Lincoln, Nebraska

Inventions Wanted
Patented or Unpatented

If you have a sound, practical invention for sale, patented or unpatented, it can now be sold without patenting expense. Write for complete details, today!

Chartered Institute of American Inventors
Dept. 3, 631 Pa. Ave. N. W., Washington, D. C.

PATENTS
AND TRADE MARKS
C. A. SNOW & CO.
Registered Patent Attorneys Since 1875
Write for Free Book and "Certification of Invention" form
427 SNOW BUILDING, WASHINGTON, D. C.

PATENTS
PERSONAL SERVICE

My **Personal** service assures strictest confidence on all your patent problems. Send me a model or drawing, or sketch and description of your invention, and \$5.00. I will make a search and report promptly as to its patentability and send you a copy of my 72-page booklet. Or, if you prefer to read my booklet first, write today for **FREE** copy. Registered Patent Attorney.

L. F. Randolph, 340-D Columbian Bldg., Washington, D.C.

AVIATION
MORE DRAFTSMEN NEEDED on planes, motors, equipment. Big pay. Special *Aviation Drafting* course trains you **QUICKLY** at home in spare time. **FREE** Bulletin. No obligation. Address
American School, Dept. A346, Drexel at 58th, Chicago

**Asthma Mucus
Loosened First Day**

For Thousands of Sufferers

Choking, gasping, wheezing spasms of Bronchial Asthma ruin sleep and energy. Ingredients in the prescription **Mendaco** quickly circulate through the blood and commonly help loosen the thick strangling mucus the first day, thus aiding nature in palliating the terrible recurring choking spasms, and in promoting freer breathing and restful sleep. Mendaco is not a smoke, dope, or injection. Just pleasant, tasteless palliating tablets that have helped thousands of sufferers. Iron clad guarantee—money back unless completely satisfactory. Ask your druggist for **Mendaco** today. **Only 60c.**

Please mention **POPULAR SCIENCE** when writing to advertisers.

HOW TO GET INTO AVIATION—NOW

by C. S. (Casey) Jones

NO. 4 in a series of advertisements describing the free training and opportunities now available in aviation. Addressed to the thousands of men and women who wish to prepare themselves for war service in this key industry.



C. S. JONES

One of the most interesting opportunities in aviation, and which provides immediate employment, is offered by the War Training Program of the Civil Service Commission.

If you are 17 or over, a U. S. Citizen, are physically able to work, and have two years' high school or equivalent, you may apply for one of the many jobs now open to civilians as employees of

the War Department, in aviation.

Under a continuing program, the Civil Service Commission is accepting applications from both men and women who meet above requirements. Men classified 1-A, or persons now employed at their highest skills in defense industries, are not eligible.

Upon passing the aptitude tests, you are given three months' special training in an accredited aeronautics school, and receive pay for this period of \$100 per month. You are assigned to one of five courses: *Aircraft Instruments, Aircraft Electrical*

Installations, Aircraft Sheet Metal Fabrication, Aircraft Propellers and Hydraulics or Aircraft Engines.

After completing the training period successfully, you are employed at a United States Air Depot, at base pay of \$125 per month for 40-hour week, with 50% increased rate for overtime. You are employed by the Department of War, but not in the Army.

After taking up your duties, you will find ample opportunities for advancement and increased pay in your trade, depending upon your experience and abilities.

For further information, write or call at the U. S. Air Depot, Rome, N. Y., or N. Y. State Education Dept., War Training Program, 20 West 44th Street, New York City.

C. S. Jones
President

ACADEMY OF AERONAUTICS, La Guardia Field, N. Y. C.
(Awarded Efficiency Banner of First District Army Air Forces)
CASEY JONES SCHOOL OF AERONAUTICS, Newark, N. J.

Engineering and Design courses still open for private enrollment to qualified applicants. Mechanics courses devoted exclusively to military and government contract training.
Training the Key Men of Tomorrow in Aviation

Yours FREE THIS 10" SLIDE RULE



Has genuine Lucite,
Non-shattering Magnifying
Indicator
A B C D and K scales.


If you are doing figure work without a slide rule you are wasting from 60% to 97% of your time. Every mechanic, machinist, draftsman, accountant, electrician, aircraft worker and business man should have a slide rule and know how to use this greatest time-saving mathematical instrument.

PROMOTIONS ARE WAITING FOR MEN WHO KNOW HOW TO USE

The Slide Rule

Here is a brand new text complete with work sheets and an answer book and 5 place logarithm tables that will teach you how to use the slide-rule in a series of simple, easy to understand lessons, authoritatively written by Hobart H. Sommers, M.A., Dean, Austin Evening Junior College; Harry Drell, B.S., Lockheed Aircraft Corporation; T. W. Wallschlaeger, M.S., Illinois Institute of Technology.

It will show you how to do all kinds of figure-work in seconds and without pencil or paper—multiplying, dividing, extracting roots, ratios, percentages, squares, areas of circles, radius of circles, volumes of prisms, cylinders, cones, pyramids, spheres and innumerable other problems important in business and industry. Beginners or experts will find this valuable book complete in every detail—the novice will learn to do rapid slide-rule calculations in a couple of hours—the engineer can review methods and problems with the work sheets and answer book. Get this text and a free Mannheim Type 10" slide rule bound right with the book itself . . . complete for only \$2.98.

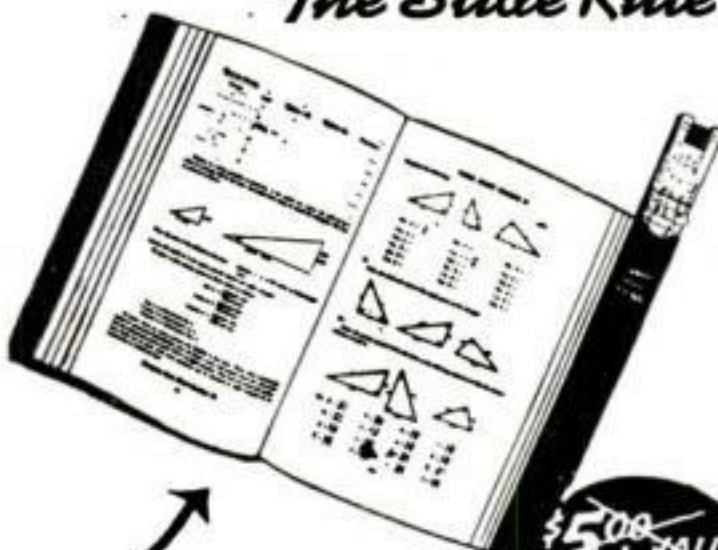

Regular
\$5.00 Value

Slide rule alone worth \$1.00. Logarithm Table Books cost from 75c to \$1.00. Slide Rule Course worth \$3.50. All complete with Answer Book for only \$2.98.



~~\$5.00 VALUE~~
ONLY
\$2.98

FREE SLIDE RULE COUPON!

WILCOX & FOLLETT CO.

1255 So. Wabash Ave., Dept. PS-3, Chicago, Illinois.

Please send me the new "The Slide Rule and How To Use It" with a free 10" Slide Rule with Magnifying Indicator.

I am enclosing check or money order for \$2.98.

Name.....

Address.....

City..... State.....

Occupation.....

.....Put X here if you order C.O.D.

Money back if not doubly satisfied. Return in 10 days for Full Refund.

Here I am At Work

Making Good Money at a big Aircraft Plant thanks to this



DRAFTING

THE KEY TO ALL WAR AND PEACETIME INDUSTRY

Yes, this free lesson proved that drafting is easy, mighty interesting work . . . convinced me I didn't need special talent to get into this well-paid profession . . . proved beyond a doubt that Drafting by the fascinating C.T.C. method can be mastered easily **AT HOME IN SPARE TIME.**

So I enrolled. I learned Drafting at home,—in my spare time. Today I feel secure in my job as an Aircraft Draftsman. The War Production Program has increased the demand for Aircraft Draftsmen, Machine Draftsmen, Architectural Draftsmen, Electrical Draftsmen and Structural Draftsmen. For Draftsmen always come first on any new project in manufacturing and industry . . . and in those new Aircraft plants and Shipbuilding yards, Draftsmen can't be replaced with machines. What's more, I'm slated for promotion and more pay—but if I wish, I can be independent . . . go into business. And, as a draftsman, I have a peace time future as well as a good job now.

Here's a tip: Mail the coupon or drop a card for the free trial lesson. Do this today—and drafting will take care of you tomorrow.

YOU GET THIS COMPLETE DRAW- ING OUTFIT

Without a penny extra. All the tools you need, including drawing table. With this outfit you can put your ideas on paper quickly and with accuracy. With training, you're all set to master drafting in months—not years—at home, and you can use these very same instruments as a draftsman later.



MAIL THIS COUPON

CHICAGO TECHNICAL COLLEGE

C-219 Tech Bldg., 2000 So. Michigan Avenue, Chicago, Illinois

Please send me Free Trial Lesson in DRAFTING showing how to learn at home by C.T.C. plan for a good job in aircraft and other war industries. No obligation, of course.

Name

Address

City State.....

Occupation Age.....

LEARN in Spare Time—At Home! (or at the College in Chicago)

A few hours of pleasant home study every week—that's all. NO interference with your present job! With Chicago Tech's help, you train yourself step by step. This tested method,—developed over 39 years of C.T.C. progress,—will fit you for a job in months—just the kind of a job you've wanted.

TRAIN FOR PROMOTION—and More Money

ALL WAGES and salaries have been fixed by new Federal Law. The only manner in which an employee can get more money is through increased responsibilities and more important duties. Get this: the only way in which your employer can pay you more money by law—is through promotion—by giving you more responsibilities. And the best manner to secure promotion is through training yourself to be more valuable.

To prove to you how easy it is to learn drafting by the Chicago Tech method, we'll send you a Trial Lesson FREE. No charge for this lesson either now or later. Send a post card or the coupon now for FREE TRIAL LESSON in Drafting.

39 Year Old College in Modern Well Equipped Home

Chicago Technical College has graduated hundreds of successful draftsmen, engineers and technicians since its founding nearly 40 years ago. During that time, its educational standards and instruction have been of the highest. Chicago Technical College occupies a unique place in the educational world in that it offers both residential and Home Study courses. In its new home on Michigan Avenue in Chicago the College has modern well-equipped shops, laboratories and drafting rooms where hundreds are in training for promotion in its day and evening classes. You can get this same high grade training in Drafting right in your own home. Keep your present job and train for a better one. Mail the Coupon today!

WOMEN!

Girls and women are also taking good positions in drafting rooms at same high base pay as men. Find out if you are qualified. Send the coupon.



CHICAGO TECHNICAL COLLEGE

Training Division for War Production
C-219 Tech Bldg., 2000 So. Michigan Avenue, Chicago, Illinois

Copyrighted material

POPULAR SCIENCE

Classified

OPPORTUNITIES

**MONEY-MAKING,
MONEY-SAVING**



Classified Ads only 35c per word per insertion, payable in advance. Minimum ad 10 words. To be included in April issue copy should be in our office by February 8th. April issue on sale March 1st. POPULAR SCIENCE MONTHLY—351 FOURTH AVE.—NEW YORK CITY

ADVERTISING

FREE—"10 Reasons" why you'll profit by classified advertising in Popular Science. Write for this free folder today. Read the important facts it contains before you place any classified advertising. Write for your copy today—it's free! O. K. Kelly, Room 1101, 353 Fourth Avenue, N. Y. C.

MAIL—Order or agent ad reaching 1,000,000 families throughout United States \$15.40 incl. Newspaper, magazine, mailing-list, ratebook, free. Chicago Advertising Agency, 20-SP West Jackson, Chicago.

MAIL order sales skyrocketing. Cash producing ads, letters, folders, etc. prepared. Best pullers, lowest rates. Free product analysis. Van De Mark, Times Star Tower, Cincinnati.

SALES letters by former Assistant Director of Correspondence at Sears, Roebuck & Co. Write fully. Director, 1832 Stanwood St., Philadelphia, Pa.

WHITE SPACE helps get more business! It makes your ad stand out on the page, attracts immediate attention! Use White Space in your next ad for increased returns.

MAIL Order Advertising Specialists. Martin Agency, 171TF Madison Avenue, New York City.

ADVERTISE: 24 words, 149 newspapers, \$6.50. Lists Free. Advertising Bureau, 4515-P Cottage Grove, Chicago.

AGENTS WANTED

MONEY Making Sensation. Sell friends New Baby congratulation, Birthday Easter, Get Well, Humorous, Patriotic Greeting cards and gift wrappings by the box—30c up. Request famous All Occasion \$1.00 box on approval. Special Get Started offer. Hedenkamp, 343 Broadway, Dept. PS-2, New York.

AMBITIOUS School Seniors—Sell Classmates the "tops" in Graduation Name Cards. Best Commissions. Free Cards. Agencies going like wildfire. Hurry! Craft-cards, Box 235-M, Pittsburgh, Pa.

WRITE for Free Fabric Samples amazing stain-proof tablecloths. Clean with damp cloth. Require no ironing. Beautiful patterns. Look expensive, long wearing, low priced. Commissions big. Also complete dress line. Melville Company, Dept. 3567, Cincinnati, Ohio.

EASY money daily. Take orders sensational \$1 All Occasion greeting card assortment. Friends buy quickly. Up to 100% profit. Birthday, Easter, Baby Congratulation assortments. Samples on approval. Special offer. Elmira Greeting Card Co., M-9 Elmira, N. Y.

SCHOOL Seniors—Sell America's most beautiful, distinctive Graduation Name Cards. Positively highest commission. Lowest prices. Free sample kit. Print-craft, 1423 E. Elm Street, Scranton, Pa.

SELL 50 for \$1.00 name imprinted stationery with matching envelopes—free samples. Odd cards, 2½c. Birthday, All Occasion greeting card assortments, 35c up. Cards for boys in service. Special offer. New England Art, North Abington, F-385, Massachusetts.

CALL on friends with greeting card assortments; Easter, Birthday, other occasions. Personal stationery; gift wrappings. Big profits. Experience unnecessary. Samples on approval. Wallace Brown, 225 Fifth Avenue, Dept. U-35, New York.

I WILL give you \$5.00 worth full size packages foods, groceries, soap, etc. Free if you agree to show friends and others. Amazing spare time money making opportunity. Write Zanol, 8816 Monmouth, Cincinnati, Ohio.

GOOD Paying business silvering mirrors, plating autoparts, reflectors, bicycles, bathroom fixtures by late method. Free particulars and proofs. Gunmetal Co., Ave. G, Decatur, Ill.

IF you are ambitious you can make good money with a Rawleigh Route. We help you get started. No experience needed to start. Steady work for right man. Write Rawleigh Co., Box C-2-PSC, Freeport, Ill.

TAKE orders for new, sensational Plastic Lifetime Reproductions of any photo or negative. Big earning opportunity. Part or full time. Get details quickly. Quaker Service Co., 914 Walnut St., Philadelphia, Pa.

SILVERWARE Plating and Polishing Liquid. Apply with a cloth. Cleans, silver-plates and polishes with one rubbing. Makes old and worn silverware look like new. NuSilver, Aurora, Ill.

BIG Money taking orders; Shirts, Ties, Hosiery, Underwear, Pants, Jackets, Sweaters, Uniforms, etc. Sales equipment free. Experience unnecessary. Nimrod, 4922-AV Lincoln, Chicago.

SELL new-used clothing from home, auto, store. Men's suits, 82c; pants, 23c; top-coats, 37c; dresses, 9c; ladies' coats, 33c. Other bargains. Catalog free. S&N, 565A Roosevelt, Chicago.

FAST selling drug store item. Every man a good prospect. 200% profit. Illustrated catalog free. Hygienic Drug Products, Dept. 103, Box 3353 Merchandise Mart, Chicago.

COMIC Hitler novelties—documents, certificates, assorted samples with wholesale list, 25c coin. Victory Novelties, 2053 W. 35th St., Chicago.

SELL dresses at low prices! Hundreds sensational bargains. Actual samples free. Send dress size, age. Harford, Dept. S-366, Cincinnati, Ohio.

FREE Water and our concentrates, makes flavors, lotions, shampoos, 72 products, labels, bottles furnished. Qualco, F-20030 Russell, Detroit.

MAKE money applying initials on automobiles. Also, sideline salesmen for short run Decal name plates. Ralco, 1483 Washington, Boston, Mass.

MEN'S shoes 14c, hats 12c, pants 28c, dresses 10c, winter coats 50c, fall coats 35c. Bargain catalog free. Portnoy, 566-W Roosevelt, Chicago.

LICK After-war layoffs! Start own business; home, office. Booklet describing "Collection of 127 Tested Plans" free. Elite Co., 214A Grand St., New York.

SNAPPY fun cards! Twelve to package. \$1.00 dozen packages. Two sample packages, 25c. Charles Torian, Hampton, Va.

SELL Miniature Bibles. Large profit. Sample free. H. Tooker, 630-A Chestnut, Hamilton, Ohio.

MAGICAL Goods. Novelties, formulas, 300 exposes, cards, dice, races, slots, pin ball. Catalog dime. Formico Systems, 314 Kiefaber, Dayton, Ohio.

MAGIC calendar. Year calendar instantly any year 1800—2049. Unbelievable. Every person prospect. Copyrighted. Dollar Dozen. Roy Ginn, Rusk, Texas.

SENSATIONAL invention! Eliminates window drafts; rattles, saves 25% fuel. Samples, 25c. Minnicks, Beecher St., Washington, D. C.

MAGIC shopping bag. Sells like wild. Magically turns purse into roomy shopping bag. Handy, compact. Samples sent on trial. Kristee 126, Akron, Ohio.

SCIENTIFIC manufacturing processes. Simplified! Profitable! Trade Secrets! Profits to 1,500%. Lists free. Thermoblab, Peoria, Ill.

AGENTS—300% Profit selling Gold Leaf Letters; stores and offices. Free samples. Metallic Letter Co., 437 N. Clark, Chicago.

CHAMPION belt sample, 25c; information, 3c. Leathercraft, 844 W. Baltimore, Baltimore, Md.

EXCELLENT sparetime sideline! Substantial profits! Pines, 144-34 70th Avenue, Flushing, N. Y.

SANITARY latex. Lowest prices. Samples, \$1.00. Diverso, Dept.-Z, 617 No. Second Street, Milwaukee, Wisconsin.

SELL Latex Products. Large Profits. Send \$1.00 for samples. Peerless, 4050 BH Broadway, Kansas City, Mo.

FOR quick cash without canvassing, write: Terrill, B-1, Bogard, Mo.

LUMINOUS paint—Profitable 50c seller. Details. Ward, 97B, Saybrook, Conn.

ANTIQUES, RELICS INDIAN GOODS

276 ANTIQUE firearms, swords, cartridges. Catalog, 10c. (Photographs of most.) Indian relics, minerals, fossils, 4,000 bargains. Catalog, 10c. (Photographs of most.) Heike, Wenona, Illinois.

SWORDS, rapiers, daggers, pistols, armor; illustrated catalog, 25c. Robert Abels, 860½ Lexington Ave., N. Y.

INDIAN relics cheap. Large catalog for stamp. Grutzmacher, Mukwonago, Wis.

25 GENUINE Indian Arrow heads, \$1.00. Catalog. Geo. Holder, Glenwood, Ark.

ASTROLOGY

1943 DAILY Solar Forecast. Send 25c, birth-date, Gray, 492 Chauncey Street, Brooklyn, New York.

AUTHORS SERVICE

NEW Writers Wanted to re-write ideas in papers, magazines, books. Splendid opportunity to "break into" profitable writing field. Rush postcard for Free Details. Comfort Writer's Service, Dept. FL-150, St. Louis, Mo.

AUTOMOBILES

WHIRLGAS Superchargers, \$3, increase mileage 20%; power 10%. Perfect perpetual performance. Refund guarantee. University test. Any car; give make, year. Wrench installs 15 minutes. Good results with 30% fuel oil mix or low octane gasoline. John Hanley, Manufacturer, 5719 Loraine, Detroit, Mich.

AUTOMOBILE Racing Book, Fifth Edition
—Revised. Tells how to build dirt track bodies, frames, engines. Records, superchargers, rules, formula, plans, stock conversions, roadster racing, fast Fords. \$1.00 postpaid. \$1.15 C.O.D. Ray Kuns, Department 274, Madisonville, Cincinnati, Ohio.

NEW scientific tablet saves gas up to 30%!
Results guaranteed. Positively harmless—\$1 box treats 180 gallons—C. O. D. or postpaid. (Liberal supply, 25c). Distributors wanted. Gas-O-Lubri Products, G-3338 Manderson, Omaha, Nebr.

AUTO SUPPLIES & EQUIPMENT

DIESEL conversions for auto, tractor, and Marine engines. Cheap installation. Wonderful performance. Proven factory method. Different and better. Costs nothing to investigate. Write for free circular No. 3, Harrington Company, 201-204 Manchester Bldg., Portland, Oregon.

GAS Rationing! Burn kerosene or other cheap fuel. Convert your car with used and discarded parts. Simple guaranteed instructions \$1. Wayne Engineering, Box 36, Greenville, Ohio.

STOP sticking valves, free up Piston Rings, put old kick in your engine. Send \$1.00—will tell you how. You'll say 'twas best dollar you ever spent. H. Rochester, Dept. L, P. O. Box 363, Buffalo, N. Y.

SAVE—Be Patriotic! Stay within speed limit. Send one dollar and receive Governor for your car. Unlimited supply. State make. Navy's Shop, Ashley, N. Dak.

FUEL oil conversions—For automotive, marine engines. Write for free literature. Houston & Logan, 2112 Addison, Berkeley, California.

RECLAIM used motor oil; 1c per gallon. Formula, 15c (coin). R. Plumb, Herkimer, N. Y.

AUTO Owner's Special. Ten automotive formulas, \$1.00. Monroe-Methods, Box 4766, San Francisco, Calif.

GASLESS Gas! Quickly, easily compounded. Formula, 25c. Dueffey, Covington, Ky.

REFINE used oil without cost. Particulars—C. Gerwin, Alva, Okla.

AUTO TRAILERS

BUILD your own house trailer. Have exactly the kind and size you want, arranged and equipped the way you want it. Save money and have a better trailer. Thousands of smart people have built from Jim Dandy plans. Send 10c today for Jim's interesting Trailer Plan Catalog illustrating 7 streamlined and conventional models of house trailers with floor plans, collapsible tent trailer and utility trailer any of which you can build yourself. The plan you select costs only \$1.00. Send dime today for Catalog. Jim Dandy, Box 125-B, Wausau, Wisconsin.

AVIATION

BUILD and fly your own motorcycle powered monoplane, home. Easy, cheap. Tested plans, guaranteed, \$1.00. Aerotech, Dearborn, Mich.

"AIRPLANES, How To Fly Them," 64 pages, 20c. Bison-5, Buffalo, Minnesota.

BABY CHICKS

100 CHICKS, \$5.75; 200—\$11.00. Postpaid. Empire Hatchery, Seward, N.Y.

BATTERIES, GENERATORS, ETC.

EDISON lifetime storage batteries for light and power. Eliminate acid battery diseases. Long guarantee. All kinds rebuilt generating plants, motors, and miscellaneous articles at bargain prices. Free interesting literature. W. Hawley Smith Company, Croton Falls, N. Y.

EDISON Batteries: Power, Light. Five year guarantees. Fifteen year life. Complete lighting equipment. Free literature. See-Jay Company, 321 Yonkers Avenue, Yonkers, New York.

RENEW dead car batteries inexpensively. Get wise. Instructions, \$1.00. Popular Service, Racine, Wisconsin.

BOATS, OUTBOARD MOTORS, ETC.

REBUILT Outboard motors. Fully guaranteed. Hundreds to pick from. Send 10c for complete list. Boat design book, 15c. Buy now before prices advance. Chicago's largest dealer. Masters & Son, 214 West Chicago Avenue, Chicago.

OUTBOARD Motors. Used and Rebuilt. Save money. Used parts. Bargain list free. Crandall-Hicks, 955 Commonwealth, Boston, Mass.

BODY-BUILDING COURSES

NEW Jiu Jitsu for self-defense. Powerful system of tough holds, chokes, throws, gun-disarming (illustrated). Learn to handle armed brutes with bare hands. Send \$1.00 plus 10c for mailing for manual used by U. S. Marines, Gordy, 58-B East 18th, Chicago.

SUPER Ju-Jitsu—lightning defense and attack system. Sensational new home study course now ready! Learn to lick brutes twice your size with only your bare hands. Free details. Nelson Co., 500 Sherman, Dept. C-509, Chicago.

SUPER system of Natural Physical Training. Free booklet. Harry Good, 3261-PS Watson Rd., St. Louis, Mo.

BE strong, muscular, full of pep. Amazing new body-building course. Write Olympic System, Waterville, Me.

SUPER Ju-Jitsu. Lick men twice your size. Complete course. Send \$1.00. Guaranteed. Lee, 3620 Merchandise Mart, Chicago.

HANDBALANCING quickly learned. Builds muscles. Great fun! Details for card. Power, 923 W. Vine, Kalamazoo, Mich.

BOOK MATCHES

NOVELTY Matches! Strike at the seat of trouble. You can put your friends in stitches. Strike a match on Hitler's britches. 10 matchpacks, 28c postpaid. Shepherd Service, P. O. Box 3085, Rincon Station, San Francisco, California.

BOOKS, PERIODICALS

ONE book free with every book you buy. Your favorite magazines at lowest possible prices. The latest books rented at less than a penny and half per day. These advantages are yours, if you join this amazing club. No dues whatever. Book and Magazine Club, P.S. 315 Fifth Ave., N. Y.

BUSINESS, trade, diversion magazines. Current single copies. Choose from over 500 leading publications, representing 140 industries, professions, hobbies, etc. List with prices free. Commercial Engraving Publishing Co., 34S North Ritter, Indianapolis, Indiana.

SAVE up to 50% on home repairs! Big new book, "Tinkering With Tools" shows how to do hundreds of odd jobs around the house. Fully illustrated. Only \$1.00! Dept. C-33, Popular Science, 353 Fourth Ave., New York City.

EDUCATIONAL Books sold cheaply or rented for small fee. Books bought. Money back guarantee. 4,000 Bargains. Catalog Free. (Courses Bought). Lee Mountain, Pisgah, Ala.

ANY Book, (New, Used, Out-of-Print, Rare). Promptly Supplied! Lowest Prices! Send for Free Bargain Catalogues! Old Prof's Book Shop, S16, Arcadia Court, Pontiac, Mich.

BACK dated magazines (foreign, domestic). Books—latest fiction. Used, new textbooks. Catalogs 10c (refunded). Cicerone's, 863 First Ave., New York, N. Y.

RECEIVE \$3.00 best-seller, monthly selection, books for 75c on approval without obligation. Kasson, 396 Broadway, New York.

LOVE Diary—(Ruthbella-Sansicchi). Privately printed, deluxe. Price \$5.00. Sample, 25c. Ferrante Art Press, 309 Third, Palisades Park, N. J.

BOOKS, (out-of-print, new, used) quickly supplied. Many 35c bargains. Catalogue. T. Jamkowski, 18870 Marx Ave., Detroit, Michigan.

RARE photos with "Playboy's Miscellany Pricelist", 50c. Bryce Hembree, 305 West 8th St., Los Angeles, Calif.

REBINDING: We bind magazines, old books, Bibles, hymnals. Heckman Bindery, Dept. I, North Manchester, Indiana.

5 MOST read mail order magazines, 20c. Armand Cartier, 695B North, Pittsfield, Mass.

STEREOSCOPIC (three dimensional) Art Photos. Particulars for stamp. Oddity House, St. Petersburg, Fla.

19 DIFFERENT exciting poses, most beautiful nude models. Send 50c. Lee, 3620 Merchandise Mart, Chicago.

NEW free catalogue technical, business home study books. James Bennett, General Delivery, New York.

PRETTY girl pictures, novelties, books. Big assortment, \$1.00. List, 10c. Gross Specialties, P. Carnegie, Pa.

MALE Athletes! Superphotos! Novak, 2039 East 21st., Oakland, California. (Stamp).

BIBLES, calculators, useful books; list free. Edwards Store, 1700 Locust, Quincy, Illinois.

BACK number magazines. List, Ewen's, 118-01 200 Street, St. Albans, N. Y.

ADULT books. Sample and catalog, 10c. Alstone, 260, Lunenburg, Mass.

BUILD IT YOURSELF

BUILD electric bicycle without gears, chains, welding. Plans, \$1.00. H. Klauss, 1369 Missouri St., Pittsburgh, Pa.

BUILD attractive plywood kitchen cabinets. Plans, 25c. Roger Underwood, 4617 Johnson Avenue, Western Springs, Illinois.

BUSINESS OPPORTUNITIES

PLASTEX Industries offer industrious men an opportunity to start a business of their own, manufacturing art goods, novelties and utility products in Plastex and marble imitation. 1/2c material makes regular 10c store seller. Rubber molds furnished for speed production. Small investment brings big returns. We are now placing big chain store orders with manufacturers. Ambitious men have chance for real prosperity. Plastex Industries, Dept. S., 1085 Washington Ave., New York, N. Y.

BUILD your own Business! Popular Science Classified ads will introduce your products into over 700,000 homes. These small ads have helped build big businesses. Send us a description of your product. We will submit full information and suggested ads for your approval. O. K. Kelly, Classified Mgr., 353-J Fourth Ave., N. Y. C.

BRUSH Plating outfits connect to a battery, no tanks necessary. Almost as simple as painting. Your opportunity to make good income plating autoparts, bathroom fixtures, reflectors, mirrors. Get free proof and particulars that put you in a paying business of your own. Gunmetal Co., Ave. E, Decatur, Illinois.

AMBITIOUS School Seniors—Your classmates will (eat up) our Graduation Cards. Priced 49c per hundred, up. Highest commissions. Free Cards and Cardalog. Rush name! Craftcards, Box 235-X, Pittsburgh, Pennsylvania.

START Home Business making statuary, plaques, art goods, novelties, souvenirs, concrete pottery, garden furniture, artificial marble flooring, liquid marble. Make your own flexible molds. Amazing profits. Valuable folder free. Creative Publishers, PS3, Glencoe, Illinois.

MAIL Order Business Course shows you how to make money, spare or fulltime. Teaches professional mail order technique—not penny-catching schemes. Free details. Nelson Company, 500 Sherman, Dept. C-403, Chicago.

HOMEWORKERS—\$50.00, \$75.00, \$100.00 weekly. Castwood gifts, plaques, novelties. Material, molds, instructions furnished. Sample woodcut, mold model with illustrated molding circular, catalogue new flexible molds, 25c postpaid. Castwood Products, 2110W, Lawrence, Chicago.

COLOR Concrete with chemicals. Stucco-rock. Cement Artistry. Wishing-wells. Spin concrete pottery. Benches, Garden Ornaments. Cold-glaze, concrete-paints, marbling. Sample 10c. Hollywood Cement-Craft, 8530 Wonderland, Hollywood, Calif.

STATUARY: Make all kinds. Simple process. Make and install artificial stone flooring in color. Liquid marble tile slabs. Other money-makers. Literature free. Compo-Tex, Box 786F, St. Louis, Mo.

SELL our latest exclusive books of instruction by mail. Publisher furnishes snappy circulars. No bookstore competition. Bigger profits. Rush name! Financial Education, 436 Commonwealth Bldg., Denver.

FOR an extremely profitable lifetime business, operate a Collection Agency-Credit Bureau. Many make \$4,000 yearly, up. Write Cole Associates, Syracuse, N. Y.

127 WAYS to make money, in home or office, business of your own. Full particulars free. Elite Co., 214-A, Grand St., New York.

NO priorities or rationing. Old established hatchery for sale because of owner's age. Few season's proceeds will return asking price. Becker's Hatchery, Vineland, N. J.

INTERESTED in real plastics? Send stamped envelope, Box 498, Gainesville, Texas.

SWISS Music Box Works—\$1.85 to \$2.25. Suitable for many novelties. Mermod Manufacturers, 147 W. 46th Street, N. Y.

BE Successful—Operate own business; home, office, 127 tested plans. Particulars free. General Sales, 149-B East 16th, New York.

WILL buy or finance Mail Order Business or Correspondence School course. Give complete details. Art White, 800 Broadway, Cincinnati.

START a home business in spare time. Make extra money. Experience unnecessary. Literature free. Dunbar, New Brunswick, N. J.

FREE—200 clever mailorder, homework, local business offers—all snappy money-makers. Lewis Co., 828-K Carpenter, Oak Park, Ill.

MAIL Order Business—Course in modern Mail Order methods; learn how successful men sell by mail. Free details. Jno. W. Fore, 4539 Chestnut, Kansas City, Mo.

EXTRAORDINARY opportunity! Manufacturing newest unequalled necessities. Investment insignificant. Income great. Miller, Chemist, Tampa, Florida.

LIQUID Marble — Marvelous, colorful! Brushed, sprayed, molded. Rubberlastic molds! Composition Flooring! Particulars free. Marbleizing Service, Edwardsville, Ill.

MOLD-MAKING, plaster casting. Money-making business. Literature free. Kemilo, Park Ridge, Illinois.

MAKE money collecting accounts. Good income; quick results. Collectors Association, Newark, Ohio.

DOLLARS in your daily mail. Start business of your own. Write Vickers, 1053-R 8, Bellows, Akron, Ohio.

MONEY Making Knacks—Business at home; mail order work. Details, Jc. Waltman's, 504 Mill St., Chester, Pa.

WEBER Typewriter Mechanics School. Simplified homestudy. Repairing increasing. Canton, Ohio.

HOLD or start business; no priority; new material. Particulars. Box 468, 207 E. 84th St. New York, N. Y.

MONEY making business starter. Circular free. Wayne Products, Pleasantville, New Jersey.

RAISE Angora rabbits—wool brings \$5.00 pound. Particulars free. Grinstead's, Edwardsville, Ill.

\$50—\$100 WEEKLY using Sawdust. Stamp Please. Clement, 80-L Gorsline St., Rochester, N. Y.

MAILORDER. Opportunities book, large size, 10c postpaid. Waddell's, 245 East 77th, New York.

CAMERAS, PHOTO, SUPPLIES

WRITE Bass First—Largest stocks of fine cameras, (still and movies) in the U.S.A. Latest Argus C-3 with coupled range finder, synchro flash, 50mm. F:3.5 lens; also 75mm. Bausch & Lomb Telephoto F:5.6, also coupled to range finder, \$82.55 value, price—\$60.50, unconditionally guaranteed. Cowhide Eveready case, \$4.75. V. P. Ihagee, F:4.5 Anastigmat, Prontor shutter, \$16.75. Whatever you want in photography, write Bass first. Liberal trades. For over thirty years, money back if not satisfied. Bass Camera Company, Dept. S.P., 179 W. Madison Street, Chicago, Ill.

STILL Available At Central—Hundreds of bargains in Cameras and Supplies. Send for free illustrated catalog listing still and movie cameras, films, lenses, enlargers, meters, supplies—at tremendous savings—all guaranteed. Trade in your old camera or equipment. Write for your free copy of newest money-saving bargain book—just out! Limited edition. Hurry! Central Camera Co., (Photographic Headquarters since 1899), 230 S. Wabash Ave., Dept. B-182, Chicago, Illinois.

AMATEUR Photographers attention! Improve your hobby of picture taking and learn how to make money with it. Write today for our 40-page book catalog and a sample copy of American Photography, enclosing ten cents for postage. Contains articles and pictures of the world's foremost writers and pictorialists. Camera House 141, 353 Newbury St., Boston, Mass.

CASH! Spot cash for cameras, lenses, binoculars, movie or still, sound projectors. Send full description by mail, or wire for prompt cash offer. Over 30 years of dependability insures honorable dealings. Bass Camera Company, 179 West Madison Street, Chicago, Illinois.

CAMERA Repairing. Bellows made to order, shutters repaired. Bellows made to fit all standard cameras! United Camera Co., Inc., B-1515 Belmont, Chicago.

MAKE money in photography. Learn quickly at home. Easy plan. Previous experience unnecessary. Common school education sufficient. Booklet and requirements free. American School of Photography, 1315 Michigan, Dept. 1741, Chicago.

GORGEOUS Girls! Nude photographs for Art Study! Post card size. Glossy finish. 10 for \$1.00, 25 for \$2.00 postpaid. Cine Art Studio, Box 328-G, Hollywood, Calif.

HIGHEST Prices for Cameras! Send yours in for free estimate. Bank references. 943 Pennsylvania Ave., N. W., Washington, D. C.

OIL coloring photographs a fascinating hobby or profitable business. Learn at home. Easy simplified method. Previous experience unnecessary. Send for free information and requirements. National Art School, 1315 Michigan, Dept. 1742, Chicago.

CARTOONING, SIGN PAINTING, DRAWING AIDS

SENSATIONAL cartoon businesses, markets. Hartman Publishers, 2438 W. Lincoln, Nebr.

EARN money evenings, copying and duplicating comic cartoons for advertisers. Comic-Ads, Argyle, Wisconsin.

CARTOONING Course—36 lessons, 6 booklets, 816 illustrations only \$2.80. Templeton Studios, Elgin, Illinois.

CHALK TALK STUNTS

LAUGH producing program, \$1.00. Illustrated catalog 10c. Cartoonist Balda, Oshkosh, Wis.

CHEMICALS & APPARATUS

CHEMISTRY Laboratory apparatus and chemicals for industrial, analytical, and experimental laboratories. Complete supply service for students taking correspondence school chemistry courses. Send 3c postage for free 44 page catalog. Dept. M26, Biological Supply Co., 1176 Mt. Hope Ave., Rochester, N. Y.

CHEMICAL Magic made easy! Baffle your friends with startling tricks and stunts. The Home Chemist shows you how! 192 pages. Illustrated. Only \$1.00! Dept. C-33, Popular Science, 353 Fourth Ave., N. Y.

WINN'S new idea Home Laboratory Chemical Kits and apparatus outfits for home experimenting. Send 5c for literature and retail supply catalogue. J. H. Winn Co., Dept. 611, 124 W. 23rd St., N. Y.

HANDBOOK for Chemical Experimenters. Hundreds of experiments; illustrated; 50c. Experiment booklet, 10c. Reading Scientific Company, Reading, Pa.

FREE Catalog: Chemistry, mineralogy, biology. Special: Telescope, five power, leather case, send \$1.00. Tracey Laboratories, Evanston, Illinois.

LABORATORY Supplies at Wholesale Prices: Chemistry, Biology, Physics. Catalogue, 10c. National Scientific Co., 2204 W. North Ave., Chicago. Established 1908.

CATALOG 3000 Illustrations 10,000 prices. Sent for 50c. Laboratory Materials, 7317 Vincennes, Chicago.

LUMINOUS Paints will glow in dark. Six colors. Fairmount Chemical Co., 126 Liberty St., New York City.

COMPLETE 25 piece Chemical Kit, \$1.00. D. PS-2. Colonial Chemical, Brockton, Mass.

FREE chemical catalogue. Enclose 3c postage. Greenwood, 398 Broadway, N. Y.

DETECTIVES

DETECTIVE training—Secret investigations—Easy method—Fingerprints. Booklet Free. International Detective System, Box 756-P, Journal Square, Jersey City.

DETECTIVES—Work home—Travel. Experience unnecessary. Write, Wagoner, 2640-P Broadway, N. Y.

SECRET detectives make big money. Rewards. New training method. National Detective Service, Struthers, Ohio.

DOGS, BIRDS, PETS

ST. BERNARD puppies. Champion sired beauties. Franklin Young, R3, Riverhead, Long Island, New York.

DRAFTING INSTRUMENTS

FREE catalog of drafting instruments and supplies. Gordon's, 162-PSB Madison, Chicago.

EDUCATIONAL & INSTRUCTION

RADIO Communications courses qualifying for all Federal licenses. Home study and resident courses. American Radio Institute, 1123 Broadway, New York, N. Y.

EARN Certified Grapho-Analyst degree in amazing new science. Students report earning up to \$1.00 an hour spare time, \$75.00 weekly full time. Graduates in Employment and Credit Agencies, Police Departments, hotels, theaters, department stores, courts, doctor's offices, private practice. Free Placement service. 3000 word illustrated lesson free. Institute, Linn Creek, Missouri.

FREE—A complete I. C. S. lesson pamphlet on Shop Practice! Unusual money-making opportunities in this booming field today. Experience, first-hand, the thrill and satisfaction of mastering a first step to success. International Correspondence Schools, Box 7647-K, Scranton, Pa.

WELDING—Electric Arc. Learn quickly by actual practice at Hobart Welding School. Individual instruction at bare cost of materials used. 50c in stamps brings valuable welding lessons post paid and full particulars. Hobart Welding School, Box P-332 Troy, Ohio.

CRYPTOGRAPHY—art of secret writing. New, interesting twelve lesson course quickly teaches you to become amateur cryptographer. Complete course, \$1.00 postpaid. Order now! Fargo Mfg. Co., Uniontown, Pa.

GOOD "used" educational books on all subjects bought, sold, rented, exchanged. Satisfaction guaranteed. Complete details and 84-page illustrated bargain catalog Free. Write Nelson Company, 500 Sherman, Dept. C-203, Chicago.

RADIO engineering, broadcasting, aviation and police radio, servicing, marine and Morse telegraphy taught thoroughly. All expenses low. Catalog free. Dodge Institute, 500 Monroe, Valparaiso, Ind.

THE master system of short method arithmetic used by the world's foremost experts. Complete course. Send \$1.00. Guaranteed. Lee, 3620 Merchandise Mart, Chicago.

"SLIDE Rule Simplified". 25 processes. Normal, Inverted, SLT scales; "K", Folded, separate. \$1.00. Copyright owner: Adrian Gerrits, 517 N. Durkee, Appleton, Wisconsin.

LEARN Telegraphy! Splendid opportunities now prevail. All expenses low. Catalog free. Dodge Institute, 501 Monroe, Valparaiso, Ind.

MAKE up to \$25-\$35 week as a Trained Practical Nurse! Learn quickly at home. Booklet free. Chicago School of Nursing, Dept. K-1, Chicago.

PRACTICAL semi-technical home study books fully illustrated. Many subjects. Bargain catalogue free. Lumco, Kimball, Nebraska.

CLINICAL Laboratory Technic taught in your own home. Practice outfit supplied. Bulletin free. Imperial Technical Institute, Box 973-B, Austin, Texas.

COLORFUL masterpiece charts—Anatomical, physical, occult. Prisms, radium, books. New Age Supplies, 3915 24th, San Francisco.

HOME Study Course. Drugless Therapy. Free literature. Drugless Therapy Inst., Tama, Iowa.

DRAFTING: Concise, accurate, complete \$2.00. Professional Draftsman, 910 South-Mariposa, Los Angeles.

UNUSUAL bargains in books. Write your wants. Catalog Free. Royal Sales, Box 22, Station "T", Brooklyn, N. Y.

DRAFTING Course \$1 complete! Trigonometry \$1. Slide Rule \$1. Inquire Giles, Dept. PS-4, 1326 Myers, Burbank, Calif.

TOOLMAKING, diemaking, mathematical questions answered, \$1.00. Licensed Teacher, 11345 Grandville, Detroit.

USED Correspondence Courses and technical books bought, sold, rented; catalog free. Educational Exchange, Henagar, Ala.

LOCKSMITH Course. Lock-picking, key-fitting, etc. \$1.00 prepaid. Miller's Key Shop, Canadian, Texas.

ELECTRICAL SUPPLIES & EQUIP.

MOTORS, generators, welders, fencers, other electrical items. Priority unnecessary. Write LeJay Manufacturing, Minneapolis, Minn.

ELECTRIC Pencil: Writes—Engraves all Metals. \$1.00 postpaid. Beyer Mfg., 4515-C Cottage Grove, Chicago.

ELECTRO-Magnets—Plans for building. \$1.00. Terry Sales, Central Station 1676, Toledo, Ohio.

ENGINES, MOTORS, ETC.

WINDING Data, 225 motors, single and three phase, \$1.00. Motor Data, Box 7631, Kansas City, Mo.

FARMS, OTHER REAL ESTATE

SPORTSMAN'S camp on dandy stream, \$1600—In hunting, fishing country, just off macadam highway, vantage 2 miles, 90 acres, part tillable, valuable woodland, sturdy cabin building, stone fireplace, spring affords water; photo page 28 Big Catalog. Write for Free copy, Strout Realty, 255-ZB 4th Ave., N. Y. C.

SEE the Highlands of Louisiana where winter brings no idle acres. Choice cut-over land at low prices with terms. Send for descriptive book without obligation. Long-Bell Farm Land Corporation, 897 R. A. Long Bldg., Kansas City, Mo.

GOOD Farm Bargains. Washington, Minnesota, Montana, Idaho, Oregon, North Dakota. Dependable crops, favorable climate. Write for literature, lists describing typical farms. Specify which state. J. W. Haw, 120 Northern Pacific Ry., St. Paul, Minn.

40 ACRES, near White River, unimproved; poultry land, \$190; \$5 down, \$5 monthly. Free list and literature. Hubbard, 269 Grossman Bldg., Kansas City, Kans.

ORLANDO, Florida, 5 acres on main highway; good fruit and vegetable land; easy terms; free booklet. Department X, Box 1944, Orlando, Florida.

TEN acres good Florida land, \$50.00, \$5.00 down, \$5.00 monthly. R. W. Stewart, Inverness, Florida.

FIELDGLASSES, TELESCOPES & MICROSCOPES

LENSES—Build your own telescope, field glass, microscope, riflescope, etc. Assortment of fifteen lenses—\$1.00 postpaid. Thirty lenses—\$2.00. Sixty different lenses—\$5.00. Slightly chipped on edge. Satisfaction absolutely guaranteed. American Lens Company, 1313-S Vine Avenue, Park Ridge, Illinois.

MICROSCOPES, scientific and laboratory equipment. We buy, sell, repair and swap. Lists sent on request. Sellright Giftwares Corp., 225 Fifth Ave., New York, New York.

ASTRONOMICAL telescopes, binoculars, cameras, microscopes: bought, sold, repaired. Send 10c for list of instruments desired. Rasmussen, Box 294, Amsterdam, N. Y.

MICROSCOPES! Research—Industrial—Amateur—Accessories. We sell—buy—repair—exchange. Inquiries invited. National Microscope Exchange, 121 Chambers St., New York, N. Y.

FOR THE HOME

BUY something British in the Scotsguard automatic fire detector. Simply attach to your present door bell wiring. Postpaid, \$2.00. Scotsguard, Box 453, Waterbury, Conn.

FRAGRANT Maine balsam pillow. Ideal gift. Fresh balsam scent. \$1.00 each prepaid U. S. A. Arts Flower Mart, 202 E. 57th St., New York City.

FOR INVENTORS

INVENTORS: Learn now, without obligation, how to protect and sell your invention. Secure Free "Record of Invention" form for establishing date of your invention and Free book "Patent Guide for the Inventor", containing complete information about patent procedure and selling inventions. Delay may be costly. For prompt, confidential service—write to—Clarence A. O'Brien & Harvey Jacobson, Registered Patent Attorneys, 32A-C Adams Building, Washington, D. C.

INVENTORS—Take prompt steps to protect your invention. Delays are dangerous. Get new Free book, "Protect, Finance and Sell Your Invention," and "Invention Record" form. Preliminary information free. Reasonable fees. Conscientious counsel. Easy payment plan. Learn how to protect and sell your invention. Write us today. McMorro & Berman, Registered Patent Attorneys, 143-M Albee Bldg., Washington, D. C.

INVENTORS: New military and commercial inventions urgently needed by manufacturers. Write for particulars. Chartered Institute, Dept. 3-A, Washington, D. C.

PATENT Your Idea! Write immediately for two free illustrated books, "Patent Protection" and "When and How to Sell an Invention". 68 pages of valuable information for inventors. No obligation. Address: Victor J. Evans & Co., 742-C Merlin Bldg., Washington, D. C.

INVENTORS—Manufacturers want inventions for post-war production. Send 25c for list of needed items. Box 4089, Denver, Colorado.

CASH for practical ideas and inventions. Mr. Ball, BB-9441 Pleasant, Chicago.

FORMULAS, PLANS, ETC.

AUTHENTIC Formulary 924 pages (illustrated). 10,000 Money making formulas, recipes, instructions, substitutes. \$1.75 postpaid or C.O.D. (Foreign, \$2.10). Catalog, 3c. Adams-Brown, Chestnut Hill, Mass.

FORMULAS—Greatest money makers. Details free. H. Tucker, 630-B Chestnut, Hamilton, Ohio.

FORMULAS—All kinds. Latest money-makers; literature Free. KemiKal, Park Ridge, Ill.

110 SURE winners formula book. New real money makers. Send 50c. Lee, 3620 Merchandise Mart, Chicago.

VANILLA flavor, 40c gallon; formula, \$1.00. McDaniel, 939 Euclid, Detroit.

FUR FARMING

ANGORA Wool rabbits. Finest pedigree breeding stock. Kovalevsky, Madison, New Hampshire.

GAMES, ENTERTAINMENT

NAVAL Warfare, strategy. Locate, sink enemy fleet in fascinating game for any number. \$1.00. T. N. Palmer, 55 Pineapple St., Brooklyn, N. Y.

HEARING AIDS & REPAIRS

HEARING Aids Repaired. Quick service. Wholesale, retail guaranteed. Marshall Brown, 19 East Congress Street, Chicago, Illinois.

HELP WANTED

DON'T Be A Job Hunter—Start your own business on our capital. No hard times; no layoffs; always your own boss. Hundreds average \$3,000 to \$5,000 annual sales year after year. We supply stocks, equipment on credit. 200 home necessities. Selling experience unnecessary to start. Wonderful opportunity to own pleasant, profitable business backed by world wide industry. Write Rawleigh Co., Dept. C-U-PSC, Freeport, Ill.

HIGHGRADE SALESMEN

ALL-Out Salesmen Wanted. No car needed. Sell essential industries a product which replaces urgently needed war materials. No priority restrictions. Demand heavy. Before war our salesmen earned up to \$5,000 per year. War time earnings substantially greater. In 1942 L. K. Agard multiplied his earnings to \$14,367.22; Alberto Calas jumped up to \$10,988.19; C. H. Libbey, a new man, received \$8,904.78; S. L. Richards made \$7,025.04 more than last year. (These are sworn statements.) No order takers or high-powered promoters wanted. We're looking for straightforward, Capable salesmen, although experience this line unnecessary. Write airmail outlining qualifications. Salesmanager, Box 789-D, Fort Worth, Texas.

MEN and Women! Sell, advertising trade stimulators and beautiful portrait pictures. Send \$5.00 for 100, 8x10 inch size, assorted. They will sell on sight, 25c each. Send \$2.00 for 241 pictures assorted in natural colors, mounted in beautiful catalogue. Send \$1.00 for my special assortment that will bring you \$5.00, 25c in postage stamps brings you 1 picture and letter of information. William H. Dyer, Sr., House of Novelties, 1713 East 79th Street, Chicago, Ill.

ADVERTISING Book Matches. America's largest manufacturer of Union Label Book Matches. Fast selling line. Large sales producing kit. Sample matches. Complete cut catalog. 17 color combination makes selling easy. Commission in advance. Superior Match Company, 7530 Greenwood Ave., Dept. P-3, Chicago.

PROFITABLE, dignified business for high grade, industrious men and women retelling Rawleigh Products direct from manufacturer to consumer. Every home your market. Large repeat orders. A few openings nearby. Write Rawleigh Co., Dept. C-65-PSC, Freeport, Ill.

HOBBIES, COLLECTIONS

20 DIFFERENT cactus plants, \$1.00. 200 mixed seed, 25c. Eulalia Turner, Azusa, California.

BEAUTIFUL Jewelry Stones removed from rings, etc. 100 assorted \$2.00. Lowe's, Box 311, St. Louis, Mo.

HOBBY catalogue for Stamp, Mexican dressed fleas, 40c. Chamelon, 25c. Quivira Specialties, Winfield, Kansas.

HOME CRAFTSMEN

28 LAWN Ornament patterns 25c. Other patterns: 15"-20" high; Dutch girl, Dutch boy, pirate, bull terrier, Mexican girl, Mexican boy, dwarf, penguin, flower girl, 10c each; 3 for 25c. 25 Novelty patterns, 30c. All 62 full size patterns \$1.00 postpaid. Strother, Box 383-EH, Belington, W. Va.

LEATHERCRAFT Headquarters. Leather, tools and instructions for you to make most anything in leather. Also archery and wood craft supplies. Send ten cents for catalog. J. C. Larson Co., 180 No. Wacker Drive, Chicago, Ill., Dept. 180-S.

CATALOG—Patterns plywood novelties. Lawn ornaments, silhouettes, letters & numerals. Decal transfers, handy hand tools, new power sander. Other lines. 500 articles finely illustrated. Write today. Wo-Met Shop, Ashburn, Georgia.

GET Free leathercraft instruction pamphlets, prices of leathers, tools, projects. Fascinating Hobby. Make gifts. Leather samples 5c. Wilder & Company, 1038 Crosby, Dept. A-1, Chicago, Ill.

UPHOLSTERING supplies, list free. Re-upholster your own furniture and save. "Tricks of the Trade" makes it easy, \$1.00. Wilson Supplies, 294 Quinpiac Ave., New Haven, Conn.

LEATHERCRAFTSMEN: Send 10c for handbook and catalogue of tools and supplies. E. A. Sweet Co., Inc., Leathercraft Division S-32, 148 State St., Binghamton, N. Y.

USED wood & metal working power tools, bought, sold, exchanged. Details Free. National Tool Mart, Ashburn, Georgia.

MAKE telescopes, microscopes, cameras, magnifiers. Trifling cost. Jamer, Manorville, N. Y.

MAKE your own smoking pipes. Briar pipe blocks, 30c; stems, 15c each. Michelson & Sternberg, Inc., 116 Broad Street, N. Y. C.

KNOCKDOWN cedar chest, lumber, veneer. Illustrated catalog, 10c. Giles-Kendall Co., Decatur, Alabama.

HAVE: Very fine violin, also violin wood. Want: Firearms. Museum, Wenona, Ill.

NOVELTIES from scrap wood, 15 patterns, 25c. Lynds, Medway, Massachusetts.

HUNTING

I'LL trade guns and ammunition. Swap your guns or ammunition for other guns, other ammunition, for bargains in other equipment. I'll also pay cash (or trade) for modern used guns, ammunition, fishing tackle, outboards, golf balls, clubs, binoculars, cameras. Write immediately for liberal "cash or trade" offer. Also for Free Giant Bargain List. Send 3c stamp. Milton Klein, Gun Trader Since 1885, 508-JC South Halsted, Chicago.

INVENTIONS WANTED

INVENTORS: Have you a sound, practical invention for sale, patented or unpatented? If so, write Chartered Institute of American Inventors, Dept. 3-C, Washington, D. C.

INVENTIONS needed now. Money making possibilities unlimited. 100 good ideas for you to work with for only 25c. Kennedy, 1730 Stewart, Kansas City, Kansas.

CASH for Inventions—Patented, unpatented. Mr. Ball, BC-9441 Pleasant, Chicago.

INVENTIONS Promoted. Patented or unpatented. Write Adam Fisher Company, 183-A Enright, St. Louis, Mo.

INVENTIONS! Have you good patentable ideas? Write Mr. Metzler, 11 West 42nd, New York.

JEWELRY

ZIRCON Diamonds, beautiful, inexpensive. Catalogue Free. Box 388/206, Wheeling, W. Va.

LEGAL DIRECTORY

MEXICAN legal matters reliably handled. Address—Box 240, Juarez, Mexico.

MACHINERY, TOOLS & SUPPLIES

LEWIS milling machines, shapers and other shop tools are efficiently handling scores of production jobs on war subcontracts. Rough or semi-finished castings with construction blueprints and parts supplied from stock on low priorities. Save 5/6ths usual cost of finished product. Send 10c to cover cost of mailing new catalog. Lewis Machine Tool Company, P. O. Box 116, Sta. A, Department S-27, Los Angeles, Calif.

STEEL beam trammels for draftsmen, engineers, mechanics. Circular Free. Clair Company, Box 92, Blythebourne Station, Brooklyn, N. Y.

NEW caliper, direct reading, speeds up defense work, cheap. Free illustrated circular. Factory, 811-H East 31st, Kansas City, Mo.

THE New Shebel Saw Filer produces saws that have no equal. Send for full information. A. P. Shebel, 726 S. 2nd St., Milwaukee, Wis.

FOR sale new and used drills, reamers, milling cutters. Write P. O. Box 493, Flint, Michigan.

USED wood & metal working power tools, bought, sold, exchanged. Details Free. National Tool Mart, Ashburn, Georgia.

GRIND Drills Like Factory: Attachment for Bench Grinder. Cheap. Factory, 811-A East 31, Kansas City, Mo.

BUILD Your own lathe grinder, castings, building instructions, \$2.50. Particulars, 10c. Star Machine Shop, Kingfisher, Okla.

RECLAIM dull and broken drills with Nu-Way Drill Grinder. Circular free. Tractor-Lite-Mfg. Co., Spirit Lake, Iowa.

MAGIC TRICKS, PUZZLES, JOKER NOVELTIES

YOU can do the magic tricks in Mac's 1943 assortment: Chinese wands, devil's ladder, cut cord trick, red and black Monte, new diminishing card. All new, nice club size apparatus, patter instructions in strong box postpaid \$1.00. Magic Catalog, 10c. Mac's Magic Shop, 506-B Main, Ft. Worth, Texas.

500 TRICKS you can do, only 10c! Brand new tricks for pocket, parlor, stage, with cards, coins, thimbles, balls, professional apparatus, books, illusions. Send 10c for Douglas' famous book of 500 Tricks. Douglas Magicland, Dallas, Texas.

HOW does he do it? Learn spirit mind reading. Earn money. Complete book, 50c. Guaranteed. Bookman, 3620 Merchandise Mart, Chicago.

HYPNOTISM! Learn that ancient art. Amaze your friends. Send \$1.00 complete course. Guaranteed. Bookman, 3620 Merchandise Mart, Chicago.

HOLLYWOOD Special! Magicians button, catalog, ghost illusion and free trick for 25c. Magic House of Charles, Box 888S, Hollywood, Calif.

WORLD'S largest professional magic shop keeps you in touch with latest tricks. To receive mailings send 25c for 1943 catalog. Holdens, P-220 W. 42nd St., New York.

MAGICIANS' Gamblers' secrets exposed. Cards, Dice, Punchboards, Slot Machine. Catalog 10c. Book Co., Box 671, St. Louis, Mo.

MAGICIANS' headquarters. 216-page illustrated catalog, 25c. Kanter's, S-1311 Walnut, Philadelphia.

TELL anyone's age and amount of change your friend has in his pocket. Secret, dime. Carl Bohman, Box 45, Schenectady.

JOIN Magicians' Fraternity! Free tricks. Monthly magazine, sample 10c. International Magicians, Mt. Morris, Illinois.

DOLLAR magic set free with colossal catalog, 25c. Trixie, 2404 N. 15th St., Philadelphia.

BE a Magician. Large professional magic catalog of latest tricks, 25c. Ireland, P-109 North Dearborn, Chicago.

GET acquainted offer. Free tricks. H. J. Willis, Box 1704, Cleveland, Ohio.

MAGNET Trick Instruction Book, 25c. Central Station Box 1676, Toledo, Ohio.

BOOKS, cards, novelties, catalog, Samples, 10c. Easterncity, 330-Se Wells, Chicago.

MANUFACTURING

MODELS, small lot manufacturing, metals, plastics, etc. Milburn, Burlington, Kentucky.

MILITARY INSIGNIA

SILK embroidered emblems, beautiful display for home, business. Start individualistic collection. Sample, stamp, Hobbyguild, 35-A West 32, New York.

MINERALS & PRECIOUS STONES

DO you know ores? 24 beautiful mineral specimens. Gold, manganese, copper, etc.; each identified. Postpaid one dollar. Arizona Mineral Specimen Co., Cherry, Arizona.

FASCINATING minerals, 25 labeled specimens, \$1.25. Catalog, 5c. Scott Lewis, 2500 Beachwood Dr., Hollywood, Calif.

GOLD ore, Free. Send stamp, name, address. Miner, 675 Elliot, Denver, Colorado.

MISCELLANEOUS

MEDICAL Laboratory Technicians in great demand. We train you in your spare time, in your own home. You can practice while studying. Write for free catalogue. Imperial Technical Institute, Box 973-S, Austin, Texas.

DEFENSE workers—If your hair gets dirty and greasy, "Kleen-Hair" shampoo is meant for you. A neutral cleaner, soapless and oilless. Trial size, 25c. Aurora Laboratories, Box 8, Union City, N. J.

"LIFE After Death?"—solved! Biblical formula for better Everlasting Life and World Peace revealed. "Reincarnation Book", twenty cents. Dr. Deerbos, P. O. A, Box 41, Brooklyn, N. Y.

400 SQUARE inches luminous cloth, 3 fluorescent crayons and pigments—\$1.00. C. F. Miller, 18 West 39th St., Wilmington, Del.

FREE Painting Lessons with each Plaque bought from us. Write for price list and information. Burgermaier Arts, 406 East I Street, Dayton, Ohio.

SENSATIONAL. Thrilling! Mexican-Cuban, art pictures, books, miscellaneous. Samples, lists, 50c. Jordan, 135-L Brighton St., Boston.

CONQUER illegal coin machines! Particulars, 3c stamp. Devereaux, Box 212-P, Battle Creek, Mich.

DEAFNESS. Why? Good hearing without mechanical aids. No drugs. Relieving deafness. Johnston, Sta. C, Vancouver, Canada.

CZECHOSLOVAKIAN Prisms; Health Color Books. NuAge Company, 3915-24th St., San Francisco, Calif.

FREE literature how to locate buried treasure and minerals. Fisher Laboratory, Palo Alto, Calif.

4 LEAF clover; St. Christopher; Miraculous; compass key chains, 25c. Smith, 149 W. 75th St., N. Y.

AUTO-Hypnosis. New way to success. Free details. Victor, 675 Elliot, Denver, Colorado.

HEATING costs cut 50%!!! Guaranteed. Sworn statement, circulars 10c. Rosenzweig, RR10-B-2, Cincinnati.

RECEIVE mails, magazines, samples. Your name in numerous mailing lists 10c. Howard, 396 Broadway, New York.

DEAF? Amazingly successful home treatment. Free details. Nu-Way, Agawam, Mass.

SNAPPY cartoon booklets, 7 for 50c. Charles Torian, Hampton, Virginia.

MODELS & MODEL SUPPLIES

SHIP model kits and fittings. Complete line Fisher model yacht equipment. All Boucher, Fisher, Marine Model and Ideal Kits, fittings and blueprints at catalog prices. Most complete stock in New England. James Bliss & Co., Inc., 220 State St., Boston, Mass.

SHRUBBERY For Model Scenery. You will find Norwegian Lichen the ideal material. Circular and sample from Knutssons, West Chicago, Ill.

MOST complete Illustrated Catalog—"O-HO OO" Model Railroad Parts ever published. Send 5c for mailing. Selly, 1377 Gates Ave., Dept. 803, Brooklyn, N. Y.

RAILWAY models, complete line informative catalogs. O Gauge 112 pages, 25c. HO 48 pages, 15c. Walthers, 269 Erie, Milwaukee, Wisconsin.

MODEL Railroad Shop. Big 36 page complete catalog, 10c. Dept. P. S., Dunellen, New Jersey.

SHIP Model and yacht supplies, complete large 56 page Catalogue, 15c. Wm. Wild, 510 E. 11th St., New York City.

MONEY MAKING OPPORTUNITIES

EXTRA Dollars! Full or part time work selling magazines. Attractive commissions paid. Full list of publications. Prompt and efficient service. Start now. Write for complete selling kit. The Instructor Subscription Agency, Dept. SM, Dansville, N. Y.

LEARN Metascience. Remarkable drugless healing. No manipulation. No apparatus. Unbelievable simplicity and results. Inexpensive correspondence course. Write Metascience, De Land, Florida.

WHY worry about gas rationing, when you can operate profitable, tested mail order plan at home? Write: Martin, 2417-Z Jefferson Ave., St. Albans, W. Va.

DETECTIVES Earn Big Money. Experience unnecessary. Particulars free. Wagoner, 2640-X Broadway, N. Y.

OPPORTUNITIES? Plenty in my book, 10c coin. Spada Enterprises, 227 Front St., Hartford, Conn.

MONEY making secrets that get the money. 64 pages of trade secrets that work. Send 50c. Lee, 3620 Merchandise Mart, Chicago.

INCREASE your income: Home, sparetime. Free details. Crittenden, 125N Lincoln, Lombard, Ill.

CO-PUBLISHERS Wanted—Samples, information, 10c. Bryant's, Box 2638-CP, Denver, Colorado.

EARN money evenings, copying and duplicating comic cartoons for advertisers. Comic-Ads, Argyle, Wisconsin.

YOUR name printed in 10,000 "Big Mail" directories, 25c. Checking copies sent. Arlesse's, 15881 Log Cabin, Detroit, Mich.

RAISE Angora Rabbits—Reliable information. Maurice Sixby (Pioneer Breeder), 94 Melrose Street, Buffalo, N. Y.

DOLLAR orders filled Free! Investigate! Cutler Publications, (3159), Reading, Pa.

MAKE money renting—Amidon Metal Scaffolds, Fifth Street, Elyria, Ohio.

MONUMENTS

MONUMENTS—Direct Low Prices, Freight paid. Guaranteed. Free Catalog and samples. Write Granite-Marble Factory, A49, Oneco, Florida.

MOTION PICTURE & SOUND EQUIPMENT

EXCHANGE: Silent pictures, \$1.00 reel; sound, \$2.00. Also sell. Free catalogue. Selected sound program. Rent reasonable. Better Films, 742 New Lots Avenue, Brooklyn, N. Y.

COMPLETE 16MM sound subjects, \$1. (Need splicing). All sizes film bought, sold, exchanged. Catalogue, sample film, 10c. International-S, 2120 Strauss, Brooklyn, N. Y.

"THE World's Greatest Passion Play." Library, rent or purchase—specify sound or silent, 8mm., 16mm., 35mm., Hemenway Film Co., 33-Z Melrose St., Boston, Mass.

KODACHROME subjects for grownups. Lists, sample, 10c. Longer, projection length Waikiki Hula test film, \$1.00. Specify 8-16mm. Jenkins, 392, Elmira, N. Y.

8-16MM. FILM subjects, \$1.00 up. Lists, stamp. Pence Service, 2484 Liddesdale, Detroit, Michigan.

SALE, Rent, Exchange—8-16MM. Home Movies. Free catalogue. Bailey Films, 1653 Cosmo, Hollywood, Calif.

LEARN Movie Projection, Management. Free catalog. Give age. Theatre School, Elmira, N. Y.

A 1½c STAMP brings our 16mm, 8mm catalogue. Sterling's, 679 Northampton, Easton, Pennsylvania.

FREE, 1943 movie catalog. Film samples, 10c. Goodwill Company, Jackson, Tenn.

OUTSTANDING 8mm-16mm film subjects. Demsey, 1613 Stewart, Youngstown, Ohio.

MOTORCYCLES, BICYCLES & SUPPLIES

"MODERN Motorcycle Mechanics", 436 page book, 200 illustrations, just published. Extensively covers—operating, maintenance, complete reconditioning. American and British motorcycles, \$2.50 postpaid. Descriptive folder free. Nicholson Brothers, Saskatoon, Sask., Canada.

SAVE gasoline, tires! Motor-scooters, motorcycles, bicycle motors, midget automobiles, gasoline engines. No priority necessary. Illustrated catalog, one dime. Clymer, 307 West Pico, Los Angeles, Calif.

BICYCLES, parts, tires. Also scooter tires, all sizes. Send dime for list. Cycle Transport Co., 1241 So. Michigan Ave., Chicago, Ill.

MUSIC, MUSICAL INSTRUMENTS

MUSIC composed to words. Rhyming pamphlet on request. Phonograph recording of completed song. Send poem. Keenan's Studios, Dept. PS, Box 2140, Bridgeport, Conn.

LEARN precision piano tuning easily at home by our new Temperometer teaching device. Free booklet. Bryant School, 9B, Augusta, Michigan.

LEARN Swing piano! Postal brings free folder. Christensen, 465 Kimball Hall, Chicago.

WANTED—Piano accordions—any condition. Send description. Immediate cash. Chaton, 600 Blue Island, Chicago.

WANTED! Lyrics, melodies for songs. We arrange, publish, sell. Superior Song Studios, Passaic, N. J.

SONG Poems Wanted! Write for free instructive booklet. United Music Corporation, Dept. 31, Salem, Indiana.

EVERYTHING for violin making. Fraser, 2025 Starke St., Saginaw, Mich.

OLD GOLD, WATCHES, PRECIOUS STONES

GOLD \$35.00 Ounce—Mail old gold teeth, diamonds, jewelry, watches—receive cash by return mail. Satisfaction guaranteed. Free information. Dr. Weisberg's Gold Refining Co., 1500-B Hennepin, Minneapolis, Minn.

OLD STAMPS WANTED

I WILL pay \$100.00 each for 1924 1c green Franklin stamps, rotary perforated eleven (up to \$1,000.00 each unused). Send 6c today for large illustrated folder showing amazing prices paid. Vernon Baker, 33-P.S., Elyria, Ohio.

PATENT ATTORNEYS

INVENTORS: Take first step toward protecting your invention—without obligation. Write for Free "Record of Invention" form for establishing date of invention and Free "Patent Guide for the Inventor"—telling about confidential search service; how to sell and market inventions; details of convenient payment plan. Send today for free "Patent Guide" and "Record of Invention" form. Clarence A. O'Brien & Harvey Jacobson, Registered Patent Attorneys, 32B-C Adams Building, Washington, D. C.

PATENTS Secured. Two valuable booklets, "Patent Protection" and "When and How to Sell an Invention", together with valuable "Evidence of Invention" form sent free. Write immediately to experienced patent counselors, Victor J. Evans & Co., 741-C Merlino Bldg., Washington, D. C.

INVENTORS: Before disclosing your invention to anyone send for Form "Evidence of Conception"; "Schedule of Government and Attorney's Fees" and instructions. Sent free. Lancaster, Allwine & Rommel, 413 Bowen Building, Washington, D. C.

INVENTORS: Send for free copy my 72-page book on patents. Reasonable terms. Prompt action. Confidential, personal service. L. F. Randolph, Dept. 340-A, Washington, D. C.

"INVENTOR'S Guide" free, containing 100 mechanical movements, information about patenting, selling inventions. Frank B. Ledermann, 154 Nassau St., New York.

"PATENT-Particulars" and Blanks, free, airmailed. Sterling Buck, P-Hotel Plaza, Washington, D. C.

PATENTS

INVENTORS: Foresighted manufacturers already planning post-war sale of new non-military products. If you have a useful invention, patented or unpatented, write Chartered Institute of American Inventors, Dept. 3-B, Washington, D. C.

PERSONAL

DISCOVER how I rid myself of hemorrhoids (piles) without medication or surgery, after 20 years of suffering and discomfort. Send \$1.00 for details to M. Myers, P. O. Box 526, Santa Monica, California.

SULPHUR Baths At Home! Healthful, refreshing. Liquid concentrate now makes this possible. Send \$1.00 for pint bottle, good for 16 soothing baths. Gottlieb, 79 Elmhurst, Detroit, Michigan.

ROSIKRUCIAN secret teachings are offered to those who seek to use them solely for the perfection of their inner faculties, and in the mastering of the daily obstacles of life; the International Organization of Rosikrucians will be happy to receive the requests of those who believe that worthiness and sincerity determine the right for one to have such wisdom; to them, a copy of "The Mastery of Life," a fascinating book, will be given without price; let this book guide you to the conservative plan whereby you may widen your scope of Personal Power. Simply address your letter to Scribe W.P.K., Amore Temple, Rosikrucian Park, San Jose, California.

MANY people think Ontology is "The Pearl of Great Price" described by Jesus; the pure, original teaching which enabled the Disciples to heal the sick and raise the dead. The power to perform "Miracles" is still available to anyone who understands the Metaphysical precepts outlined in the Scriptures. Ontology opens the Bible, solves troublesome problems, helps you get results when you pray. Ontology can help you find true companionship, discover your real self, acquire Conscious Mind Power, gain health, happiness, confidence, security. Send for free 24-page booklet today. Might change your entire life pattern. Alexander Keene, D-3, Sedalia, Missouri.

TELEPATHY and the hidden power of your mind. Make your own demonstration by getting what you want the Telepathic way. Booklet free or better still send \$1.00 now for first 5 Mental-Magic lessons with strictly personal instruction. Atlantean Telepathic Guild, Box 582B, Harrisburg, Pa.

PSORIASIS Sufferers: Pixacol, used only as directed, has brought relief when everything else failed. Applied externally, dries quickly, convenient. Try regular \$1 bottle without investing a cent! Write: Pixacol Lab., Box 1298, Cleveland, Ohio.

HEALTH Seekers! You must learn Nature's way, to get well and keep well. \$7.00 buys Dr. Chirila's 600 page book, "Nature's Advanced Physician Health Guide". Details mailed Free. Dr. Chirila's Sanitarium Clinic, 706 E. Jackson Blvd., Elkhart, Ind.

YOUR sub-conscious mind can and will give you what you desire, when you know how to Direct it. Write for our free treatise "Creative Power is available to you." Creative Thought Studio, P. O. Box 1, Greendale Station, Worcester, Mass.

BUY wholesale; sell razor blades; tooth paste; shaving cream; personal needs; etc. Free catalog. Keystone, 72 Fifth Avenue, New York, New York.

FREE: Catalog of specially selected, interesting and useful low-priced items. Send for your copy today! E. Minnick Co., Timberville, Va.

SONGWRITERS, write for free booklet, Profit Sharing Plan, Allied Music, Dept. 68, 2044 East Fourth, Cincinnati, Ohio.

LEARN Ventriloquism, 3c stamp brings particulars. Smith, Dept. 206, 801 Bigelow, Peoria, Illinois.

SAVE your blades! Miracle hone gives 100 shaves to razor blade. Orenstein, 6221 - 23 Ave., Brooklyn, N. Y.

JESUS Christ prophecies end of present war. Particulars Free. Box 363-P, Farm-land, Indiana.

WOULD you like your eyesight improved and discard glasses? Send 25c for full instructions. L. F. Neer, Lake Worth, Fla.

SOCIAL magazine, photos, addresses, 25c; year, \$1.00. Western Agency, 815-Sg Hill, Los Angeles.

LOWEST prices blades, rubber sundries, personal needs. Free details. Star Products, Buffalo, N. Y.

BUY Vitamins direct. Save. Postcard—Matoska Products, White Bear, Minn.

PHOTO FINISHING

TIE and wrap rolls securely. Do not mail in ordinary envelopes. Address plainly.

BIGGEST \$1.00 value in 35MM finishing today. 36 exposure fine grain 3 1/4 x 4 1/2 enlargements; deckled, embossed margin and date. Eighteen exposures 75c; sixteen exposure splits 55c. Free mailers. 8 exposure rolls in beautiful, deckled contact finish with embossed wide margin, 25c. Mailbag Film Service, Box 5440A, Chicago.

REPRINTS 2 1/2c each, 100—\$2.00. 6 or 8 exposure rolls developed 2 prints each exposure, 25c. 36 exposure 35mm rolls fine grain enlarged prints, \$1.00. Mailing envelopes Free. Mercury, B-109 North Dearborn, Chicago.

DOUBLESIZE 4x6 prints. Quality work. Guaranteed. Everlasting. Hi-gloss finish. Overnight service. Your roll developed—8 4x6 prints from 116 or 120, 30c. All other sizes in proportion. 12 exposure roll, 40c; 16 or 18 exposure roll, 55c; 36 exposure roll, \$1.10. Reprints, 4x6, 3 1/2c each. No order less than 25c. Get our low prices on enlargements dbl. weight velvet finish and copies made from new and old prints. Send for mail bags. Pacific Photo Service, Box 666, San Francisco, Calif.

EXCLUSIVE Introductory Offer! 4 beautiful enlargements for 10c. Send any 4 negatives of the same size (up to 2 1/2" x 4 1/2") and we will return to you immediately 4 valuable enlargements—deckled and dated on Velox. Negatives returned with order. Send negatives, this ad and 10c coin today. This ad must accompany order. Mail-N-Save, Box 310-6, Quincy, Mass.

READY-TO-FRAME 6x4 Enlargements, 5c! Hand colored 20c—from your negative, 16 reprints your negative, 25c. Kodak roll developed with 16 guaranteed deckled-edge Velox prints 25c! 36 exposure 35mm. roll developed, vaporized, enlarged to 3x4, \$1.00. 3x4 reprints, 3c each. Immediate Service! Free mailers! American Studios, Dept. 511, LaCrosse, Wis.

FINER Finishing Specials 25c. Eight exposure rolls developed, with two prints of each or one enlarged print of each negative. Genuine nationally known Moentone Enamel Finish. Superior quality since 1898. Moen Photo Service, 200 Moen Bldg., La Crosse, Wisconsin.

OIL coloring photographs a fascinating hobby or profitable business. Learn at home. Easy simplified method. Previous experience unnecessary. Send for free information and requirements. National Art School, 1315 Michigan, Dept. 1722, Chicago.

25c SPECIAL offer brown color toner, Tones 200 snapshots. No darkroom needed. Sent prepaid. Edwal Laboratories, 738 Federal, Chicago.

BEAUTIFUL enlargement from each picture on roll, 25c. Cut Rate Photos, Dept. A-6, Janesville, Wisconsin.

8 EXPOSURE rolls, Giant size, 25c; 16 exposure rolls, 50c. Mayfair Photos, Box 261-A, Toledo, Ohio.

ENLARGEMENTS, two 5 x 7 from negatives, 25c (coin). Garrett's, Pittsburgh, Kansas.

PHOTOSTATS, COPIES

PHOTOSTATS of marriage licenses, birth certificates, checks, and all valuable documents. Safeguard this inexpensive way. Originals and photostats returned postpaid. Send 50c for each copy wanted. Flexostat, 110 West 40th, New York.

POULTRY & SUPPLIES

CHICKS and Poults champion mated, 52 varieties, 7 Hybrids, licensed inspected, bloodtested. Rush postal, large colored book, low prices. Berry's Farm, Route 11, Clarinda, Iowa.

GET daily income from chickens and eggs. Leading poultry magazine tells how. Small investment. Steady pay. Subscribe now. One year, 25c; five years, \$1. Poultry Tribune, Dept. 23, Mount Morris, Ill.

LOOK! Baby Chicks and Mature Breeders in 67 breeds. Catalog free. Nabob Poultry Co., Box S, Gambler, Ohio.

PRINTING, MULTIGRAPHING, MIMEOGRAPHING, LABELS

75 8 1/2 x 11 HAMMERMILL letterheads and 75 Whitewave envelopes, \$1.00 postpaid. Benneville, 907 West Roosevelt, Philadelphia.

SEND for free catalog and samples of low-cost, quality printed items for personal and business needs. Llanerch Print Shop, 538-2 Wales Avenue, Llanerch, Pa.

HAMMERMILL Letterheads, envelopes, billheads, statements. Samples free. Drew Press, Box 423-T, Greensboro, N. C.

CLASSY printing economically produced. Quick deliveries. Samples. Sicoan, 6348 Windham, St. Louis.

125 8 1/2 x 11 LETTERHEADS and 125 envelopes neatly printed, \$1.25. John Ferreira, 220 Almy St., New Bedford, Mass.

PRINTING OUTFITS & SUPPLIES

PRINT your own cards, stationery, circulars, advertising. Save money. Simple rules furnished. Print for others, nice profit. Junior outfit \$8.25; Senior outfits \$17.38. Details free. Kelsey, Inc., T-8, Meriden, Conn.

PRINTING Presses, Type, Supplies, Lists 3c. Turnbaugh Service, Loysville, Pa.

INEXPENSIVE 6x9 Printing Press, Details Free. Novelty Shop, Downsville, La.

PRESSES, Type, Supplies, Specimens, 3c. La Garza, 159 Harvard, Cambridge, Mass.

ETCHING press, Duplicator, press, cheap. Avond, 747 Sixth Ave., New York.

PROFITABLE OCCUPATIONS

\$5000 FROM Half Acre! Growing Ginseng. Seed, contract supplied. Particulars 10c. Associated Growers, Dept. 12, St. Norbert, Manitoba.

\$40.00 WEEKLY, Made growing mushrooms. Fresh, Dried, Dominion Patent 331583, free spawn. North American, 169Y Yonge, Toronto, Canada.

HOME appliance repairing—America's war-made industry. See display ad page 230 Christy Supply Co.

RADIOS, SUPPLIES & INSTRUCTION

RADIO Service men and experimenters send for our giant radio catalogue. Save dollars. United Radio Co., (1000-V), Newark, N. J.

REVISED plans 18 Crystal Sets (SW record 5300 miles), with "Radiobuilder"—year, 25c. Laboratories, 1406-T 77th Avenue, Oakland, Calif.

TALK over power lines and light beam. Blueprint, 25c. Center Radio, 111 Center, Clifton, N. J.

RARE COINS

FREE! Foreign coin, banknote and large 50-page illustrated coin catalogue to approval service applicants. Send 3c postage. Up to \$20 cash paid for Indian head cents. All dates wanted. Buying list 10c. Tatham, Coinco., Springfield-D50, Mass.

COIN Collectors—Read "The Numismatist". Published monthly. News, illustrated feature articles on coins and medals. Sample copy 25c. American Numismatic Association, 99 Livingston St., Brooklyn, N.Y.

WE buy Indian Cents, Lincoln Cents, Old Rare Coins wanted. Highest prices paid for all U. S. Coins. Send 10c for New 1943 Price Catalog. American Rare Coin Co., Dept. 4, Transportation Bldg., Chicago.

WILL pay to \$350.00 for certain dimes. Nickels \$500.00. Cents \$800.00. Over 1000 quotations. Catalogue 10c. Allan Appell, Sedalia-6A, Missouri.

30 DIFFERENT Indian Head Cents, \$1.10. Includes buying, selling lists. Large catalogue, 8c. Bebee Coin Company, 1180 East 63rd, Chicago.

COMMEMORATIVE \$1's, Columbian, Lincoln, Stone-Mountain, Long - Island, Cleveland, \$1.00 each. Illustrated catalogue 10c. Norm Shultz, Salt Lake, Utah.

10 INDIAN Head cents, different dates, also pricelists, 35c. Schultz, 1053 1/4 Richmond, Cincinnati, Ohio.

100 YEAR old cent, 25c; 10 different Indians, 25c; large illustrated buying book, 50c. Coins, Box 77, Alameda, Calif.

WE purchase all Indianhead pennies. Complete catalogue 10c. Waltman, 398 Broadway, New York.

50,000 COINS, medals, papermoney. Lists free. Nagy, 8-K South 18th, Philadelphia, Pa.

\$10 CONFEDERATE Notes, quarter each. List Free. Beffel, Box 37, Ottawa, Ill.

ELEVEN different selected coins, 25c. Oddehon, Box 44, Overland, Mo.

RUBBER STAMPS

1 LINE, 40c, 2 lines, 65c, 3 lines, 85c. Each additional line, 20c. Blythe Rubber Stamp Co., Indianapolis, Ind.

3 LINES 30c; Cushioned, indexed, 35c; Signatures, \$1.50. Printrite, Wauwatosa, Wis.

CUSHIONED, 3 lines, 35c; signatures, \$1.50. Federich Mfg., East Pittsburgh, Pa.

1 LINE 15c; additional line 10c. National Rubber Stamp, 56 West 45th, New York.

ONE line 15c; two lines, 25c; three lines, 35c. Excello, Box 500, Shreveport, La.

SONGWRITERS

WANTED. Poems, to be set to music. Submit for consideration. Transcription records made. Rhyming Pamphlet Free. Keenan's Studio, PS, Box 2140, Bridgeport, Conn.

SONGWRITERS—Special Free deal. Address—Jackson, 9441-A Pleasant Ave., Chicago.

SONGWRITERS—Send Poem For Immediate Consideration and Free Rhyming Dictionary. Richard Brothers, 146 Woods Building, Chicago.

POEMS Wanted For Musical Setting. Send poem for immediate consideration. Five Star Music Masters, 646 Beacon Building, Boston.

SONGS—Song Poems Wanted. No charge for melodies. Marketing service. Hollywood Recording Studios, 87L26 Preuss Sta., Los Angeles.

SONGWRITERS: We offer complete service. Melody writing, recording, radio broadcast, marketing. Screenland Recorders, Box 1247D, Hollywood, Calif.

POEMS made into songs. Reasonable fee. Reliable professional composer. Submit poem if reply desired. Ahlstrand Songs, Kettle River, Minnesota.

SONGWRITERS: Write for free booklet. Profit Sharing Plan. Allied Music Company, 204 East Fourth, Cincinnati, Ohio.

SONGWRITERS—Get the facts. Free informative booklet, plan. Write today. Song Service, 331-J West 46th, New York.

SONG Poems Wanted: Write for free instructive booklet. United Music Corporation, Dept. 26, Salem Indiana.

MUSIC printing—\$5.00-100; composing; arranging. Auto-Litho Co., Jensen, Fla.

SONG poems wanted. Barnhart Publications, 1320 48th, Des Moines, Iowa.

SPORTING GOODS, GUNS, FISHING TACKLE, ARCHERY

"PRACTICAL Pistol Instruction"—Basic training manual for plant guards, auxiliary police, home protection. Gives complete instructions for teaching individuals or groups in proper, safe use of all handguns. 28 pages, illustrated, 25c, coin or stamps. Full information about membership benefits, free. National Rifle Association, 1611-E, Rhode Island Ave., Washington, D. C.

I'LL swap fishing tackle or pay cash. Also guns, ammunition, golf equipment. Describe what you have. Write for Free Complete Bargain Catalogue. Send 3c stamp. Milton Klein, Trader Since 1885. 508-JC South Halsted, Chicago.

BOWS—Arrows for Recreation—Hunting—Fishing. Beautiful Archery instruction book, 90 pages, 50 illustrations, only 50c. Illustrated catalogue Free. Archery, 617 South State, Chicago.

USED guns, ammunition, binoculars. Highest cash prices paid—Trade and Sell. Stoeger Arms Corp., 507 Fifth Avenue, New York, N. Y.

SEND for free illustrated catalog of Lawrence leather belts, holsters, gun cases and other sporting equipment. George Lawrence Company, Portland, Oregon.

ARCHERY Equipment: Catalogue Free. Midwest Archery, 2209-East 75th, Chicago.

SEND 10c for Big List Used Guns. Frayseth's, Willmar, Minn.

MAKE flies, lures, rods. Send for Materials Catalog. Wilfmarths, Roosevelt, N. Y.

USED guns, bought, sold, exchanged. List stamp. Howe, Coopers Mills, Maine.

STAMP COLLECTING

NOTICE—Readers answering ads offering Approvals receive a selection of stamps from which they may make purchases at prices indicated. Ten days are allowed for payment and return of undesired stamps. Otherwise approval applicants become subject to Section 2350, Postal Laws & Regulations, 1932, providing penalties for obtaining property by false pretense.

GIANT Packet 136 All Different from Africa, South America, South Sea Islands, etc. Includes Nicaragua airmail, two scarce unused United States cataloging 20c, triangle and animal stamps; many others. Also includes fine collection 25 different British Colonies—Charkari, Jamaica, Johore, etc. and United States \$4 and \$5 high values. Total catalog price over \$4.00! Everything for only 5c to approval applicants! Mystic Stamp Co., Dept. 55-A, Camden, New York.

POSITIVELY Greatest Free offer—Latest Scott's International \$4.00 Stamp Album—covering entire world, contains 36,000 illustrated, descriptive spaces; Scott's 1943 Standard \$4.00 Catalogue "Philately's Encyclopedia"—absolutely Free to applicants for Foreign Approvals becoming customers. Bargain Stamp Service, Palm Springs, Calif.

500 UNITED States for 10c! 500 U.S.A.—absolutely unpicked and unsorted—just as received from church Missions. Many varieties, including commemoratives, airmails, high values up to \$5.00 denomination! Price only 10c to approval applicants! Money back if not delighted. Swan Stamp Co., Dept. 69A, Dunkirk, N. Y.

MacARTHUR Commemorative Stamp from Australia: Indo-China "Bomber" and new Cuba "V-for-Victory" stamps; scarce \$1.00 Abyssinia; also packet fine stamps from Far East war zones. Total catalogue price over \$1.25. Everything only 5c to serious approval applicants! Pittsco, Dept. 18A, Framingham, Mass.

VICTORY Packet Free: Includes stamps from Tanganyika—British Cayman Islands—Animal—Scarce Babyhead—Coronation—Early Victorian—Airmail—Map Stamps—with Big Catalogue—all free—send 5c for postage. Gray Stamp Company, Dept. PR, Toronto, Canada.

FREE! Leeward Is., Cayman Is., Turks and Caicos plus 60 different mint Geo. VI Coronation poster stamps, to approval service applicants sending 3c postage. Tatham Stampco, Springfield-50, Mass.

\$1.00 (Cat. Price) for 1c! Two mint U.S.A., cat. 20c; "queer countries" packet (Djibouti, Manchuria, etc.); scarce set Russia, cat. 75c. Everything for only one cent to approval applicants! Garcelon Stamp Company, Box 418, Calais, Maine.

SMOKY Mountain commemorative sheet, largest U. S. stamp issued, and 33 U. S. including commemoratives, airmail, revenues, etc. Catalogs 75c—To approval applicants for 5c. Curhan Stamp Company, Dept. C, Gloucester, Mass.

FINE Approvals, freshly mounted. Fast, personal service. Tell me what countries you prefer and I'll send their stamps. Milton Skinner, 345 East Ocean, Long Beach, Calif.

19TH CENTURY U. S. Commems., Civil War Revenues, Battleship \$5 & \$10 Stamps, Illustrated U. S. Catalogue. Free to U. S. Approval Applicants. Metropolitan Stamps, 198-X Broadway, New York.

BRITISH Empire Collection! Burma, Cyprus, Gwalior, Sarawak, Tasmania; Also 50 other British. Only 5c with Pictorial, and Commemorative Approvals. Lyman, 97 Nassau, New York City.

206 DIFFERENT stamps including Kedah, Haiti, Cochín, Albania, Johore, Perak, only 10c to approval applicants. Reich Stamp Co., 4647 Kenmore, Chicago, Dept. S3.

POSITIVELY free! Scott's latest \$5.00 International Stamp Album or 1943 Catalogue to approval applicants becoming customers. Claire's, 7402 Bayparkway, Brooklyn, New York.

FREE! Complete "United States" stamp catalog with 1,000 illustrations! Send 3c for postage. Harris & Co., 99 Transit Building, Boston, Mass.

SOLOMON Islands, Seychelles, Nejd, Caymans, Manchukuo, Brunei, Turks Caicos. Everything 3c with approvals. Viking, 130 (P) Clinton St., Brooklyn, N. Y.

UNITED States approvals complete coverage fine quality, attractive prices. Seminole Stamps, Box 436, Coconut Grove, Florida.

RARE United States, 3c "Locomotive" issued in 1869 plus 10 other "Early" U. S. Only 10c to approval applicants. H. Bedrin, 1746 Andrews Ave., New York City.

25 DIFFERENT U. S. stamps—including Comm., dollar values, revenues, regular issues, only 3c to approval applicants. H. Bedrin, 1746 Andrews Ave., New York City.

500 UNITED States, Canadian \$1.00, airmails, commemoratives, precancels, specials, dues. Taylor's Novelty Shop, 325 Ann St., Grand Rapids, Michigan.

FREE—Your choice of any 10 stamps from our first U. S. Approval selection. Illustrated list included. Cosmopolitan Stamp Company, 1457 Broadway, Dept. 3P, N.Y.C.

SPECIAL—Airmails—23 different, including Zeppelin, Triangles, Latin-America, etc., 5c with approvals. Continental Stamp Co., Dept. C, Sandy Hook, Conn.

FREE Outfit!! Album, stamps, hinges, gauge, detector, lists, 5c to serious approval applicants. Manchester Stamp Company, Dept. PS, Manchester, Connecticut.

APPROVAL Service—10c War Stamp brings 100 different and details our "Bonus Plan". Music Box, Broad St., Pawtucket, R. I.

UNITED States No. 219, 219D, 268, 414, 431, 563, C7, CE2, E2, E5, J38, J39, 25c. Approvals accompany. Whiton, Stamps, Westport, Connecticut.

U. S. MIXTURE off paper, \$1 a pound (about 10,000 stamps). Postage extra. Wm. P. Lukesh, 145 West 79th St., New York.

25 DIFFERENT Asiatic stamps free. Quality Penny approvals included. Harding Stamp Plan, 5031 No. Harding, Chicago, Ill.

BRITISH Colonials—Nice packet 75 different only 10c with approvals. Crescent Stamps, London, Canada.

BIG packet 150 stamps Free if you send 5c for largest map stamp. Approvals. Wineholt, Box P S, Woodbine, Pa.

MEXICO Census Commemorative Set, Free with approvals. Pladon Stamps, 1717-S Idaho, Toledo, Ohio.

77—ICELAND, Ecuador, Madagascar, Greece, Australia, Manchukuo, Etc., 5c. Lufbery, Middletown, Connecticut.

25 SOUTH America, 1c. Approvals. Super Stamp Shop, Route 1, Greencastle, Indiana.

1,000 MIXED Poster Stamps and Patriotic Labels, \$1.00. Rooney, 116 Prince St., New York City.

FREE! 100 stamps—Airmails, U. S. Commemoratives, etc. Approvals. F-S Co., Box 2154, Houston, Texas.

UNITED States Stamps on approval. Large variety at lowest net prices in America. Stamp Co., Albany, N. Y.

FREE! Western Hemisphere Packet. Postage 3c. Owens, 801 Welshbldg., Baycity, Mich.

FREE! Pony Express set (facsimiles). Postage 3c. Roberts, 401 Shearerbldg., Baycity, Mich.

25 DIFFERENT Portuguese Colonies, 3c; 100 different, 30c. Stamphouse, 1525 West 11th, Brooklyn, N. Y.

FREE!!! Russia War set. Postage 3c. Williams, 601 Archerbldg., Baycity, Michigan.

FREE Canada war stamps to approval applicants. Rheame, 8949 Routhier, Montreal, Canada.

80—LIBERIA, Bulgaria, Australia, China, etc. Approvals, 5c. Ricker, 2532 Chamberlain, Madison, Wis.

NEWFOUNDLAND—20 different. 5c to approval applicants. Neumann & Co., 6728 W. Finger Place, Milwaukee, Wisc.

TEN crazy-shaped stamps, 3c with approvals. O. Knopp, Box 1381, Bristol, Conn.

FREE—21 Beautiful mint Russia to sincere approval applicants sending 3c postage. Bridger, New Windsor, Illinois.

20 FOREIGN commemoratives, 5c. Approvals. Ryan, Pine Street, Middletown, Conn.

BARGAINS in fine approvals! Write today! International Stamp Co., Hallettsville, Texas.

PACKET Civil War stamps, 10c. 1000 mixed U. S., 15c. Two pounds, \$1.00. Buckley, P-208 Ludlow Bldg., Dayton, Ohio.

FIVE airmail triangles, 5c. with approvals. Avalon Stampco, Springfield-50, Mass.

3 CUBA sets 10c with approvals. Purtell, 1610 So. Third, Maywood, Ill.

PENNY approvals that please. McKee, 1217 Scott St., Covington, Ky.

15,000 VARIETIES 1c, 2c, each! Davison, Box 31B, Wollaston, Mass.

U. S. OR Foreign approvals. P. Wetterquist, 1635 13th Ave., Rockford, Ill.

PENNY Approvals that satisfy. Neil Gronberg, Box 5441S, Philadelphia, Penn.

1,000 GRABBAGS 15c each. 8 different \$1. Sandy, 630 Bingham, Reading, Pa.

CLIPPER stamp free with U. S. approvals. Redelings, 3227 Velma, Los Angeles.

U. S. APPROVALS—Large stock. Parks complete, 19c. Box 488 A, Minneapolis.

LOW, medium, approvals on foreign stamps. Frank Carr, Jr., Pompton Lakes, N. J.

SIX Liberian triangles, 10c with approvals. Vargo Stamps, Racine, Wis.

1000 MIXED U. S. old and new, 25c. Weatherby, Troy, Ohio.

TATTOOING SUPPLIES

TATTOO outfits, \$1.50 up. Write today. Zeis Studio, 728 Leslie, Rockford, Ill.

TREASURE FINDERS

MT-SCOPE Metal Locator fully guaranteed and unsurpassed in efficiency. Time payment plan, trade-in and accessories. Free literature. Fisher Research Laboratory, Palo Alto, Calif.

SEEK Buried Treasure. Methods, devices, mysteries explained. Circulars free. Century Press, Box 151D, Glen Ellyn, Ill.

WANTED—MISCELLANEOUS

IDLE machines help the Axis! Highest prices paid for lathes, shapers, millers, grinders, tools, machinery. Whole plants bought. Give full details. Pioneer Machinery, 1507 Bushwick Ave., Brooklyn, N. Y.

CASH for used optical, mechanical, scientific instruments. Gordon's, 162-SB Madison, Chicago.

AUTOMOBILE magazines, license plates, nameplates, automobiliana accessories. Swigart, Huntingdon, Pa.

MERCURY (Quicksilver) \$1.50 per pound. Western Metal Co., Bloomington, Ill.

WELDING, SOLDERING

BUILD d.c. arc welder without rewinding armature. Plans \$1.00 each, 25 to 600 amperes from Vehicle motors. Light plant generators. Automobile starter-generators. Welders Club, WB-3432 M-Mart, Chicago.

MAKE your own electric welder; complete kit, everything supplied, with full directions for assembly, \$9.95; will make a \$19.95 set. Marvel Electro Welder Mfg. Co., 195-S Center St., N. Y. C.

WELD, cut, braze with gasoline. Make your own torch. Complete instructions one U. S. dollar. Matthews Mfg. Co., Red Deer, Alta., Canada.

QUICK WAY TO LEARN MUSIC —play any instrument

GET A REAL thrill out of music! Play the musical instrument you like best. Start right in with simple tunes. No tedious, old-fashioned drills and exercises.

It's easy! Everything is in print and picture. You see every position and move. Thousands have been amazed at their progress in just a few short weeks. Now they're sought-after guests for every party! Don't miss out on the popularity that is rightfully yours!

Mail coupon today for free illustrated Booklet and Print and Picture sample that show how easily and quickly you can learn music at home. Just check instrument that interests you. (Instruments supplied when needed, cash or credit). U. S. School of Music, 83 Brunswick Bldg., New York City.

FREE PRINT and PICTURE SAMPLE

U. S. School of Music, 83 Brunswick Bldg., N. Y. C.

Please send me Free Booklet and Print and Picture Sample. I would like to play instrument checked below. (Do you have instrument.....)

Piano Violin Guitar Accordion Saxophone Mandolin Trumpet Tenor Banjo Ukulele Other Instrument

Name..... (Please Print)

Street

City State.....



DRAW for MONEY

Be An ARTIST!

Trained Artists Are Capable of Earning \$30-\$50-\$75 A WEEK Use Your Spare Time to Prepare For a Profitable Art Career

It's interesting and pleasant to study Art the W. S. A. way. **COMMERCIAL ART, ILLUSTRATING, CARTOONING**—all in ONE complete course. No previous Art experience necessary—hundreds have profited by our practical home study method since 1914. Write today for information in FREE BOOK, "Art for Pleasure & Profit"—tells all about our course, service—and commercial opportunities for you in Art. State age.

WASHINGTON SCHOOL OF ART
STUDIO 133F, 1115-15th ST., N. W.,
WASHINGTON, D. C.

Short-Cut Mathematics COMBINED WITH Practical Mechanics Simplified


NEW 2-in-1 reading course! Now you can learn the speedy, simplified system of calculation used by draftsmen, engineers, accountants, "master minds" on the stage. Learn easy way to multiply 4 figures by 4 figures without using old-fashioned multiplication; add long columns of figures this lightning short-cut method. Learn horsepower, slide rule, micrometer, logarithms, wood measure, puzzles, etc., etc. Large illustrated volume complete with answers, only \$1 postpaid. Satisfaction or refund.

FREE Amaze friends with your magic-like mental powers. Complete details... mail coupon TODAY!

NELSON CO., 500 Sherman St., Dept. C-304, Chicago
Please send free details about "Short-Cut Mathematics and Practical Mechanics Simplified." No obligation.

Name.....

Address.....

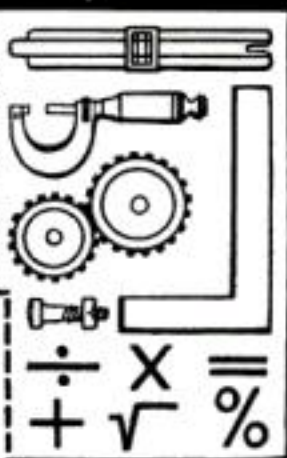

NEW BOOK ON PLASTICS
now ready



At Last! A non-technical Plastics book, written in a clear, practical, understandable way, by the well known authority E. F. Lougee, former Editor Modern Plastics Magazine. Profit by information in this intensely interesting and instructive book, entitled "PLASTICS from FARM and FOREST." No other like it anywhere. Describes many fascinating and amazing experiments in Plastics; and tells of the big opportunities both now and in the future. Do you want to know how blankets, hats and buttons are being made from skim milk; how corn cobs and sugar cane waste is being turned into wall board and molded products; how soy beans are made into automobile parts; how walnut shells find their way into Plastics and dynamite? These subjects, and many others, are explained in Lougee's Book. Get the facts on Plastics. Order this important book TO-DAY! 10 Days Inspection FREE.

Only \$2.00

how blankets, hats and buttons are being made from skim milk; how corn cobs and sugar cane waste is being turned into wall board and molded products; how soy beans are made into automobile parts; how walnut shells find their way into Plastics and dynamite? These subjects, and many others, are explained in Lougee's Book. Get the facts on Plastics. Order this important book TO-DAY! 10 Days Inspection FREE.

SEND NO MONEY

Don't delay—Book shipped C.O.D. anywhere in U.S.A. Simply pay postman \$2.00 plus small C.O.D. and postage charges. (If you send cash in advance we pay postage). In either case, if you are not fully satisfied, return the book in 10 days and we'll refund your money immediately. Mail your order NOW!

PLASTICS INSTITUTE

221 NO. LA SALLE ST., DEPT. 5 • CHICAGO, ILLINOIS

JIU JITSU LESSON FREE

Investigate the course experts buy. Write for free lesson, details. (3 lessons, 10c; Session One, \$1, guar.) The Modern School, Box H-88, Forest Hills, N.Y.



Begin today. Write now for our Free Book, "How to Become a Good Penman," it contains specimens and tells how others learned to write in spare time. Enclose 10c for your name beautifully written and a pen point suitable for shaded writing. Write today. **THE TAMBLYN SCHOOL OF PENMANSHIP**, X439 Ridge Building, Kansas City, Mo.

How to make a good living on a small farm

Want a small farm? Own one now? If you *do* want the enjoyment of security, a good living, pleasures of rural life, the freedom in being your own boss, **FIVE ACRES AND INDEPENDENCE**—the all-inclusive book by M. G. Kains, world's leading small farm expert—shows you how to select, how easily to run your farm successfully.

This book tells what kind of farm to rent or buy; how to choose it; finance it; what and how to plant; choice and care of livestock, poultry, bees, etc.; essentials of fruit and vegetable growing; fertilizers; irrigation; spraying; cultivation; harvesting; storage; sale of products and by-products. Every page packed with proved ways to make the small farm self-supporting—even profitable. Abundantly illustrated with workable plans and diagrams. Over 400 pages.

Plan now to get away from city worries, war shortages, high rents, inflation. Use this book as your guide. If not satisfied, return for full refund.

\$250 FREE
Examination

GREENBERG: PUBLISHER PM
406 Madison Ave., Dept. K, N. Y.


Send me **FIVE ACRES AND INDEPENDENCE** at \$2.50 postpaid. If not satisfied, I may return it within 7 days for full refund.

☐ Payment enclosed ☐ Send C. O. D.

NAME.....


ADDRESS.....

CITY & STATE.....

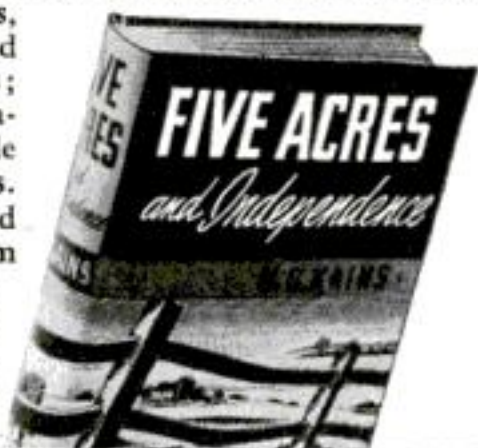

FREE 7-DAY OFFER!

Motor's New TRUCK REPAIR MANUAL

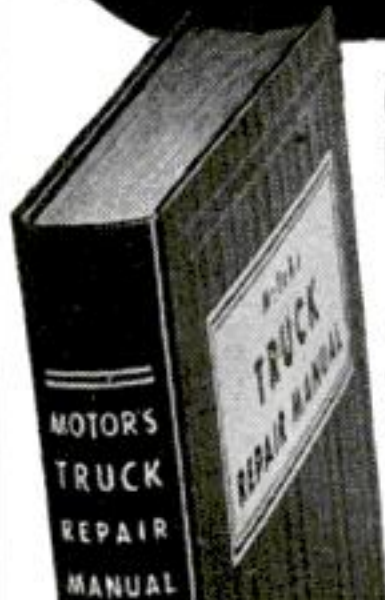

Gives Step-by-Step Instructions for Overhauling ALL TRUCKS —1936 to 1942!

JUST completed—the only book of its kind! Based on all the official truck manufacturers' manuals, and clarified for quick, ready use. Covers both diesel and gasoline engines—all models built from 1936 through 1942. Hundreds of pictures and diagrams. Complete charts and specification tables. Over 100,000 important facts you must know about tune-up and repair. Scores of helpful hints and ideas for replacing parts TODAY so that you can keep America's trucks ROLLING! Sturdy, waterproof binding; size 8 1/4 x 11 inches. Warranted to contain every single essential fact you need to do ANY job. Special Reference Index makes it easy to find the answer to anything at once.

ANYONE CAN USE IT!

Makes the ordinary mechanic an expert; helps the expert save time and money. Already being used by schools, U. S. Armed Forces, scores of fleet owners. Available only through MoToR Book Dept.

IMPORTANT NOTE TO FLEET OWNERS

Special discounts are offered for quantity purchases. If you decide to order in quantity now, we bill you later at discount prices. Same refund guarantee.

SEND NO MONEY!

Simply fill out coupon below. Mail it today and a copy of MoToR's up-to-the-minute New Truck Repair Manual will be sent to you at once for 7 days' Free Examination.

Published by MoToR,
The Automotive Business Magazine,
Desk T23, 572 Madison Ave.,
New York, N. Y.

FREE 7-DAY TRIAL

MoToR BOOK DEPT., Desk T23, 572 Madison Ave., New York, N.Y.

Rush me MoToR's New Truck Repair Manual. If O. K. I will remit \$2 in 7 days, and \$2 monthly for 3 months plus 35c shipping charge with final payment. (\$8.35 in all.) Otherwise I will return book in 7 days. (Foreign price \$10, cash with order.)

NAME.....AGE.....

ADDRESS.....

CITY.....STATE.....

OCCUPATION & EMPLOYER.....


☐ **SAVE 35c!** Check here if you enclose \$8 (Foreign \$10) with coupon. We then pay 35c costs. Same 7-day return privilege.

Please mention POPULAR SCIENCE when writing to advertisers.

LIGHTING THE WAY TO VICTORY



R. J. Reynolds Tobacco Company, Winston-Salem, North Carolina

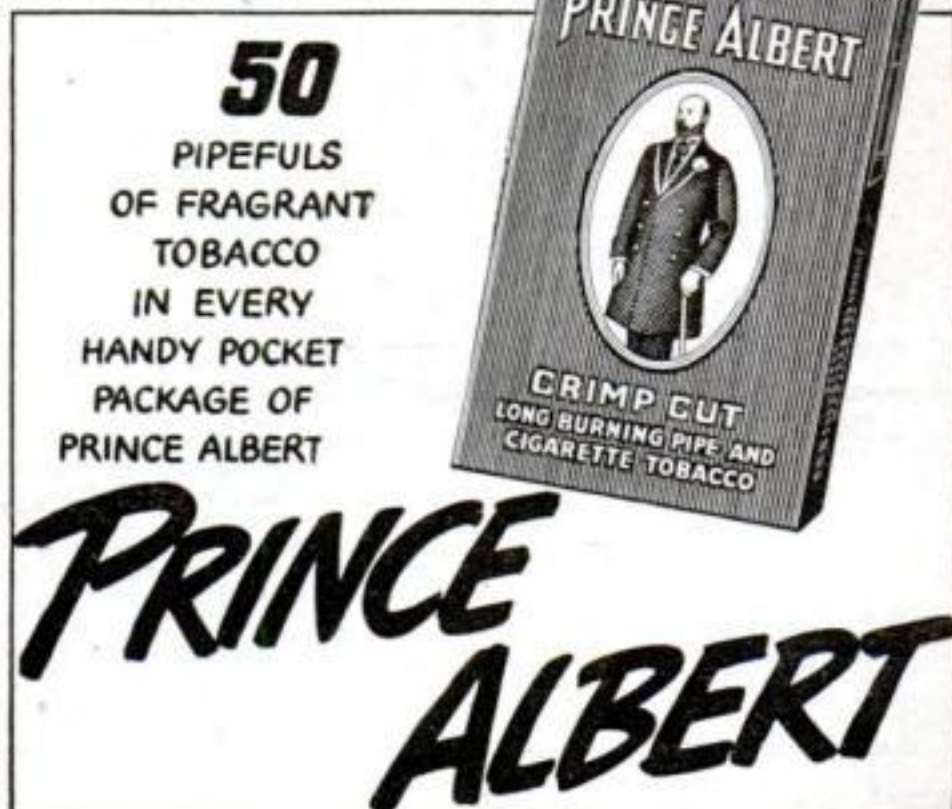


Dear Dr. Beebe:

My son Bill is fighting somewhere out in the Far East:
I have heard so many stories about the dangers of the tropics
that I have far more nightmares concerning Bill's falling a prey
to snakes than about his being bayoneted by a Jap. Will you help
me by answering a few questions?

If he is lost in the jungle, can he get his bearings
without a compass? How can he find food and safe drinking water?
How can he protect himself against sunstroke, snakes, insects,
crocodiles? Is there danger from man-killing tigers or other
animals? Are the stories true about army ants attacking men?

Yours anxiously,
Bill's Mother

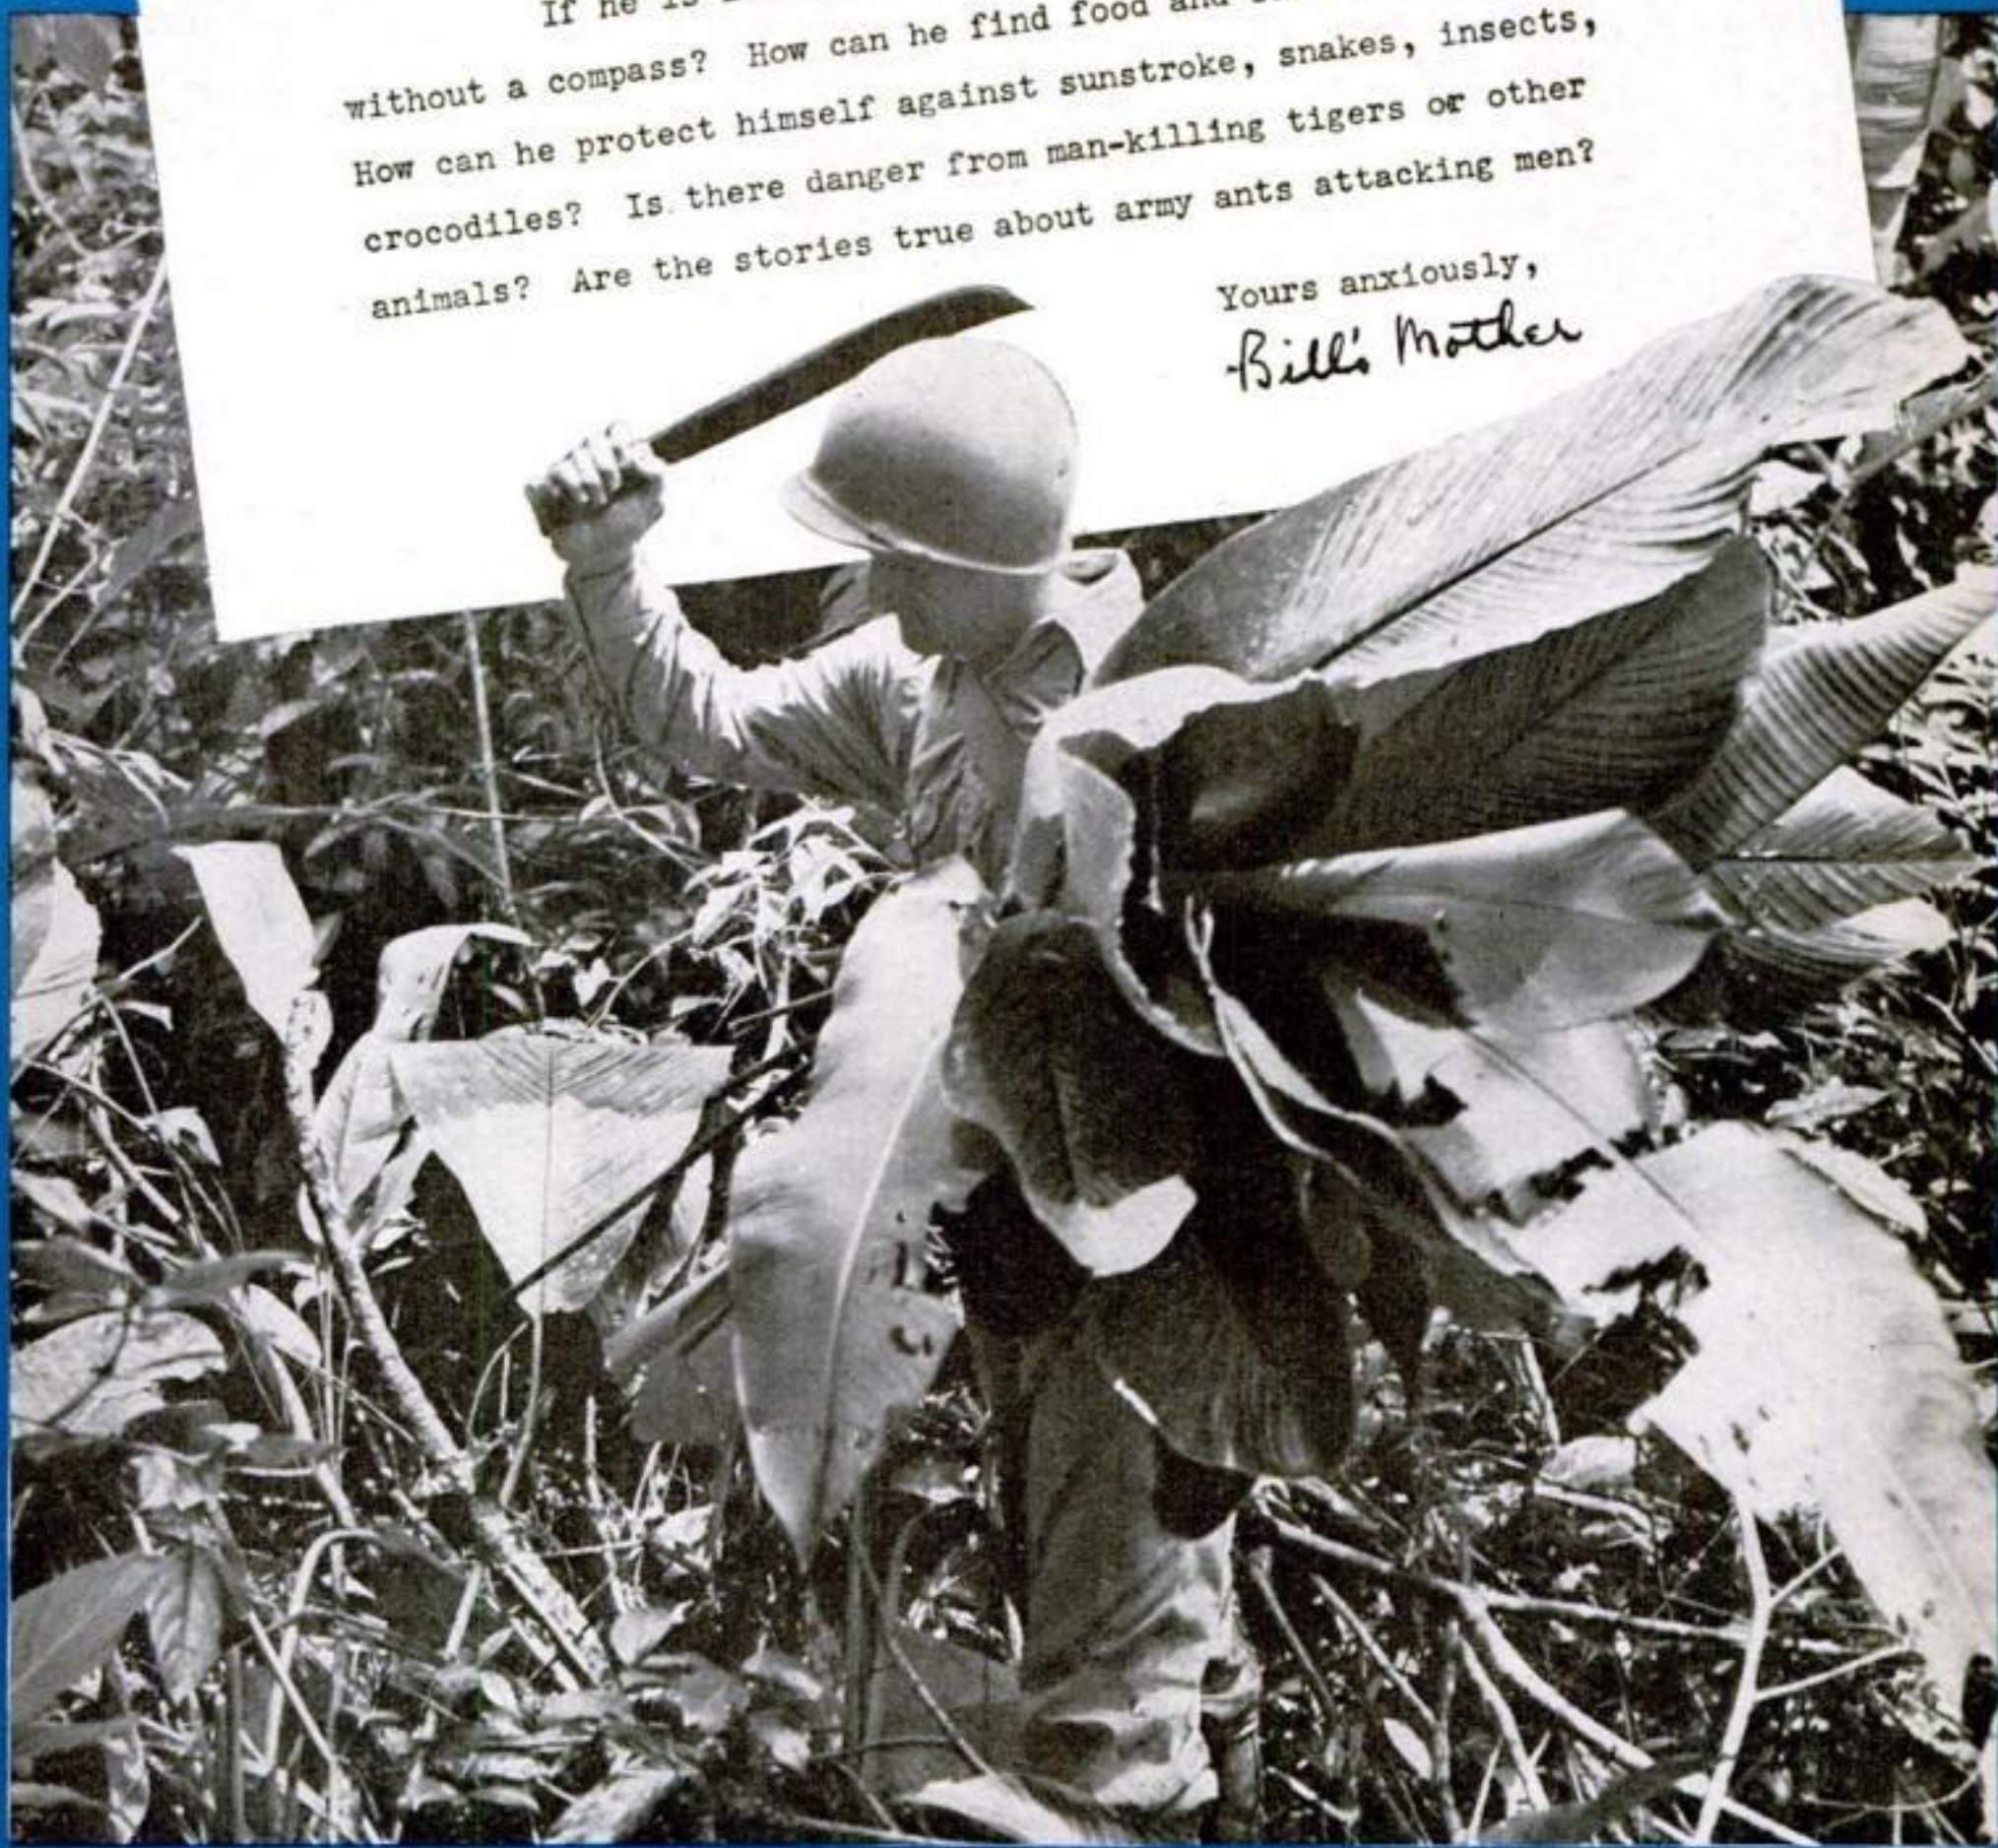

A FAMOUS EXPLORER TELLS YOU

How Lost Jungle Fighters Can Survive

By WILLIAM BEEBE

THE letter above is a composite of several I have received, and of many conversations. Perhaps this is a good time to give a comprehensive answer. I began my explorations in tropical jungles about 35 years ago,

the wilds of Venezuela. This experience has left me with an undying affection for these mighty trees and the wild creatures which live in their shadow, but this emotion is combined with a thorough respect which ever increases.

What I write is a direct answer to the



A jungle stream like this one in Malaysia offers an easy path through thick growth, and its water is safer to drink than that of stagnant forest pools. Islands afford sleeping places free from leeches.

to know the truth. I shall make use of the greatest handicap in outfit and location. Let us suppose a soldier has landed safely by parachute in the heart of the Malay jungle, or has straggled far from the line of march and is completely lost. I shall allow him nothing but his clothing—which is manifestly unfair, but if he is to be furnished with gun, knife, matches, and compass his plight would be altogether too easy.

Let us say our lost soldier knows that he ought to go west to find his line of march, or to reach friendly Malays on the west coast. His only guides will be the rising and the setting sun; and at night, through occasional openings, the Southern Cross. He must have water, food, and safety, and to achieve these his first object should be to find a stream, to which an animal trail usually will lead him. The water of such a stream will be far less dangerous than the dysentery-breeding pools and swamps of the jungle itself. Also if he keeps to the stream bed, progress will be infinitely easier than forcing a way through the thorny tangles, and he is sure to find isolated rocks, or fallen tree trunks or islets where he can hope for reasonable isolation from the multitude of leeches which elsewhere will sap his strength while he sleeps. In addition there is often a strong current of air near and over running water which would diminish any swarms of mosquitoes. Vast areas of jungles in all parts of the world are wholly free from such pests as leeches, ticks, and mosquitoes, but I am being as hard as possible on our wanderer.

If I deny him matches he must eat his

food raw. While this is unpleasant at first, it is not nearly as bad as it sounds, and existence on such provender is a welcome change from the gnawings of hunger. I have eaten grubs, lizards, frogs, snakes, monkeys, and many other creatures the very mention of which makes the city-bred person shudder, even at the very moment when he or she is, with great relish, devouring live oysters. The items I have men-



DR. WILLIAM BEEBE knows and loves the jungle from long experience. In the last 35 years he has ventured into tropical wilds in many parts of the world to study wildlife and obtain specimens for zoos and museums. On his latest trip, to eastern Venezuela, he discovered new species that throw light on the theory of evolution.



Monkeys and birds will show our lost soldier what jungle fruits and berries are edible. These are gibbons, which live in bands and fill the treetops with their noisy chorus.




tioned have been cooked, but if faced with imminent starvation I would not hesitate a moment to eat them raw. Giant grubs can be dug from almost any rotten stump, and when cooked, taste like roasted peanuts. The other, more active ingredients on our jungle menu must be caught with the bare hands or killed with a stick.

Vegetable food in a tropical jungle is a more difficult matter. Succulent leaves and roots are all about; delicious-looking fruits, berries, and nuts abound, but only the pressure of extreme hunger would tempt me to taste any of these without the example of a monkey or bird to assure me of their edibility. If only one can see a gibbon or a flock of parrots feeding, then fruit or nuts can be eaten freely.

The supposed terrors of tropical jungles sink into insignificance beside the problem of finding food. In the course of a score of expeditions I have been attacked only twice by poisonous or harmless snakes, and on both occasions the reptile was actuated by confused fear. In Malaysia our soldier may encounter a python 20 feet long, in addition to leopards, tigers, elephants, and rhinoceroses, yet the chances are 100 or 1,000 to one of their attacking, if he is able to walk or move about and thrash the undergrowth with a stick. Cobras and vipers live in these jungles, but there is more danger from rattlers and copperheads on the Palisades opposite New York City than in any tropical forest I have ever explored.

If our man lies down and in his sleep is attacked by army ants, he will awake at the first stinging bite. If he is helpless

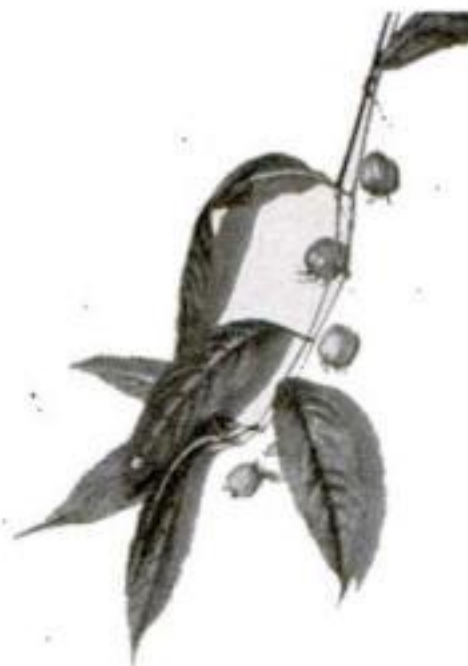


These harmless-looking yellow berries are deadly poison. Monkeys know better than to eat them



... while this scarlet fruit has been pecked at by pheasants—proof that it is edible

Land leeches like this are not poisonous but they suck the blood, causing weakness and infection



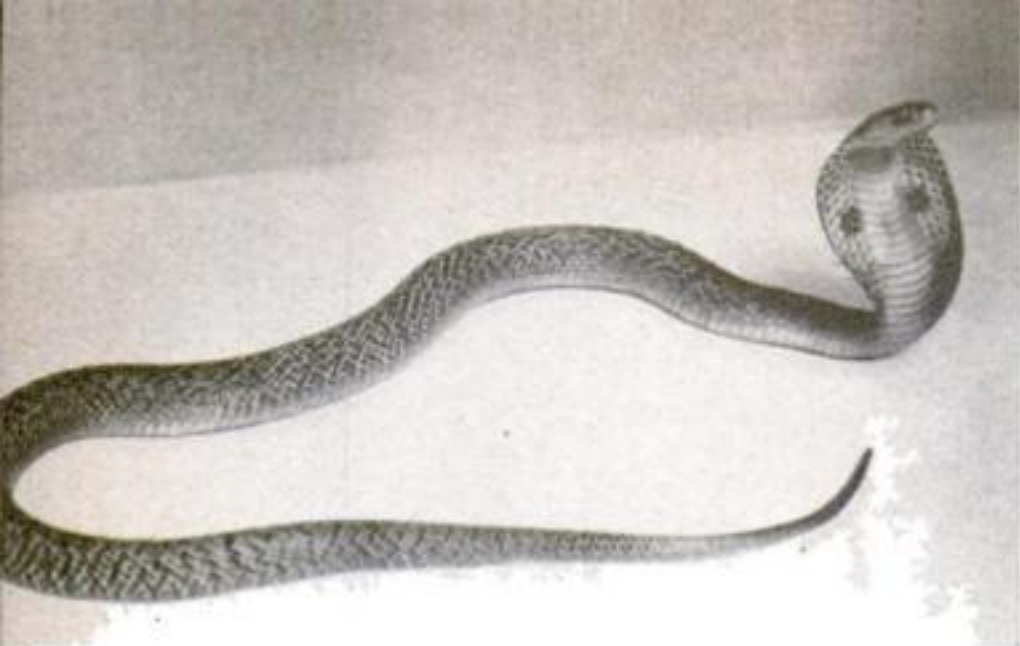

The Indian cobra is found also in Malaysian jungles. It rears its head and spreads its hood when it is approached, but never attacks unless first provoked



Russell's viper is the most dangerous snake of the jungle because its camouflage makes it blend with the forest floor. If trodden upon, it will sting

from weakness he will be killed within a half hour. Otherwise all he needs to do is to brush off those which have reached him, walk or run a few yards to one side and the danger is past. Indeed I have found these ants, both in the jungles of the Orient and in South America, to be invaluable as assistants in collecting insects, reptiles, and birds. Every living creature in their path is aroused to instant, terrified, headlong flight. If I had need of the flesh of these animals for food I would arm myself with stick or club and hunt in the van of an army of driver ants, certain of bagging many creatures whose fear would make them easy prey.

Spiders, centipedes, tarantulas, and scorpions can all be discounted as real dangers, for the same reason that one does not voluntarily put one's hand into a wasp's nest. Neither does he die if stung by one or a few of these pests. Crocodiles can be a menace under certain conditions, but any river can be safely crossed on a floating log or a rough raft of boughs and limbs of trees. In the twilight of the jungle neither sun helmet nor hat of any kind is needed. Shelter in the jungle where there are palms

is an easy problem. A single frond makes a good umbrella, and a dozen provide a satisfactory tent.

Strangely enough, as our refugee approaches the haunts of man his dangers increase. Not from the natives themselves, although they would probably be too shy to show themselves and offer help. The Malays are friendly folk and after they have had one experience with the Japs they would doubtless give all possible aid to a white man. Malaria and the danger from dysentery would increase in the vicinity of a native village, and if any tiger ever threatened attack it would be an old, toothless animal whose beat was somewhere near the huts of human beings. The worst danger here would be from the herds of semidomesticated water buffalo, the most picturesque and deadly animals in the world. When once they scent a white man for the first time, only the convenient limb of a tree will save him from sudden death. I have spent four miserable hours astride a most uncomfortable branch, with an enraged buffalo on the ground below playing jackstraws with my gun and camera. I finally was rescued by a completely naked,

Army ants on the march. No living creature can withstand their attack, but an able-bodied man can get out of their way and even use them to scare up animals for food



eight-year-old native who batted the animal over the snout and drove him off.

Perhaps the most dreadful danger of all may exist in the mind of the lost man. To a human being ignorant of these jungles, every sound, every rustle will seem to pre-
sage some unknown horror. The hammering of a pair of giant woodpeckers is the rattle of machine guns; the trumpeting of a distant elephant is a military bugle; the swish of leaves marking the flight of a tree shrew is imminent attack from some death-dealing animal. As a matter of fact, what the city-bred man would consider a supreme horror of horrors, probably never reaches his consciousness: the ambushing black leopard will scent and hear an oncoming man long before he comes within sight, and the cat, in all probability, will make his escape without a sound; the python coiled in the trail will slip aside at one's noisy approach. And when a city man tries to catch a lizard clinging to a tree trunk, and sees him spread wings and sail off through the air, he must not jump to the conclusion that his mind is going. Flying lizards are common in these jungles and the flesh of their limbs is as tasty as that of frogs' legs.

Especially must one not be deceived by the short but lusty crowing of bantams. The sound comes not from a near-by village, but from wild jungle fowl, the ancestors of all the chickens in the world.


If at last one can follow a stream until it reaches the sea, all immediate risks are over. Along the shore is an abundance of mussels and other shellfish; coconut palms are almost a certainty, and sooner or later a native proa will come sailing into view.


As far as the Japs are concerned, they are lower than any beast of the jungle which kills only for food. If our soldier at last reaches safety, and again, with weapons in his hands, faces those yellow men who have belied the name of man, I can only wish him "Good Hunting."



Don't think you're going nuts if you see a lizard take off and fly. Flying lizards glide just as flying squirrels do

Most dangerous animal in the Malay jungle is the half-domesticated water buffalo. White man's scent maddens them

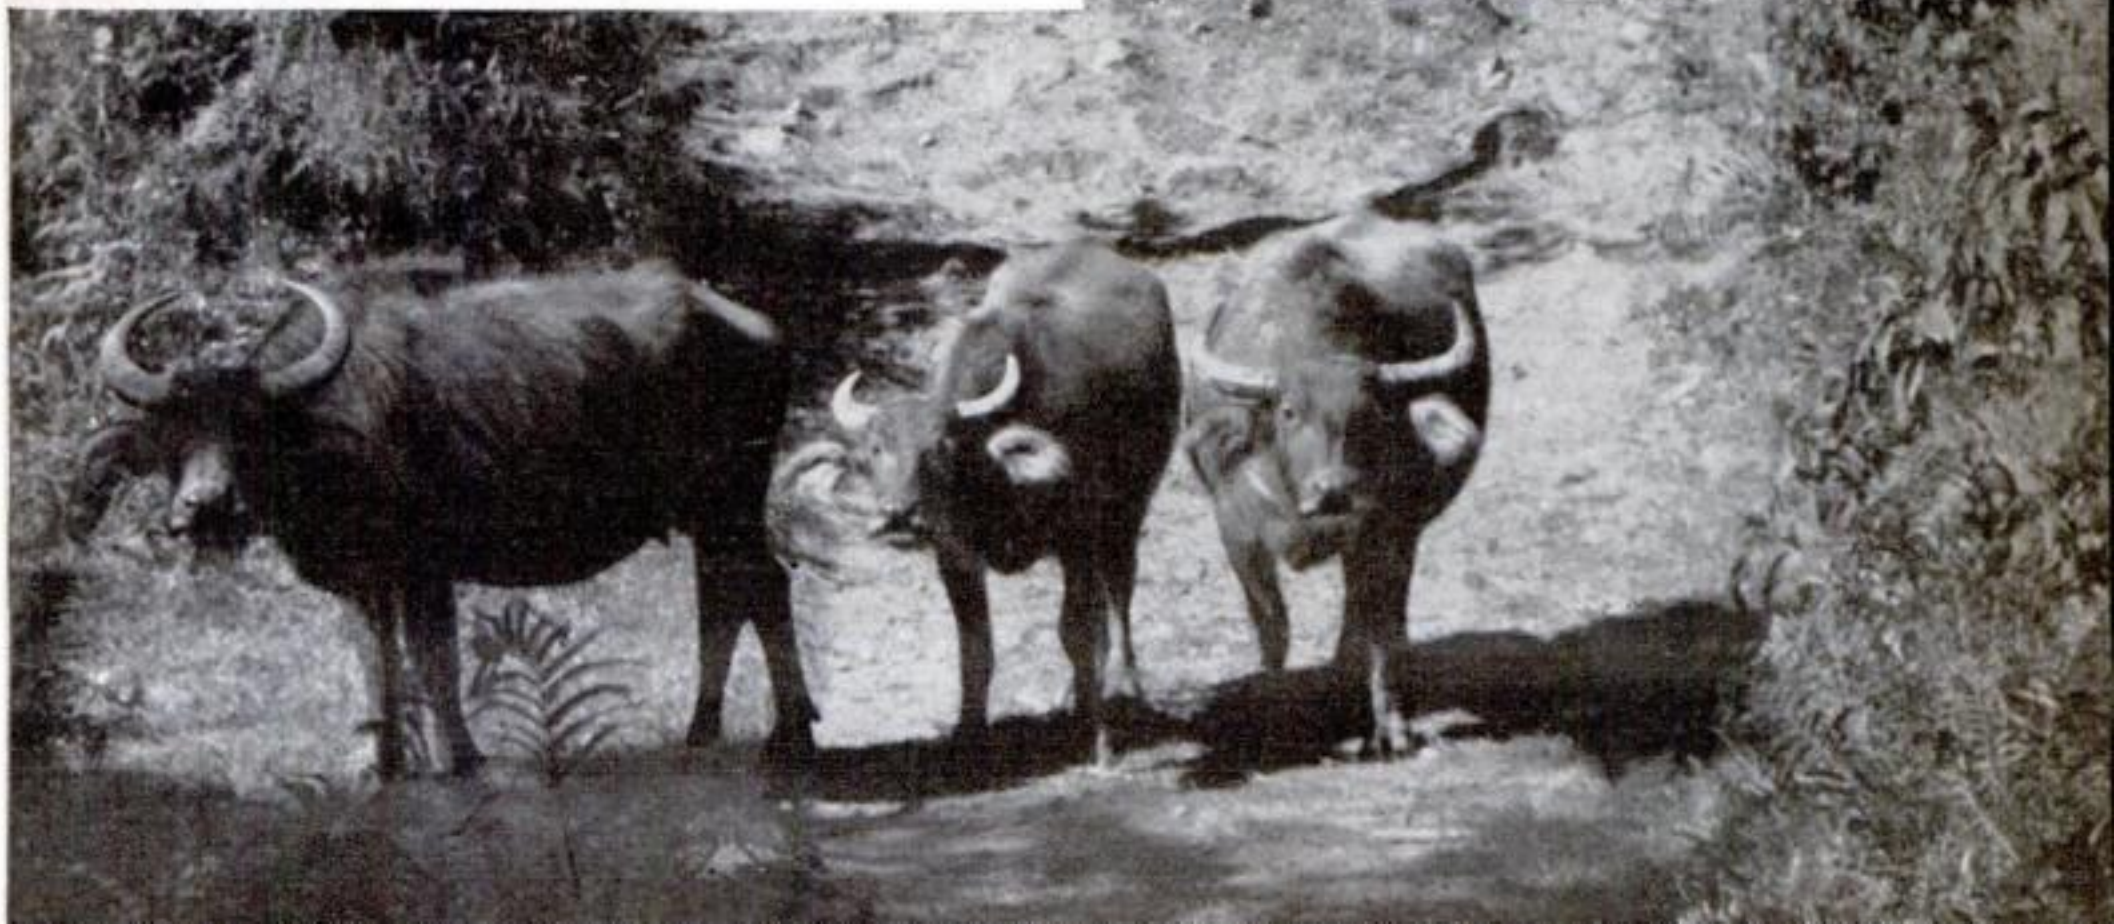

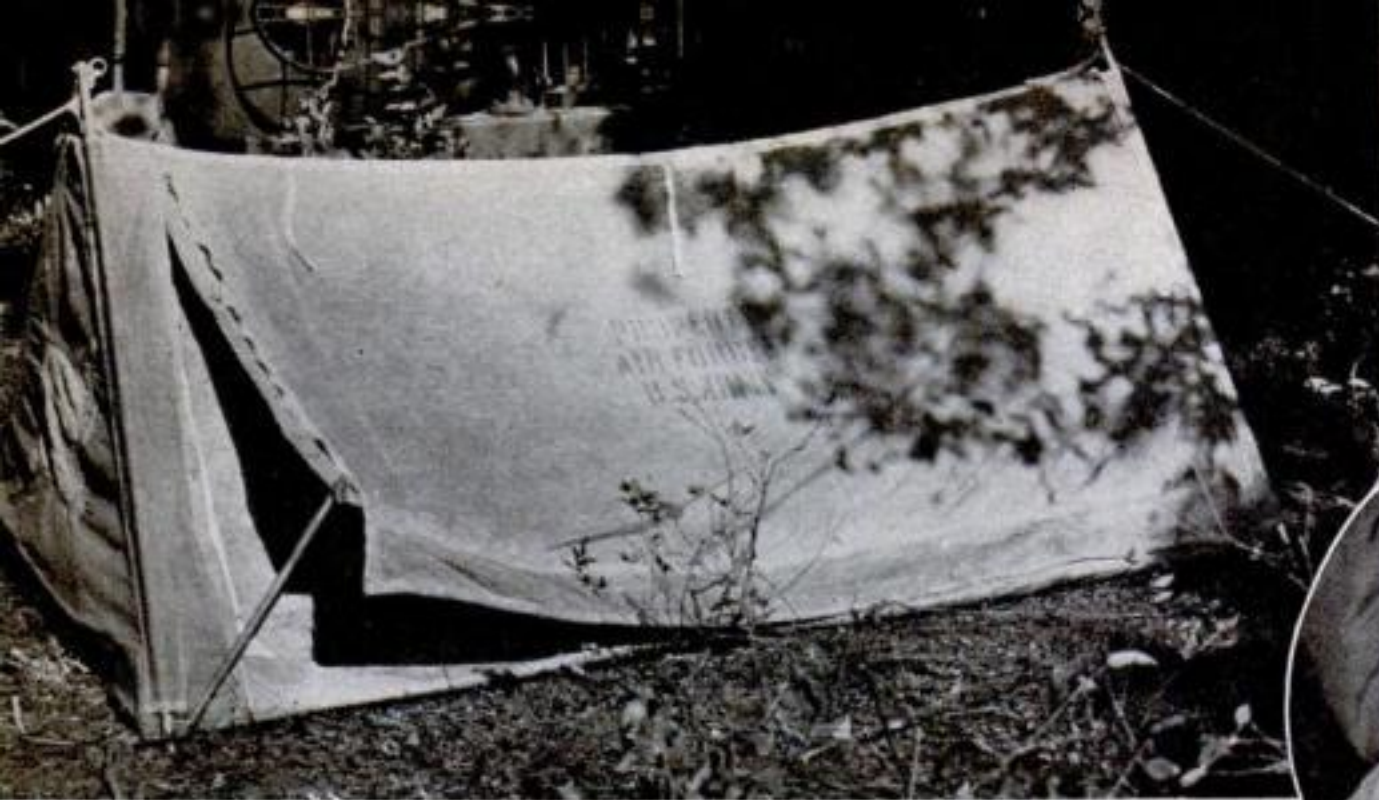

Comfortable shelter is provided in any climate by this new Army tent, put up with four light aluminum tent poles

Pup Tents for Army Flyers Designed for Modern Comfort

SLEEPING in jungle, desert, or arctic waste—or wherever their tasks may take them—still means a good rest for Army flyers equipped with the Air Corps A-2 shelter, this war's modern descendant of the pup tent. It is a highly portable, waterproof covering that can be put up in a few minutes with four light aluminum tent poles and is easily camouflaged. Ventilating windows can be locked shut if the weather requires, and mosquito bar protects against insects. The tent's pneumatic mattress is inflated simply by kneeling on an inflating bag.



Air is forced into a specially designed pneumatic mattress simply by kneeling on the ingenious inflating bag shown at the left above. Five "kneels" on the bag usually are enough

A sleeping bag that goes on top of the mattress is lined with warm quilting. Blankets can then be buttoned on with snaps



Mosquito netting in the top part of the tent can be rolled down when it is required for protection against insects. Ventilating windows in the ends are closed with slide fasteners



WHY PLANES MAKE

Vapor Trails



MOISTURE-LADEN ENGINE EXHAUST SPEWED INTO ALREADY SATURATED AIR LEAVES TRAIL OF WATER VAPOR OR ICE PARTICLES




This Dornier's exhaust trail might be spotted by the P-47 before the plane itself is seen

AIRPLANES leave trails in the atmosphere that can be picked up, if a spotter is quick enough, like those of game sought by a hunter. Some of them, especially trails left by a plane's exhaust at high, cold altitudes, endure for some time, while those made by wing tips creating vortices are audible as well as visible.


Both of these types of airplane trails are

explained by condensation. Invisible water vapor in a plane's exhaust condenses into a visible cloud when the vapor reaches an excess of what the atmosphere will hold. Wing-tip trails add no water to the air, but as their vortices expand, the air temperature in them drops and the dew point is reached if the vortices are strong enough and humidity is high.

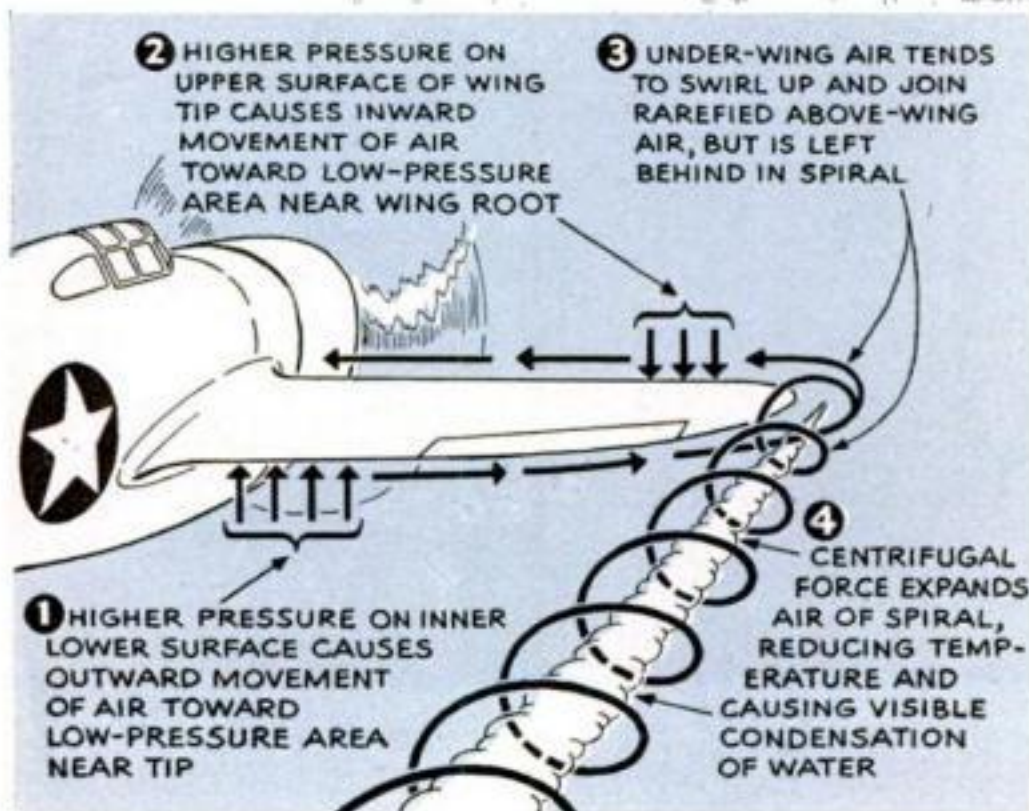

Noise like the whistle of a falling object may be heard when a heavily loaded plane pulls out of a low dive. It is from the wing-tip trail illustrated at left, and is audible after that of the motor dies away


Microscopic Plants

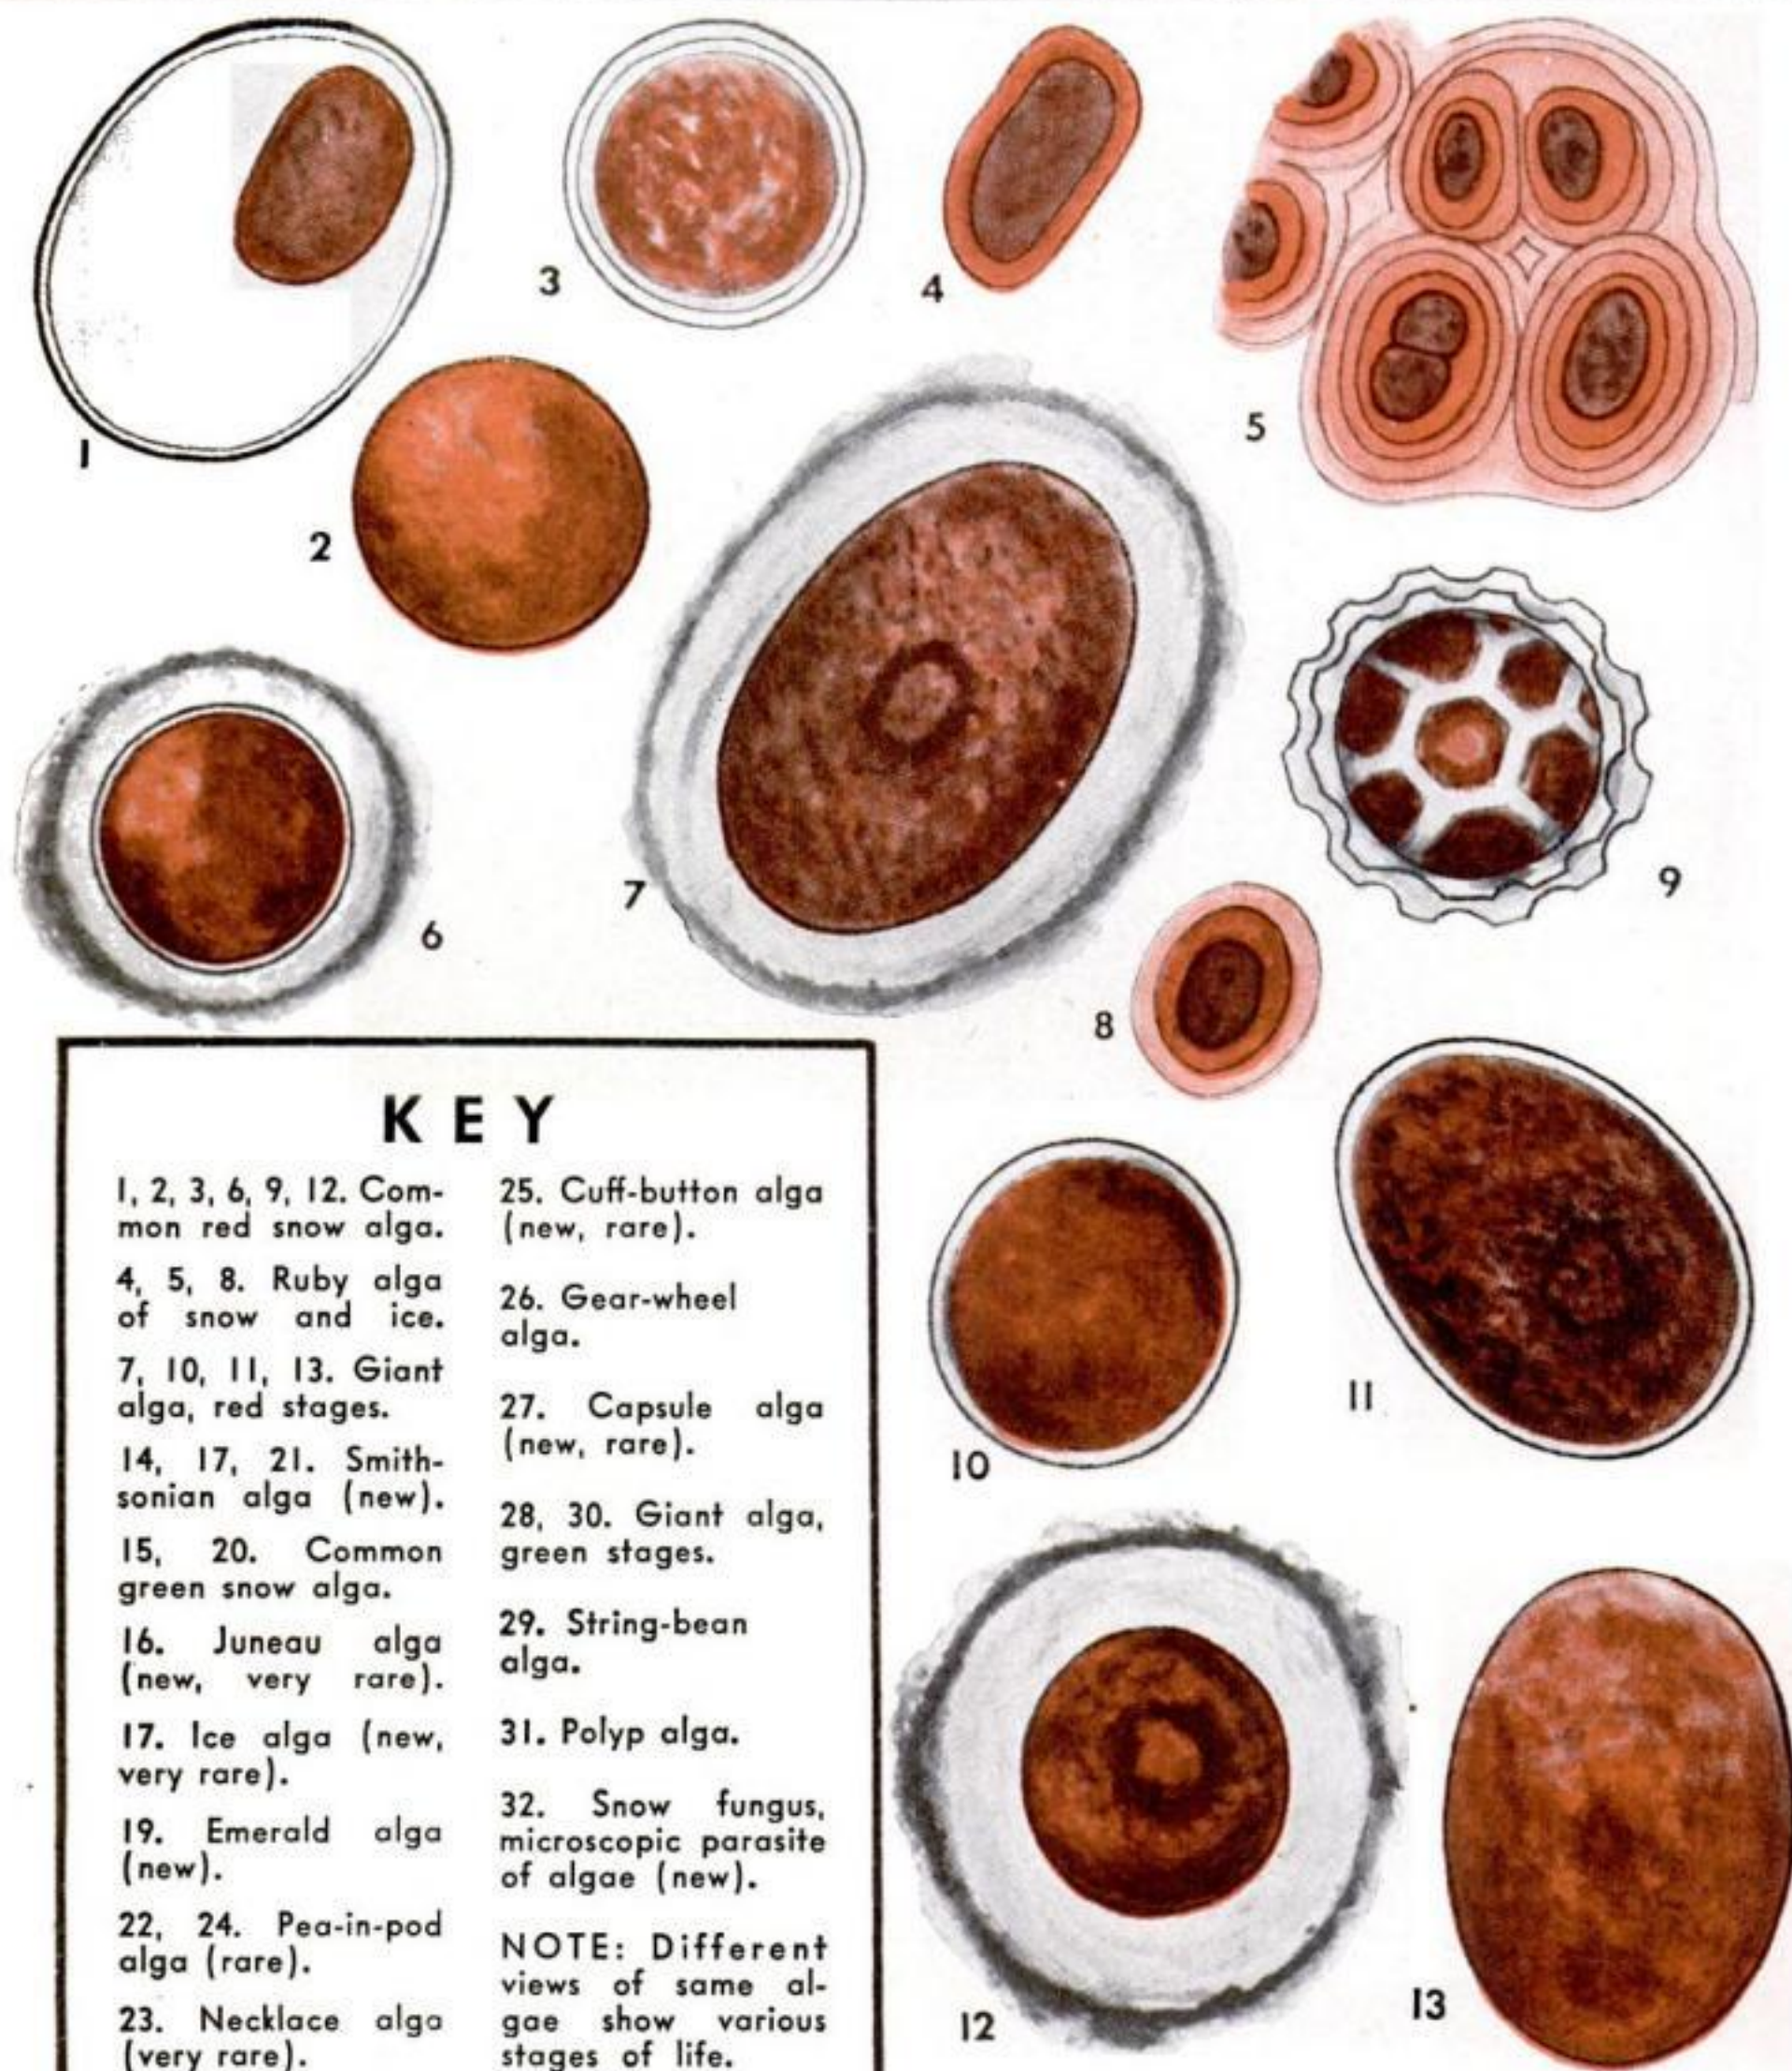

RED, green, purple, and yellow fields of snow and ice—rare curiosities of nature—owe their hues to myriads of microscopic, cold-enduring plants. Some of the world's most striking displays recently have been discovered and studied in Alaska by E. Kol, Hungarian woman scientist. High

on Thompson Pass, she reports, vast expanses of snow appear as if sprinkled with red pepper. Ice of the Columbia Glacier, extending miles along the coast, blooms with a purplish color. Mixed colonies of the plants, which belong to the family called algae, give blends of hues.

Paint Arctic Snows

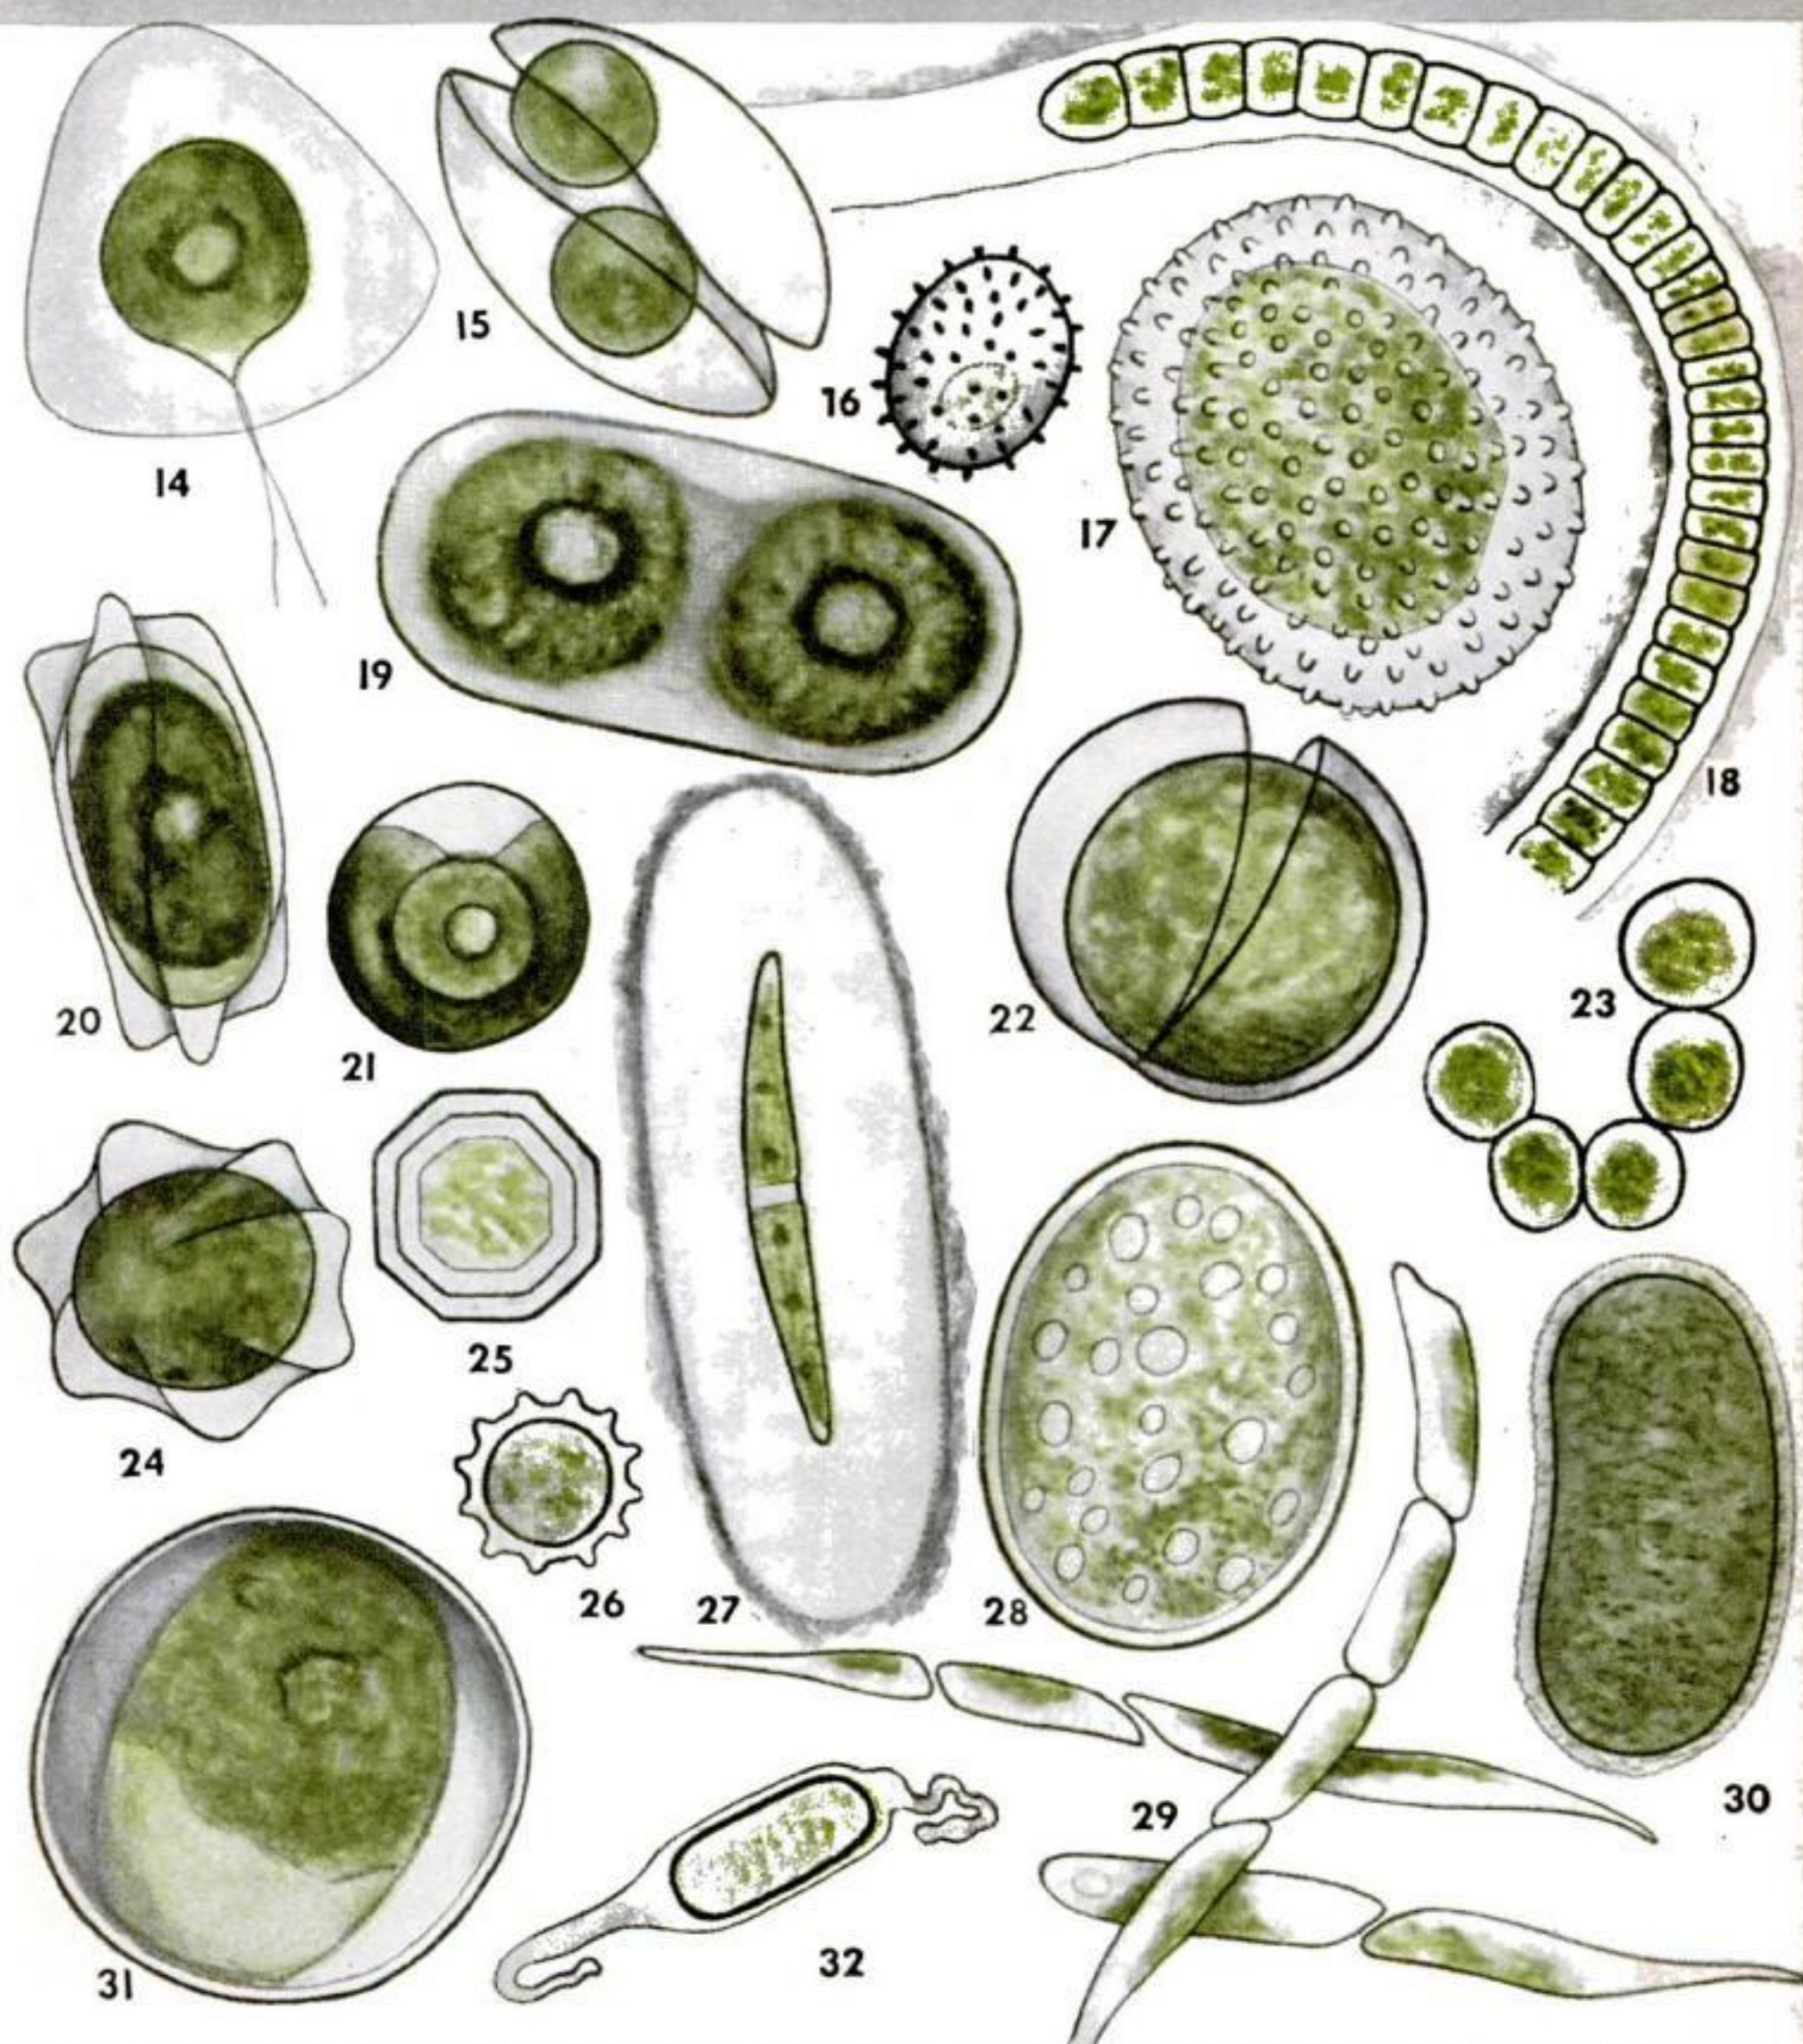

Nearly half of the 30 kinds of algae found by the explorer are new to science. To one she has given the name "Smithsonimonas Abbotii" in honor of the Smithsonian Institution, which sponsored her expedition, and of Dr. Charles G. Abbot, its secretary. This and some of her other finds are illustrated

here. Certain algae live only on snow; others, only on ice; and some, on either. Rock dust, called cryoconite, feeds them.

Even microscopic plants have their parasites. The Alaskan trophies include two hitherto unknown varieties of "microfungi," one of which is shown above.



A Vectograph of a given landscape can be reproduced any number of times, so that each man engaged in an operation can carry one and study it through polarizing glasses wherever he may be. Picture No. 2 on the opposite page shows how the road in the Polaroid Vectograph at right appears in a relief print



Polarized Light for the Eyes of the Army


**NEW AERIAL PICTURES
SHOW ENEMY TERRITORY
IN THREE DIMENSIONS**

By ALDEN P. ARMAGNAC


ENROLLED in classes at a Cambridge, Mass., laboratory, picked men of the Army, Navy, and Marine Corps are learning a new way to make aerial photographs possessing depth, or a third dimension. The pictures clearly reveal bomb damage to industrial plants. They pierce such camouflage as false shadows and make-believe "gardens" painted on roofs of war factories. Vividly they show the contours of shore lines, cliffs, hills, and valleys in enemy-held territory. Trees, ditches, and bushes, important in providing cover, appear in full relief like an exact-scale model.

From brief study of such a picture, too, a military strategist may deduce the loca-


The process of making Vectographs is shown on the opposite page. How these Vectographs may be used, both as still pictures and as moving pictures, appears on pages 60 and 61

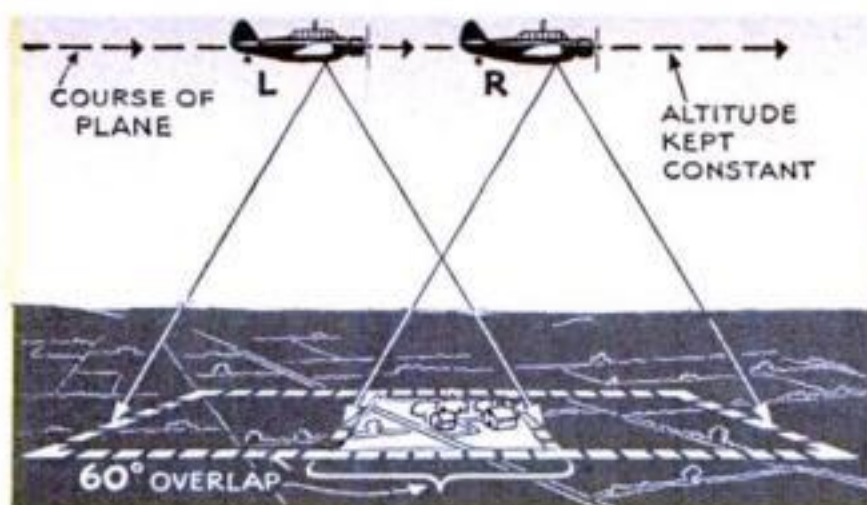


1 In shooting a scene from a plane, the photographer takes two overlapping pictures: one for the right eye, the other for the left

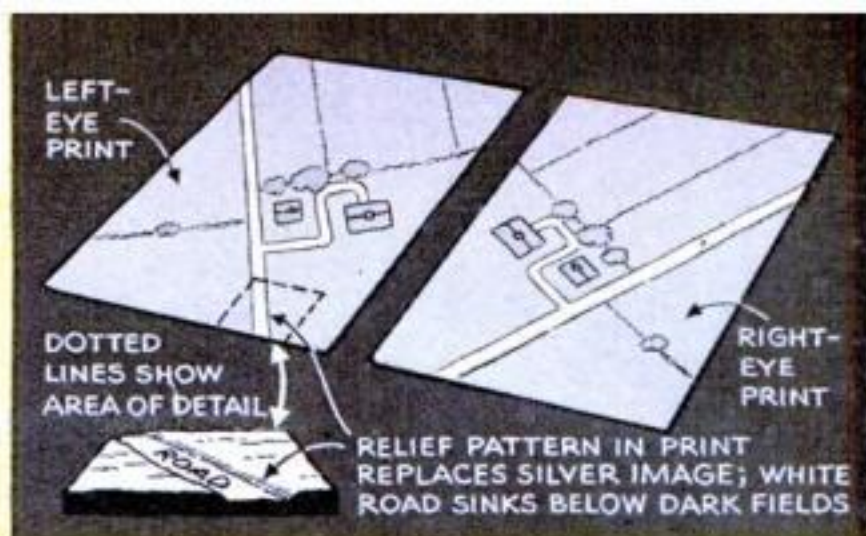


2 One of the negatives is reversed in printing, and both pictures are transferred to a relief pattern composed of hardened gelatin

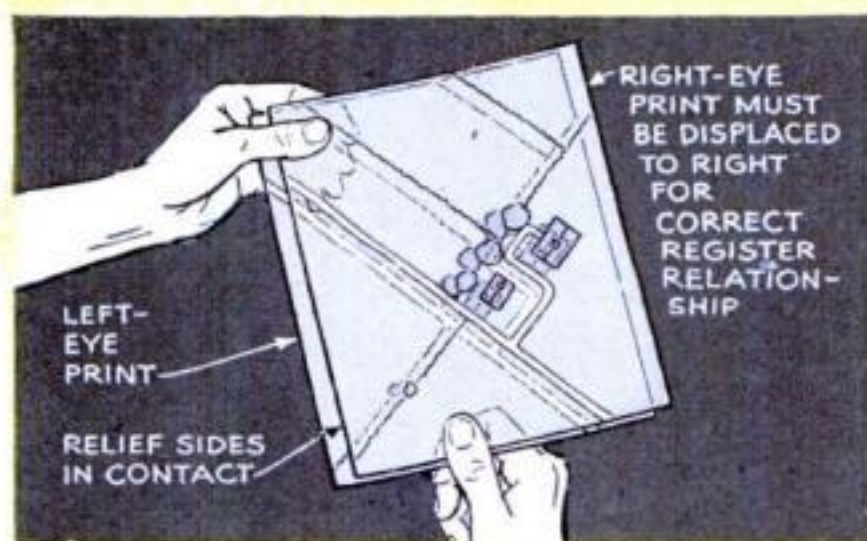


3 Here the gelatin sides of the prints are placed face to face, then adjusted so that the final Vectograph will have a double image

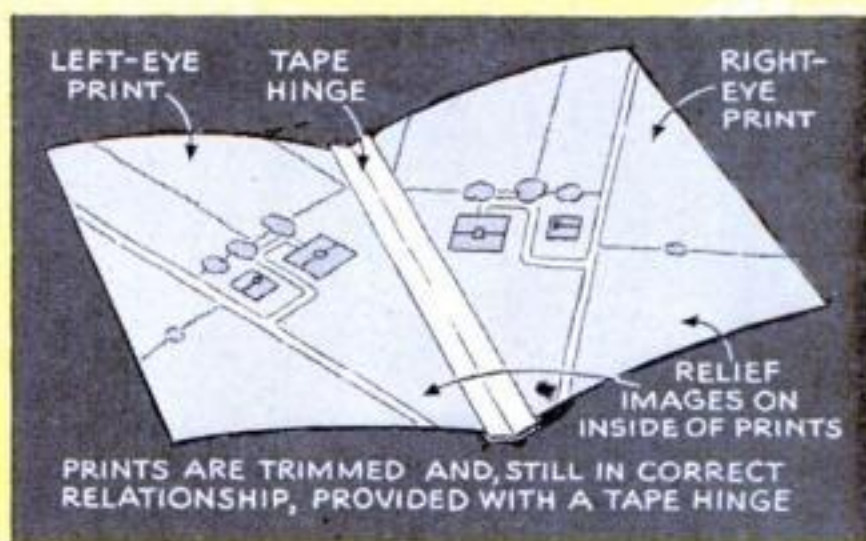


4 Prints are now taped to hold them firmly in adjustment. Contour of reliefs is in relation to lights and shadows of original scene

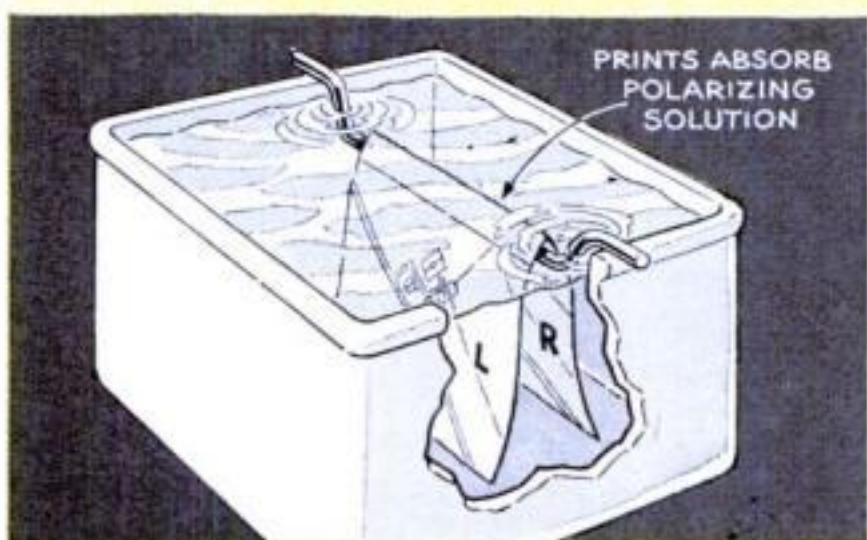


5 Placed in this bath for 30 seconds to two minutes, the gelatin absorbs the polarizing fluid, the thick part soaking up the most

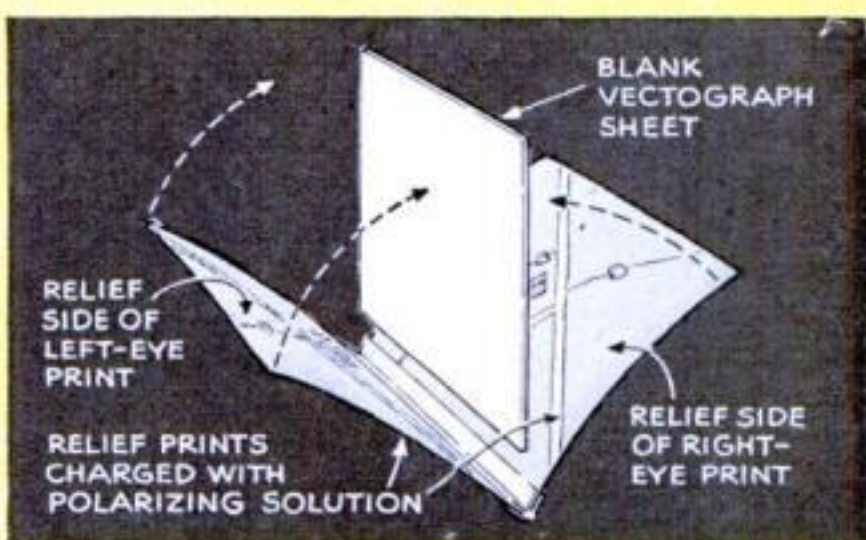


6 Preparatory to the pressing operation, a sheet of transparent plastic is carefully placed between the faces of the relief prints

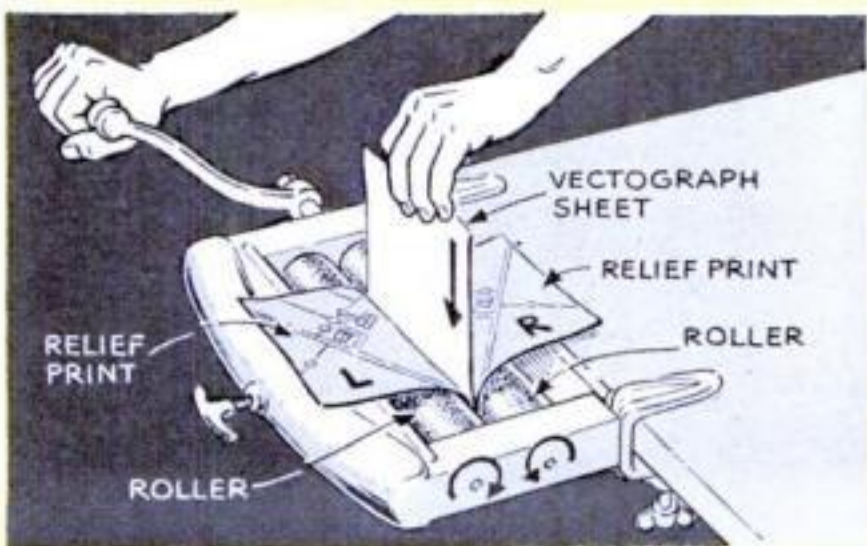

7 Hinge first, the "sandwich" is put through a pair of rollers which press the relief sides of the prints against the plastic sheet

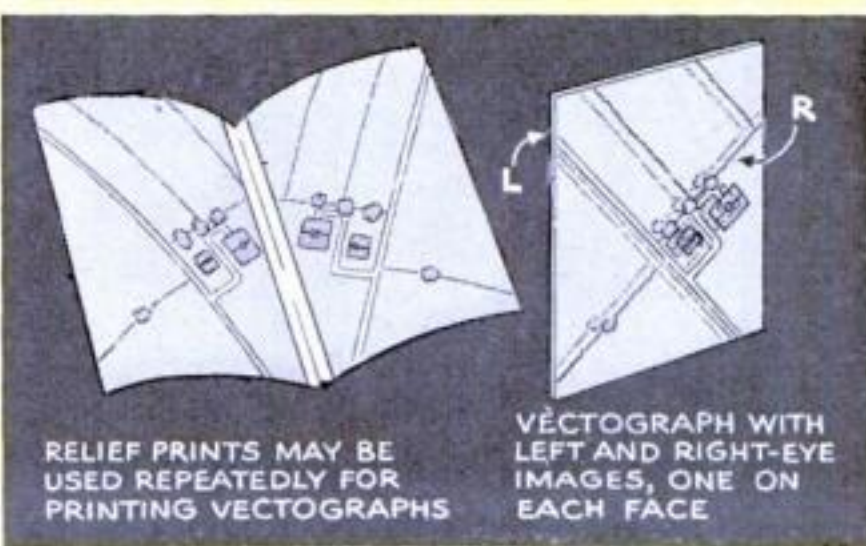

8 The "two-faced" Vectograph finally emerges. When examined through a pair of polarizing glasses, it presents a vivid stereoscopic view

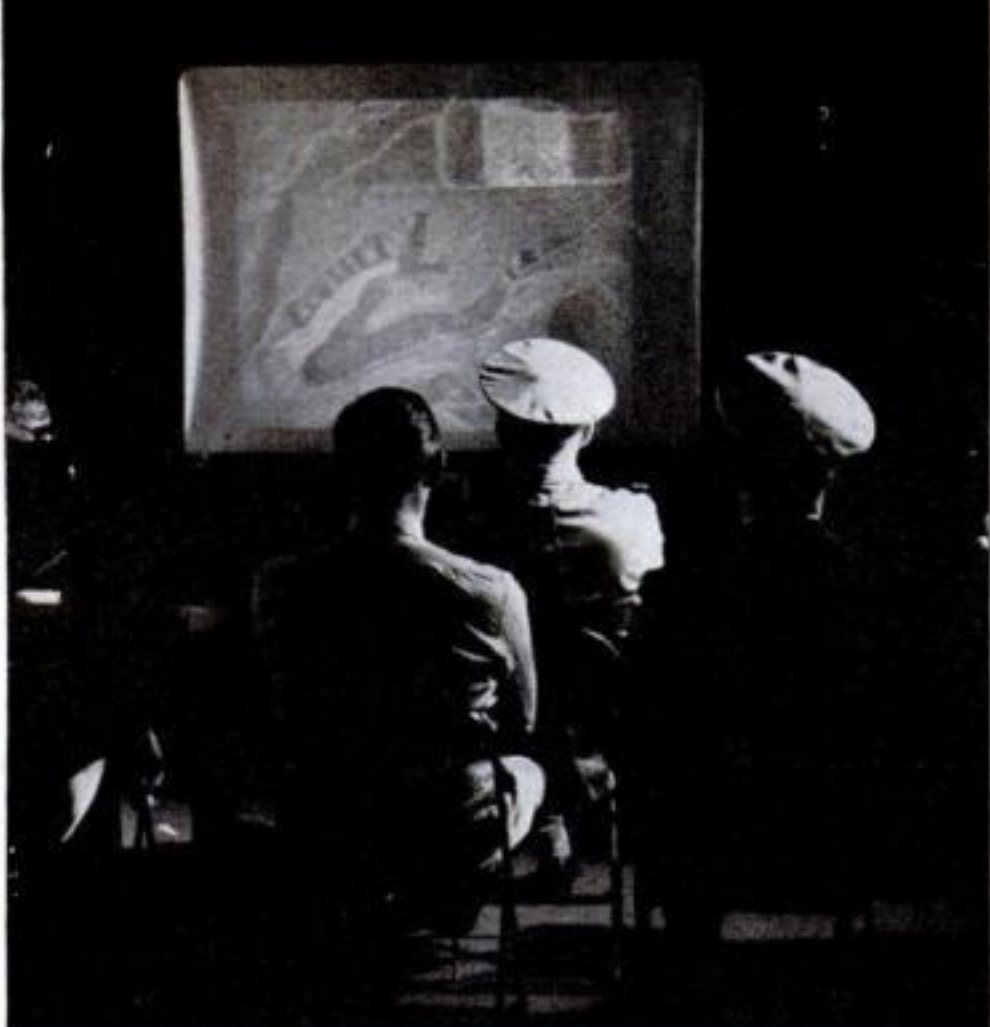

For concerted examination, a Vectograph of enemy territory can be projected on a screen and viewed through polarizing spectacles. Or it can be used to supplement map study. Instead of spectacles, men in action may carry cardboard viewer at left

tions of hostile strong points, and how they may be taken by a surprise raid, or reduced in a full-dress invasion. By projecting the pictures on a screen, a leader may instruct his men exactly in the individual parts they are to play. Finally, since an unlimited number of duplicates of a picture may be made, every man going into action may carry his personal copy, together with a simple card viewer for examining it—in a fox hole, aboard an assault boat, or even inside a tank.

The same process, with little or no modification, offers fascinating future possibilities to amateur and professional photographers. Still and motion pictures, both in black-and-white and in color, will be endowed with the final realism of depth. The stills may be mounted in albums, or finished as transparencies. Tridimensional color movies, long the dream of inventors, will assume such practical form that they may be exhibited with standard home and theater projectors. All these innovations have been perfected. Their introduction to the public awaits only peace. Until then, the entire production of the Polaroid Corporation, maker of the materials, is filling U. S. war needs.

Military classes produce the relief photographs, called Vectographs, in



An instructor demonstrates the hinging together of the two relief prints from which a Vectograph is made, and below, Army technicians work on the developing process



their first day of instruction. Simplicity of the procedure contrasts with the remarkable combination of optical and chemical principles underlying it. Credit for the process goes to a research team directed by Edwin H. Land, the same brilliant young inventor whose Polaroid, the first practical light-polarizing material, startled the scientific world some years ago (P.S.M., April '36, p. 20). Vectographs also use polarized, or "one-way," light, vibrating in only one plane, but produce it in a new way. Watching a Vectograph made helps to make the idea clear.


Raw material consists of a pair of stereoscopic, or left-and-right-eye, negatives which may be made with the simplest of box cameras by shifting the camera between two successive exposures. For stopping motion, professionals use a more expensive camera with twin lenses and synchronized

shutters. In the air, a pair of overlapping pictures made some distance apart gives the effect of looking through a giant's eyes, greatly heightening the scale of relief.


Ordinary prints from any of these photographs, mounted side by side, give a perfect effect of depth when viewed through an old-fashioned parlor stereoscope. But a soldier in the field has enough to carry without such cumbersome equipment. Therefore a special printing method is the first step of the Vectograph process. The negatives are printed photographically on pieces of special film. A "wash-off" bath takes the place of a fixing bath, transforming the picture from a silver image to a relief pattern of hardened gelatin. Its hills and hollows bear no direct relation to the contour of the terrain photographed, but rather to the distribution of high lights and shadows. For example, the relief print will be thickest where the finished picture should be dark.



Now the operator carefully adjusts the relief prints so that the final Vectograph will have a double image, and then hinges them together. One of the negatives has been reversed in printing, and both relief images now face the inside of the "book."

Placed in a brown chemical solu- *(Continued on page 212)*

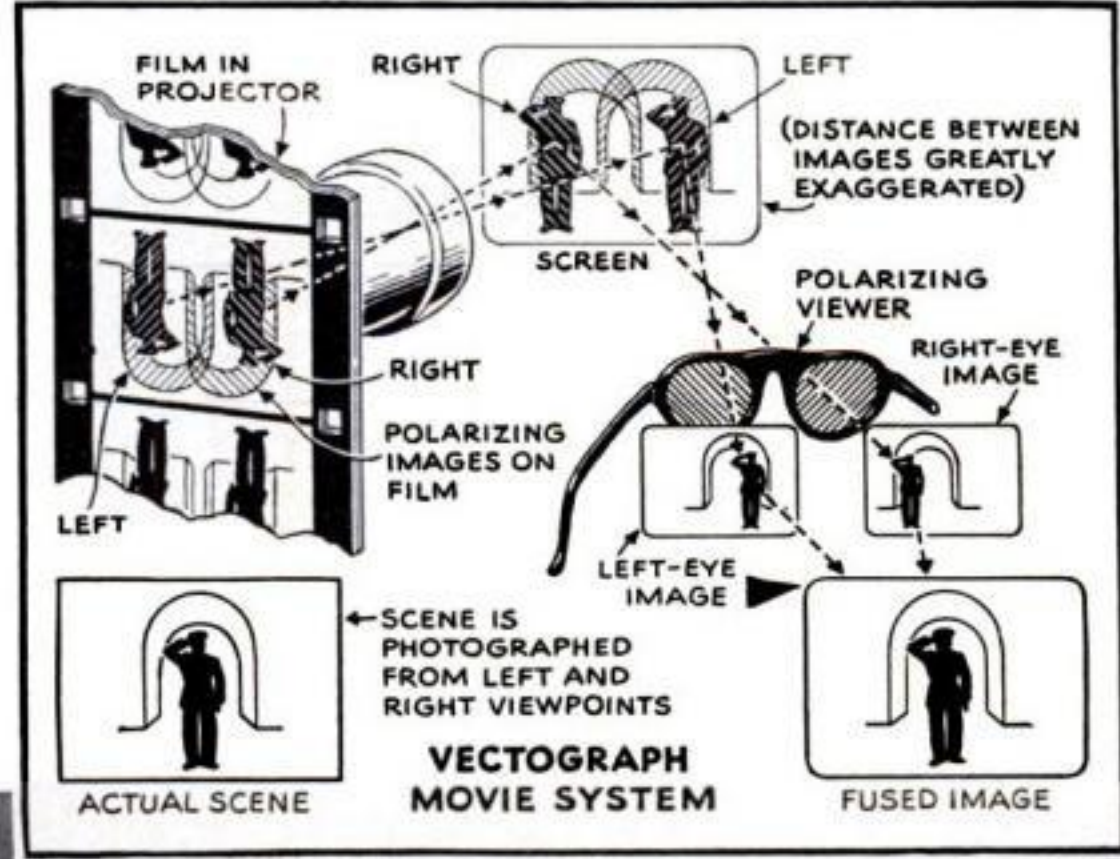


The charts at left and below show the various optical principles involved in projecting color moving-picture Vectographs on the screen

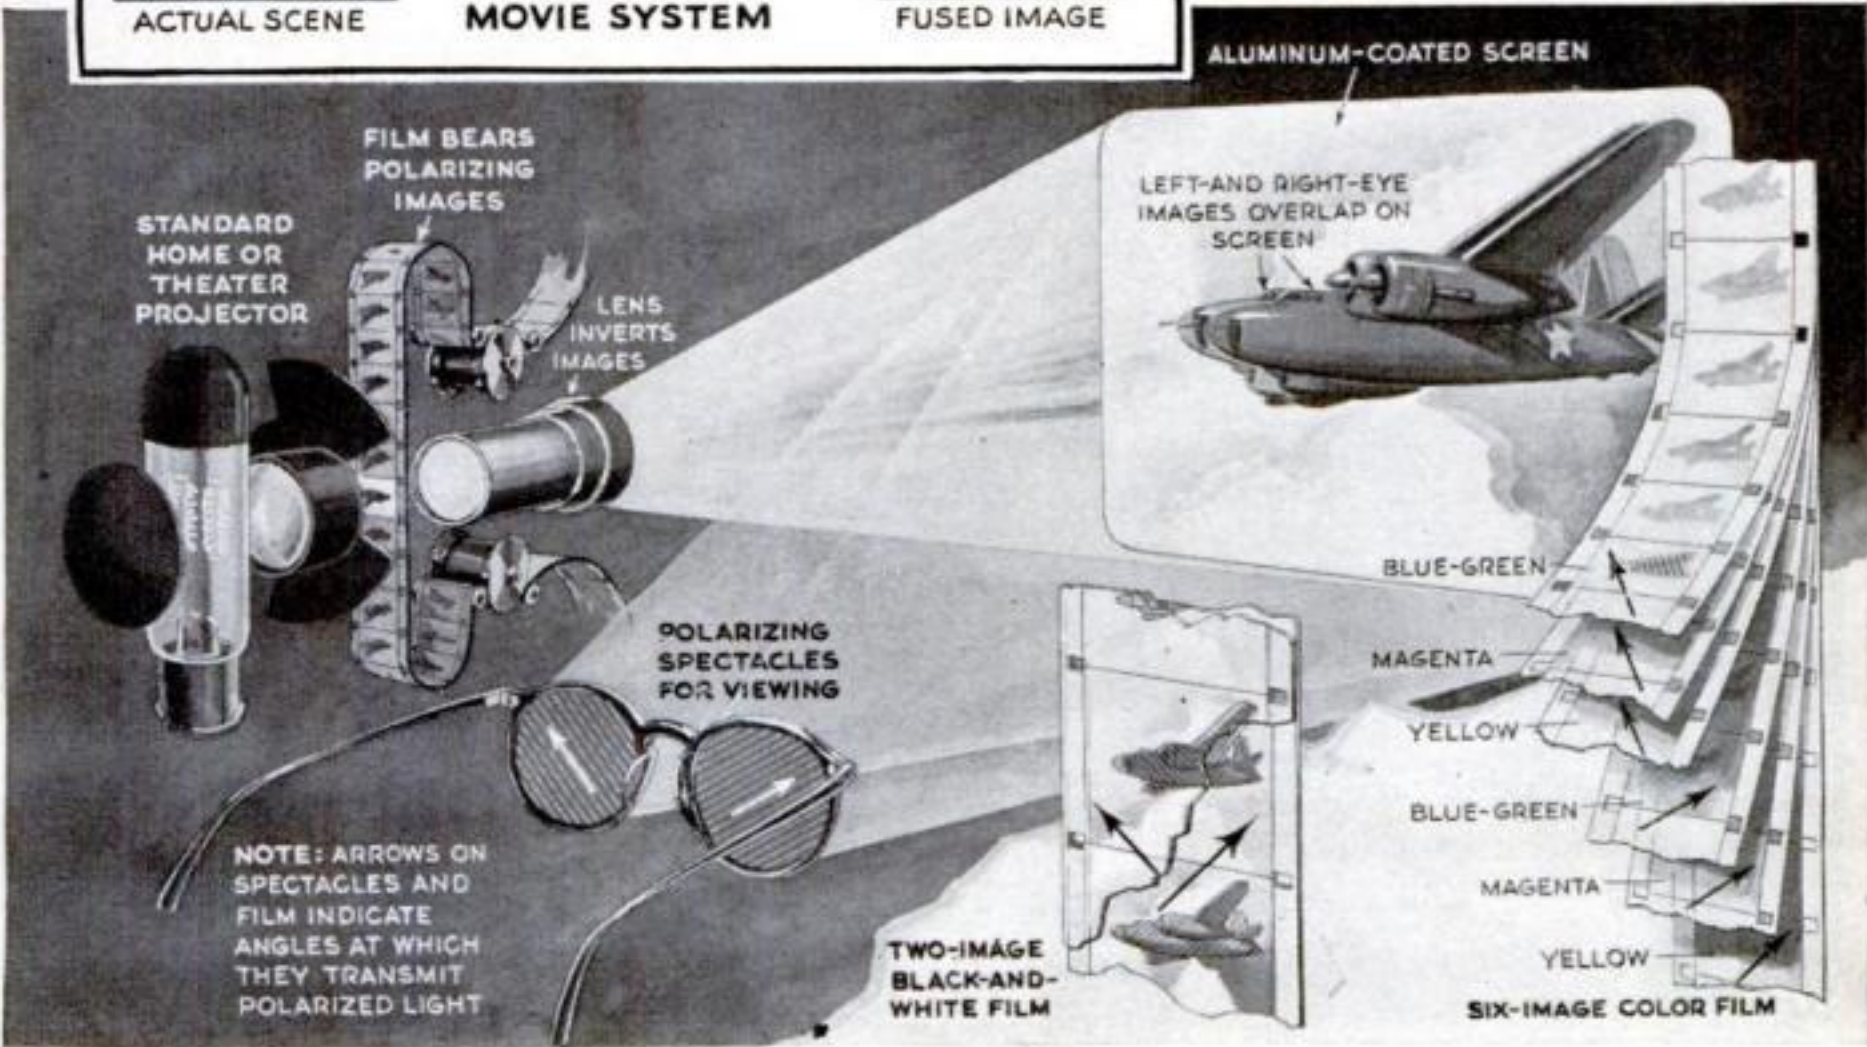


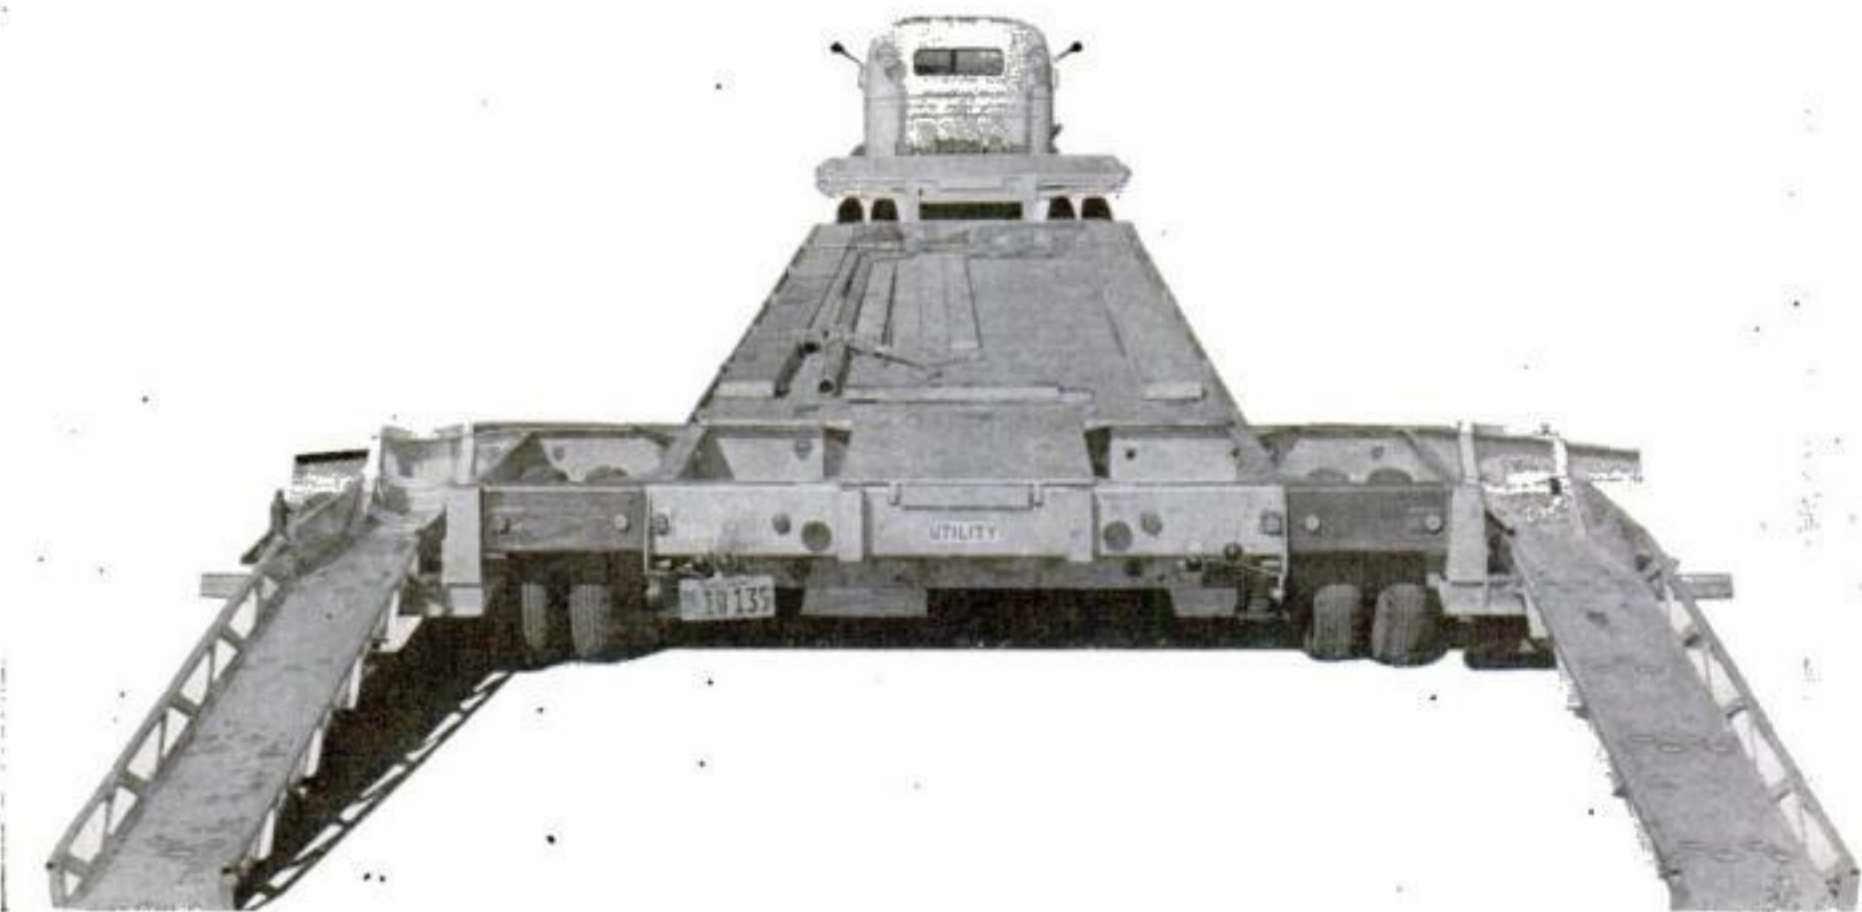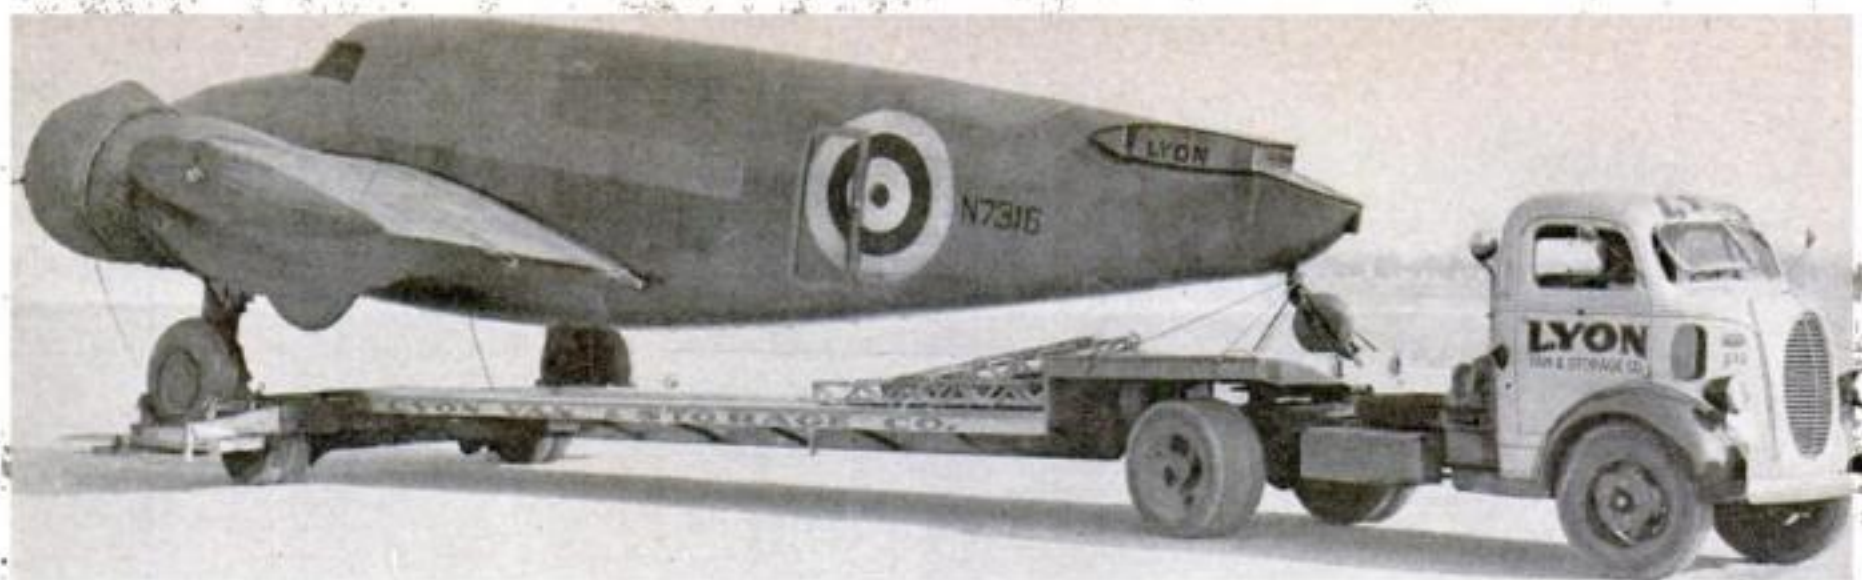

TRUCK TRAILERS with telescoping axles are being used for hauling airplanes from factories to seaports and other shipping points. Axles can be extended to a width of 12 feet, and planes' landing wheels are run up bridgelike ramps to rest in special troughs. For the return trip, the axles are telescoped to eight-foot width to give road clearance for other vehicles. Another proposed use for trailers, illustrated below, is in rushing troops into action. Steplike platforms accommodate 206 fully equipped men, who can be unloaded and dispersed in 10 seconds. Such units are especially suited to moving troops in desert warfare.

WAR

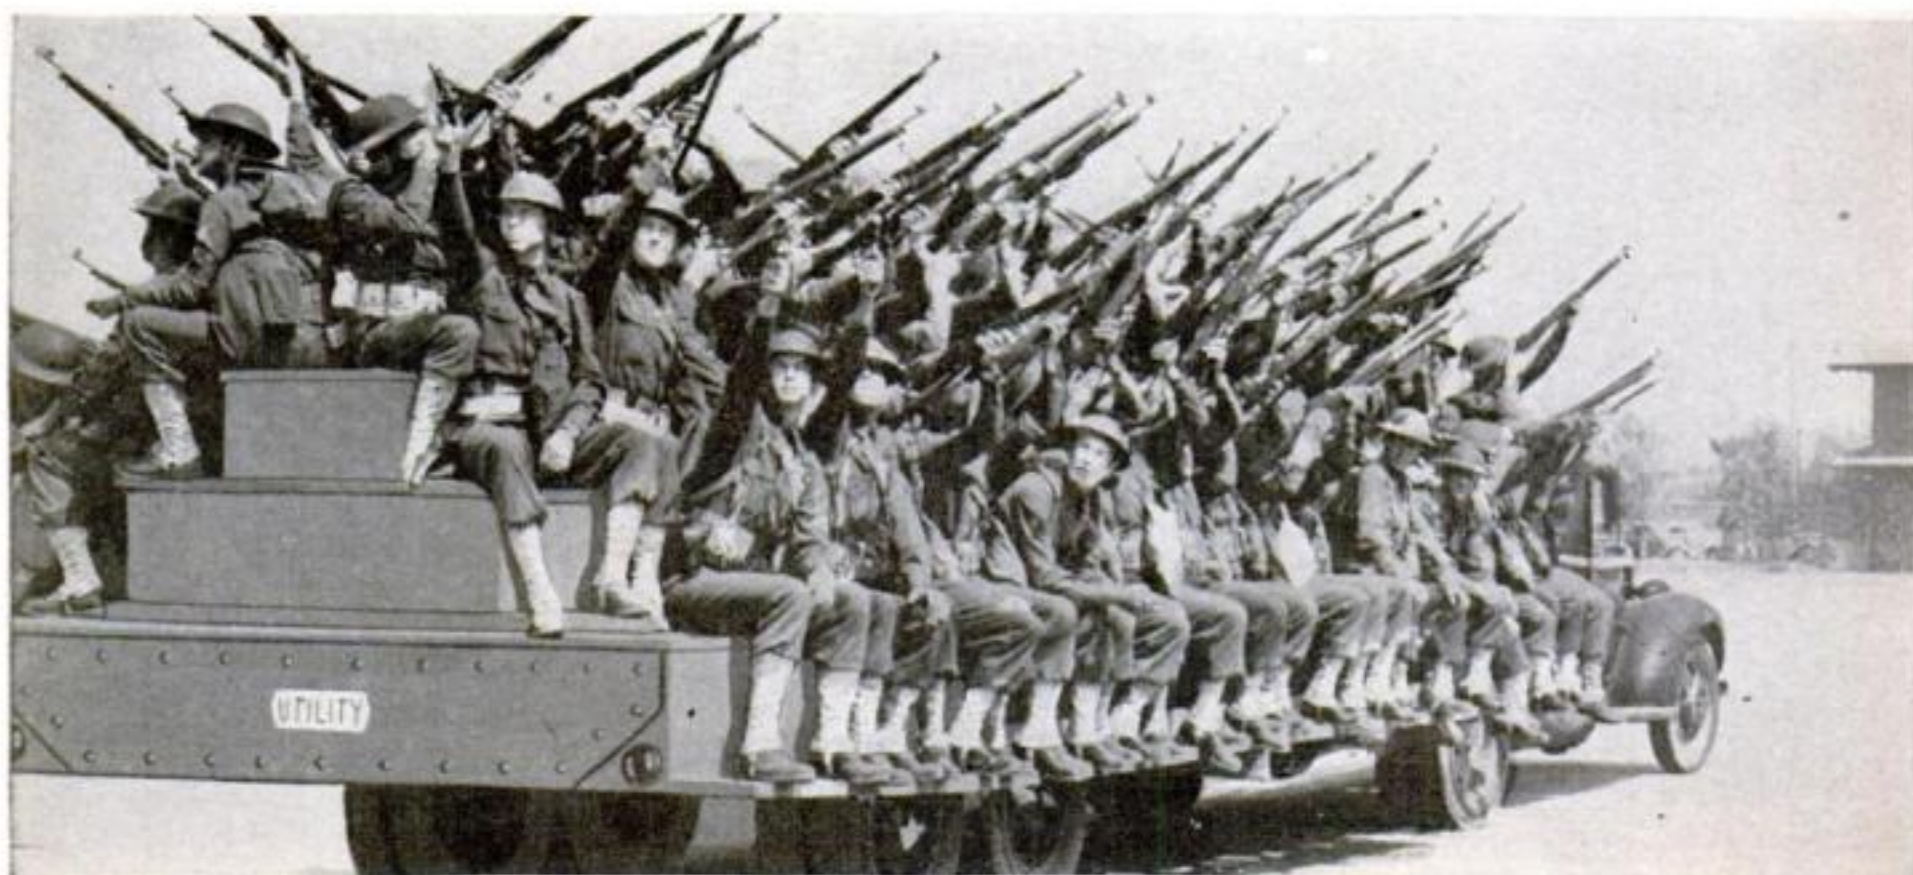

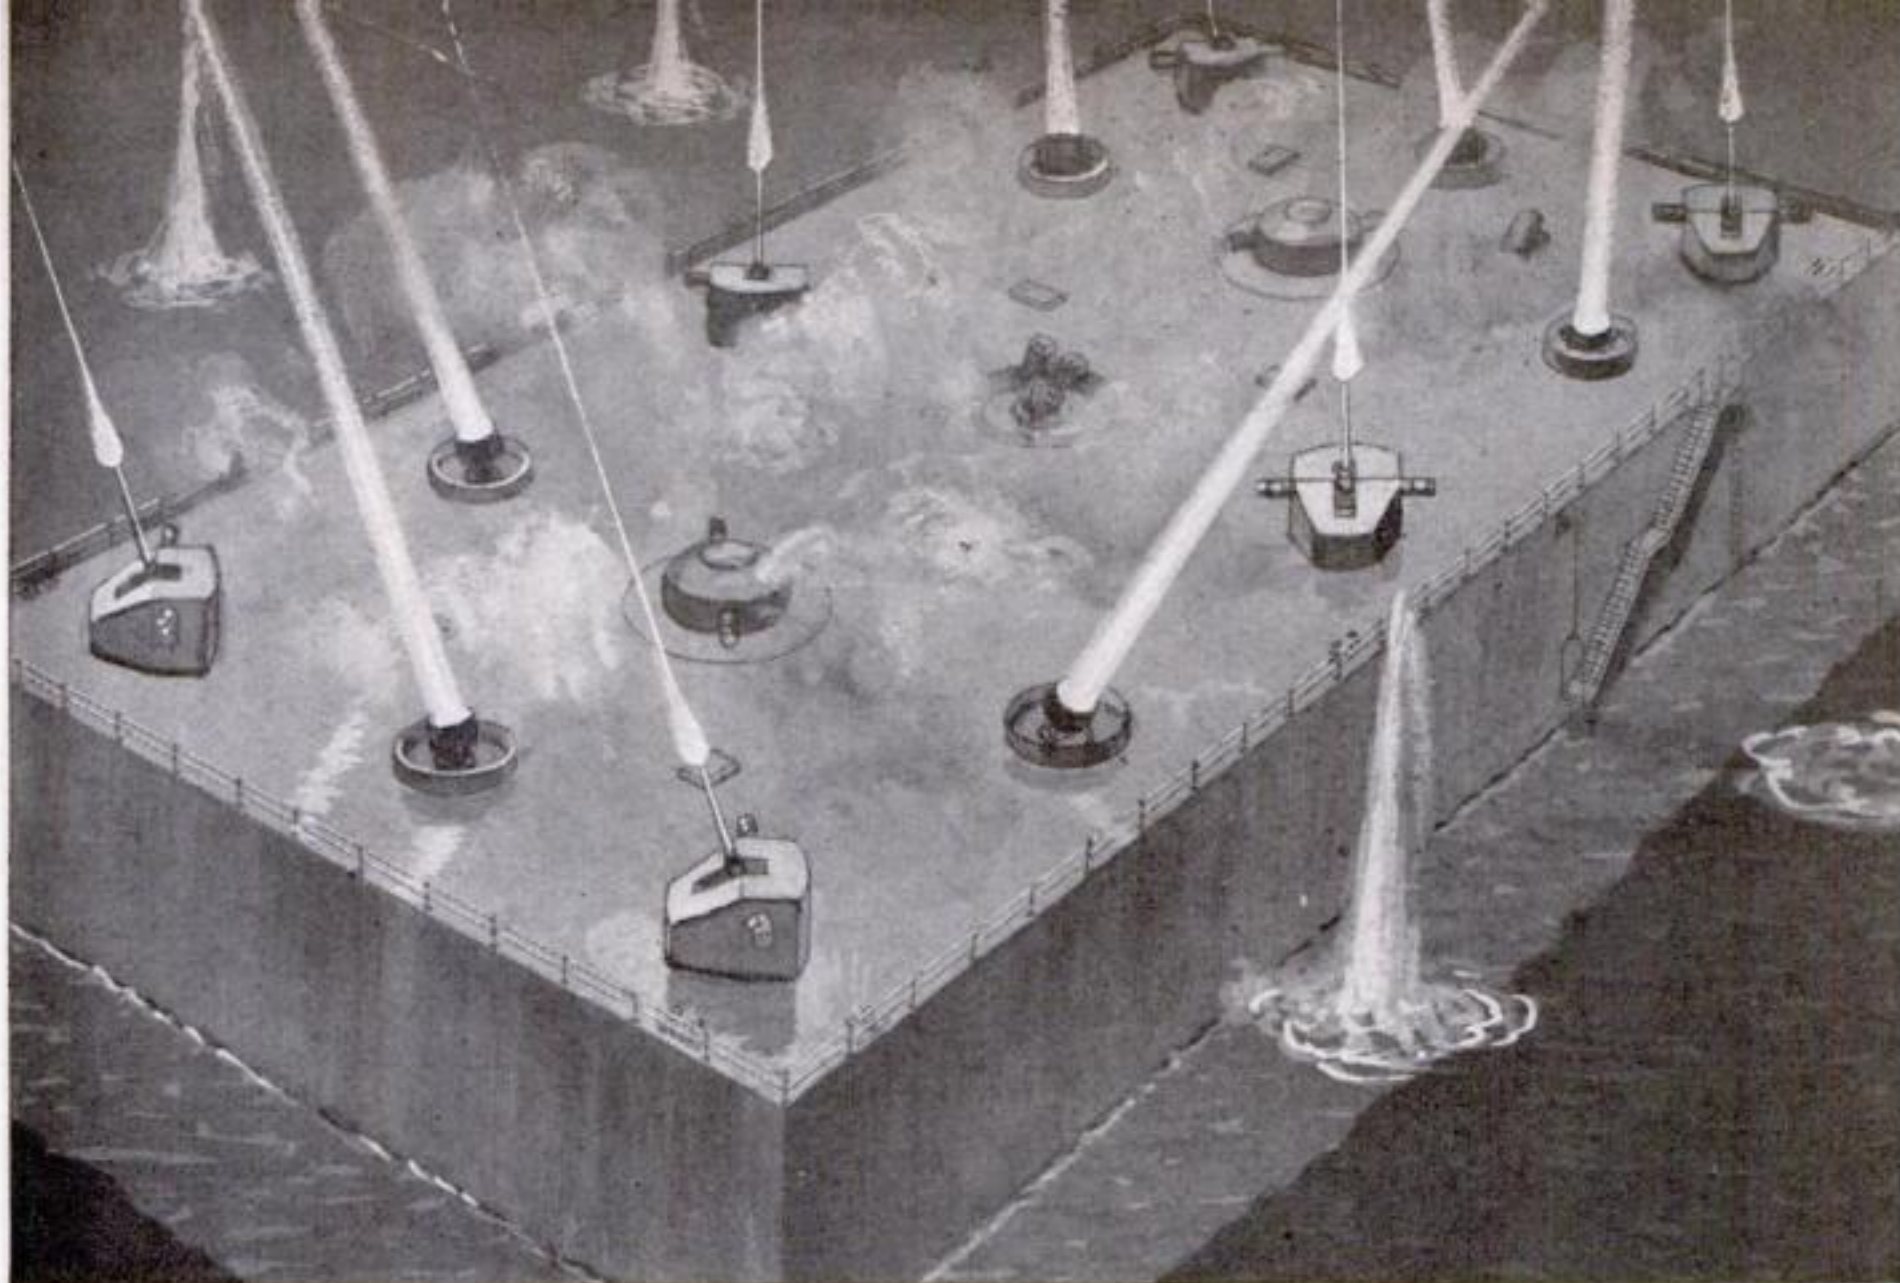


FLOATING FORTRESSES, similar to the artist's conception shown above, and designed to combat Axis aircraft, have been reported put into use by the Russian naval forces. Strongly equipped with anti-aircraft guns and powerful searchlights, the floating behemoth is made of chrome steel, and has

armor 11 inches thick. Because it lacks any means of self-propulsion, however, it is essentially a defensive weapon, and can be put to effective use only offshore from important military and industrial centers where it can intercept enemy planes intent on bombing or reconnaissance.


IDEAS

A WIRED ROCKET is the British Merchant Navy's latest surprise weapon to be used in fighting the Luftwaffe. Fired from a gun, the rocket carries into the air a parachute from which dangle long wires. By careful aiming and timing, gunners can drop a screen of these wires in front of enemy planes, which will cause them to swerve from bombing position or become entangled and destroyed. The parachutes remain in the air an appreciable length of time, and after they drop into the sea they can be salvaged and used again.

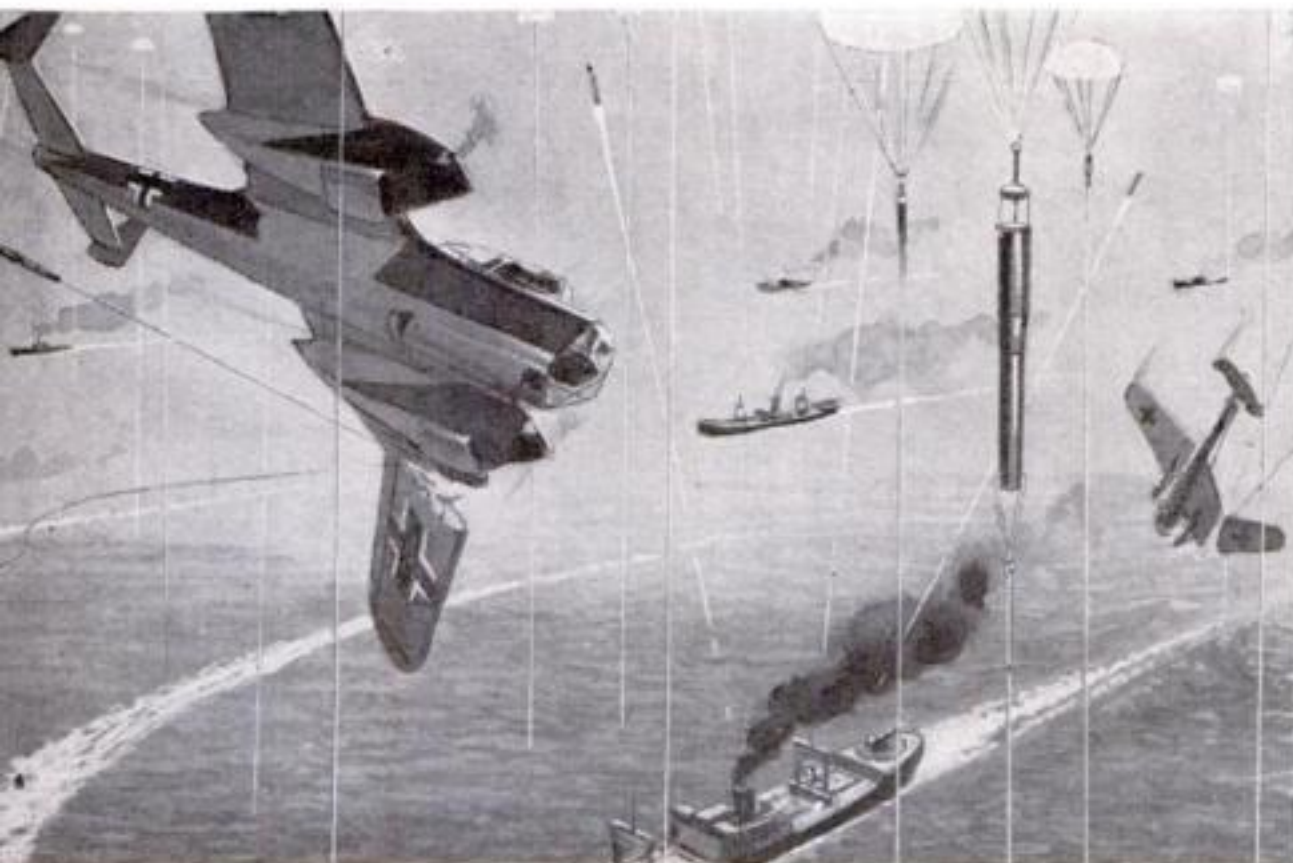




The bow of "hull 440" swings into position over the ways

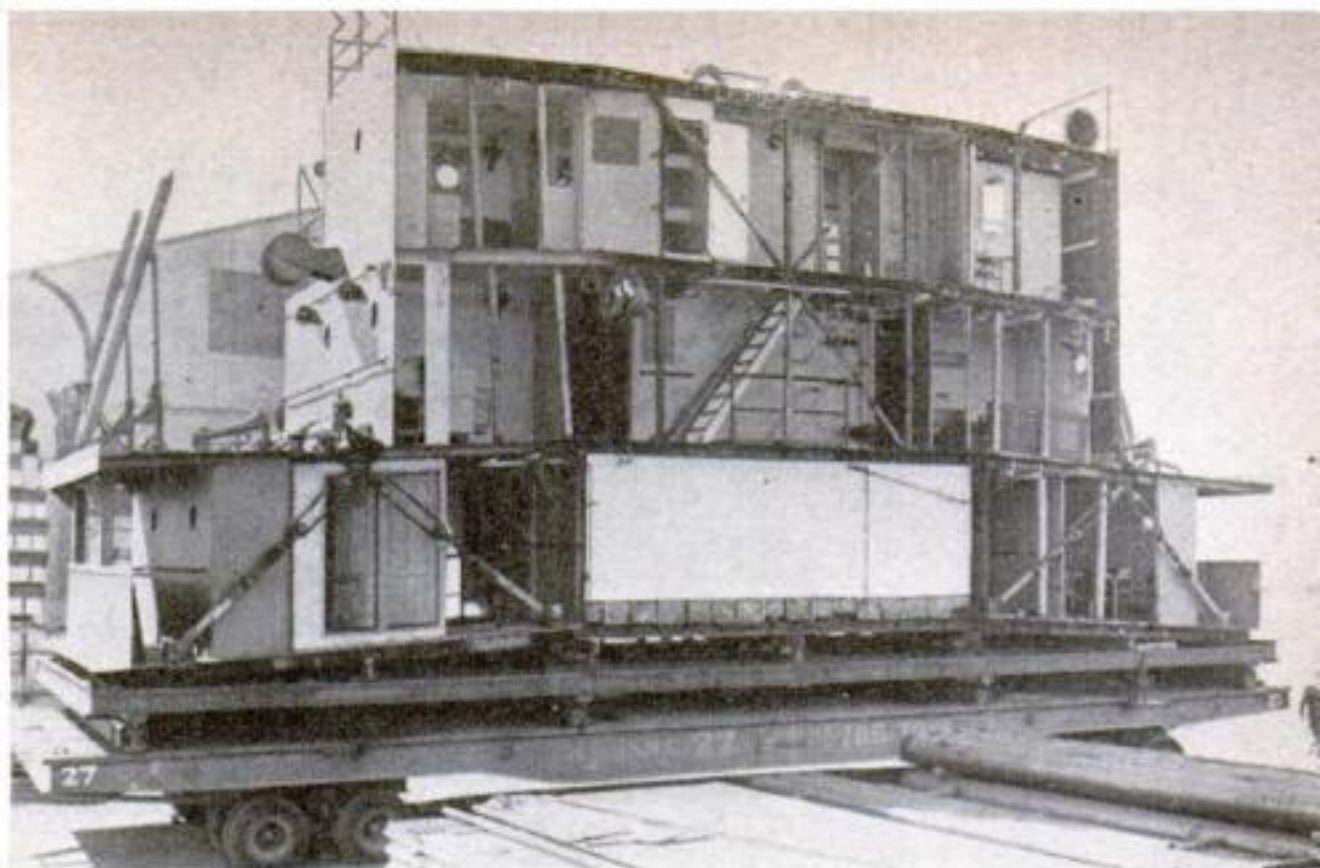

A prefabricated 84-ton section of the deckhouse arrives on a trailer

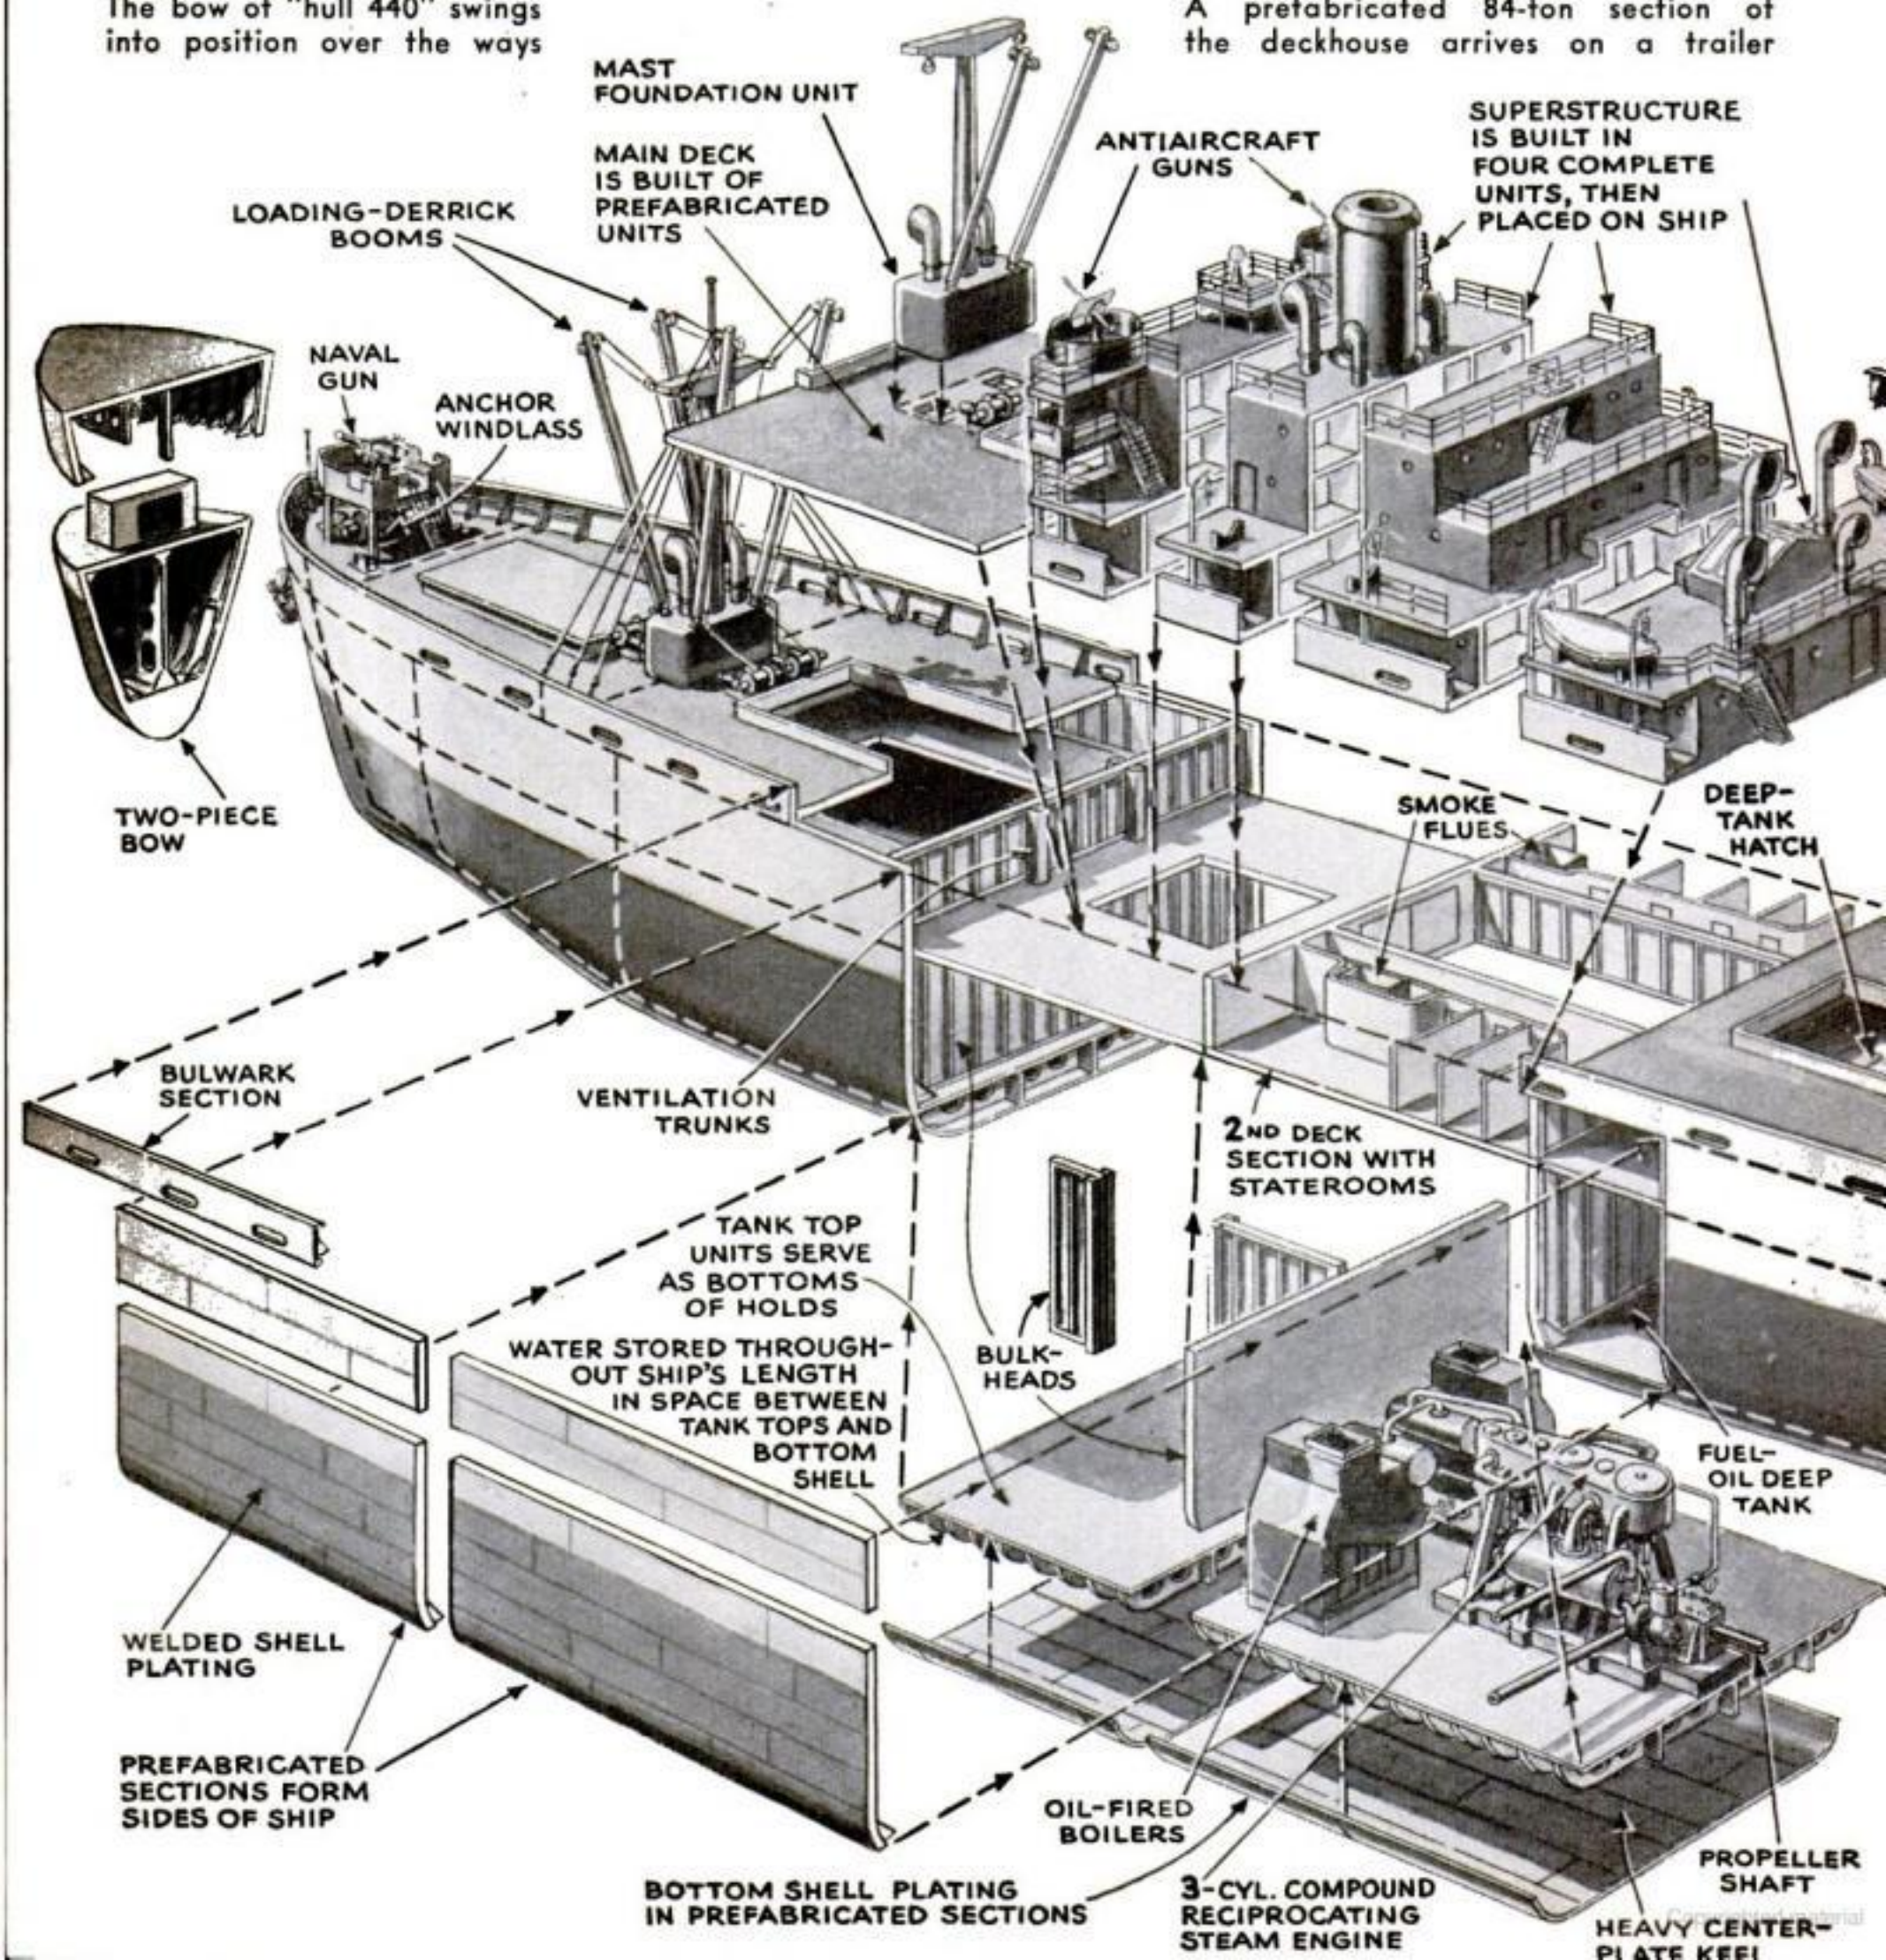


WHAT HAPPENS WHEN KAISER BUILDS A SHIP


A JIGSAW PUZZLE OF STEEL,
WITH A QUARTER OF A
MILLION PIECES AND 97 PRE-
FABRICATED SECTIONS, FORMS
A NEW VESSEL FOR VICTORY

DRAWINGS BY STEWART ROUSE

WHEN the 10,500-ton *Robert E. Peary*, on November 12, 1942, slid down way No. 1 of Henry J. Kaiser's Richmond shipyard after being on the ways only four days, 15 hours, and 26 minutes, it did more than set a world's record in speedy shipbuilding. It set records in pre-fabrication, labor-management co-op-

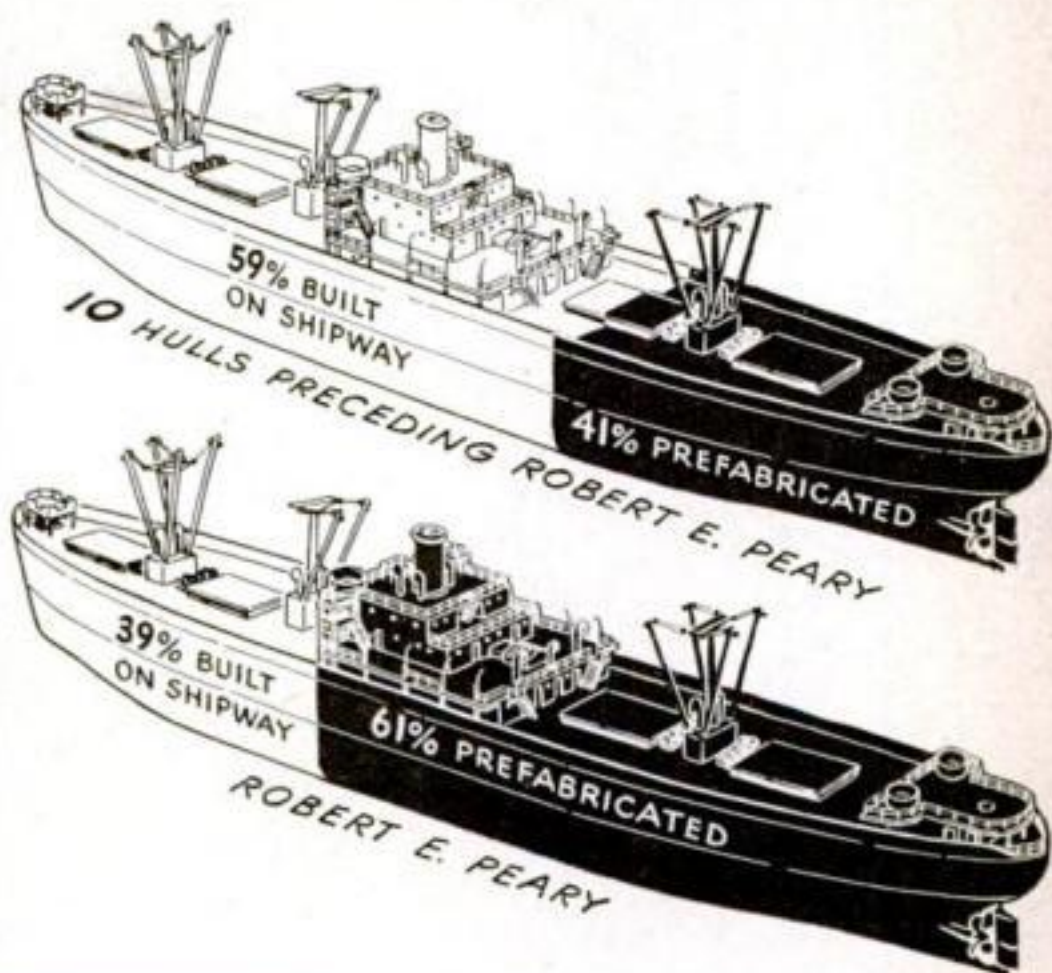

eration, and Yankee ingenuity in getting a fast job done well. Prior to the launching of the *Peary*—called "Hull 440" while in construction—the Richmond builders had been averaging a keel-to-launching time of 57 days per hull, which they had subsequently lowered to 42 days. They were feeling pretty proud of themselves when word came that the Oregon shipyards had launched a hull in 10 days and had delivered 11 ships that same month. Kaiser's engineers hitched up their pants and decided they'd do something about that. They started by asking questions of welders, riggers, pipefitters, shipfitters, draftsmen, and machinists—and the answers came back in hundreds of ideas—rigs, jigs, gadgets, devices, and suggestions which showed that the workers

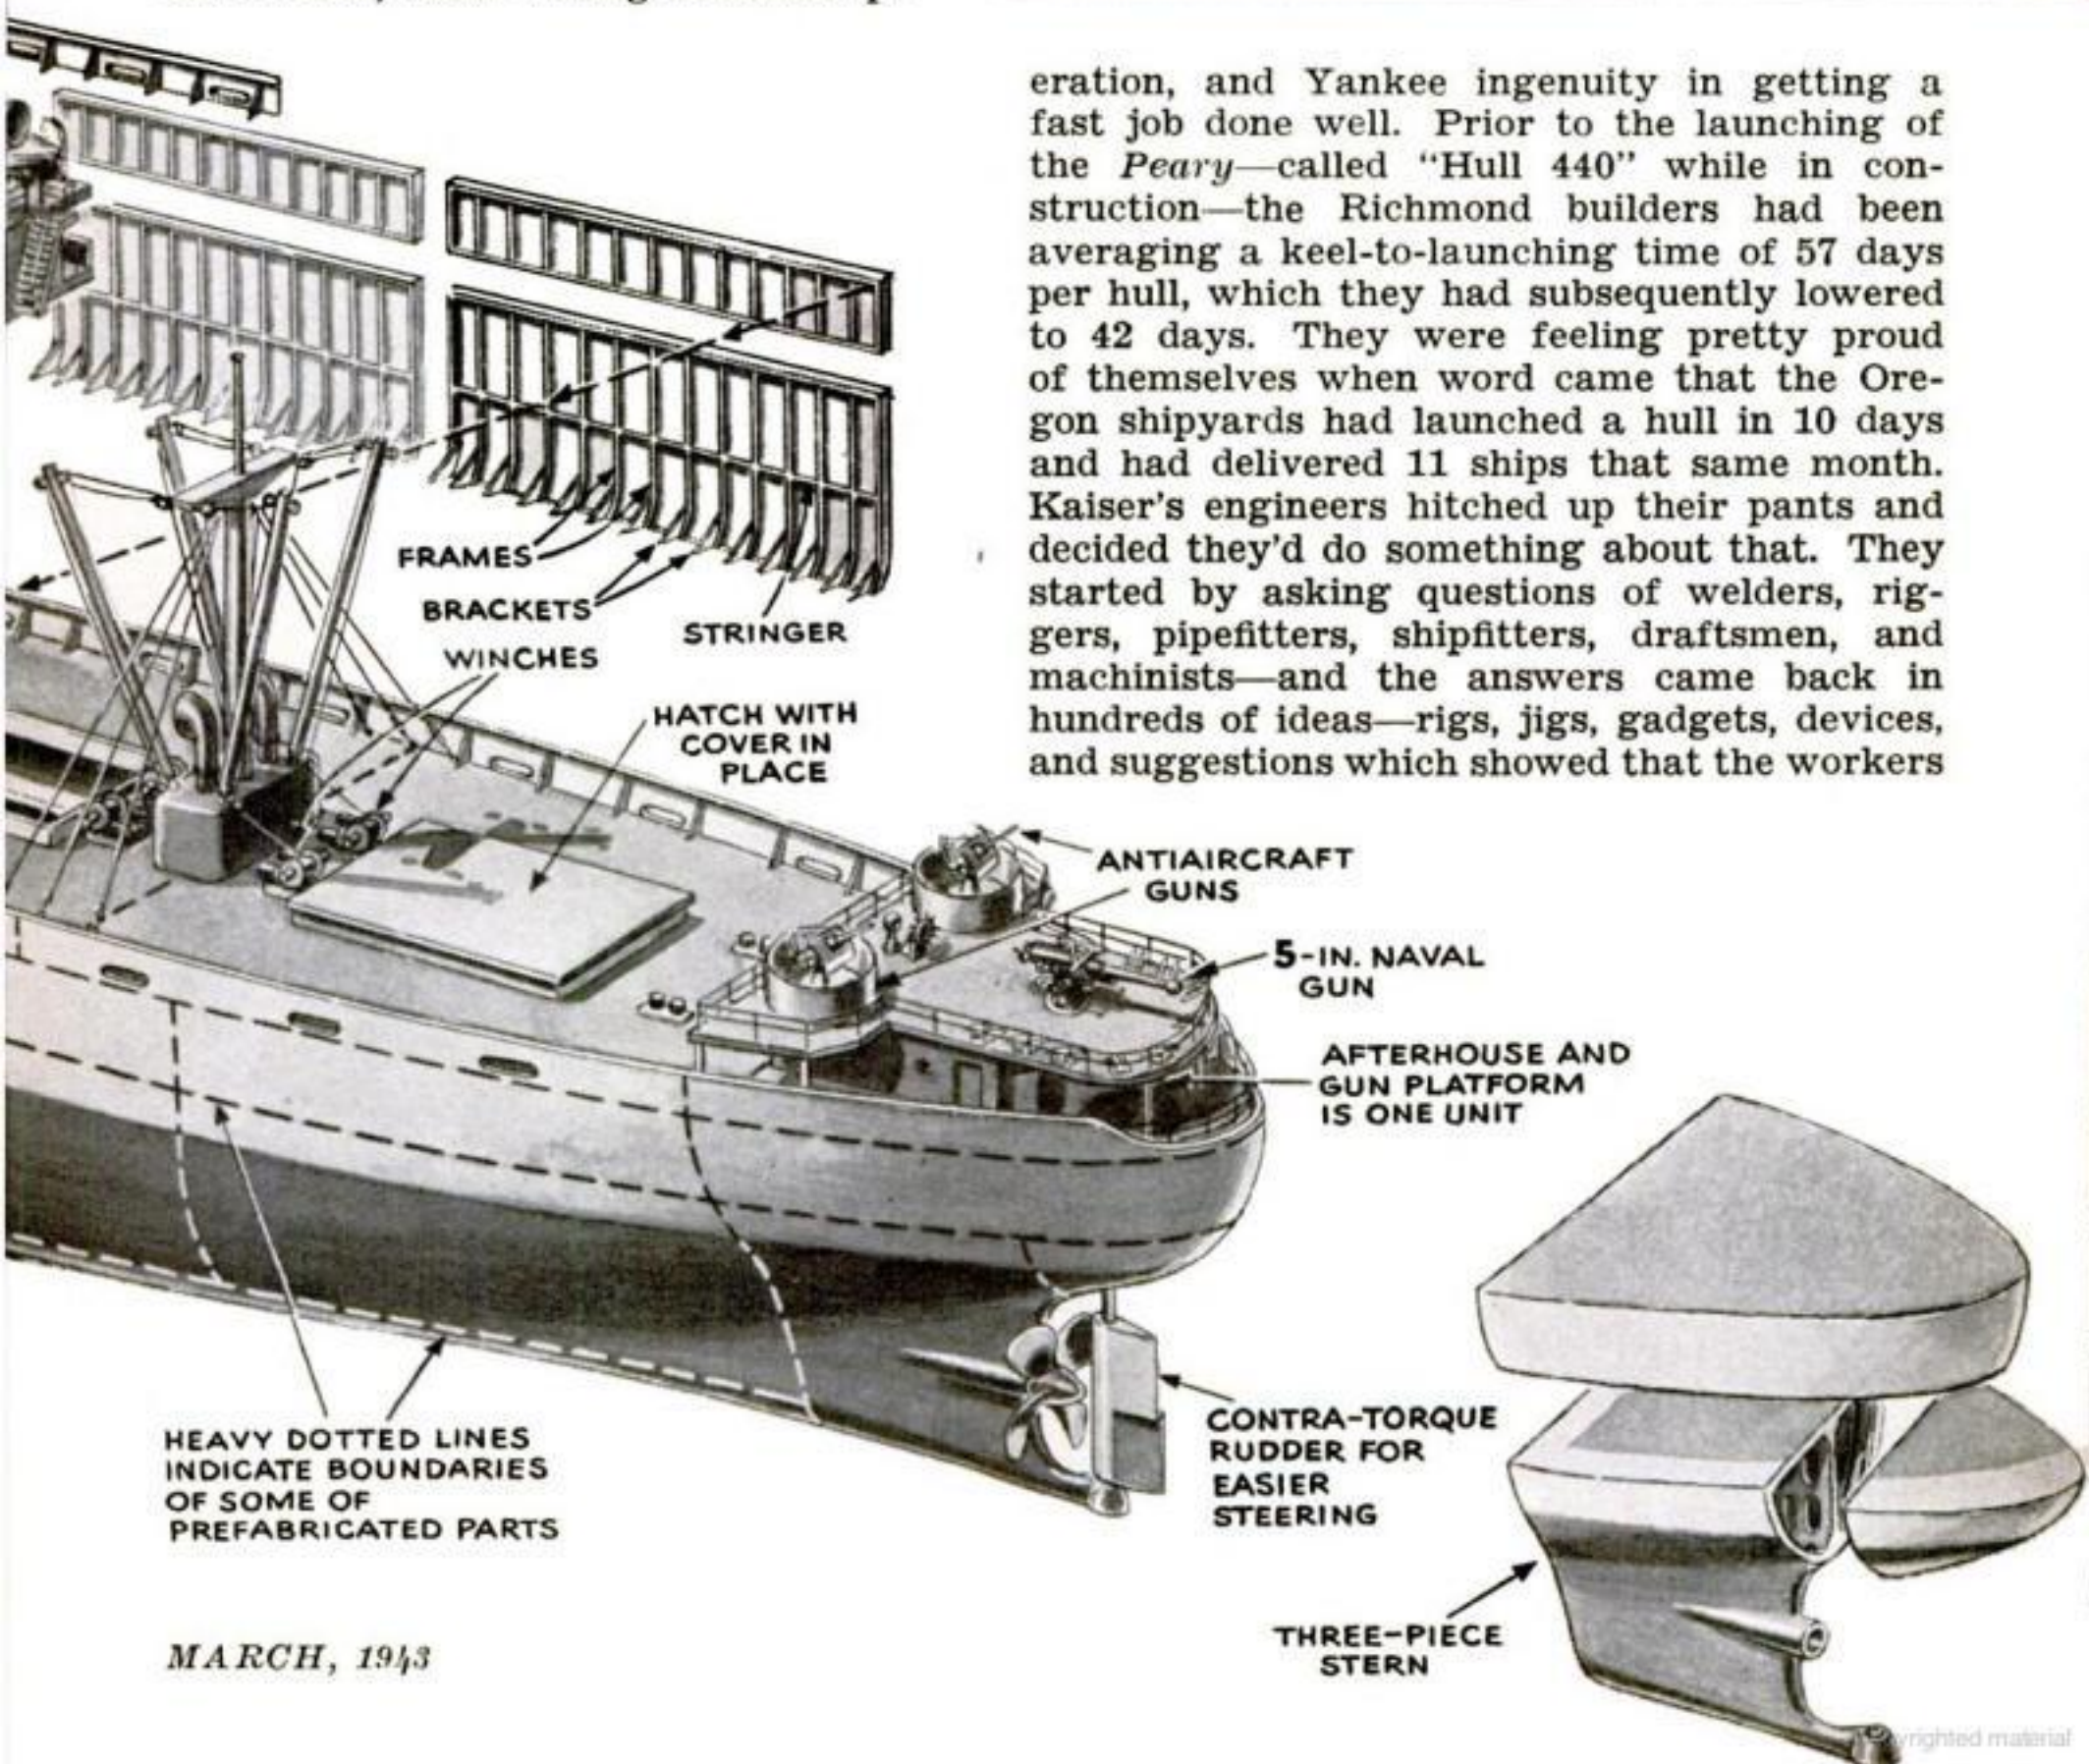

MARCH, 1943



not only knew their business but that they were willing to work for a new record. Take the welders, for instance. When volunteers were called for, a dozen women welders threatened to quit unless they were included. They and dozens of men went to work with arcs blazing, and by the time the hull was laid, 152,000 feet of weld had been completed on the assembly tables—50,000 more than on previous hulls—and only 57,800 remained to be welded on the ways. Riggers then found they had fewer lifts to make because prefabricated sections were more complete. So they set about saving hundreds of man-hours by moving 84-ton deck-houses and 70-ton bulkheads nearer the ways to have them right at hand the instant they were needed. Prefabrication reached such a high that when the main unit of the 440's deckhouse was swung into place with giant cranes, it was complete down to electric clocks and inkwells.



Approximately 250,000 individual items went into the building of Hull 440. But by the time the prefabrication boys had finished their work on the assembly tables, only 97 giant sections needed to be lifted on to the ways. The huge keel called for the laying of merely six main sections. Eighty percent of the 23,095 rivets used were driven home on the assembly tables. And on the bilge and forepeak, 18 gangs of five men each worked 'round the clock to finish their job before the keel was laid.

The marine machinists did their job, too. They had the 135-ton engine in place 12 hours after the keel was down, and in another 36 hours they had it ready to run.

Before shipyard workers can do their job, they must have the materials—and they must have 'em when they need 'em. To insure that they get them, Kaiser employs a staff of what he calls expeditors. Ingenious, resourceful, and aggressive, these energetic men scamper all over the country, busting bottlenecks wide open as they run. It is this kind of teamwork that has reduced ship-building time from years to days.

Named for the famous American explorer, the Peary is a 10,500-ton vessel with an over-all length of 441 feet. In building this prefabricated ship, the slogan of the workers was "Praise the Lord—and pass another section"

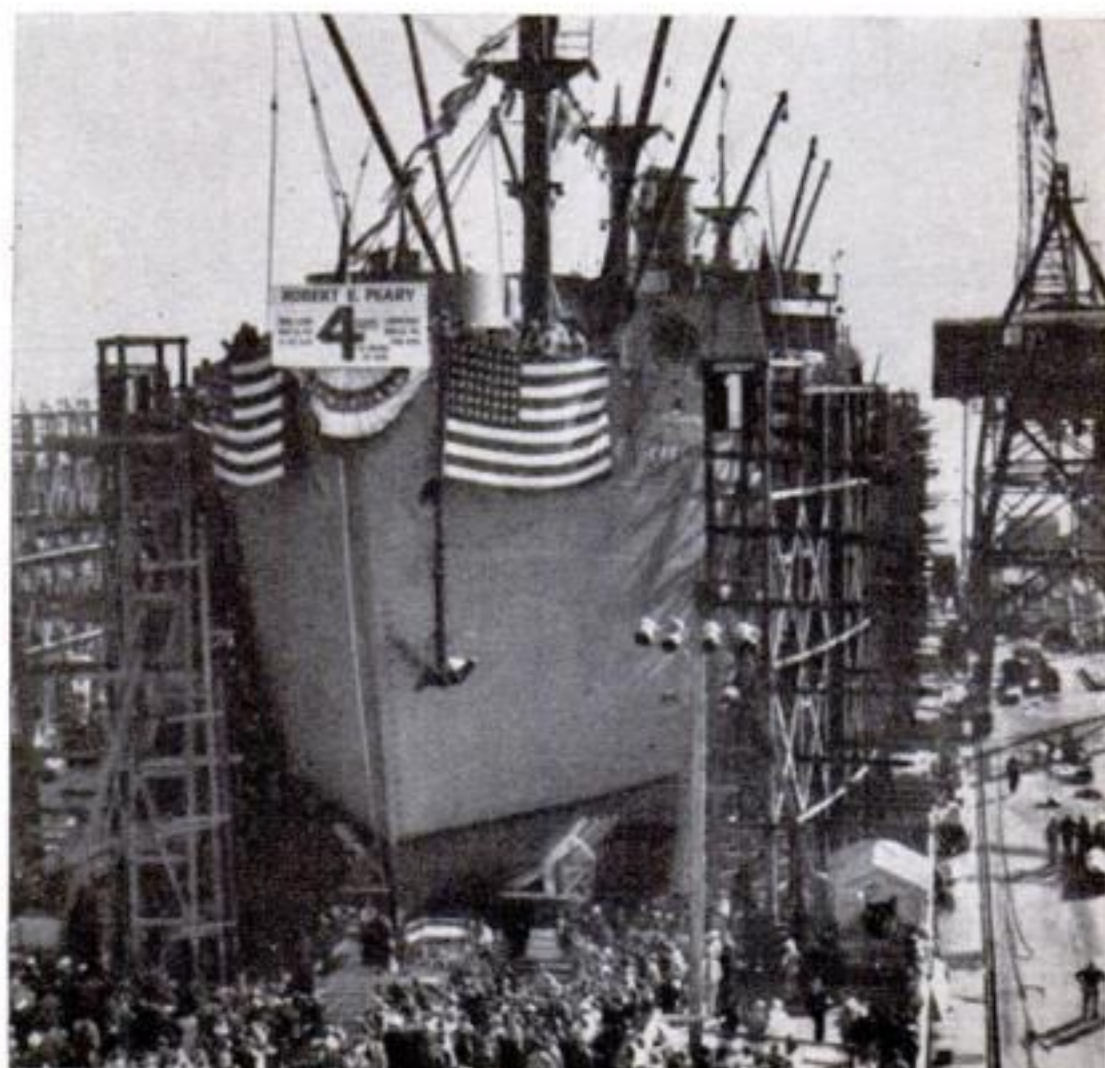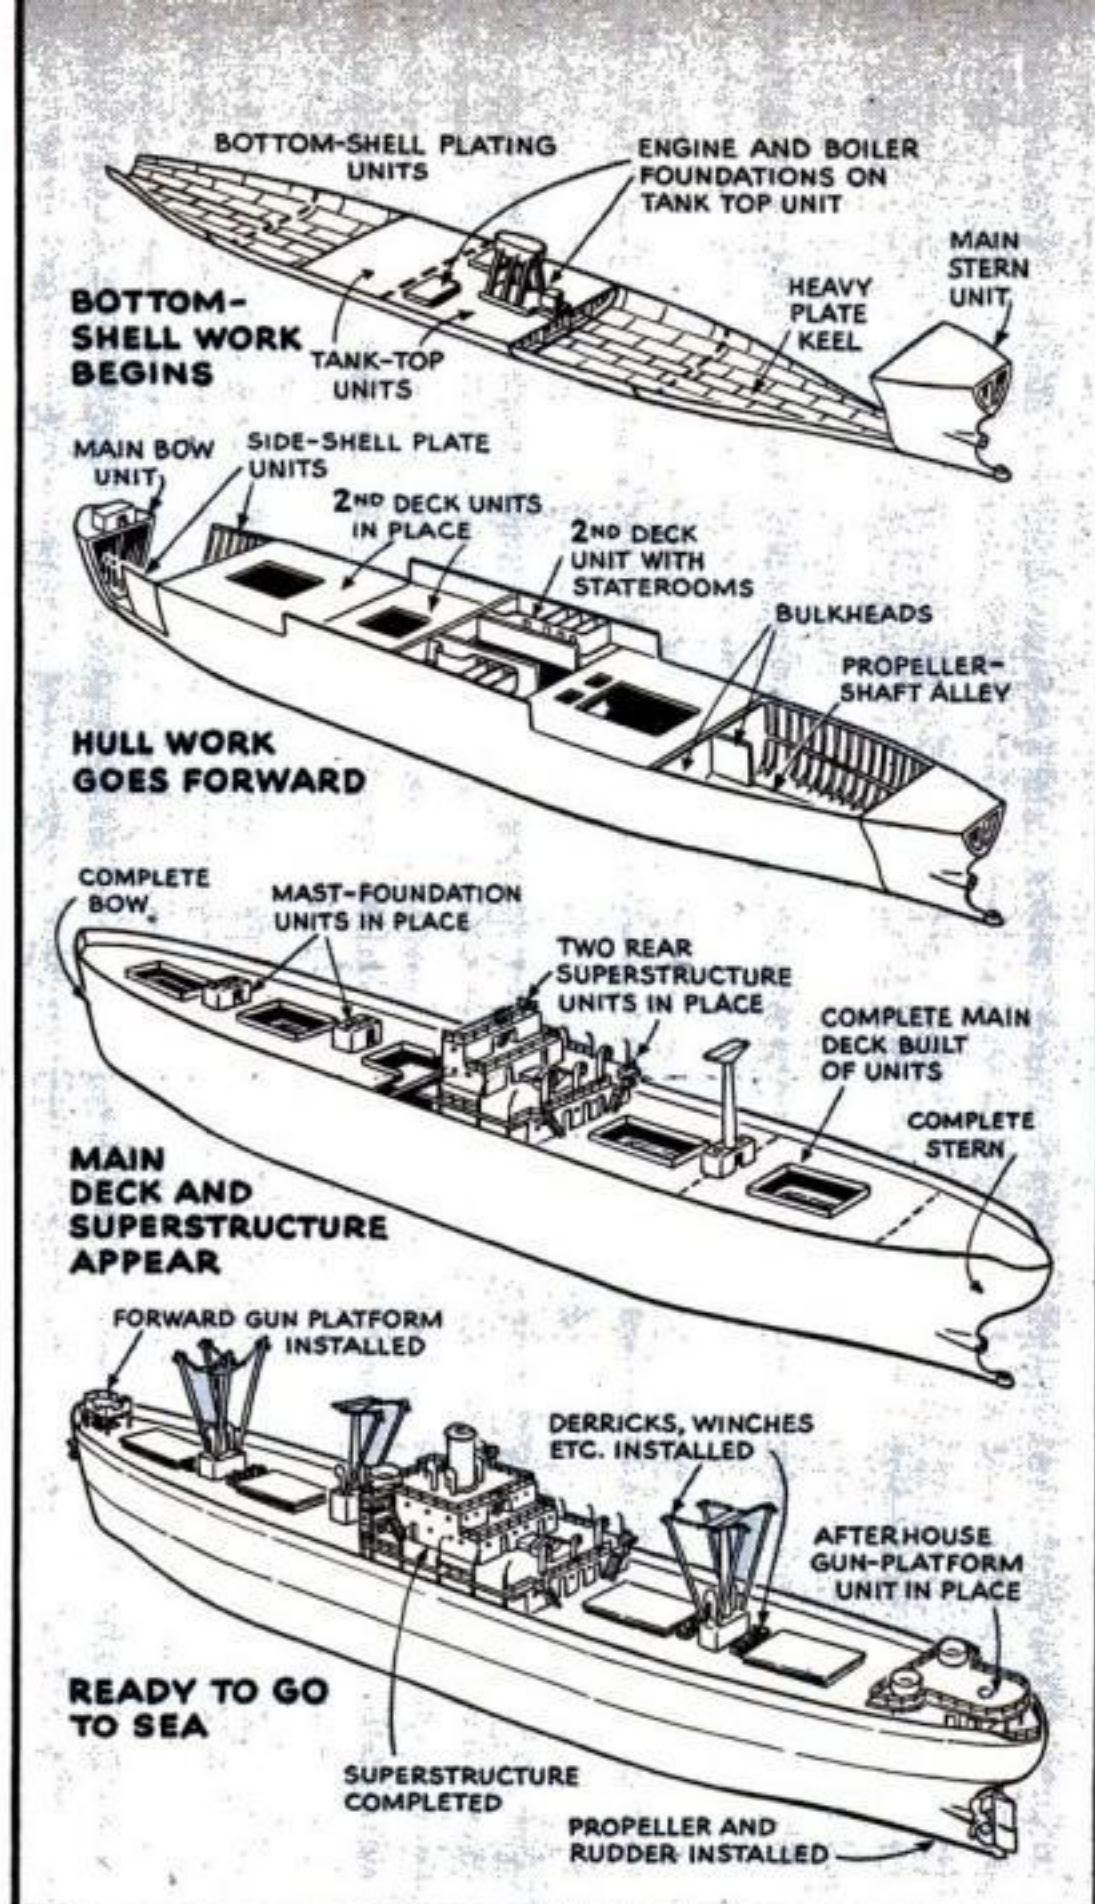

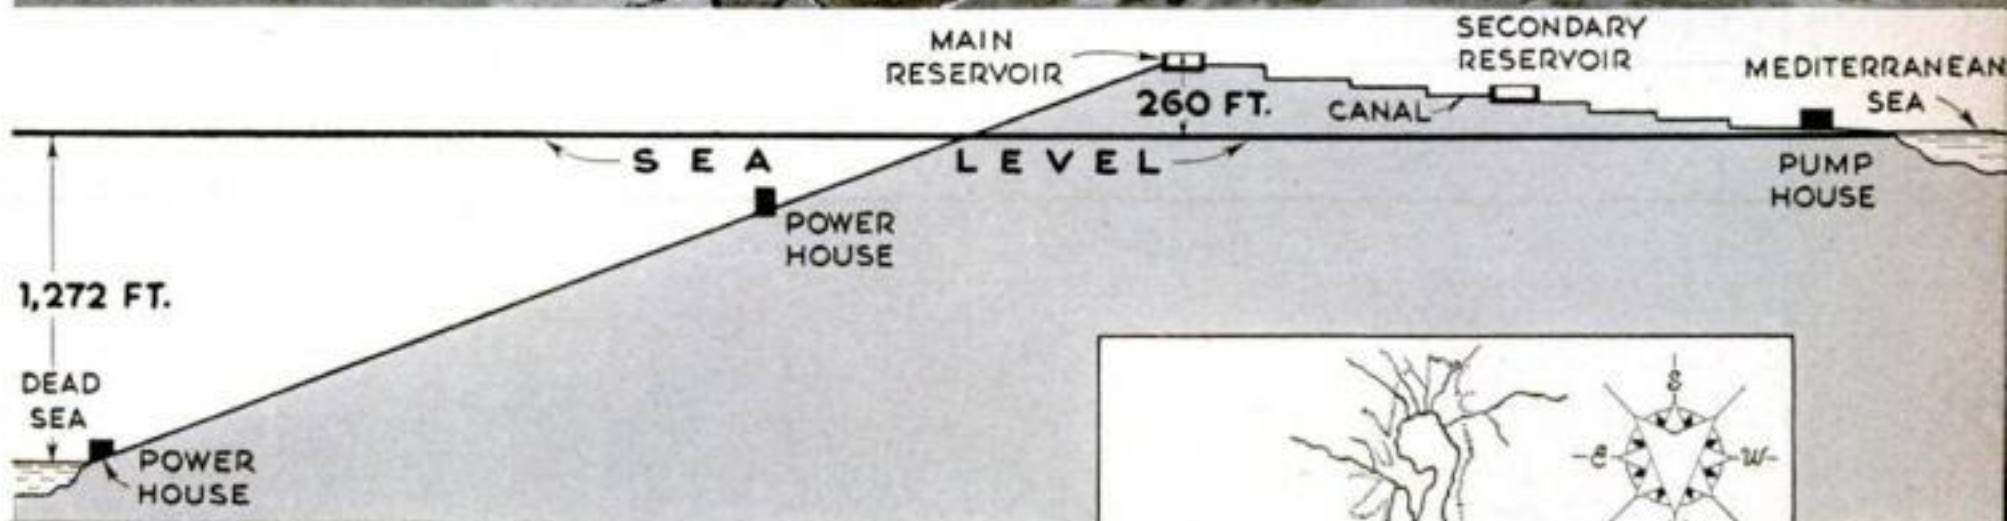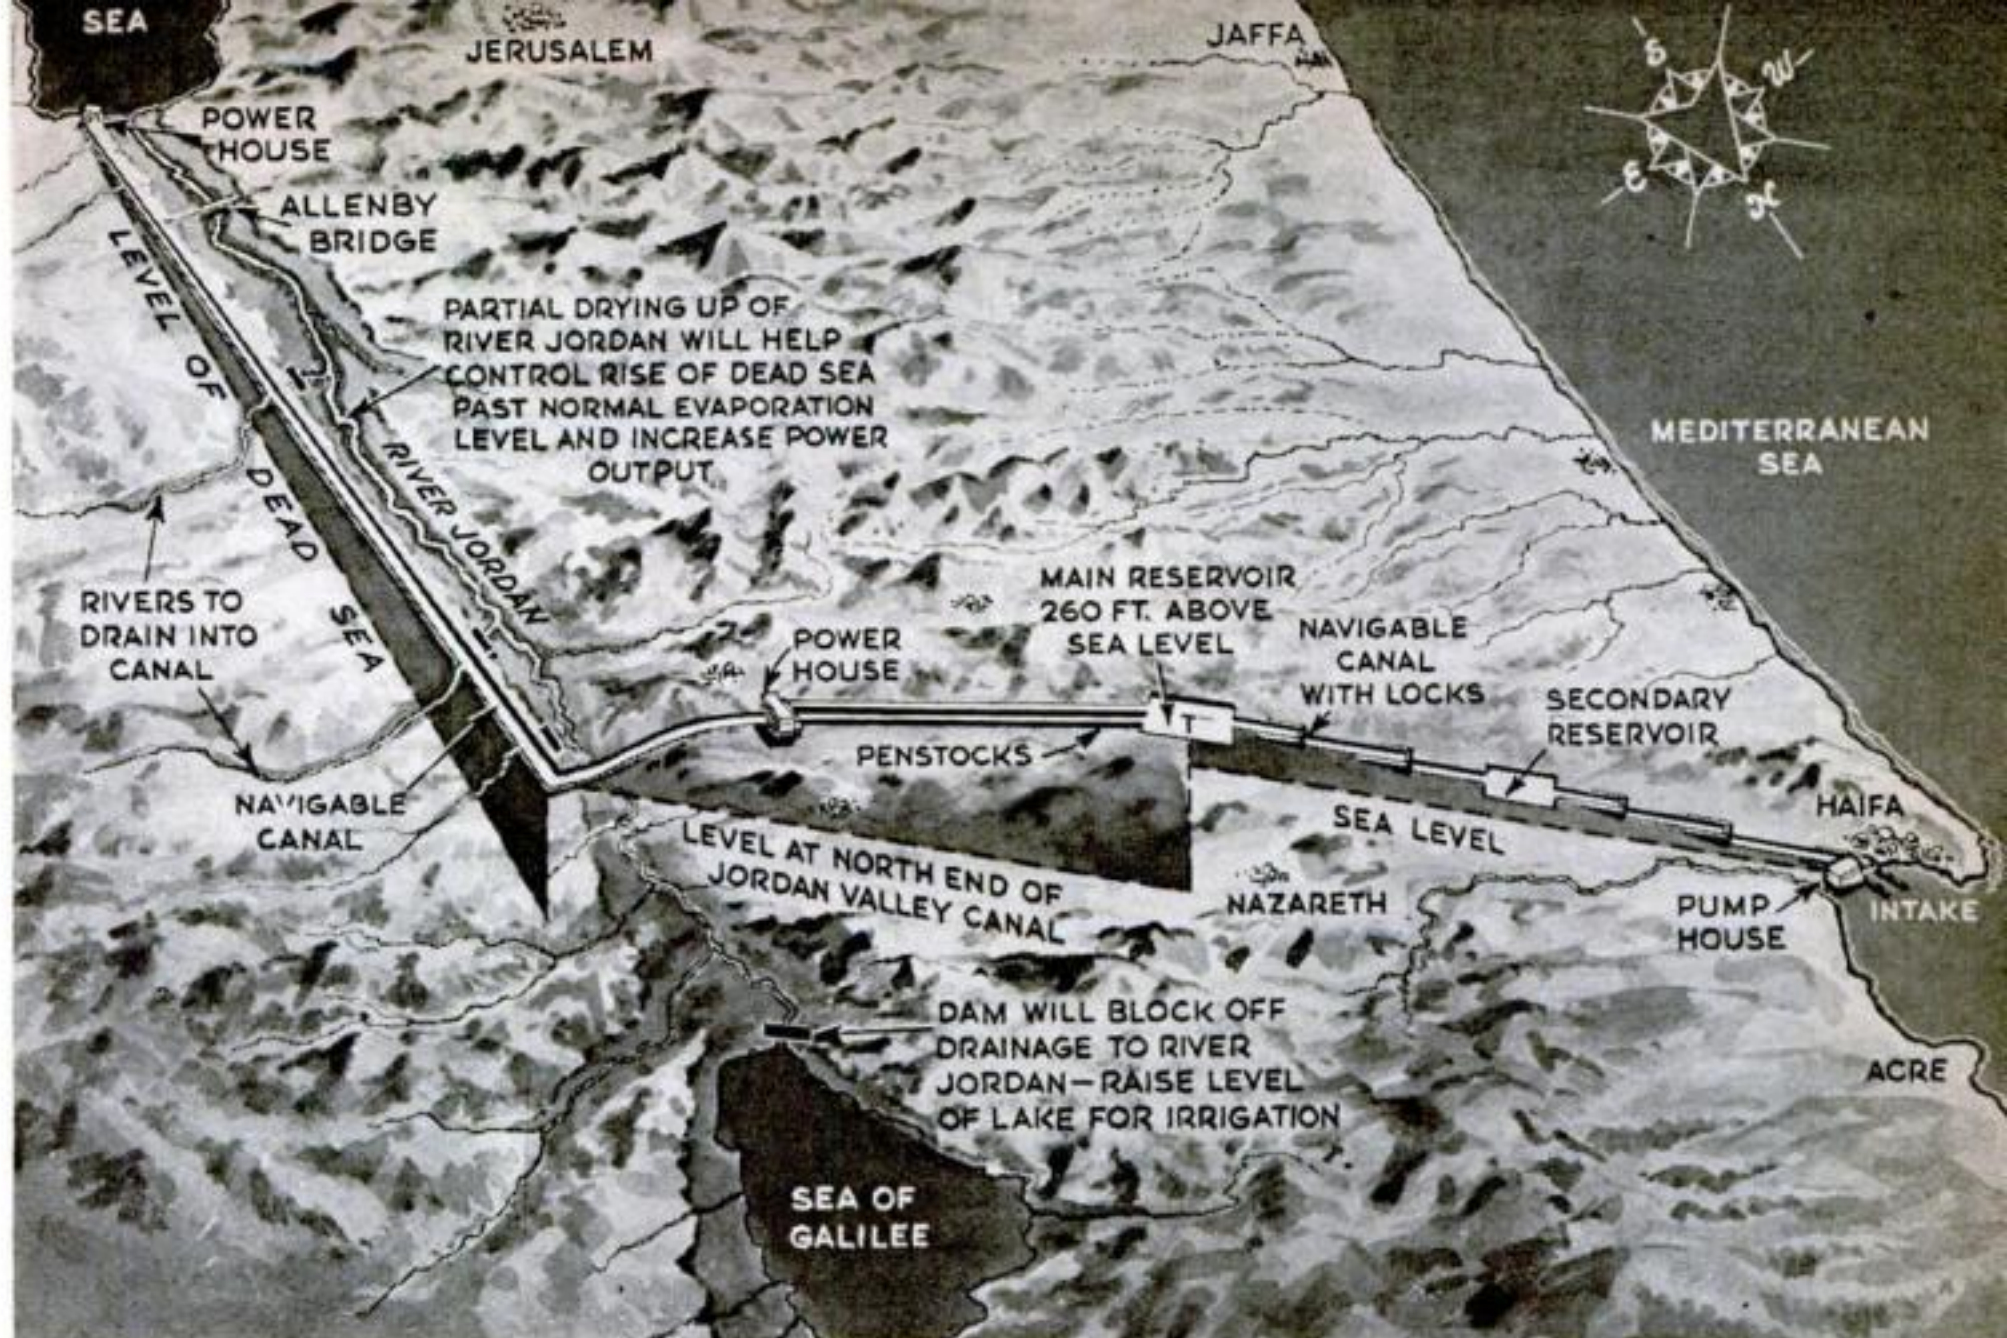


How the Gandrillon plan would supply electric power to the Holy Land. The topographical map shows the mountainous country between the Mediterranean and the Jordan. Below it is a sketch of the elevation, and to the right a scale map


Power Houses Below the Sea

DOWN the Valley of the Jordan, after the war, there may flow water from the Mediterranean to supply electric power for life and industry in the resettled land of the Bible. That is the plan of Pierre Gandrillon, a French scientist and engineer, who had completed his work to the point of actual survey when the war intervened.

Water pumped from the Mediterranean to a reservoir near the Sea of Galilee would drop to the valley and a generating plant which would provide power in excess of that

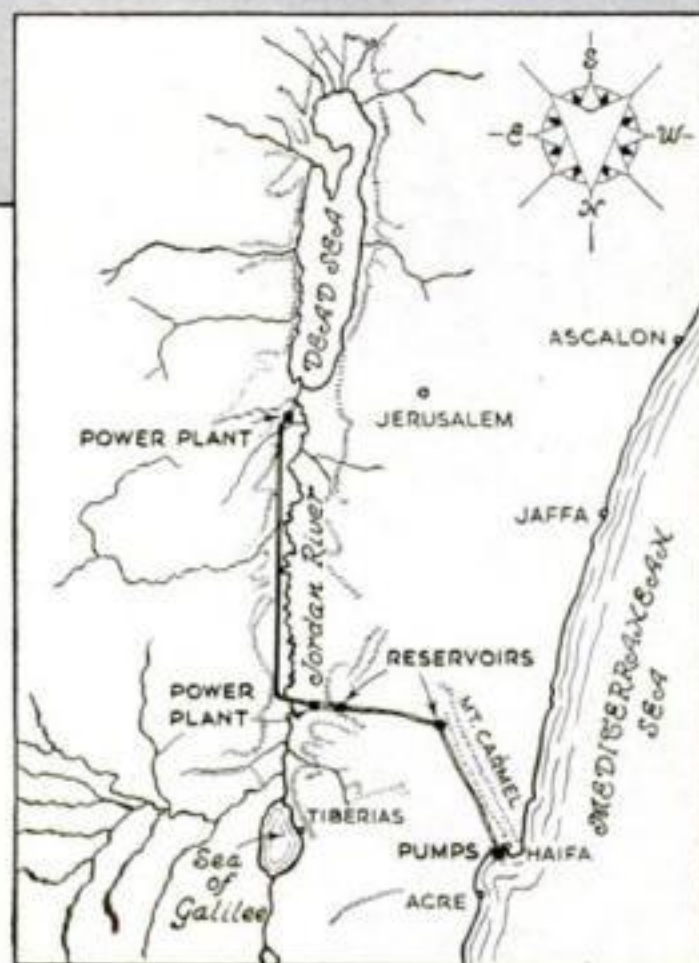


needed for pumping. A navigable canal paralleling the Jordan would carry the overflow to another power plant at the edge of the Dead Sea, where rapid evaporation would care for the surplus. A dam also at the Sea of Galilee would divert its waters for irrigating the surrounding country.

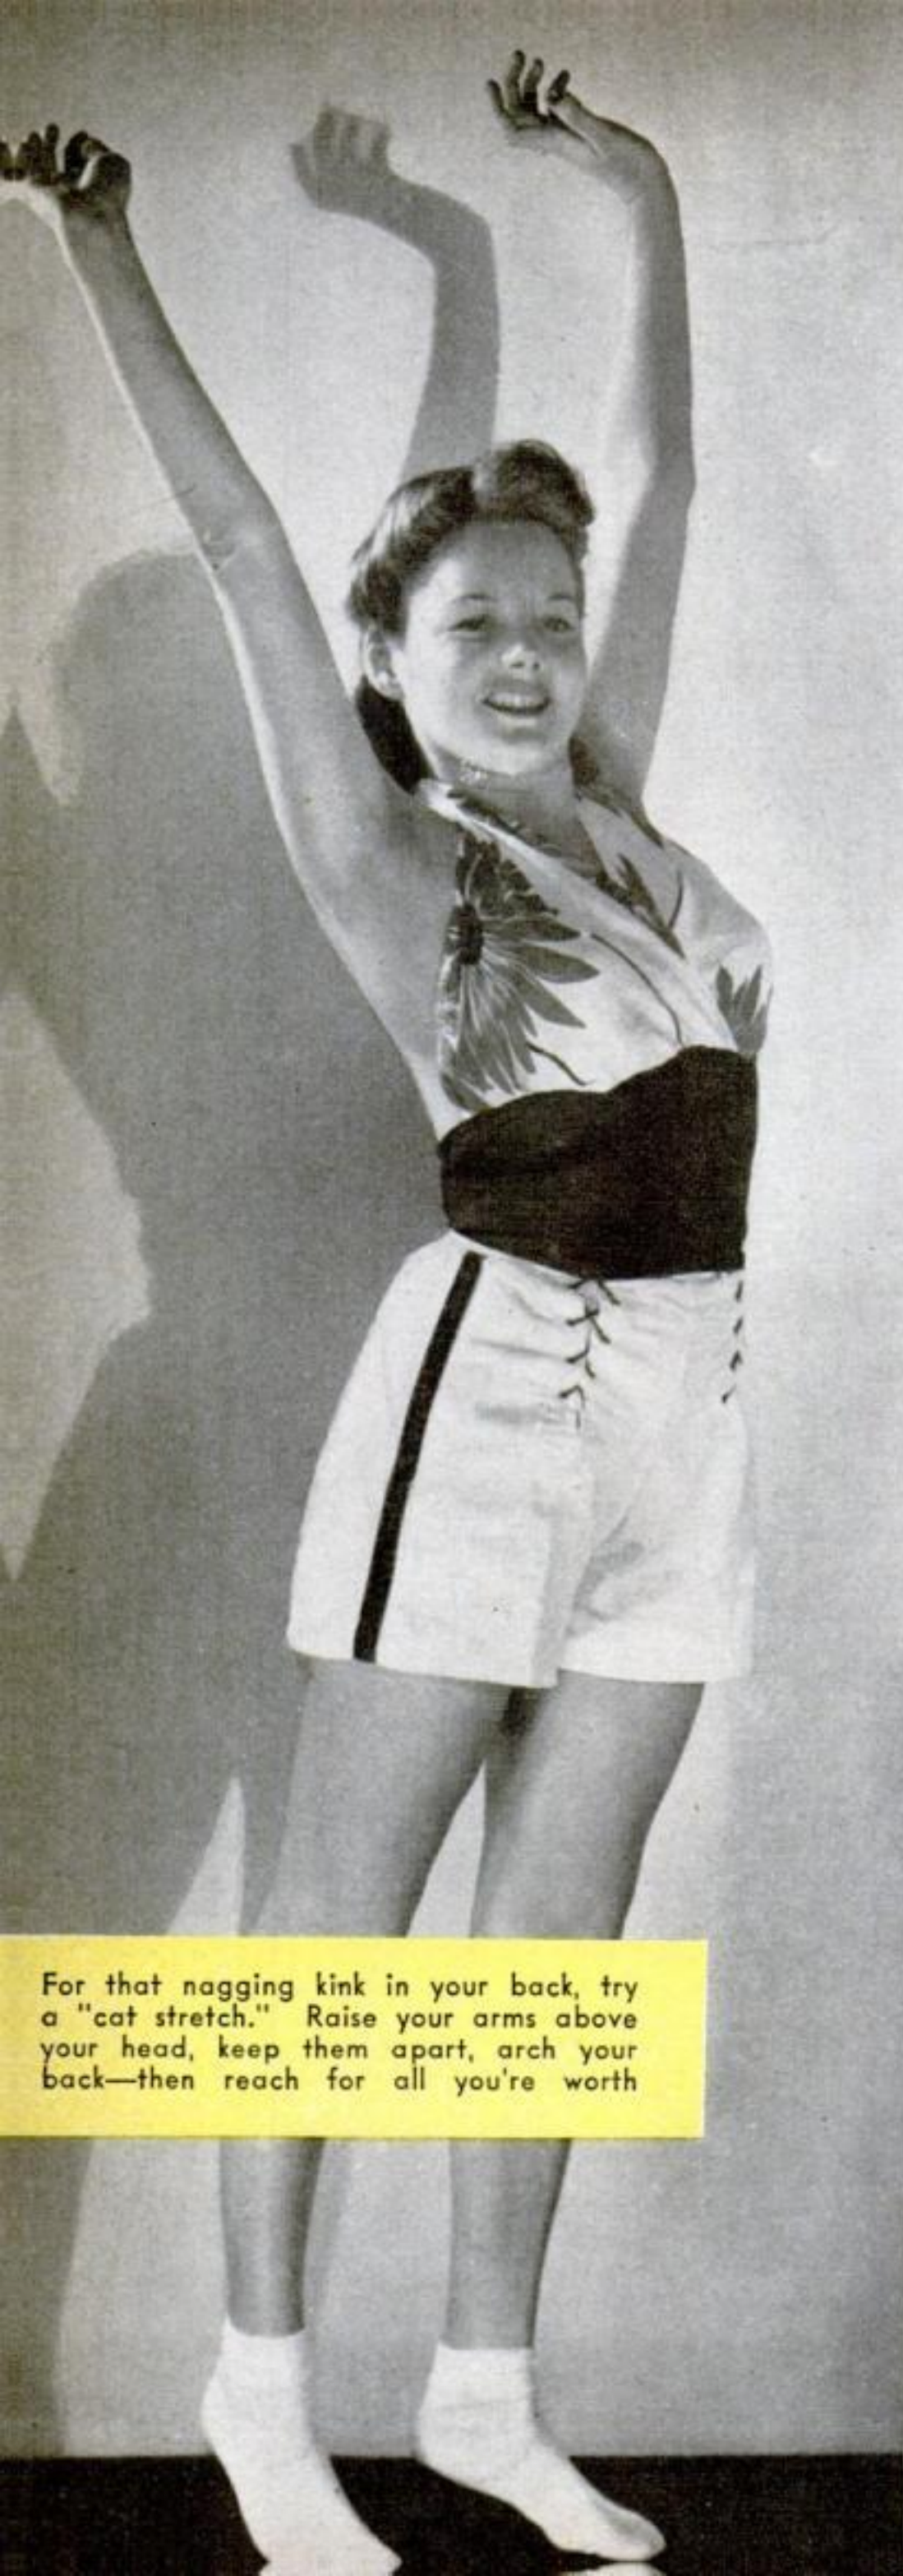

For that nagging kink in your back, try a "cat stretch." Raise your arms above your head, keep them apart, arch your back—then reach for all you're worth

If you stand at your job, don't droop. Hold your shoulders back and your tummy in. To rest, sit with your feet up

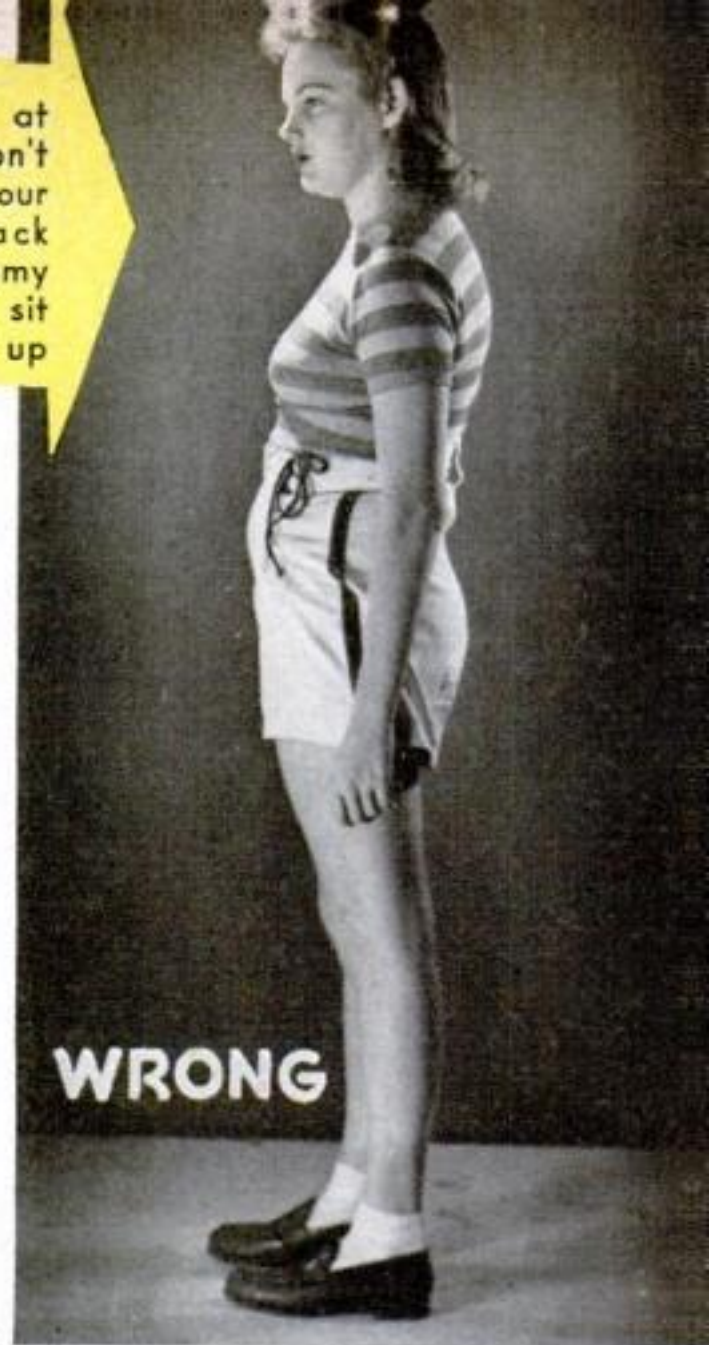

E**XERCISING**

Muscles as Well as Minds Are Being Put to the Test in U. S. Plants. Here Are a Few Tips to Help Banish That War-Worker Weariness





TIRED FEET need soaking in warm water, roomy flat-heeled shoes, and one minute of toe wiggling with heels higher than the hips

CRAMPED HANDS can be relaxed by being scrubbed in water, by massage, or by just a good hand shaking


SNEEZES belong behind a handkerchief. First line of defense against a cold is cleanliness. For a fever, go to bed—and stay there



HEALTH TRICKS FOR WAR WORKERS

OF THE millions of men and women in U. S. war plants, many are "green" to hard physical labor, and most are learning for the first time the agony of muscle strain. As critical as the materials they are making, however, is the ability of these operatives to keep working long hours, day after day, without loss of efficiency. Inten-


sive research by the U. S. Department of Labor and various safety councils discloses that brief, regular rest periods from a machine or workbench are the surest safeguard against the fatigue which invites both accident and inefficiency. Also strongly recommended are the simple muscle-rejuvenating exercises shown on these pages.

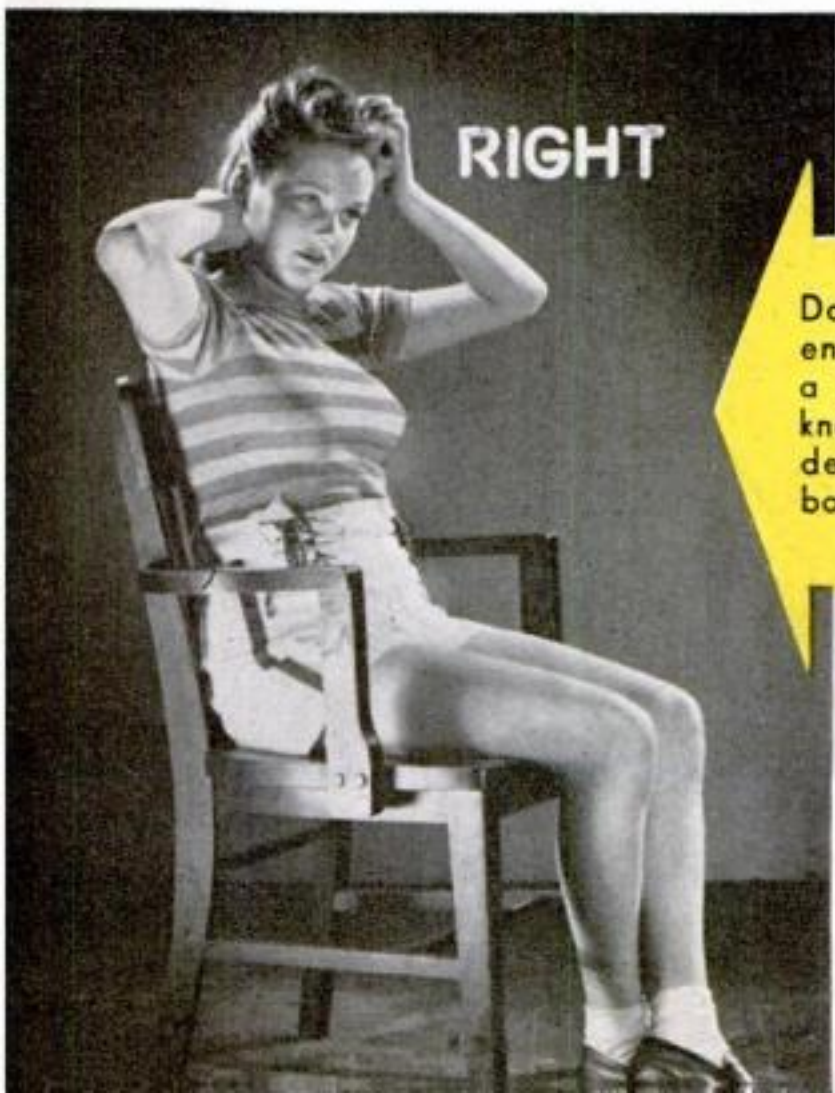

Don't perch on the end of a chair in a slumped, knock-kneed fashion. Sit deep, with backbone against chair

Believe it or not, one of the best ways to revive tired muscles is to exercise them in a speedy game



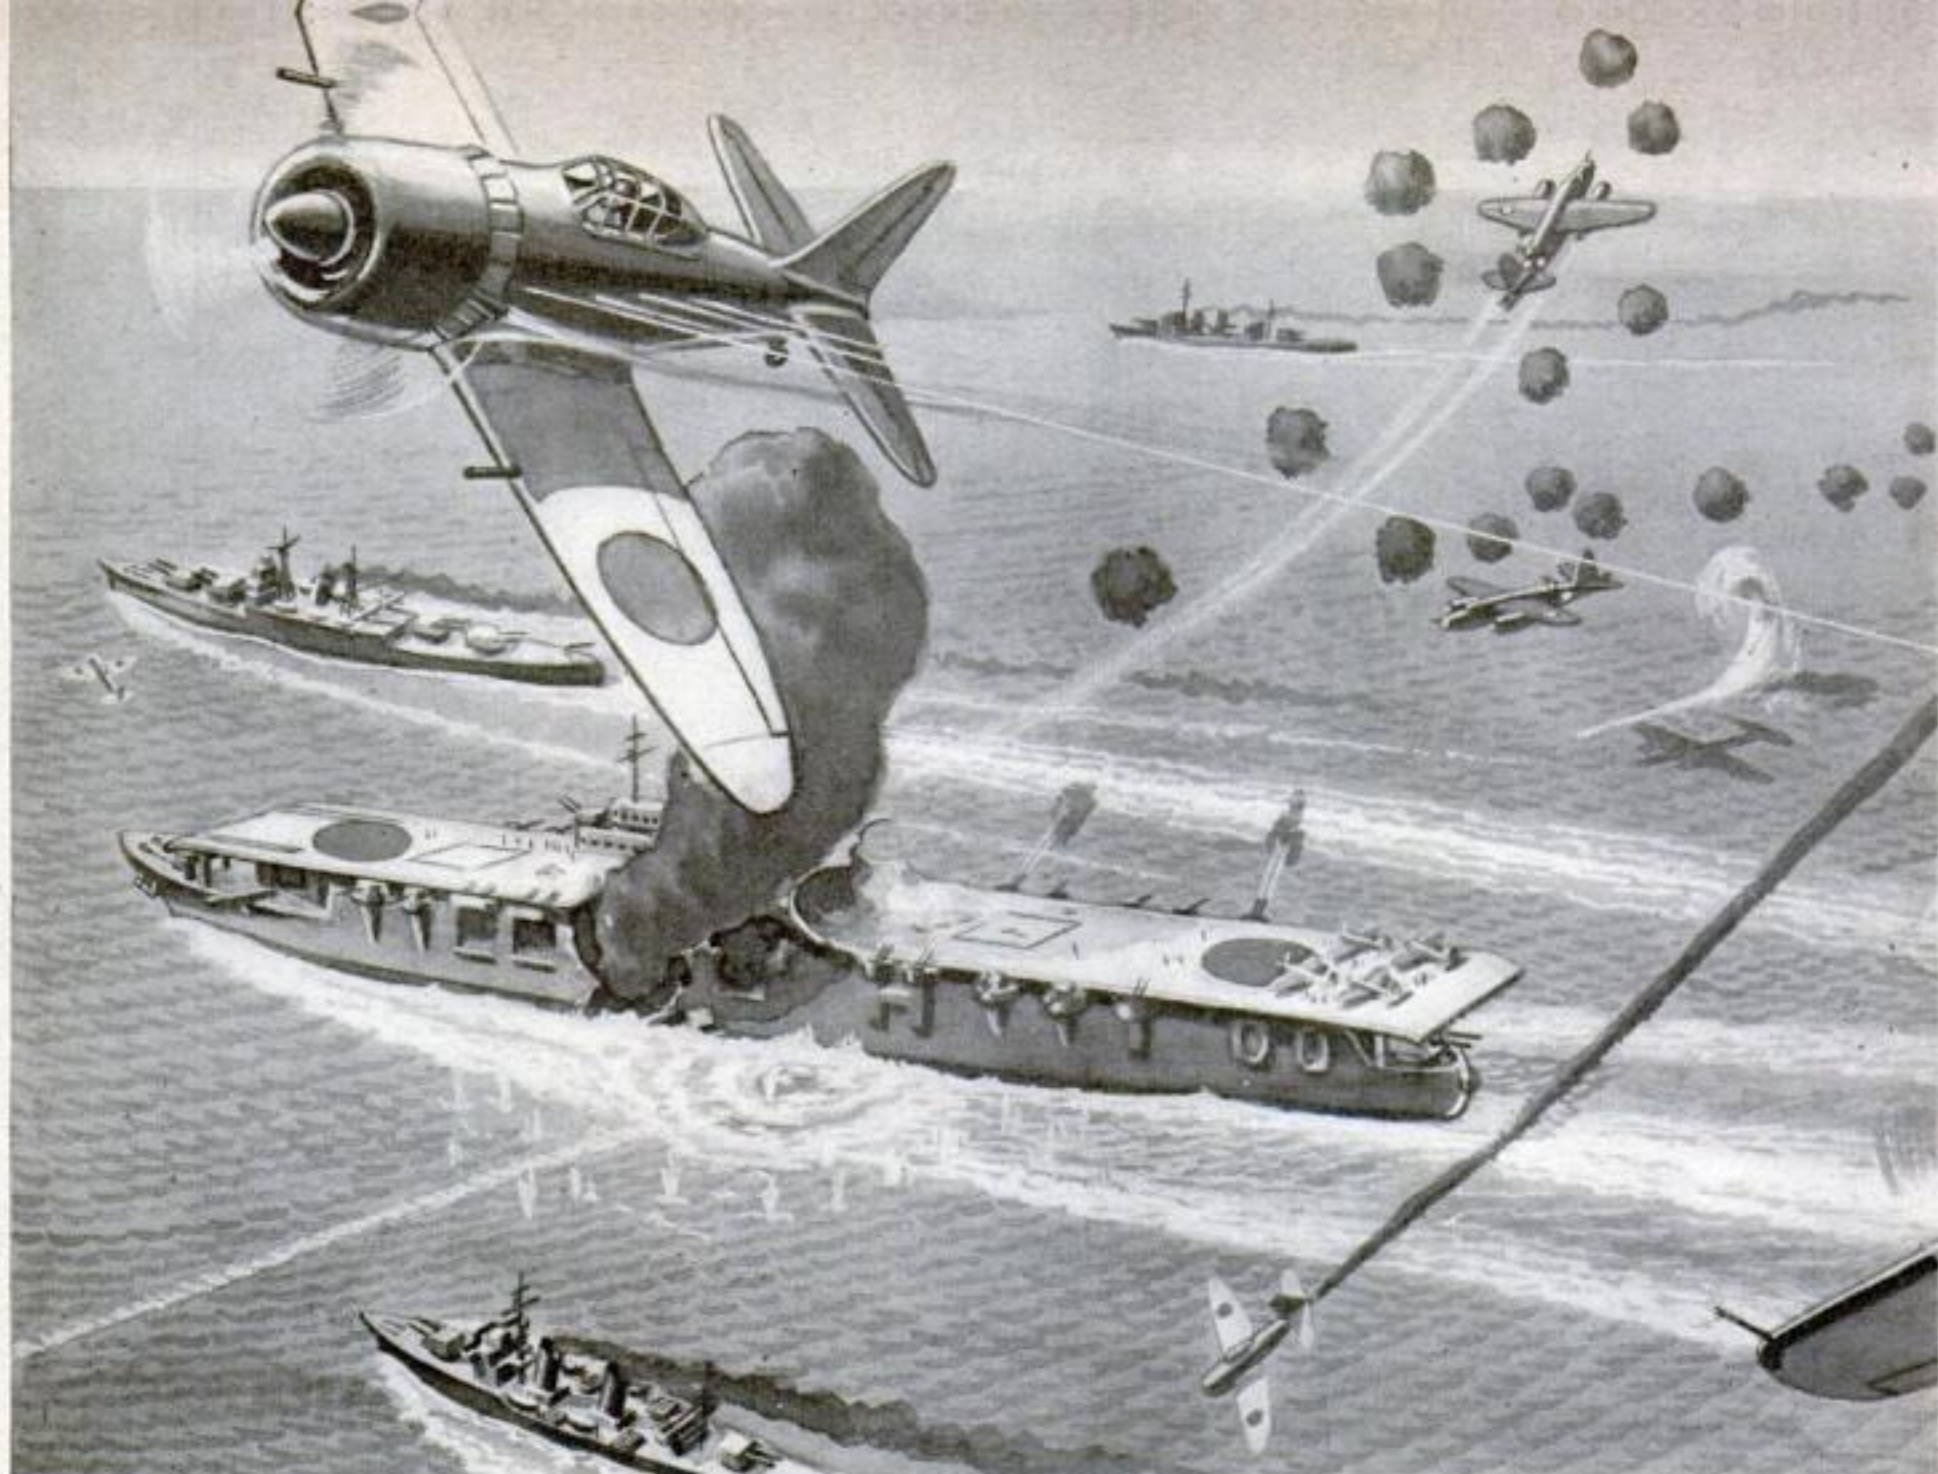


In the B-26, the Army has found what it has long looked for—a bomber that can fight through to an objective, and then fight its way back. Although it now carries heavier loads than it was originally designed for, the Marauder still flies like a racer and maneuvers like a fighter


THE ARMY ASKED
FOR A MIRACLE...
THE ANSWER WAS

The B-26

HOW GLENN L. MARTIN
BUILT A MEDIUM BOMBER
THAT FLIES LIKE A
CLOSED-COURSE RACER

MARAUDER
B-26

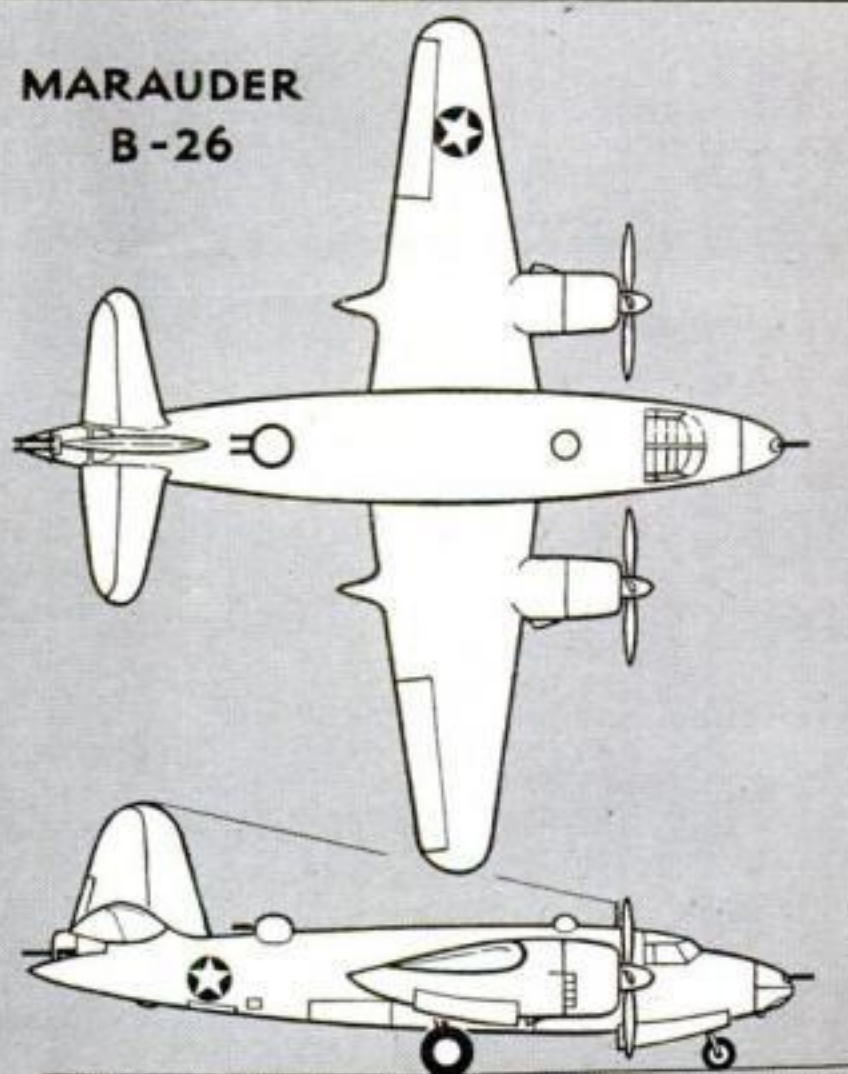

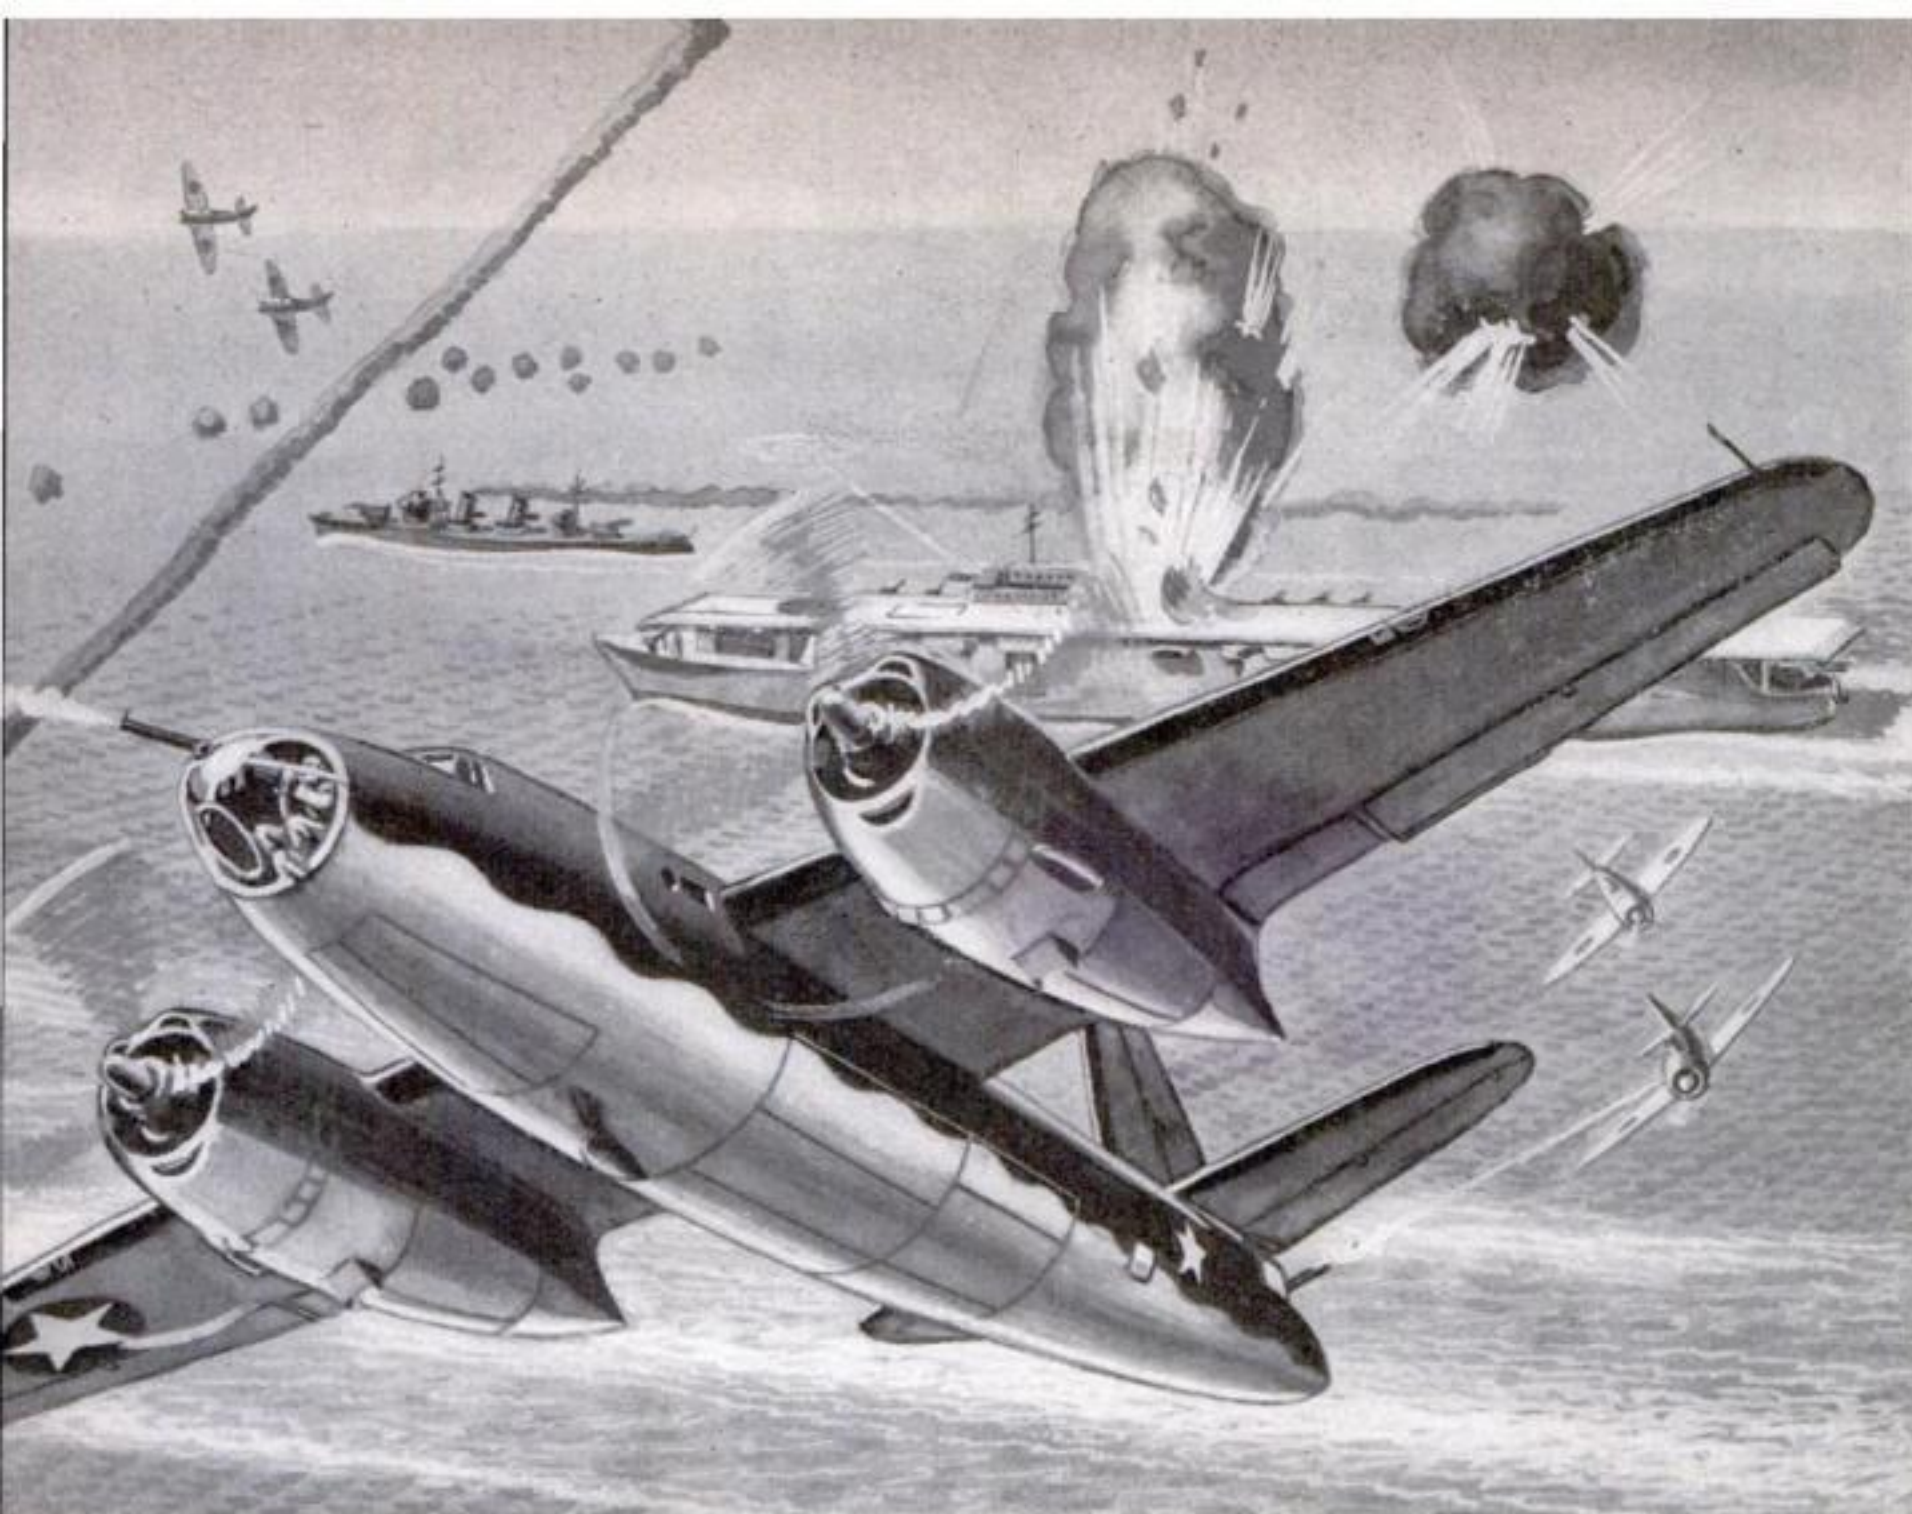

The Battle of Midway turned out to be a proving ground for the torpedo-carrying Marauder—and a burial ground for Jap warships. When the battle started, a formation of Jap carriers, powerfully escorted, was attacked by four B-26's. The score was two carriers sunk, two Marauders lost

By William S. Friedman

IF THE Japanese have not developed any profanity in their language in 2,000 years, they must be thinking up some at this late date to describe the U.S. Army's B-26 medium bomber.

On this side of the Pacific, no well-informed observer has offered a temperate opinion of this airplane. It has either fast friends or outspoken critics. But there is no doubt that the B-26 is the fastest, fightingest, most ornery twin-engined medium bomber produced to date. It flies at near-pursuit speed, turns like a fighter, and has a tricycle landing gear that allows it to operate from bases usually staked out for fighter planes.

The B-26 had a swift, almost tumultuous beginning. Shortly before the march on Poland, the major planners of American war strategy saw that we might have to fight beyond the seas. Before this time, the belief that we could operate from our own hemisphere had produced the Flying Fortress and similar long-range craft. Events in 1939 dictated a radical change in that policy. To supplement the Boeing B-17's, a fast, shorter-range bomber, capable of sinking a battleship should it slip inside the long-range patrol, seemed to be required. The original theory was that if such a bomber was extremely fast, it could get away with light defensive armament, depending on high speed for its own protec-

POWER PLANT
2 2,000-HP.
PRATT & WHITNEYS

SPAN
65 FEET


LENGTH
58 FEET, 3 INCHES

HEIGHT
19 FEET

WEIGHT
26,625 POUNDS

SPEED
300 CLASS

**WHAT YOU
SHOULD KNOW
ABOUT OUR
FIGHTING PLANES**

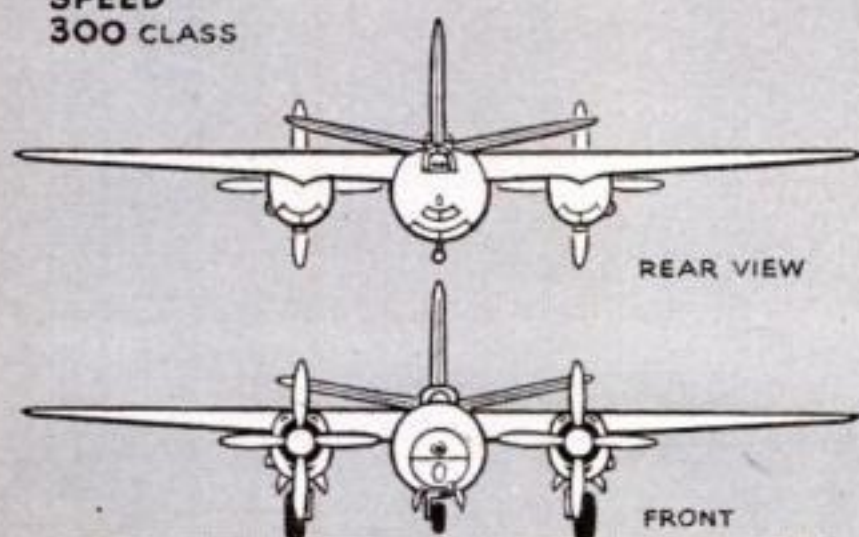

REAR VIEW

FRONT

tion against the enemy fighter opposition.

The bid for an airplane of this type went out to the nation's manufacturers. The Glenn L. Martin Company in Baltimore took the proposition under consideration and asked the engineering staff to submit proposals in the form of three-view drawings. Several sets of sketches were sent in. They were set up for study and discussion before the entire staff. Then iron-haired, steel-eyed Glenn L. Martin walked in, surveyed the half-dozen proposals and, after a couple of minutes, pointed to one. "That's it!" He picked out a proposal set forward by the brilliant nonconformist, Peyton Magruder.

Some of the engineers who studied the Army's demands had asked, "When do they want this miracle passed?" The general opinion, at first, was that the Army was asking for the impossible. That was all that was needed. It seems that the Army's current motto, "The difficult performed immediately, the impossible takes a little longer," started with Magruder and the specialists who worked with him.

Most men would have gone about picking up where their predecessors left off. Magruder heaved most current ideas for bomber design out the door, welcoming such notions as all-plastic transparent noses, and streamlined fuselages that simulated theoretical blackboard illustrations. He drew as perfect a set of outer contours for speed and performance as anyone dared

in a ship that size, then defied the structures men to design for his theory.

For three weeks the project engineers lived within the limits of the Martin plan near Baltimore, driving a drafting crew to the verge of collapse as events in Europe showed more and more the desperate need for this kind of airplane—a ship that could fly like a racer, maneuver like a fighter, and lift a truck's load.


The proposed bomber was exactly what most people thought Magruder would trot out. Short-spanned, high-winged and deep-bellied, a closed-course racer built big, packed with the latest radical ideas on airplane design.

There was no fussing about peacetime production frippery. The first B-26 that came off the line was the pilot model and full-scale prototype in one. Behind it stretched a production line. The B-26 represented the longest chance ever taken on a single design.


The first Marauder appeared in November 1940. It had a span of 65 feet, was 58'3" long, and was powered by two 1,850-h.p. Pratt & Whitney Wasp engines. Its top speed was above 350 m.p.h. The prototype, unburdened with armament, had an operating ceiling in the neighborhood of 29,000 feet, and its range ran just a little short of 2,400 miles. With current armament, the range is approximately 1,300 miles.

The early models were lightly armed. They toted a .30 (Continued on page 75)

HOW THE FIRE POWER OF THE B-26 HAS BEEN STEPPED UP

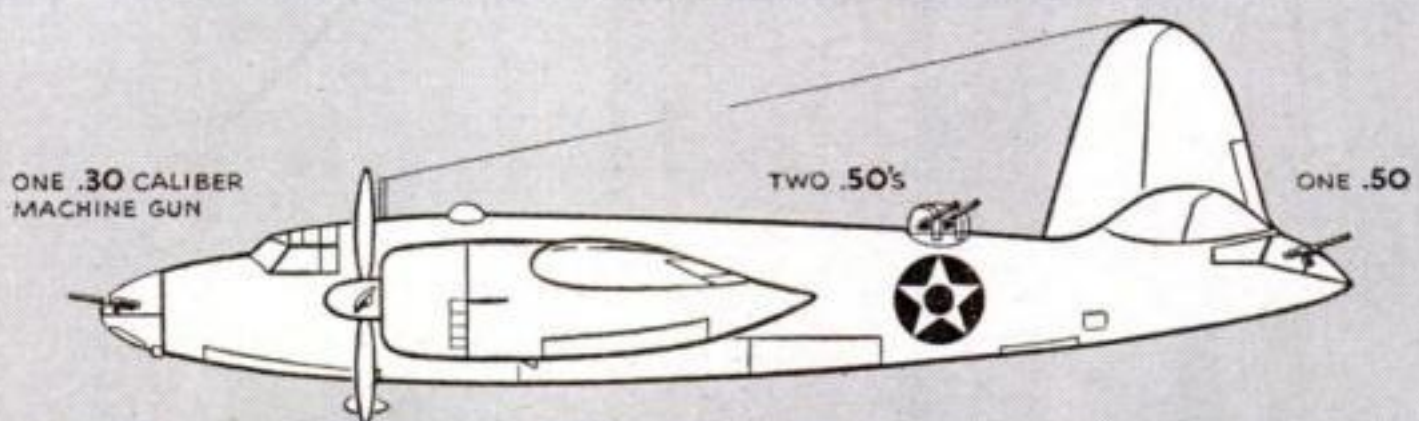

The original B-26 was lightly armed. Its designers believed that its high speed made heavy defensive armament unnecessary. War experience brought a change . . .

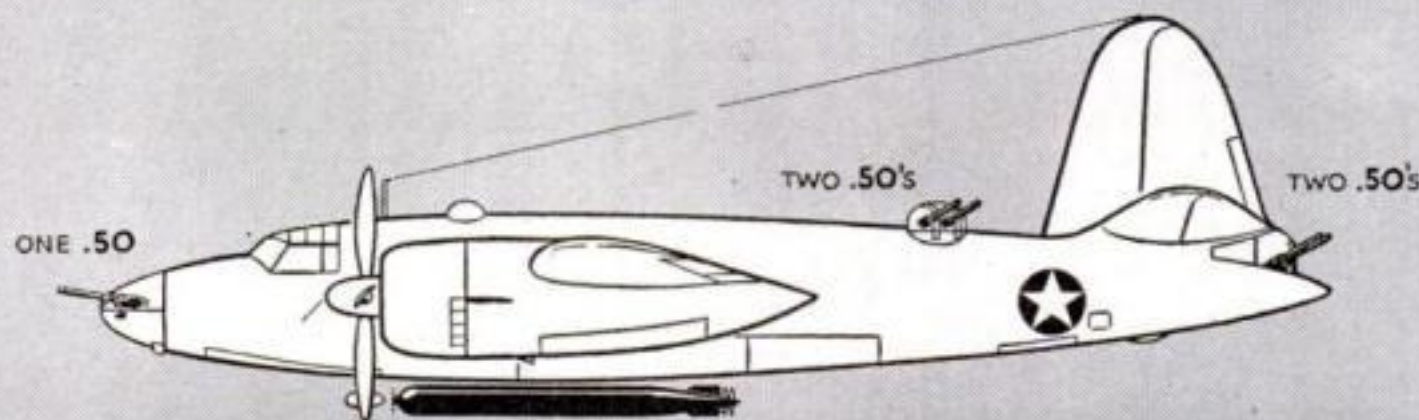

. . . to the heavily armed Marauder of today. Other guns may be added to those shown here. A torpedo can be carried in a simple rack on the underside of the fuselage



*F*ROM the big transparent nose of the Martin Marauder, the bombardier aims the .50 caliber machine gun that guards the bomber from head-on attack. (Kodachrome by Hans Greenhoff)



Short-spanned, high-winged, and deep-bellied, the B-26 is designed to fly like a fighter—and haul bombs by the truckload



Two .50's in the tail give the Marauder a murderous sting. The first, lightly-gunned B-26 had only a single gun in this spot



In its specifications for the B-26, the Army seemed to ask for the impossible—and got it. Defying most of the orthodox ideas of warplane design, the Marauder was one of the longest chances in aircraft building

caliber machine gun forward and a heavier one in a light mount in the tail, while the main weight was borne by the two .50s in a top power-driven turret.

The day the first Marauder taxied down the line at Martin's plant, everybody knew it was going to be plenty hot—and it was. The ship caught up with a couple of contemporary first-line fighters. Its top speed was so great that good air pictures had to wait until a second model could be built. Only a few ships could pull up alongside to give a photographer a chance for a shot.

There is more to the simple, clean, cigar-shaped lines of the B-26 than meets the eye. Probably this was one of the things that sold the production-wise engineers like Harry Volmer, the manufacturing boss, and factory manager Tommy Soden. The fuselage was unusually free from compound curves which are tough to make, tougher to tool and all but impossible to assemble. The ship had been engineered to eliminate one of the major bugbears of airframe production.

As more and more war information rolled in, it became evident that even a medium bomber must take care of itself in a fight, and that, despite high speeds, the effectiveness of a bomber depended on how well it could fight its way to an objective and fight its way back. More guns went onto the Marauder. The single-gun stinger in the tail gave way to two .50's. The .30 caliber peashooter that protruded delicately through the transparent nose was replaced by a murderous flexible .50.

Most recent addition to the ship's armament is a simple rack that permits it to sling a torpedo outside. The first appearance of this idea at the Battle of Midway, major proving ground for the B-26, was a complete surprise to the Japanese fleet. A formation of aircraft carriers was approaching Midway, surrounded by destroyer and cruiser escort. The plan was for high-flying

B-17's to "soften up" the enemy, while the B-26's swept in for the kill. Everything was OK except that the Fortresses failed to make contact with the enemy. As a result, when the four B-26's came in flying low, they were faced with a completely screened naval unit, still keeping perfect formation. There was no waiting, no turning back. The Japs stood by for a low-flying bomb attack, spreading formation to minimize hits. The B-26's, taking advantage of their maneuverability and speed, dropped close to the water for the attack. This meant that precious time was gained as the Jap antiaircraft gunners had to readjust their gun positions. The B-26's dashed in and delivered their deadly missiles, sinking two of the carriers right in the middle of the defense formation.

Performance in the Aleutians, where they sank two destroyers in one patrol, indicates the great advantage gained by long-range torpedo patrol. The maximum range for the best regular torpedo plane is in the neighborhood of 1,000 miles. This means that patrol activities must be limited to small areas or entrusted to slower equipment. A plane like the Marauder can carry its torpedo considerably farther, searching inlets and protected water where enemy craft may be lurking.

One remarkable thing must be noted in the Marauder's performance: It is little affected by the increased loads imposed on it. Guns, bombs, and torpedo can be saddled on it. Still the Marauder lifts its nose up, tucks away its tricycle landing gear, and soars away.

By orthodox engineering ideas, the Marauder should not even taxi. The authoritative German magazine, *Luftfahrtforschung* originally passed the design off as a joke. The Japanese official registry would not even list it. Some folks are still in doubt, rubbing their eyes as production-type B-26s go off the line to make things unpleasant for Berlin and Tokyo.



The *Phantom*, 91-foot model of a radio-controlled concrete convoy vessel proposed as an answer to the U-boats. The cabin is a temporary structure for the crew of two that took her to Washington for tests

Crewless Ships for Phantom Convoy

RIDING at anchor in the Capitol Yacht Basin at Washington is one of the strangest ships afloat. Appropriately named the *Phantom*, she resembles anything but a sea-going craft. Her deck is almost flush with the water line. Missing are smokestacks, superstructure, and cabins.


The *Phantom* is a 91-foot model of a revolutionary-type concrete ship, completely automatic and designed to travel in convoys of ten or more operated by remote radio control. In convoy the crewless ships are expected to slip through the water at 10 knots, invisible to enemy raiders beyond a radius of two miles. Progress will be controlled by an escorting vessel using a secret system of ultrashort-wave and code-signal devices. If the control vessel is sunk, the *Phantoms* will proceed for two hours on the same course. Then mechanisms aboard will halt them automatically and send distress signals, giving their approximate position.

The *Phantoms* are to be 260 feet long, 36 feet on the beam, and 27 feet deep—small

for modern shipping—but they will have a dead-weight capacity of 2,000 tons. Diesel engines of 1,000 horsepower will drive them under automatic control. Except for air intakes for the engines, the craft will be completely sealed.


A series of 10 to 15 watertight compartments will make a *Phantom* fairly resistant to torpedo attack. If a torpedo hit floods one of these compartments, ballast tanks with automatic pumps will trim the ship. All vital parts will be concentrated within a space less than a tenth of the ship's total length.

Into this ingenious plan have gone the skill of F. B. Woodworth, radio expert who helped develop ship-to-shore radiotelephone service, and Vladimir Yourkevitch, designer of the *Normandie's* hull. Their model, the *Phantom*, is awaiting Government tests. They believe that *Phantom* convoys will save the lives of many merchant seamen and help solve United Nations shipping problems.

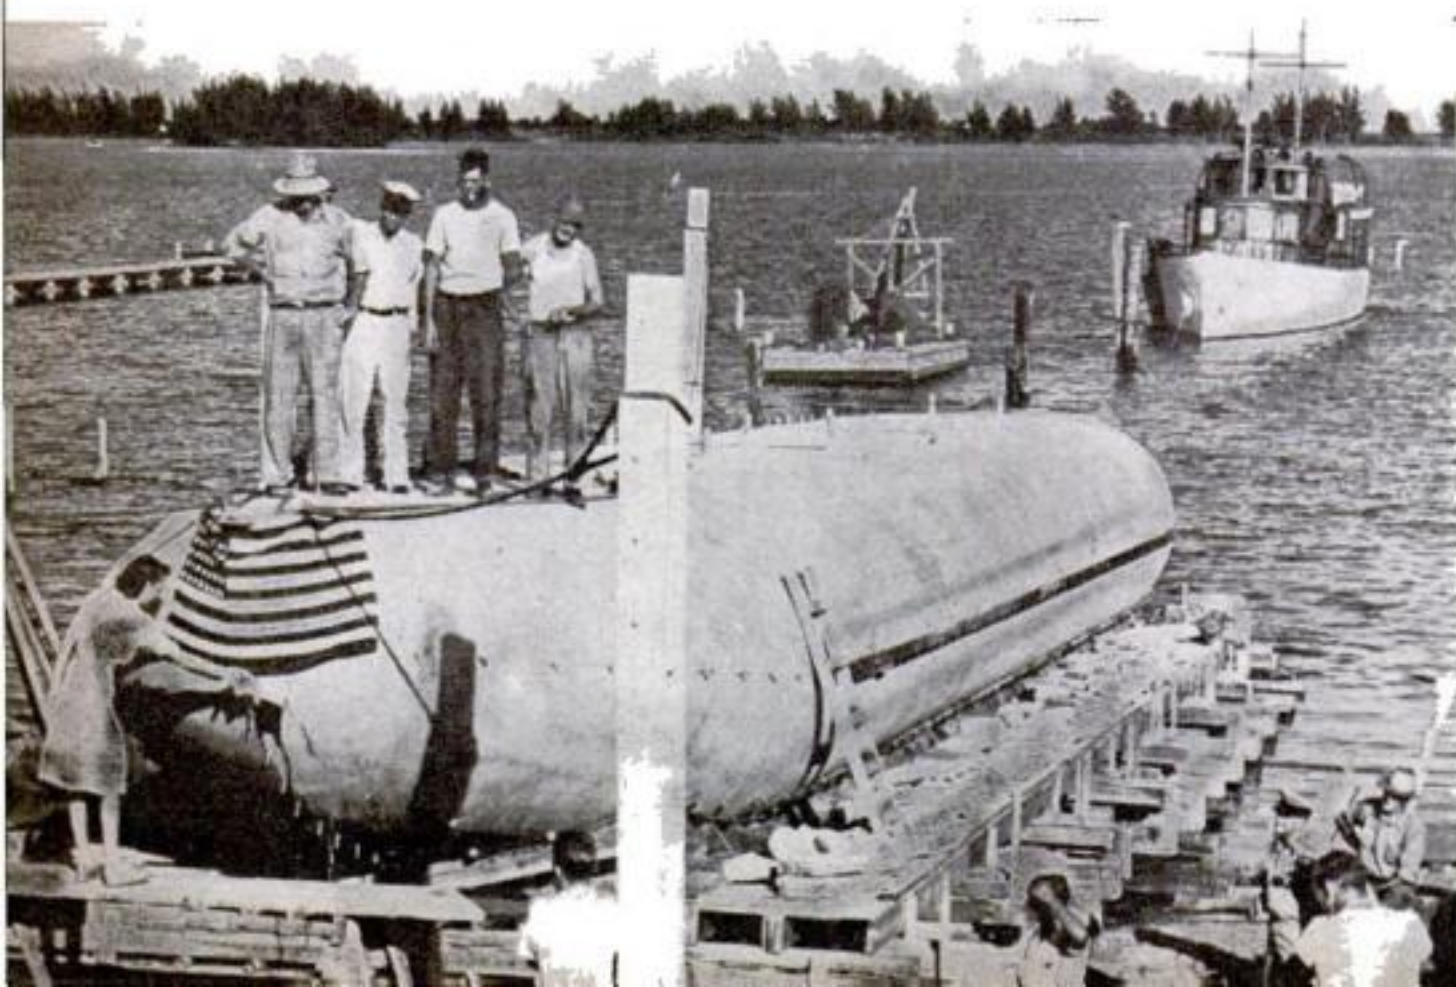

The model receives her appropriate name in the launching ceremony at a Florida shipyard. Actual ships would be 260 feet long and 36 feet in the beam. A convoy of these vessels, controlled by a "mother" naval craft, would be almost invulnerable to torpedo attack

Reverse Oars Let Rowers Look Ahead

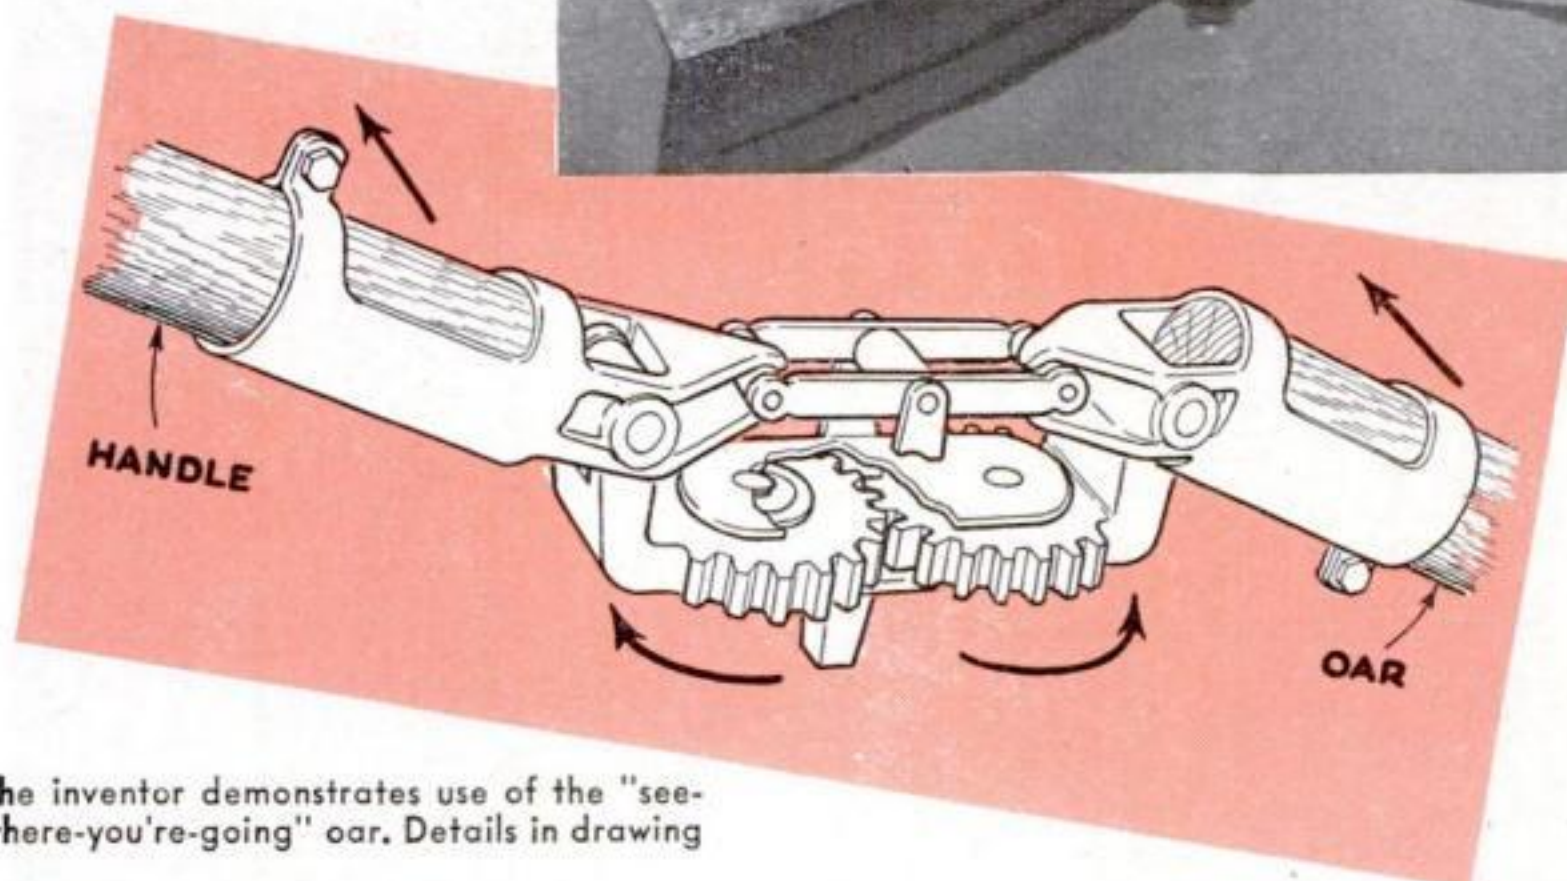


The inventor demonstrates use of the "see-where-you're-going" oar. Details in drawing

ROWING a boat while facing forward is said to be made practical for the first time by an invention of Percy M. Griffin, of Albany, N. Y. The device consists of an oarlock in which the forward-and-backward motion of the oar handle is reversed in the oar by means of segment gears as shown in the drawing above. At the same time,

a rocker mechanism controls the vertical movement so that the oar is lifted out of the water when the handle is depressed, as in ordinary rowing. The complete oar with its mechanism lifts out of the socket and can be folded for carrying and storage. Detachable sockets are provided so that the device may be used on any boat.

"HURRY HUTS" built entirely from prefabricated wood sections are protecting U. S. troops from the rigors of winter in Alaska and on the Pacific Coast. Containing no metal except the bolts and a few fittings that hold them together, they represent a saving of at least three tons of steel for each unit as compared with steel huts. Only 39 man-hours of labor are required to erect one of the huts, and inexperienced workmen may be employed. Packaging is carefully planned to eliminate loose parts as far as possible, with bolts embedded in section panels and nuts attached.



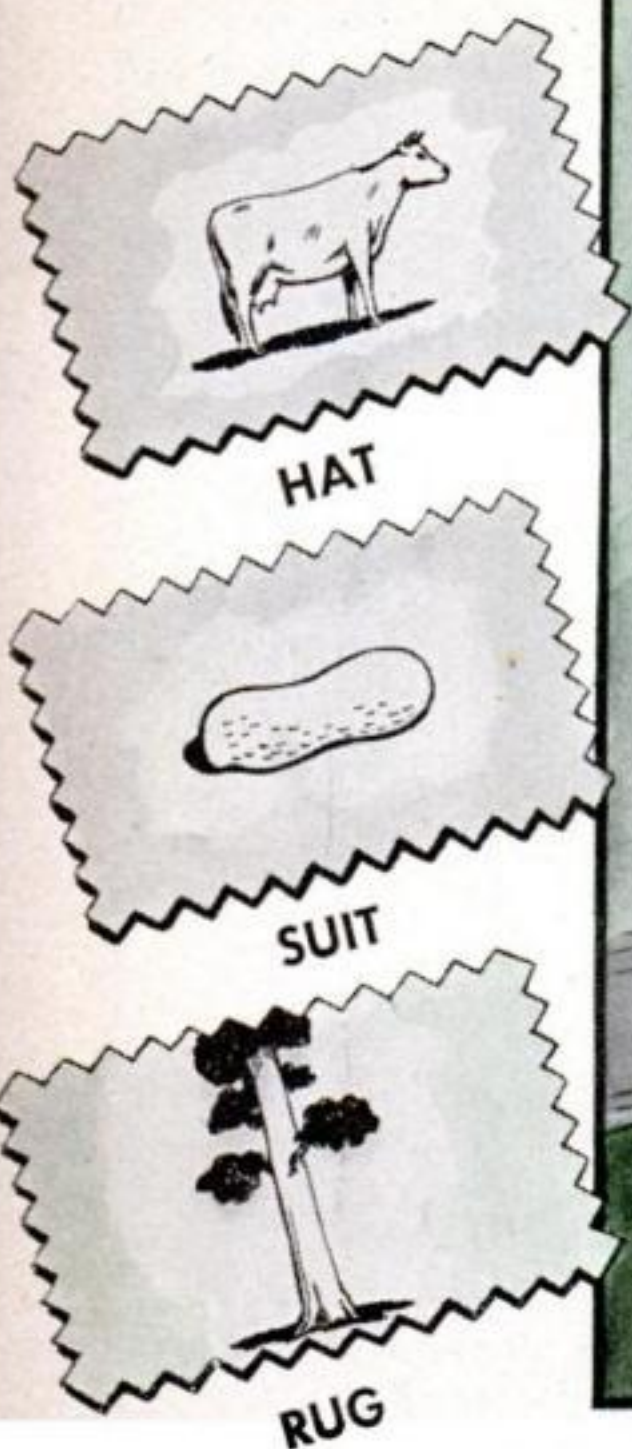

HOW SCIENCE IS *Changing Your Clothes*

YOUR clothes are due for a lot of changes, and you will like them all. You'll soon be wearing suits made partly out of skim milk, soybeans, peanuts, seaweed, bark, cellulose, plastics, and possibly even glass, and you won't even have to get used to it. The chances are, if your merchant didn't let you in on the secret you'd think you were still buying wool.


This is the day of synthetics—and in textiles as well as in other fields, the chemist is going to give you good substitutes for the materials you can no longer buy. If sheep can't grow enough wool to clothe both you and the Army, the chemist will take the food the sheep eat and grow wool in his test tube without the need and the delay of the middleman. Samples of the magic show that the venture is a great success.

There is cloth for suitings and overcoats made partly of rayon from cotton linters, Aralac processed from skim milk, Palco shredded from the bark of the redwood tree, and peanut fiber from the peanut kernel. Velon, which is a plastic, and soybeans are going into handsome, serviceable upholstery. Nylon scraps left from the manufacture of parachutes are used in other war materials. Fiberglas yarns are making colorful neckties, draperies, and bedspreads. Most of them can duplicate all the qualities of natural fabrics, and many can add something extra.


Scientifically, man-made fibers fall into four major classes: protein, which is a component of food; cellulosic, from cotton and wood pulp; true synthetics, from coal and air; and glass. Aralac, first of the usable

protein fibers to be introduced, is derived from casein, which is about three percent of the content of skim milk. One National Dairy Products Corporation factory is producing about 5,000,000 pounds of Aralac yarns this year and, blended with fur or wool, the synthetic has already met wide acceptance in "felt" hats. It has turned up also as a blend with rayon, giving that cellulose fiber a woollike resilience. Aralac is like wool in every way, but is only about 75 percent as strong and needs a blend to make it wear.


Henry Ford is producing a soybean protein fiber on a commercial scale (P.S.M., Aug. '42, p. 106). It has been used mostly in wool blends for upholstery materials, but successful experiments are being made in developing a

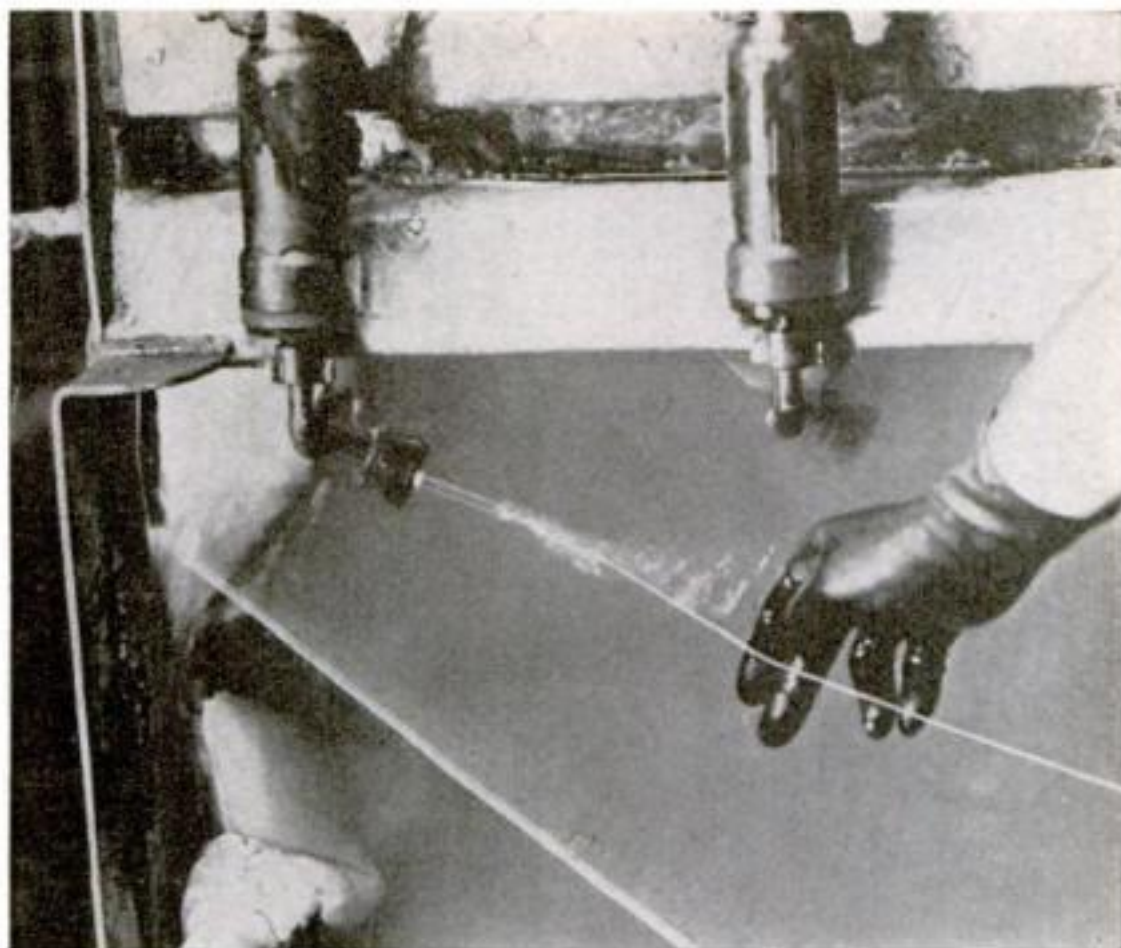


Extrusion is the essential process by which most synthetics are converted into textile fibers. Reduced to viscous liquids, they are forced through tiny holes in a nozzle, or spinneret, into a coagulating bath, emerging as fine filaments. Some are woven as continuous filaments, others chopped and spun into staple yarns

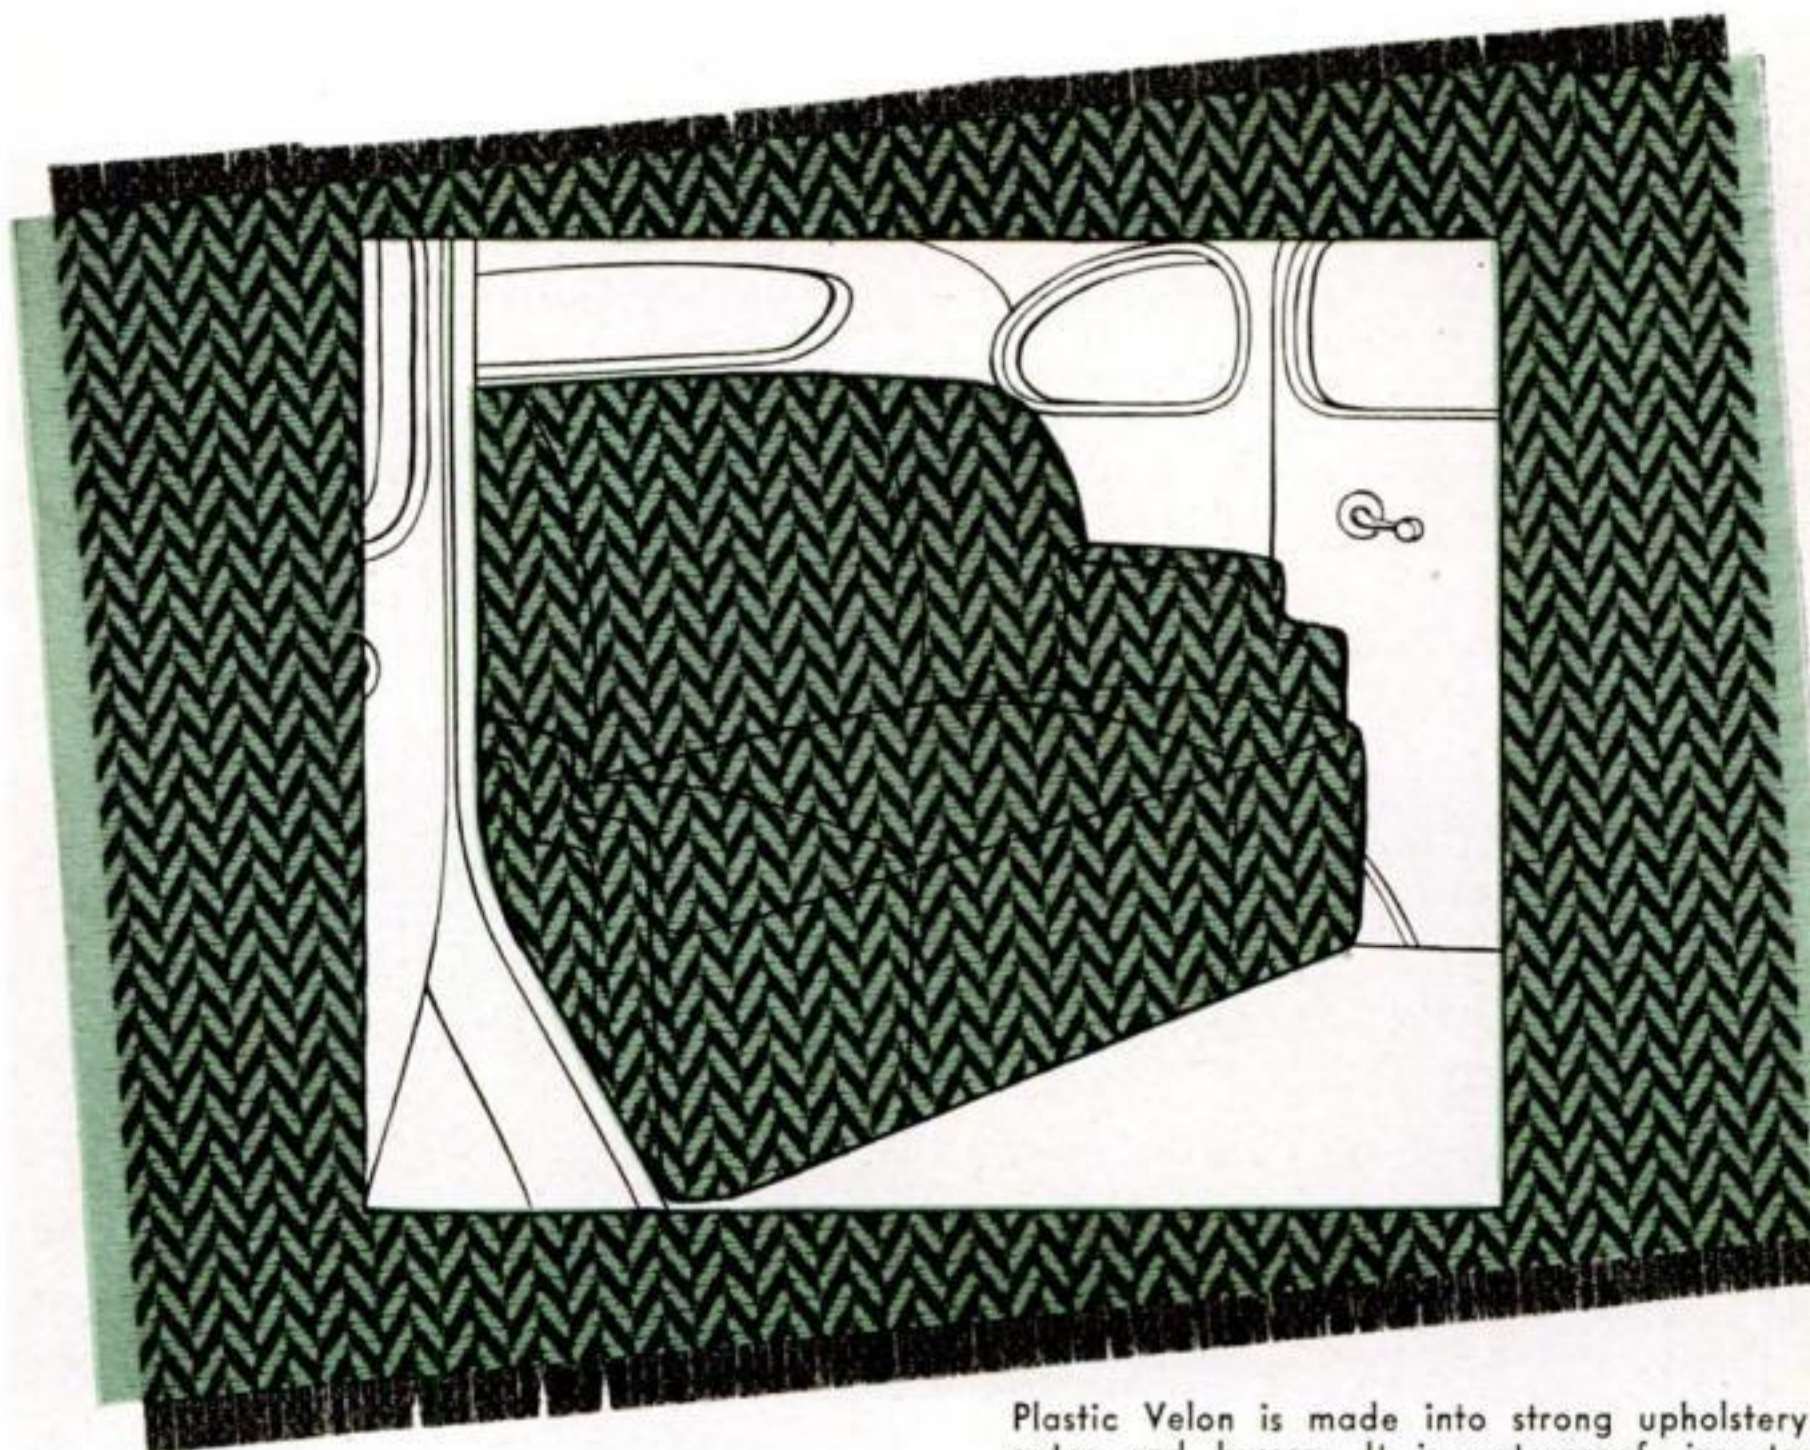


Plastic Velon is made into strong upholstery for autos and busses. It is waterproof, insectproof, and acidproof, and may soon be used in clothing

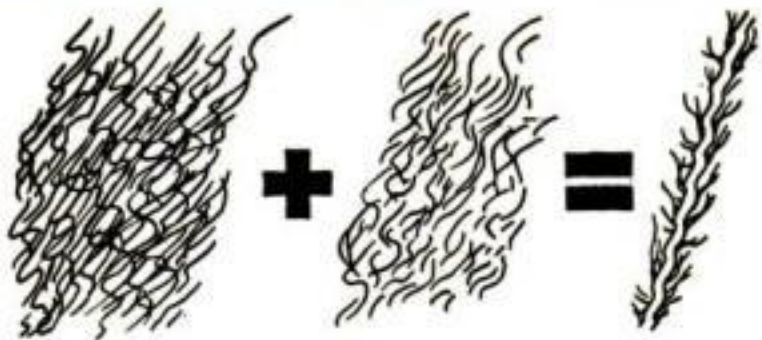


BLENDING combines two or more different staple fibers in one yarn. This attains a quality that neither fiber alone possesses

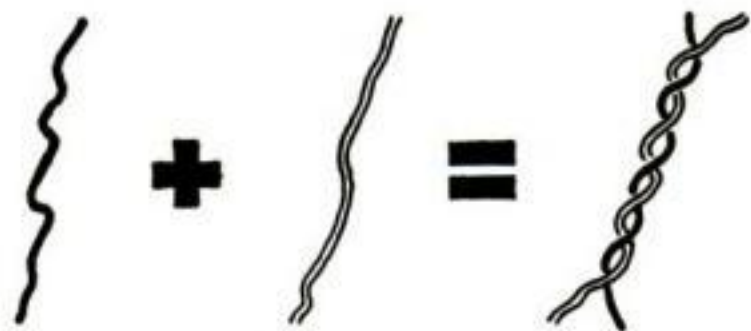


PLAITING combines a continuous-filament synthetic fiber with a natural-fiber yarn. The resulting thread is called plied yarn

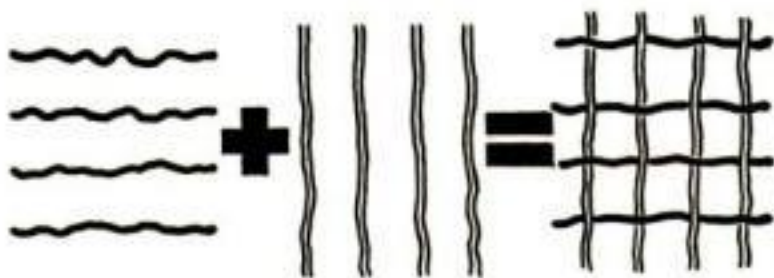


MIXING one synthetic fiber with another or with a natural yarn may be done during weaving. One is the warp and one the woof

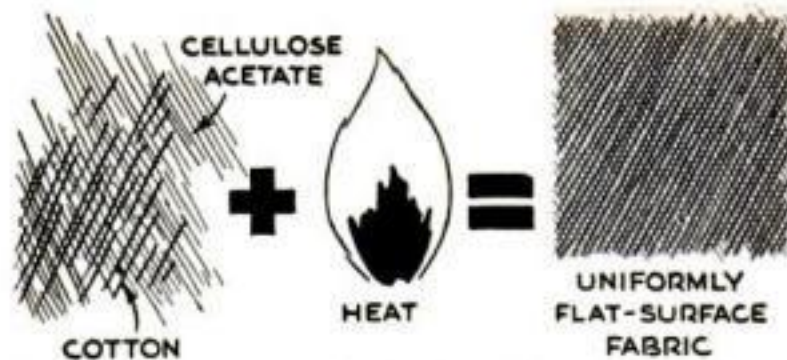

WELDING is a method of making fabric from synthetic yarns without spinning or weaving. It is still in the experimental stage. A natural fiber, such as cotton, is mixed with a cellulose acetate fiber and heated under pressure. At a high temperature the acetate welds the fibers together into a fluffy web. The mass is heated again, this time in an alkaline solution that converts the acetate fibers into cellulose, producing a woollike flannel. Synthetic yarns used for this are acetate rayon, nylon, and vinyl compounds



KNITTING cotton and nylon together in a single operation is a step in the production of nylon fleece. Nylon is looped (above) on a cotton backing, and the loops are then cut (below) by brushing. The free ends of nylon yarn give the fabric the nappy appearance of that shown at the bottom of the facing page



suiting fabric. A couple of Scotch chemists have exhibited small swatches of a fabric half wool and half peanuts. It is softer and more pliable than soybean wool, and in other respects is much like both it and Aralac. From England come reports of a new fiber from kelp, or seaweed, utilizing the protein content, algin, which is a by-product from

the extraction of iodine. Algin fabric is completely fire-resistant: a swatch soaked in gasoline was set afire, and the blaze burned out without damaging the cloth.


In Australia experiments are being made with fibers from animal muscle tissue and from leather waste. In occupied France, fabric called "Piloita" is made from sweep-

Nylon has been drafted by the Army, but in using it in parachute cloth . . .

. . . there are bits of waste thread left over. These threads are chopped up . . .

. . . into short staple fiber and then twisted . . .



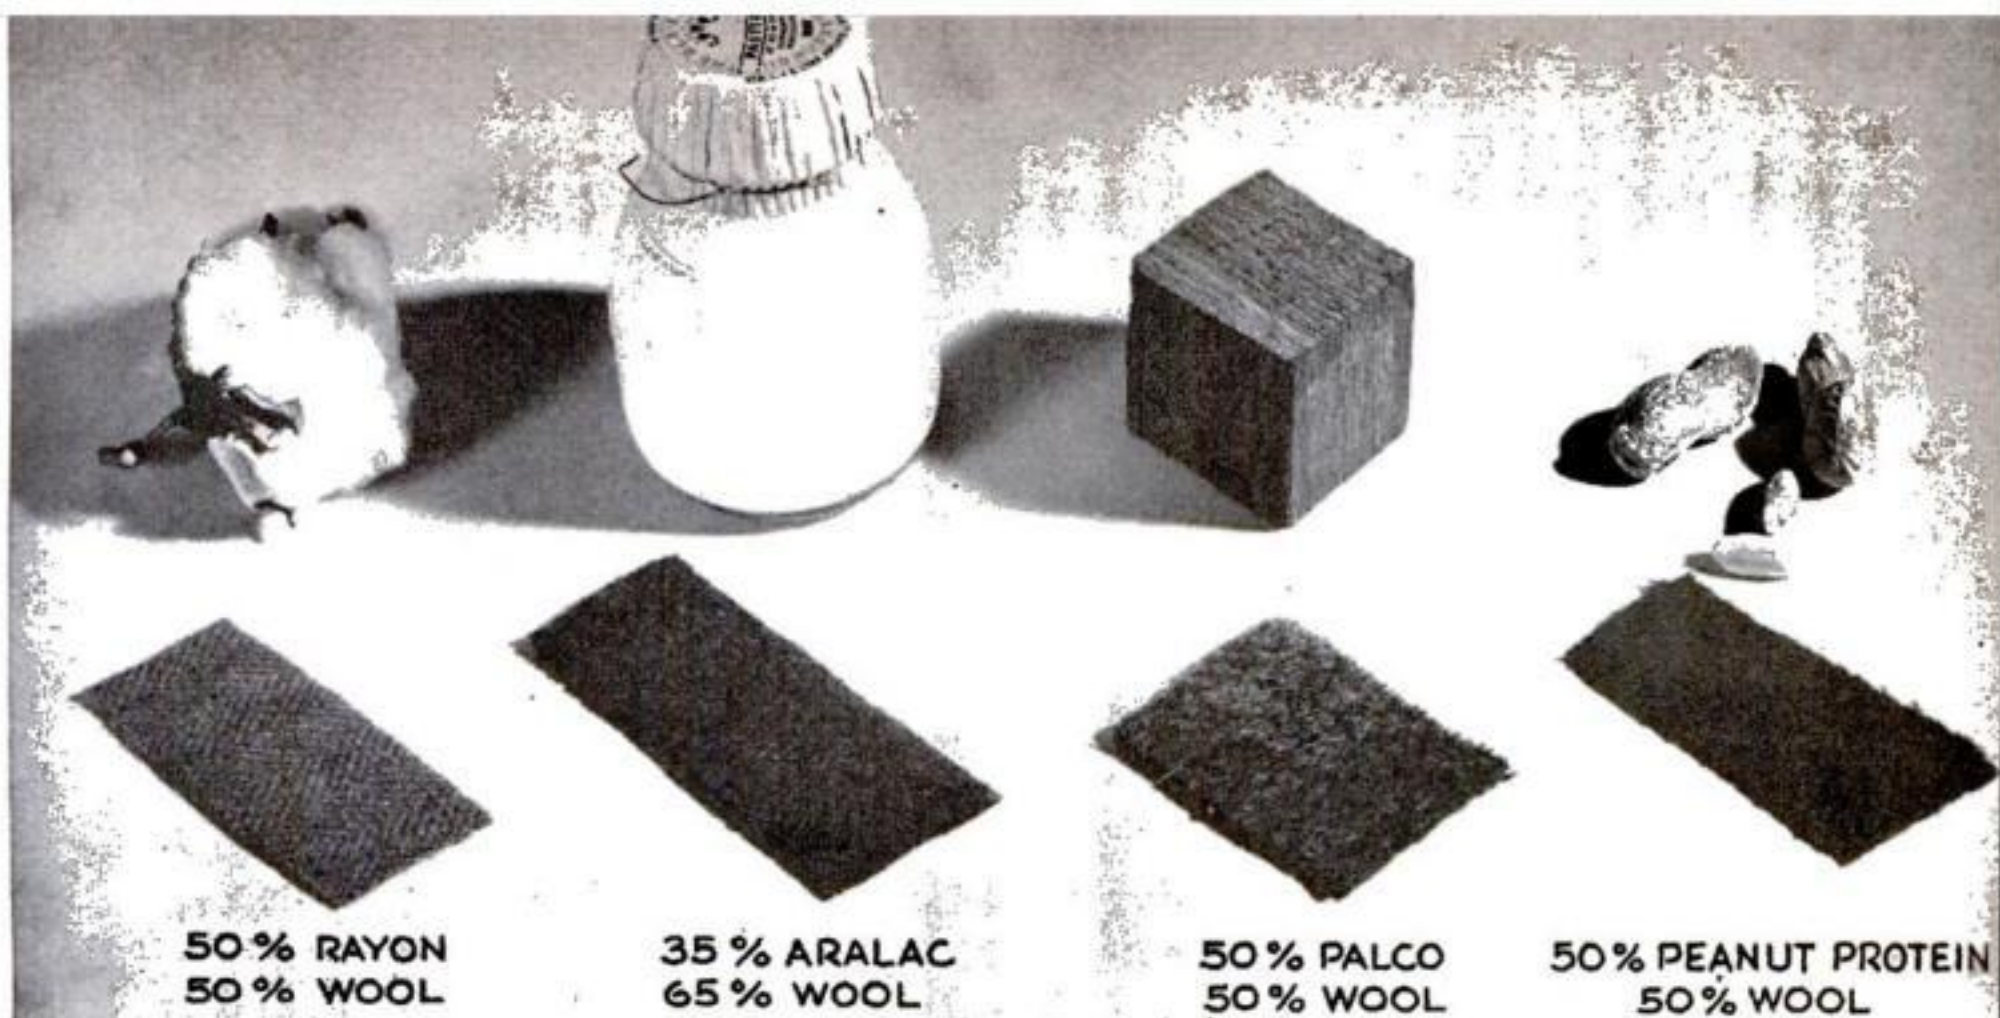

Woollike fibers that never saw a sheep's back are being spun with real wool into blended fibers that make fine, warm fabrics. Here wool is used in four promising blends—with rayon made from cotton linters, with Aralac processed from skim milk, with Palco fiber shredded from the bark of the redwood tree, and with peanut fiber from the peanut kernel. They mark a big step forward in textile research

ings of hair from barber-shop floors. The Germans and Japanese are reported to be working on a fabric made of fish, but they are keeping it secret, not even telling what the finished product smells like.

Fiberglas, extruded in filaments 22/100,000 of an inch in diameter, has electrical and chemical properties that have made it a "must" for war industries short of rubber and silk. It is fire-resistant, waterproof, wrinkleproof, and insectproof, and when no longer needed in the war effort will reappear on the peacetime market in drapes, bed spreads, tablecloths, and the like, and blended with silk or rayon in neckties. Because it does not stand abrasion well and is cold, it has not yet been developed for use in clothing.


Plastics can be converted into strong, warm textiles, and some have qualities of electrical and chemical inertness that no natural fiber can approach. The newest is



... and spun into fuzzy and resilient yarn. This soft spun Nylon is used in making ...

... a handsome, woollike fleece that has a heavy, even-textured nap

Nylon fleece on a cotton backing tailors well, as shown in the photograph above, and withstands wear. Though resilient, it tends to flatten in abrasion tests. Nylon for civilian use, however, will probably be restricted now that its manufacture has been frozen for war needs

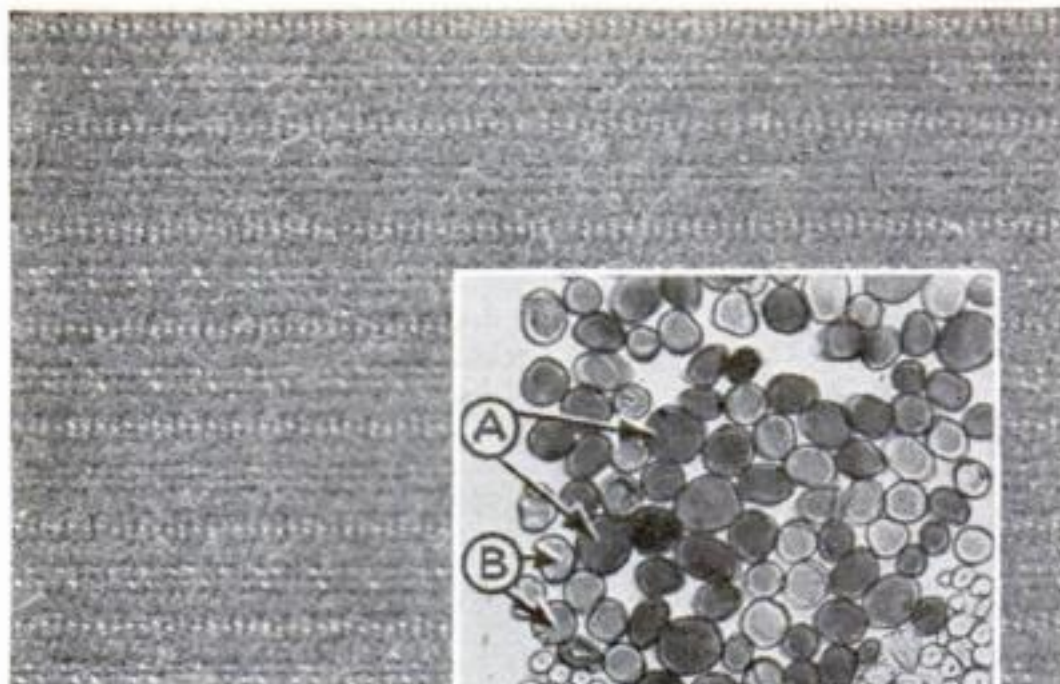

Wool-and-peanut suiting in the test-tube stage. The photomicrograph of a cross section of the fibers shows a body of wool (A) and peanut (B) and cotton stripes of white (C) and red (D)

Southern Regional Research Laboratory, U. S. Dept. of Agriculture

vinylidene chloride Velon, which looks much like a shiny, coarse horsehair. It is unaffected by water, most acids, insects, and rot, and is used for upholstery, drapes, handbags, luggage, and also, in a large-size filament, for insect screening in place of copper. Its base is the same as that of plastic water pipes (P.S.M., Oct. '42, p. 73). The

Here a good wool substitute, 18 percent Aralac and 82 percent spun rayon, is stretched to the breaking point, somewhat lower than that of wool




Firestone Rubber Company, in charge of its development, believes that Velon can be mixed with cotton and wool as successfully for suitings as for upholstery.

Another plastic fiber with possibilities is Vinyon, a copolymer of vinyl chloride and vinyl acetate. Like nylon, it is extruded in tiny filaments that can be made up into continuous-filament or staple-yarn fabrics. Its use in war work is largely in chemical processes where its resistance to chemicals makes it invaluable as a filter. Low heat resistance—it begins to get tacky at 150 degrees Fahrenheit and can't be ironed—is delaying its use as ordinary fabric, but the American Viscose Company, which is developing it in partnership with Union Carbide and Carbon, reports that this fault is being licked.

Palco, the bark of the redwood, already used as a substitute for cork in manufacturing insulation (P.S.M. Jan. '43, p. 110), is also being shredded as a wool blender in blankets, heavy-duty Mackinaws, and felt hats, and as a mattress filler. Palco fiber is warm, resilient, tough, water-resistant, and cheap, costing six cents a pound to a

Water that soaks into an untreated fabric, at the right below, is repelled by the Zelan-impregnated sample at left. The finish stands many cleanings

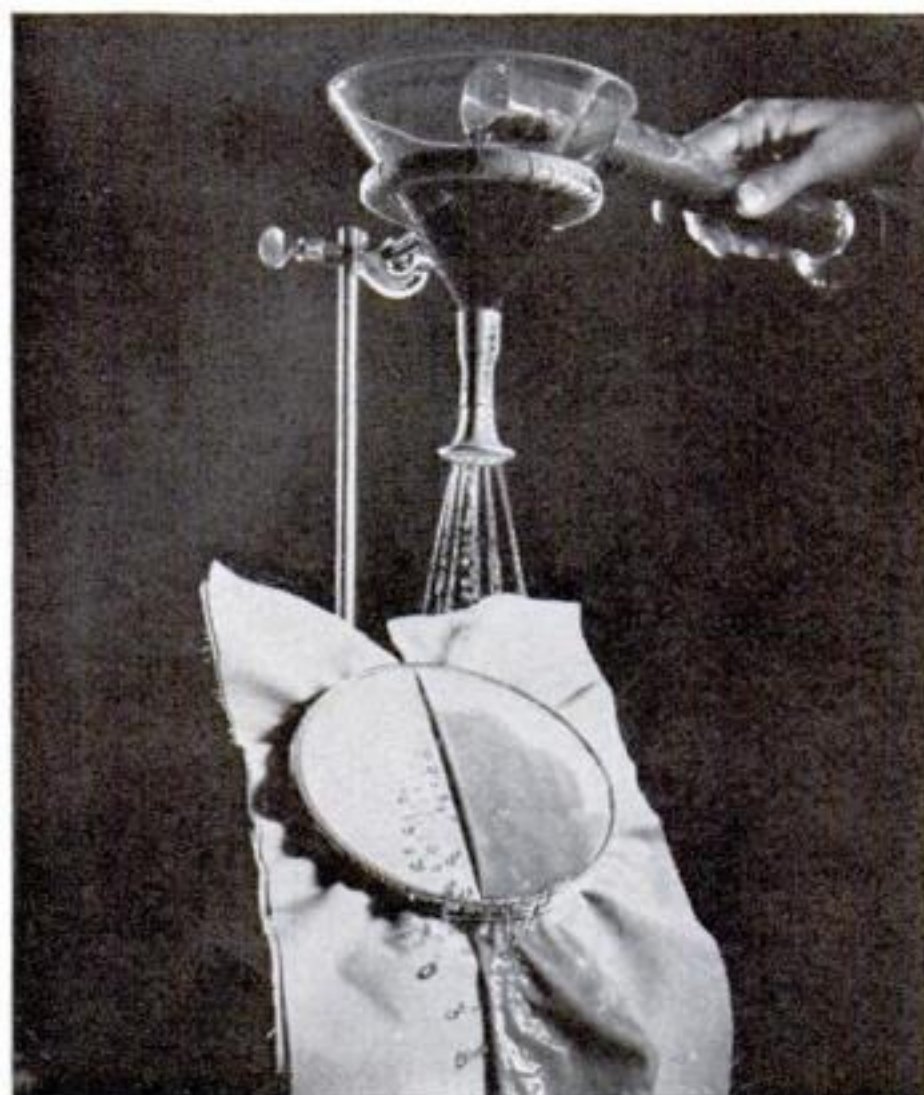



Rayon can duplicate any fabric on the market. Here, from left to right, it doubles as a lightweight worsted suiting with good draping form, as a fresh and crisp sharkskin, as a fleecy wool-type fabric with a lofty nap, as a crease-resistant textured crepe, and as a permanently-marked, handsome moiré


dollar for virgin wool, but is too short and coarse for use unblended.

Rayon, synthesized from the cellulose in cotton or wood pulp (and soon possibly from corn or milkweed stalks), is the oldest artificial fabric of them all. Consumption in the United States topped that of wool in 1941 when it had taken over the field of silk. It can duplicate any fabric on the market.


The actual manufacture of all these test-tube fibers, with the exception of Palco bark, includes one controlling process, extrusion. After the raw materials of the synthetic fibers have been reduced to viscous liquid, they are forced through a spinneret having a nozzle with several hundred pin-point holes, going from it into a coagulating bath where they solidify into web-fine filaments.

Two new fabric finishes complete the roster of textile developments. One is Du Pont's Zelan, a long-chain nitrogen-complex liquid that is a semipermanent water repellent and may soon be used on raincoats made without rubber. The other is Koloc which, the United States Rubber Company reports, more than doubles the life of cloth treated with it. Unfortunately a small amount of rubber is required in its manufacture, and that will serve to keep it off the market until sufficient supplies of natural or synthetic rubber are again available.

"Teddy-bear" cloth, just to the right, is cotton-backed wool for heavy coats. The all-rayon "brush-knit" fabric, far right, gives other coats a warm lining

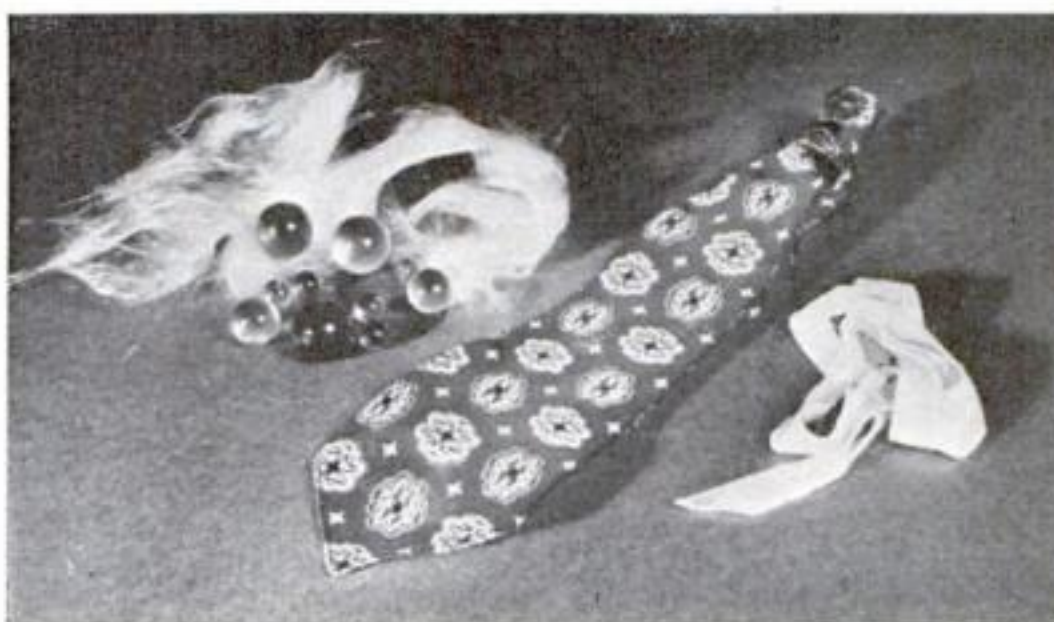

Fiberglas yarn drawn from marbles of unblemished glass has been woven into neckties like that above. Now in war work, it makes insulating tape for electric motors and generators

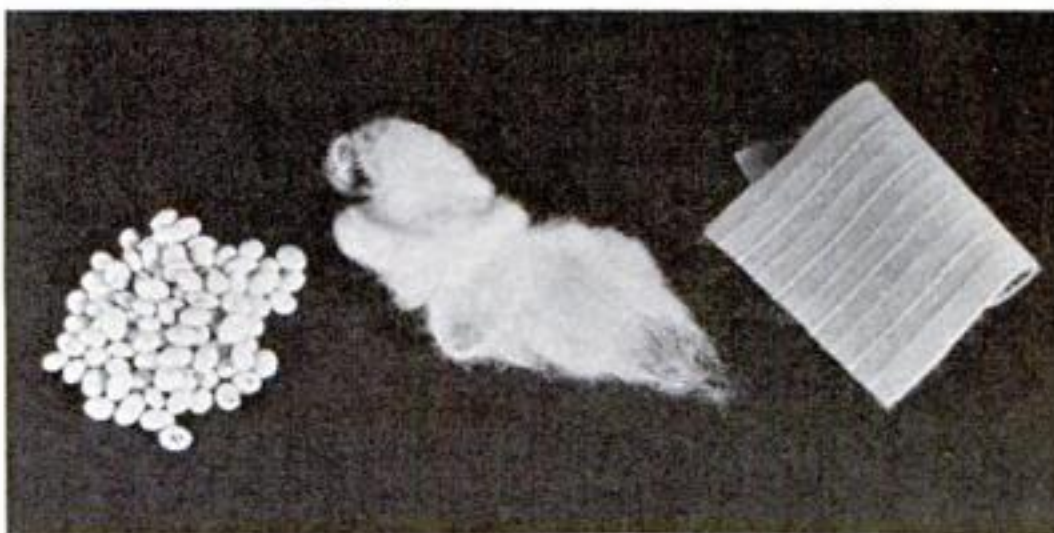


Soybeans, versatile protein, are the source of the synthetic yarn at center. It is used with wool in upholstery fabrics, and its coarseness may be reduced to permit use in clothing







A seaman's most important safety device is this rubber life suit, distinctive features of which are easily visible yellow hood and gloves, weighted shoes to keep him upright in the water, and a watertight zipper. By pulling the wooden knob of the zipper up to his neck, he can make the suit entirely watertight except for the fastener at the neck, which remains out of water. A kapok vest, shown below, adds to his buoyancy. When in dangerous waters, he pulls on the trousers of the suit, and keeps its sleeves tied at his waist so he can get into it quickly

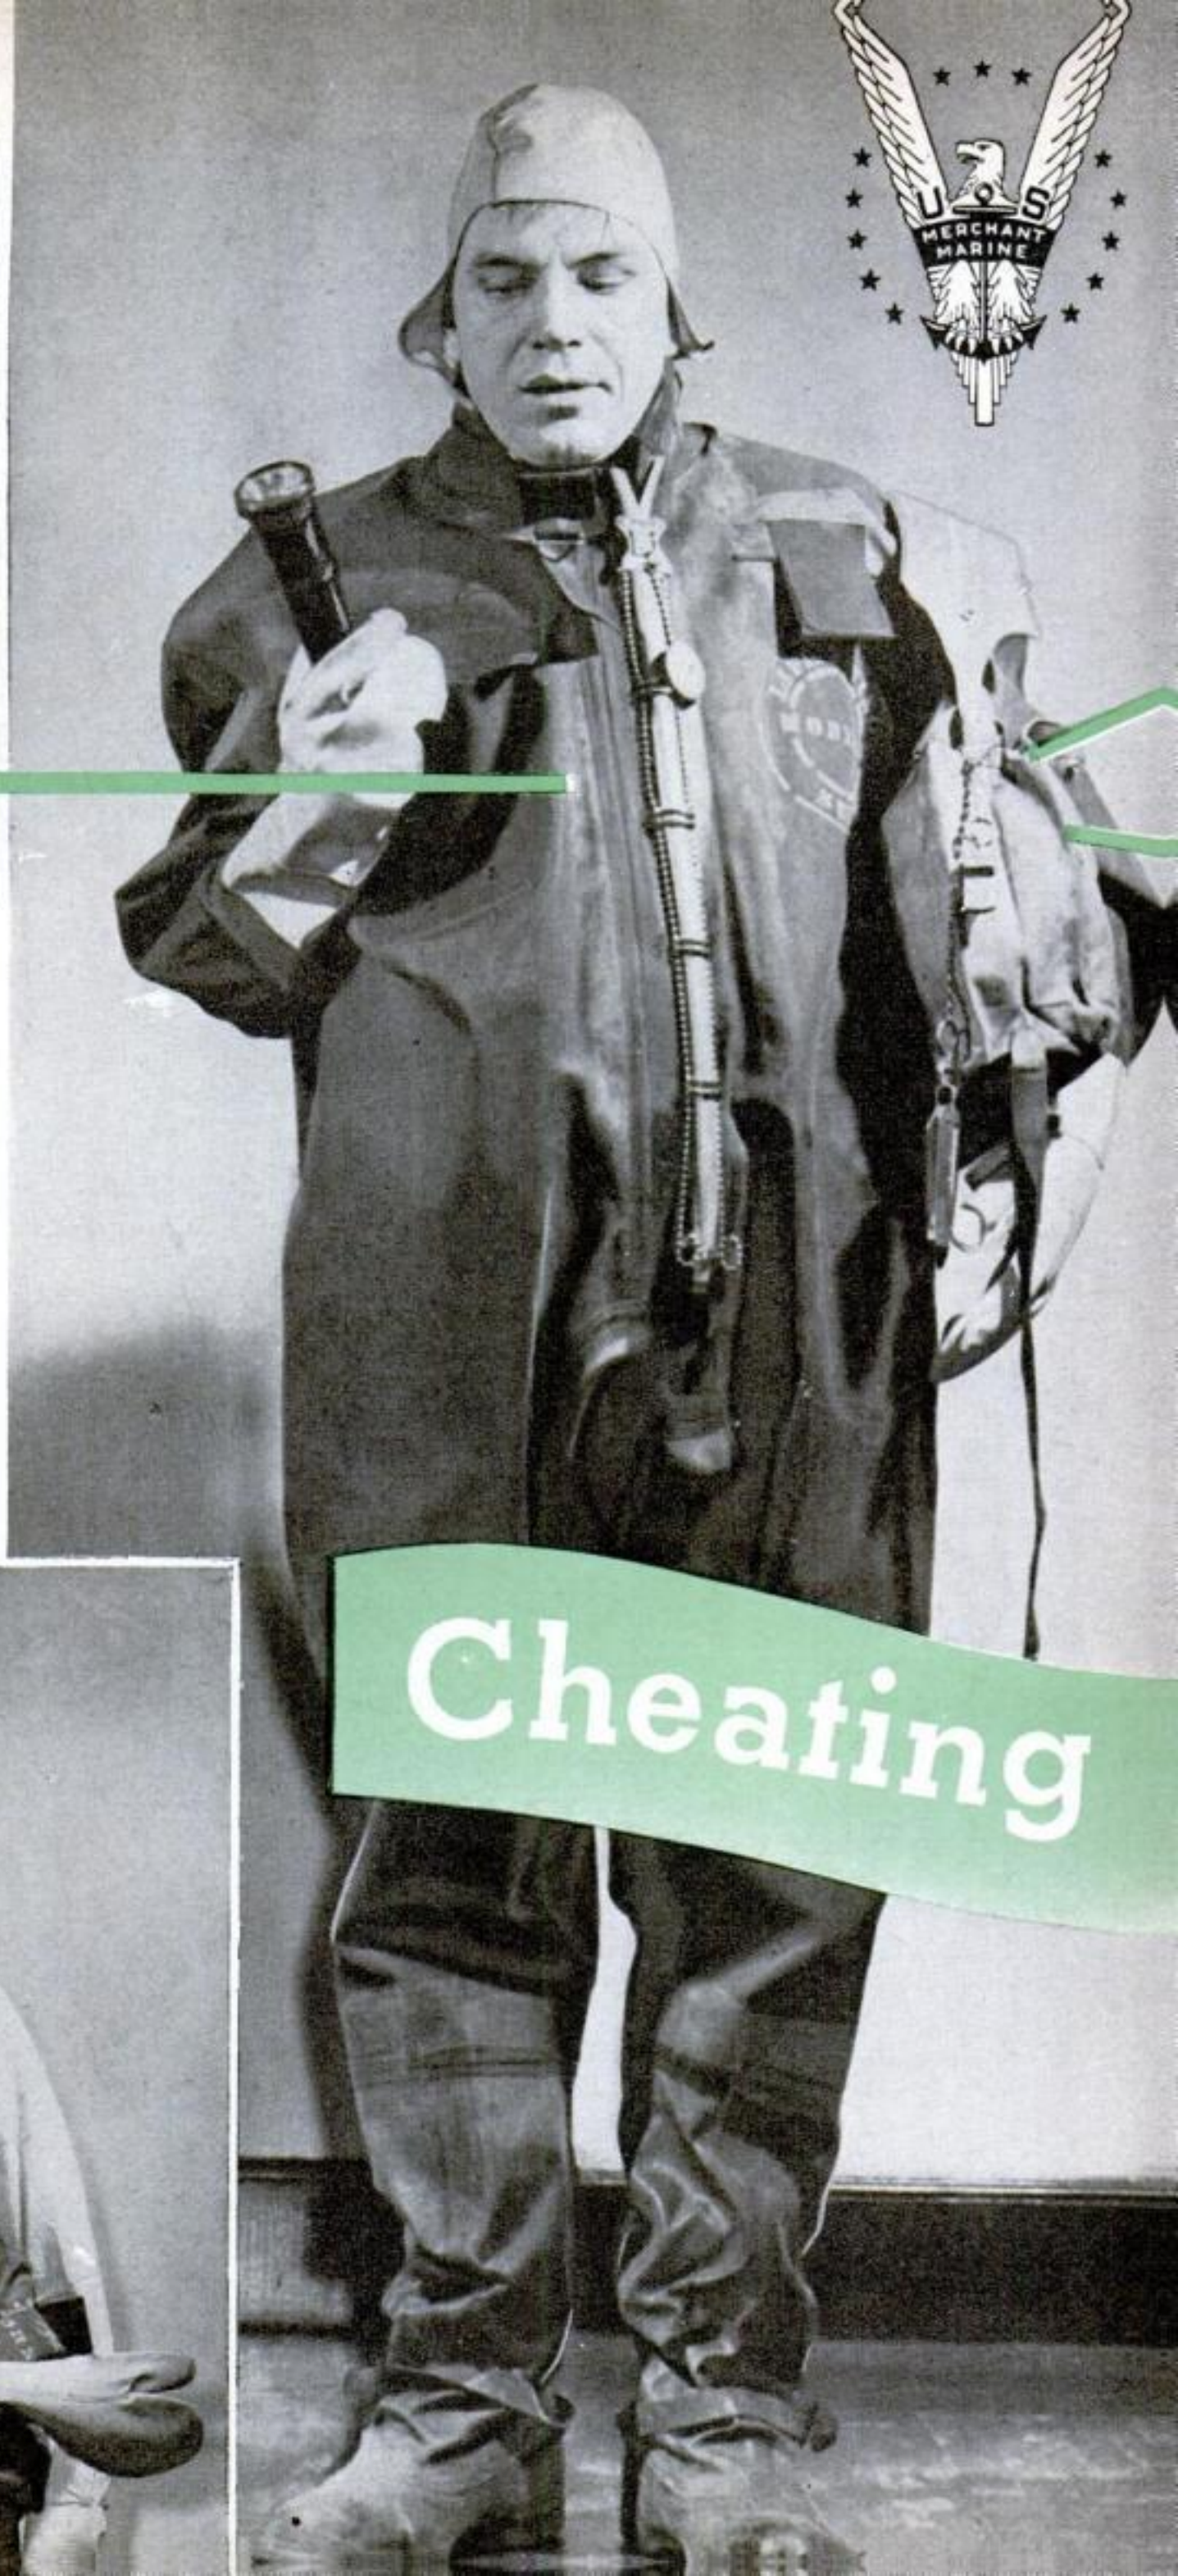

Cheating

This watertight safety bag, designed to carry the items shown below, can also be quickly inflated by mouth to serve as a life preserver

Photographs by Robert F. Smith

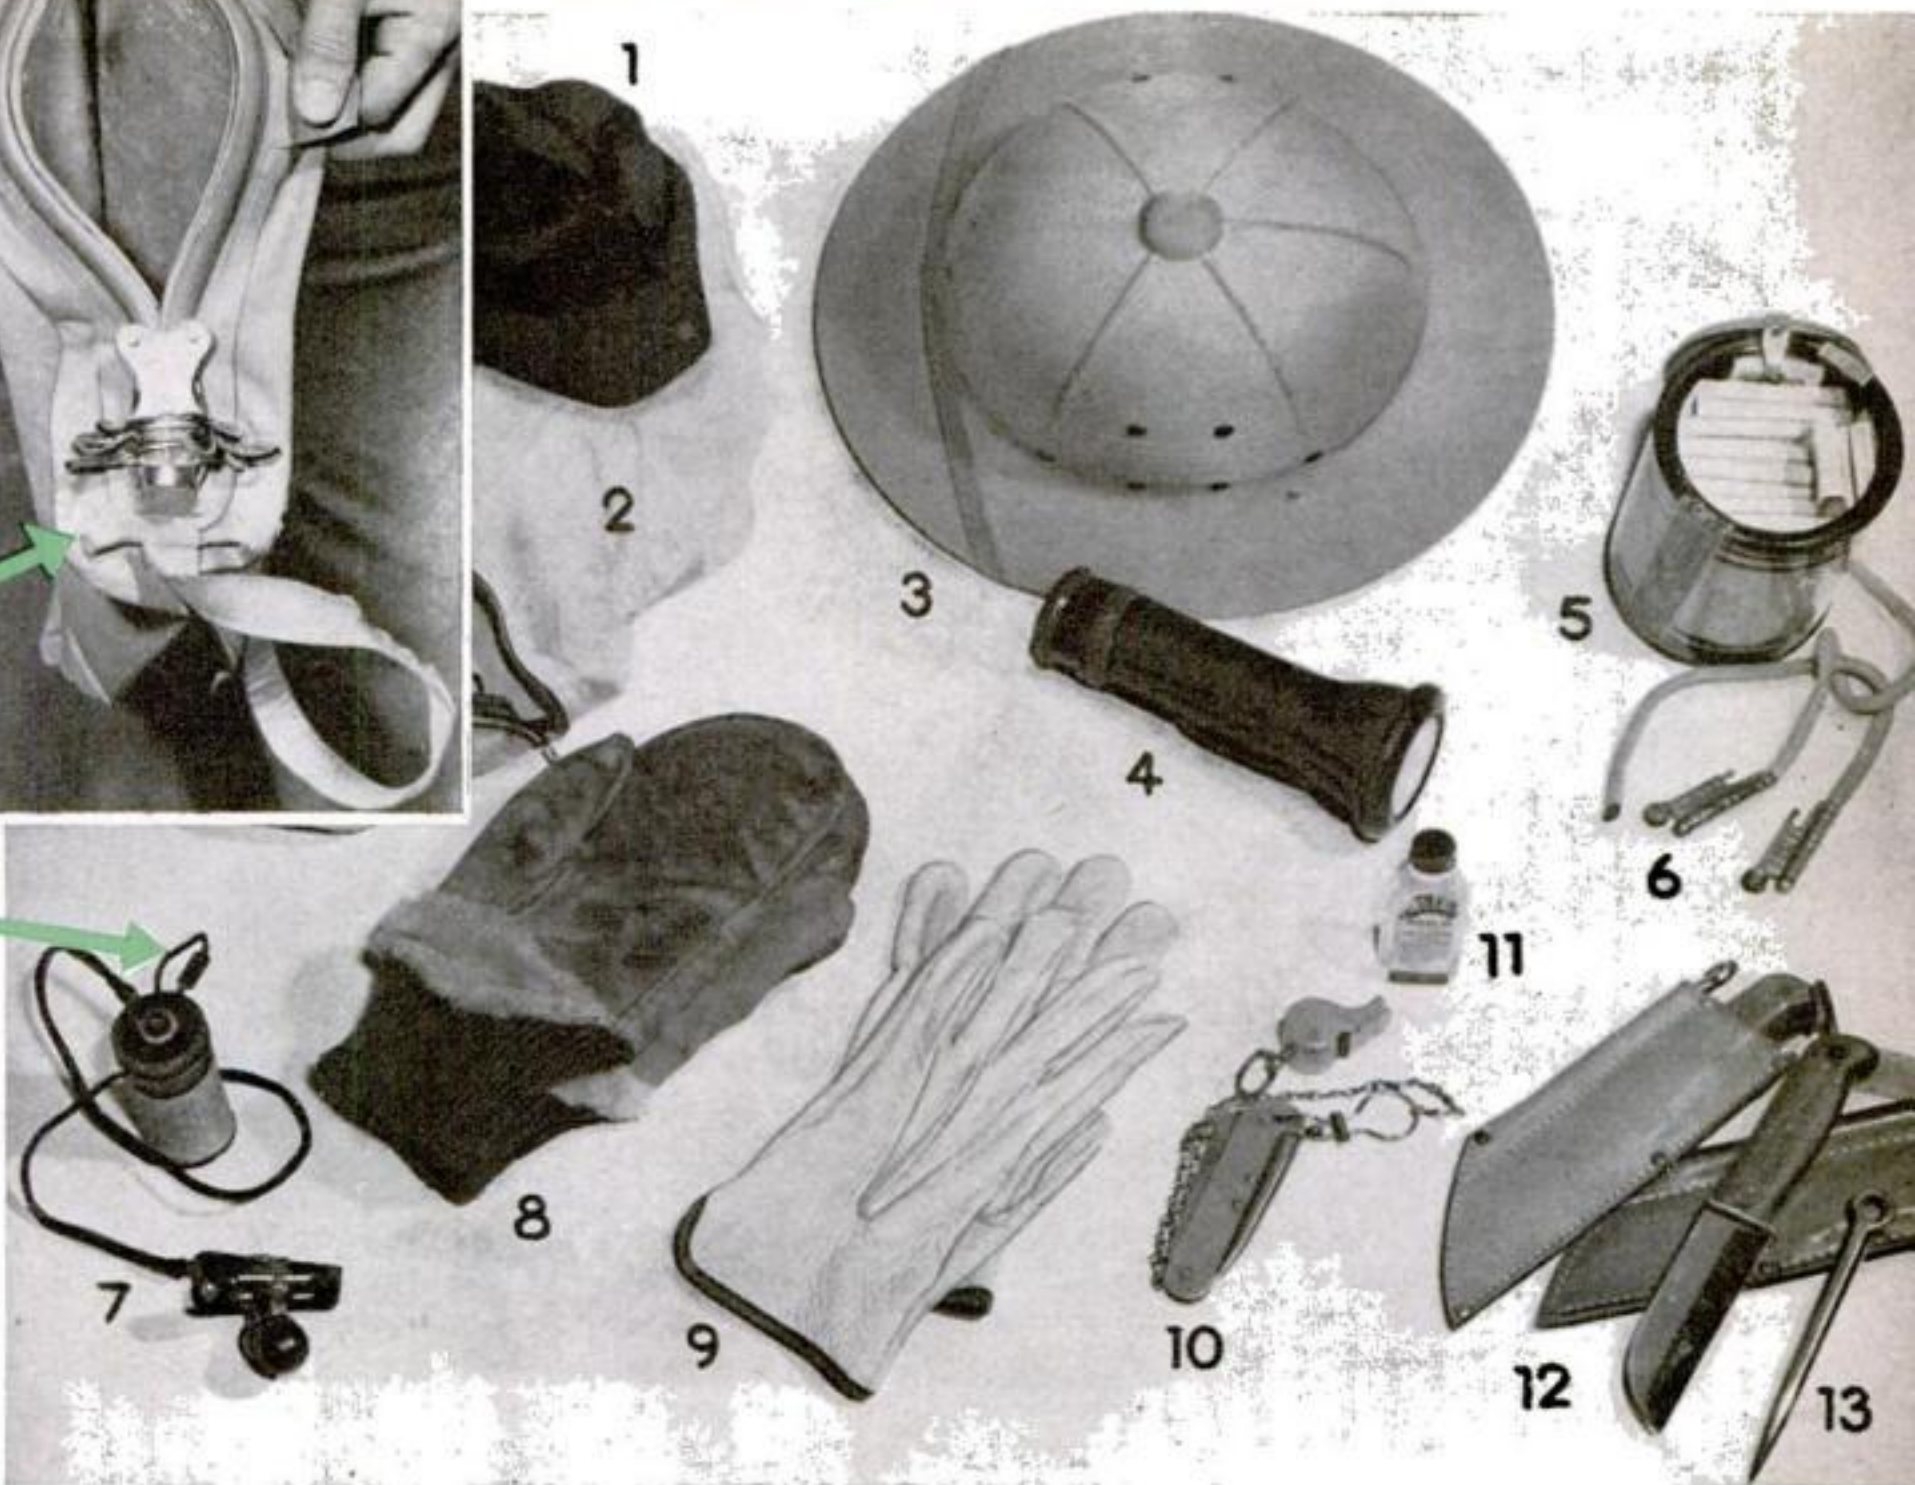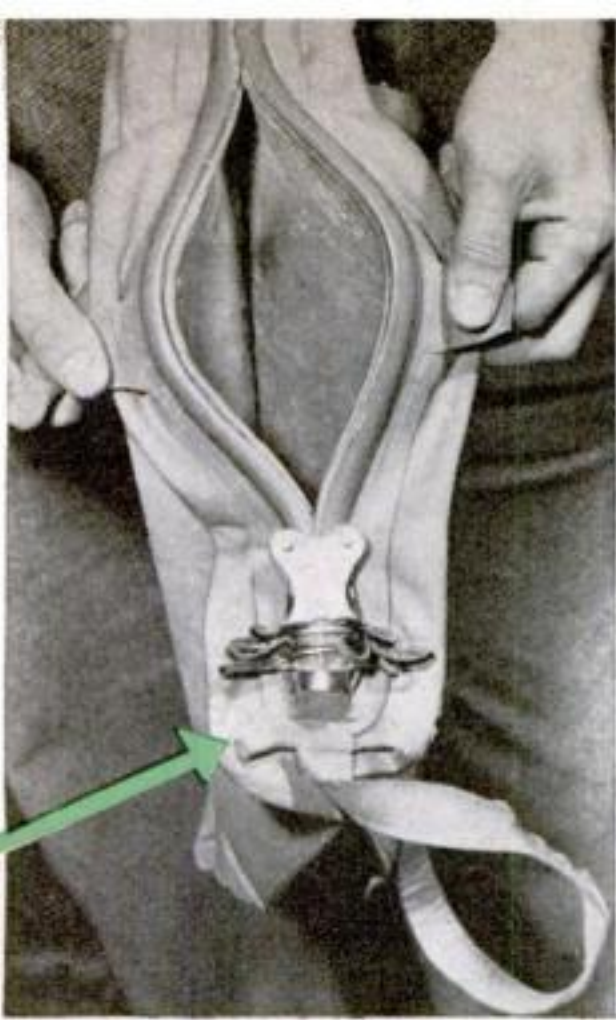

What the well-equipped shipwrecked seaman now carries: (1) Wool cap. (2) Chamois leatherette shirt. (3) Tropical helmet. (4) Flashlight. (5-6) Cigarette tin; lighters. (7) Life-belt light. (8-9) Woolen mittens; leather gloves. (10) Jackknife; whistle. (11) waterproofing oil. (12-13) Sheath knives and spike

the Axis Torpedoes


SOUND TRAINING AND GOOD EQUIPMENT NOW BRING SHIPWRECKED SEAMEN BACK TO PORT

BY BERNARD WOLFE

IT WAS all over before you could say "All hands on deck—man the lifeboats!" One minute Marty was standing watch on the graveyard shift, wondering if he really saw a streak of foam creasing the inky waters—the next, the whole ship heaved and shuddered and, with a terrible splintering crash, split in two.

In a matter of seconds, or so it seemed to Marty, the deck he stood on was awash and he was going under. Worse yet, the lifeboats up forward were lost, and Marty's hand had been badly crushed by a hurtling

piece of deck plate. But he was in very little danger. For one thing, he had a new-style kapok vest strapped tightly around his torso, and, in addition, his rubber life suit was half on, with the sleeves tied around his waist. In practically nothing flat he had his arms inserted in the sleeves and the helmet adjusted over his head. One yank with his good hand zipped the slide fastener shut up to his neck. His watertight emergency safety bag, full of valuable gear, was right beside him, and in another moment he had it hanging over his

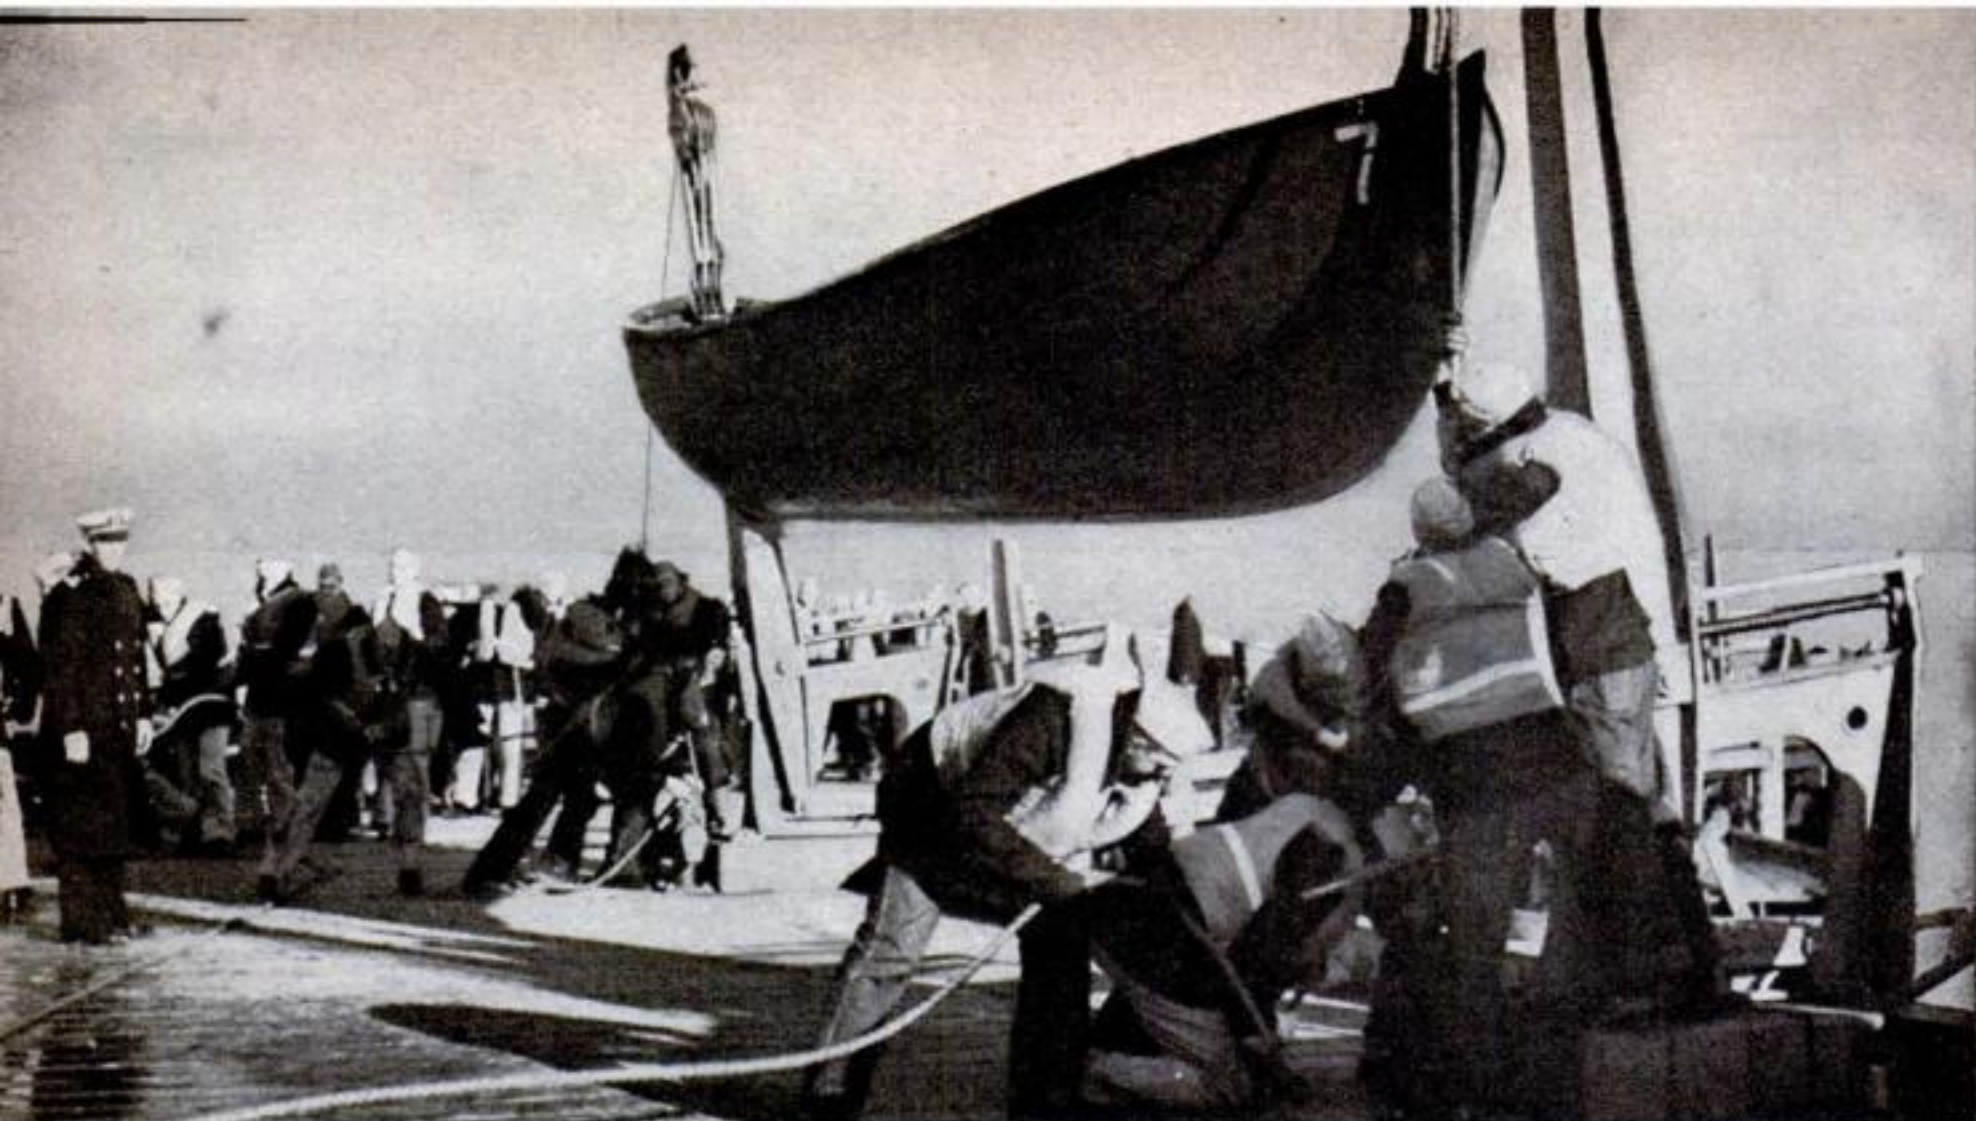

shoulder. Had he been caught without any other equipment, this little bag would have saved the day for Marty, for there was enough air trapped in it to support the weight of two men in the water.

What subsequently happened to this typical seaman is now a common story among the gallant men of our merchant marine. With his air-filled life suit, his inflated bag, and his kapok vest, he had buoyancy to spare, and he wasn't pulled down very far by the suction from the sinking boat, nor even by the davit guy wire that momentarily coiled around his boots. As soon as he shot to the surface, he kicked himself upright, and the next moment he was flashing the red signal light clamped to the chest of his rubber suit. Some of his ship-

mates who had managed to lower away one of the life boats aft were attracted by the flickering light, and soon had hauled him into their boat. Here there was an ample stock of sulfa drugs and other medicinal supplies in the emergency first-aid kit, and Marty's hand was carefully attended to.

Even better, the boat was equipped with a portable radio receiving and transmitting set. The ship's radio operator had gone down with the vessel, but there was no difficulty in operating the radio, since it had an automatic signal which flashed repeated SOS's over the international-distress wave length to all ships at sea and coastal listening posts. This distress signal was picked up by a near-by Coast Guard station, which speedily dispatched a rescue




At an Eastern training station, Merchant Marine cadets shown above are instructed in lowering a lifeboat from a pair of davits. At the left, a seaman "models" the clothes used on the Arctic run. These include a fur hood, felt mask, sheepskin-lined corduroy jacket, felt boots with rubber overshoes, and fleece-lined mittens. The drawstring-type Vaco life suit at right has a special flashlight with a spring arrangement, shown below, which enables the wearer to signal passing ships and planes while he is adrift



MERCHANT MARINE SCHOOLS TEACH MEN TO PLAY SAFE

The United States Merchant Marine Academy at Kings Point, Long Island, N. Y., is only one of the Government's new cadet schools now training men from civilian life for ratings in the Merchant Marine service. The course takes about a year to complete, and gives an intensive training in the more important phases of seamanship. Most important of all at the moment are the studies in safety seamanship—based largely on the experiences of shipwrecked seamen who have come back to tell how lack of proper equipment and insufficient training can take a heavy toll of lives in torpedoings and bombings. Cadets, in every stage of their training, are now studying and profiting by these experiences. Shown on these pages are some of the lifesaving methods that cadets must master before certification. At left, they climb down ropes and cargo nets in an abandon-ship exercise. At lower left, a cadet jumps from the "deck" to the water in a rubber life suit. At bottom left, with his safety bag under his arm, he waits to be rescued, and below, his comrades haul him in safely.

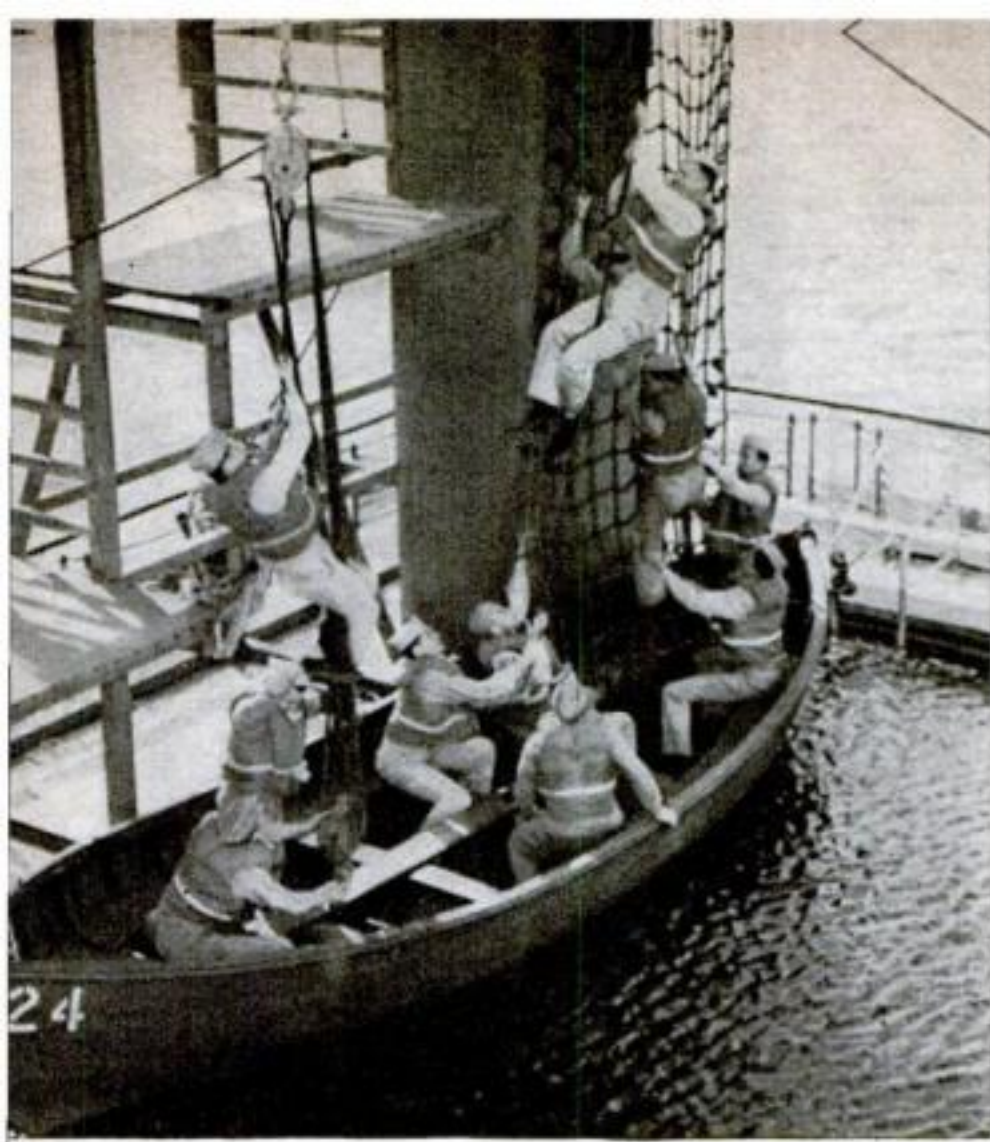



First-aid kits are also required equipment for all rafts and lifeboats. The watertight container shown below contains, among other necessities, sulfa drugs, tannic acid, splints, gauze, scissors, forceps, ammonia, iodine, adhesive tape, cotton, and safety pins



Among the many items shown at the "Safety-At-Sea" exhibit held recently at the New York headquarters of the National Maritime Union are those appearing at upper left. The Delta Morse-code signaling lamp above shows the telegrapher's key with which a shipwrecked seaman can flash the dots and dashes of a message to a passing ship. At lower left are some of the concentrated foods with which every lifeboat must be equipped. Among these are canned pemmican, sweet chocolate, malted-milk tablets, and biscuits. One of the most serviceable pieces of equipment for every seaman who has to abandon ship is the Sculler automatic distress signal shown at the right. This canvas-covered instrument requires no keys or switches to flash its signal. Simply turning it right side up forces down an internal weight which makes a contact and lights the bulb. It is watertight and extremely durable.



boat. There was no trouble in finding the lifeboat a few hours later, because Marty's comrades kept shooting up brilliant red parachute flares from their signaling gun.

Today, a little more than a year after the opening shot of the war, the United States merchant marine has become expert in meeting all emergencies at sea, and is being equipped with a host of lifesaving devices which bid fair to make it the safest merchant fleet in the world.

How this safety streamlining was accomplished is a story of close co-operation between the Navy, the Coast Guard, the Maritime Commission, the War Shipping Administration, and hundreds of sailors in the maritime unions—men like Marty and his mates who came back from sea with recommendations based on first-hand experience. Early in the war, the National Maritime Union, for example, drew up a



The "doughnut" raft below is used when lifeboats and rafts are unavailable. Made of canvas-covered cork, it has a rope-supported submerged platform for use by injured or exhausted men. Rope coils attached to the sides permit men in the water to hold onto the raft



Lifeboats riddled with machine-gun bullets add to seamen's difficulties. Two kinds of plugs are used to stop up the holes: a wooden conical plug which will fit into almost any size bullet hole; and a metal plug whose toggle bar opens on the outside of the hole, allowing washer to be screwed tight

safety program designed to save lives, ships, and cargoes from avoidable loss. Included in this program were urgent pleas for better loading of ships; the proper provisioning of lifeboats; the installation on all merchant ships of lifesaving suits, rafts, and defensive arms; the reconditioning of quarters to accommodate Navy gun crews; compulsory lifeboat and fire drills on every boat before leaving port; the keeping of lifeboats swung out on their davits at all times; the establishment of an adequate coast patrol through the requisitioning of small private craft; the organization of safety committees aboard all ships; and a thorough training program for new men.


Government experts, engaged in elaborate research on their own, listened carefully to the men who man the ships and in many instances adopted their suggestions. Government agencies then swung into action by drastically tightening the regulations covering equipment and behavior on board merchant vessels. Local Merchant Marine inspectors in every port, operating under the Coast Guard, went over every ship from stem to stern, checking the safety equipment and supervising the installation of new gear. The Division of Training of the War Shipping Administration, under Telfair Knight, director of the division, and Captain R. R. McNulty, assistant director and supervisor of the Merchant Marine Cadet Corps, has set up 13 centers for the training of thousands of men. Some of these centers are cadet schools which are training men from civilian life and seamen



up from the fo'c'sle for both licensed and unlicensed ratings in the Merchant Marine. Others, like the huge Sheepshead Bay Maritime Training Station at Oriental Point, N. Y., are preparing men to be stewards, deck hands, and boiler-room apprentices. In every school a strenuous Safety Seamanship Program has been instituted.

The United States Merchant Marine Academy—located at Kings Point, L. I., on the luxurious grounds that were formerly the estates of Walter P. Chrysler, Nicholas Schenck, and the late movie star, Thomas Meighan—is typical of the Government's cadet training centers. Entrance requirements are every bit as tough as the Navy's. Only high-school graduates of good character, and who can pass stiff physical and intelligence tests, are admitted. Cadet officers, taken from civil life, receive 10 weeks of preliminary training, then spend six months at sea, and finally return to school for six to eight months of additional instruction. Their classes cover naval science, seamanship, navigation, cargo loading, ship construction, lifeboat certification, and a heavy dose of Safety Seamanship—in other words, a course of study that runs the whole nautical gamut.

Before certification, the cadets go through a four-hour drill which simulates the actual conditions of a vessel under fire. This is the acid test, and it takes real proficiency to survive it. Some of the men, designated as casualties, are lowered into lifeboats and given first-aid treatment while the crew is pulling away (*Continued on page 214*)

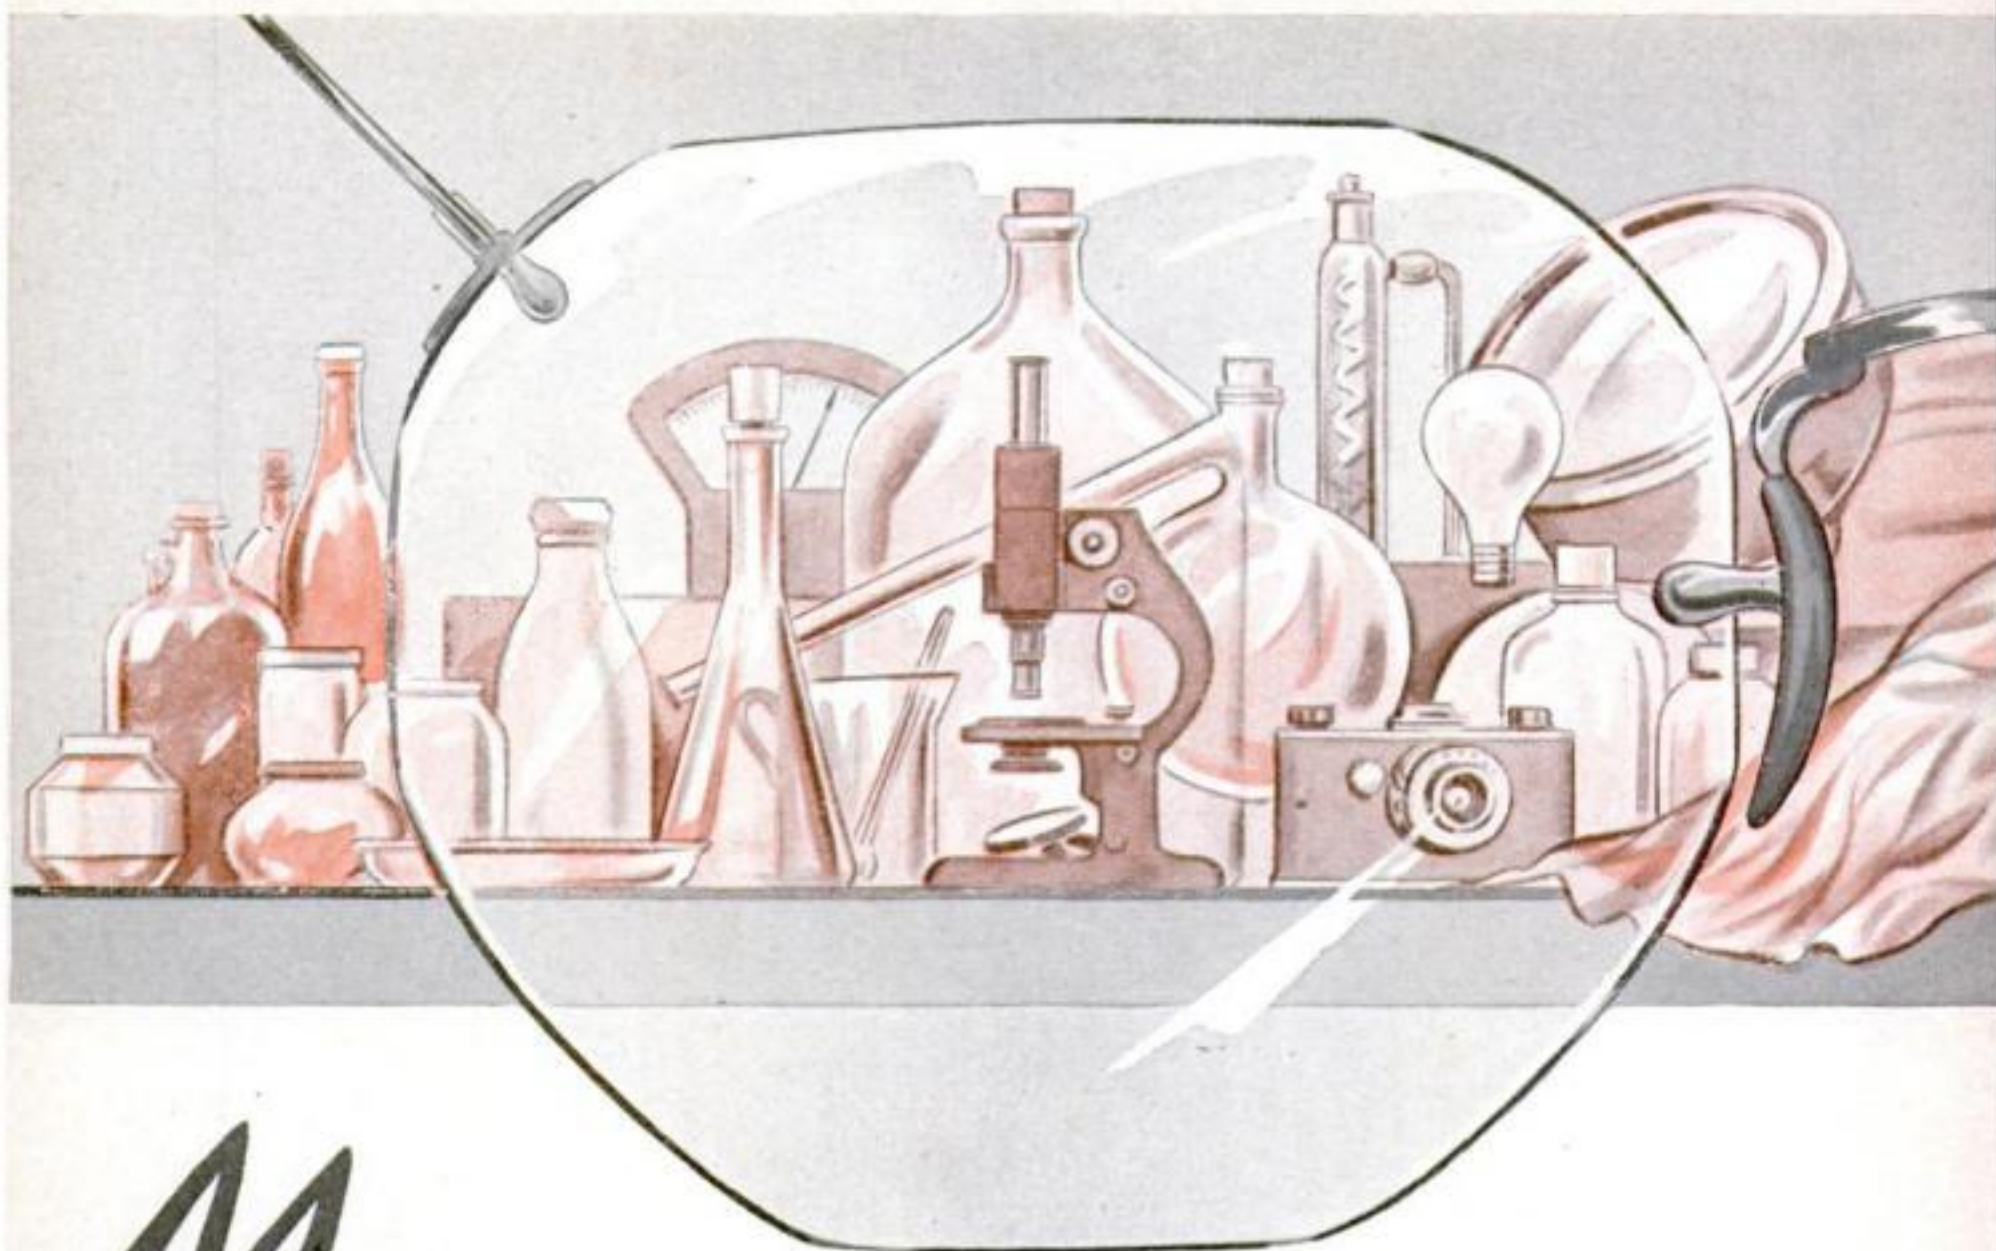

MYSTERY MATERIAL

SCIENCE HAS DISCOVERED UNDREAMED-OF WAYS TO

By HERBERT ASBURY


ALTHOUGH man has manufactured glass for some 10,000 years, he still doesn't know precisely what it is or how to describe it accurately. The scientist may call it "a super-cooled liquid," or "an amorphous solid," but these and other definitions don't describe glass in the sense that H_2O , for example, describes water. No true chemical formula for glass is known, because its chemical constitution and molecular structure are mysteries which not even the microscope and the X-ray have been able to solve.

From remotest antiquity this mysterious substance has been used by man for his safety, comfort, and adornment. Artifacts of obsidian, glass manufactured by nature through volcanic action, have been found in almost every country of the world. The savage of the Stone Age chipped knives and spearheads from fragments of obsidian, and as early as the Bronze Age the substance was sold and bartered as an important article of commerce. For thousands of years it was in demand for weapons, jewelry, and

mirrors, but its importance began to decline when the first artificial glass appeared about 8,000 B. C.

In the modern world glass is everywhere. We drink from glass and preserve our food in it. We look through it, into it, and use it for protection from the weather. It enables the optical scientist to measure and control light, and the astronomer to see and photograph the planets and the stars. It makes possible the spectroscope and the microscope, the cathode-ray tube and the X-ray machine, and the myriad instruments of a great research laboratory. A world without glass would be dark, dreary, and uncomfortable; to millions it would also be blurred and dangerous.

The pace of technological advance in the glass industry has been tremendously accelerated by the war, and American manufacturers are producing new types of glass which are not only proving satisfactory as substitutes for critical materials, but are being used in the actual fabrication of weapons. Perhaps the most important of these discoveries have been made in optical glass, the manufacture of which is one of

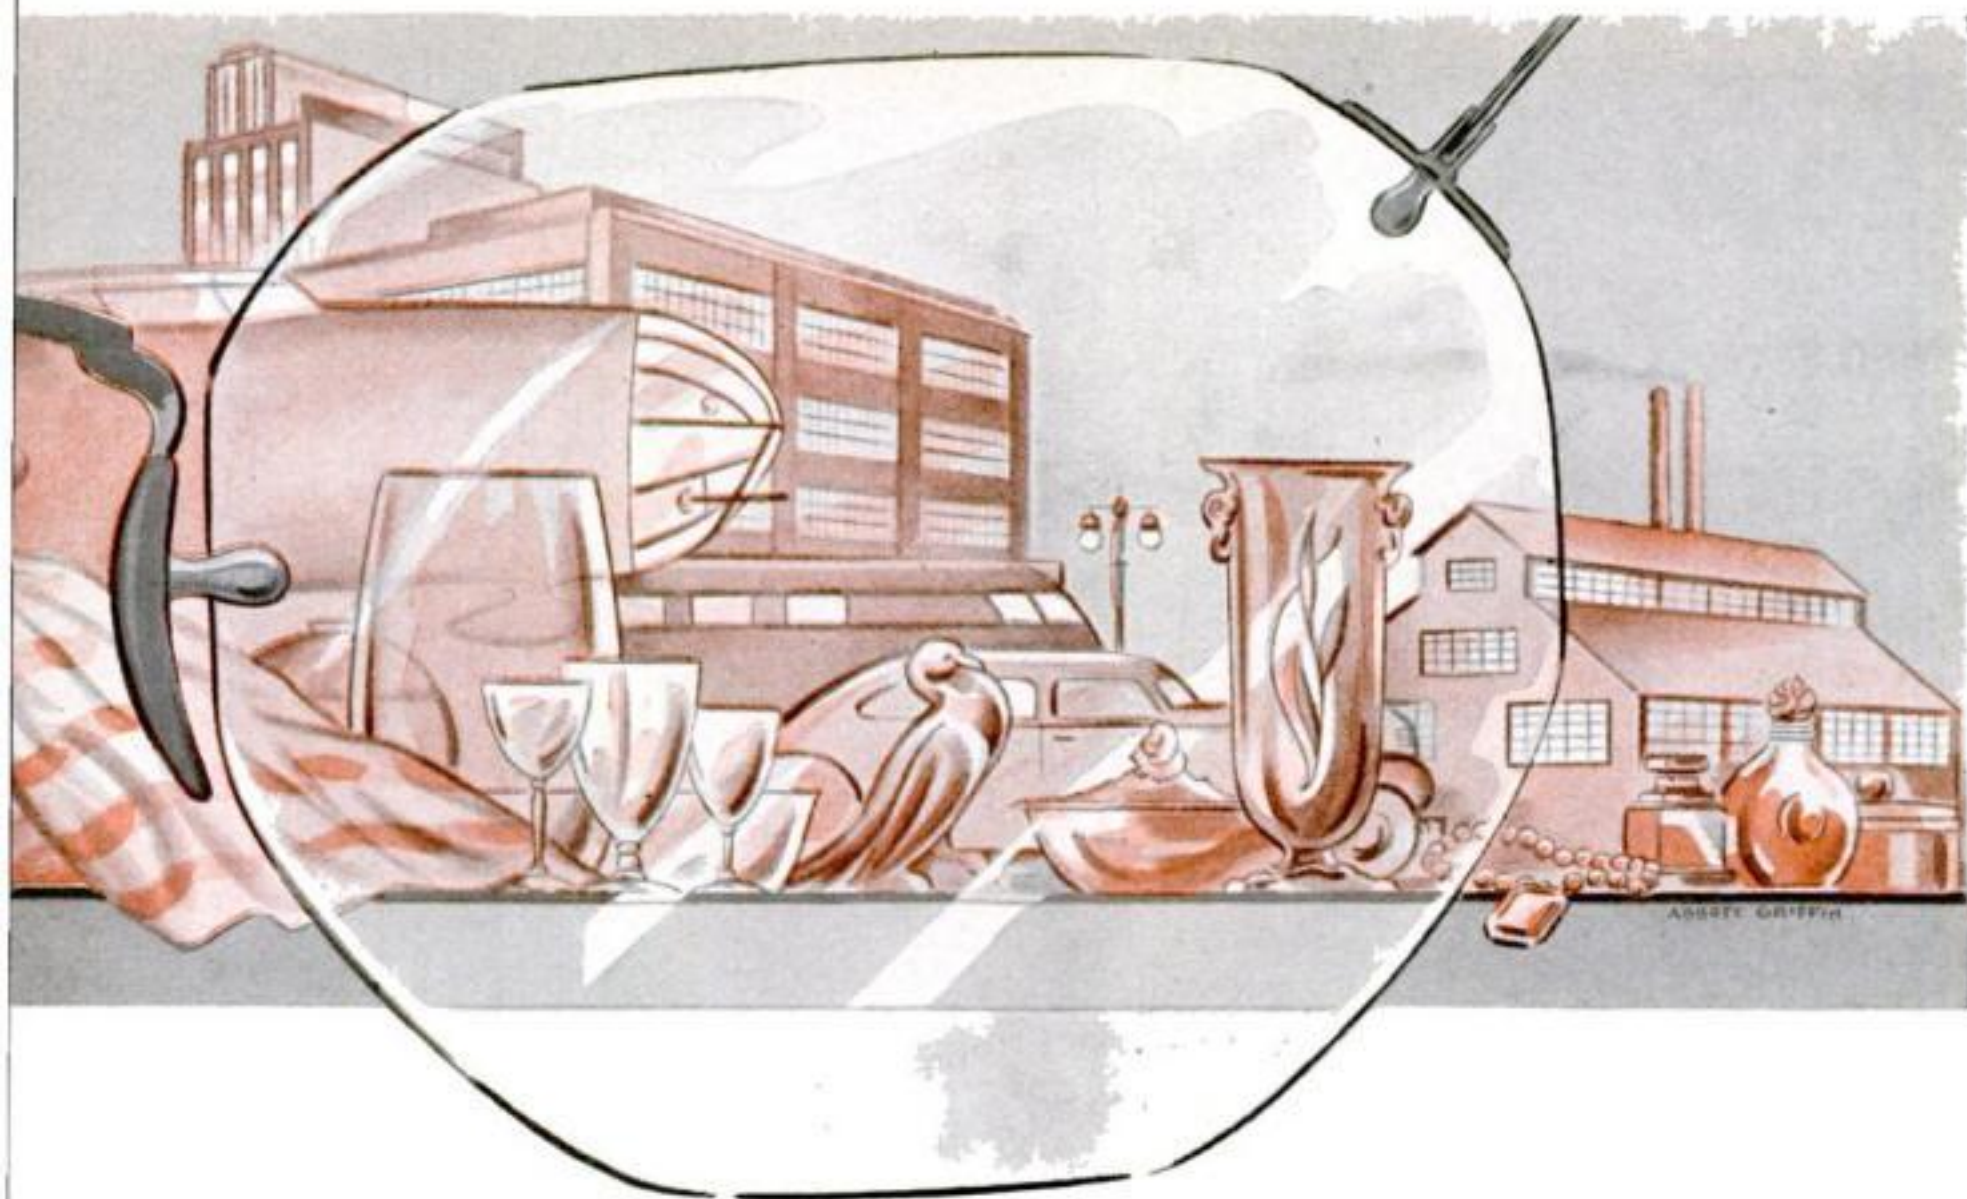

OF A THOUSAND USES

USE GLASS—BUT STILL HASN'T FOUND OUT JUST WHAT IT IS

America's most carefully guarded military secrets. In this field the new glasses have enormously increased the efficiency of our range finders, detection devices, aerial cameras, and other precision instruments used by the armed forces. One new glass is being ground into lenses which will enable observers to look directly at the sun with clear vision, and so spot dive bombers and other approaching aircraft. Another will blot out all reflected glare, but the lens ground from it can be rotated by hand to exclude as much light as desired. A third, the first glass made without sand, has a much higher refractive index than any glass previously manufactured. Applied to aerial cameras, it will give better definition and cover a larger area with no loss in lens speed.


New uses for glass in ammunition, and in the actual manufacture of ordnance, are of equal importance, but cannot be revealed. Two of the country's largest glass-makers, Libbey-Owens-Ford and Pittsburgh Plate Glass, are making a glass up to four inches in thickness, which will stop a .50 caliber bullet, and are fabricating housings

for pilots and bombardiers out of bent laminated safety glass. A year ago both of these glasses were considered impossible to make.


To alleviate a shortage of cork for low-temperature insulation, and of magnesia, asbestos, and other materials for high temperatures, the Pittsburgh-Corning Corporation has developed Foamglas, (P. S. M. Nov. '42, p. 49).

The Corning Glass Works are making automobile batteries of glass for the first time, using their famous heat-tempered Pyrex, and are thus conserving lead and rubber. Various metals are being saved by the use of glass springs for stresses of 2,000 pounds per square inch. In many respects glass is superior to steel for this purpose. It is more truly elastic, retains its elasticity over a broader temperature range, is immune to acids, and is apparently immune to fatigue. One such spring showed no signs of failure after 8,000,000 deflections in a sulphuric-acid mist.

Extensive use of the new fiber glass for heat insulation and interior finishing in ships and airplanes is (CONTINUED)

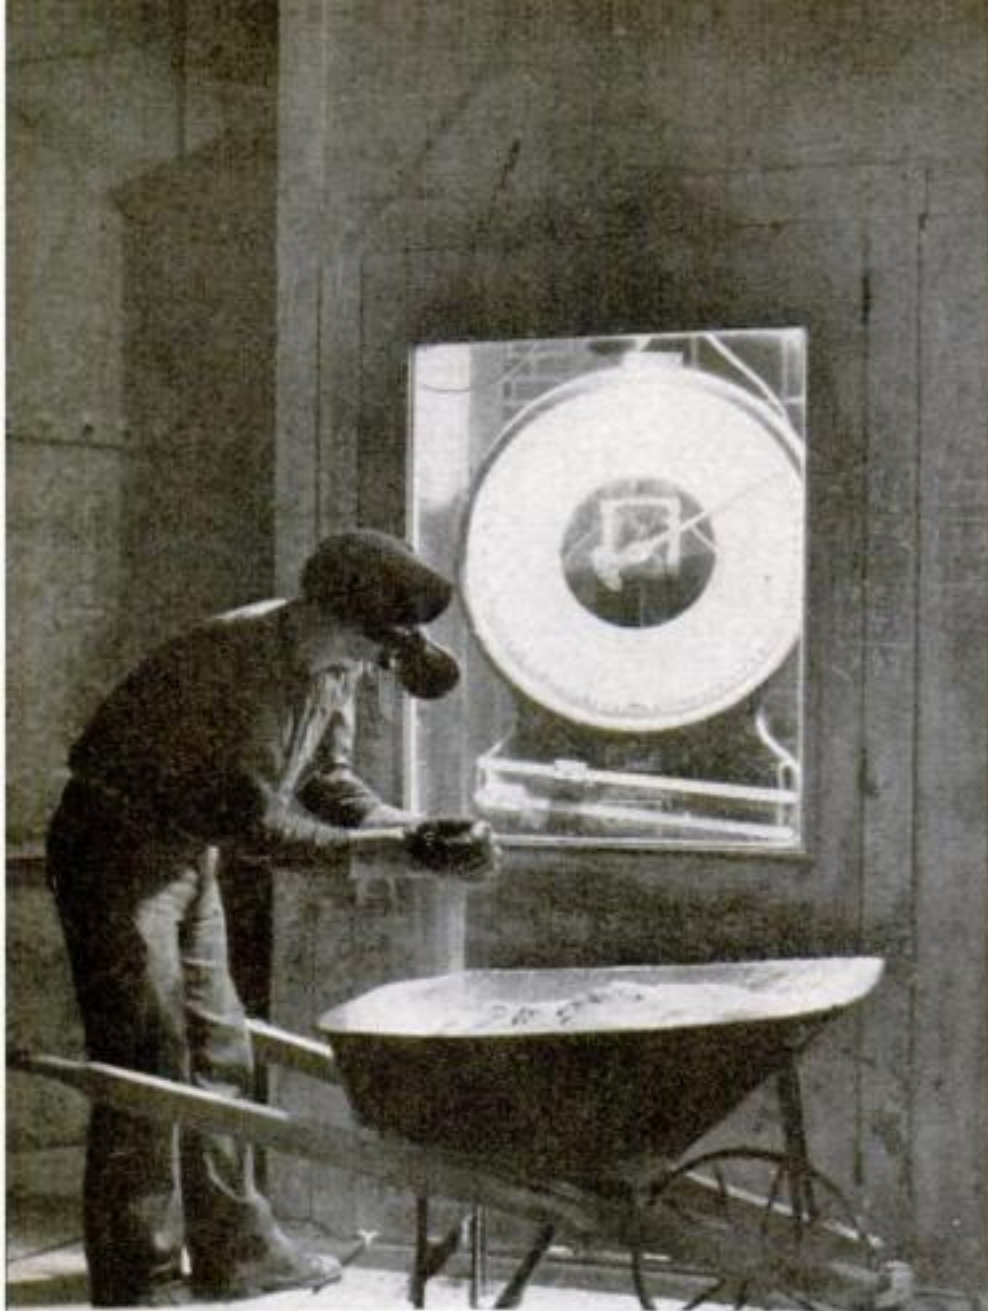



1 Glass making starts with precise weighing of silica, limestone, and other ingredients. Here the operator is keeping his eye on the delicate scale as he lets a handful of material dribble through his fingers

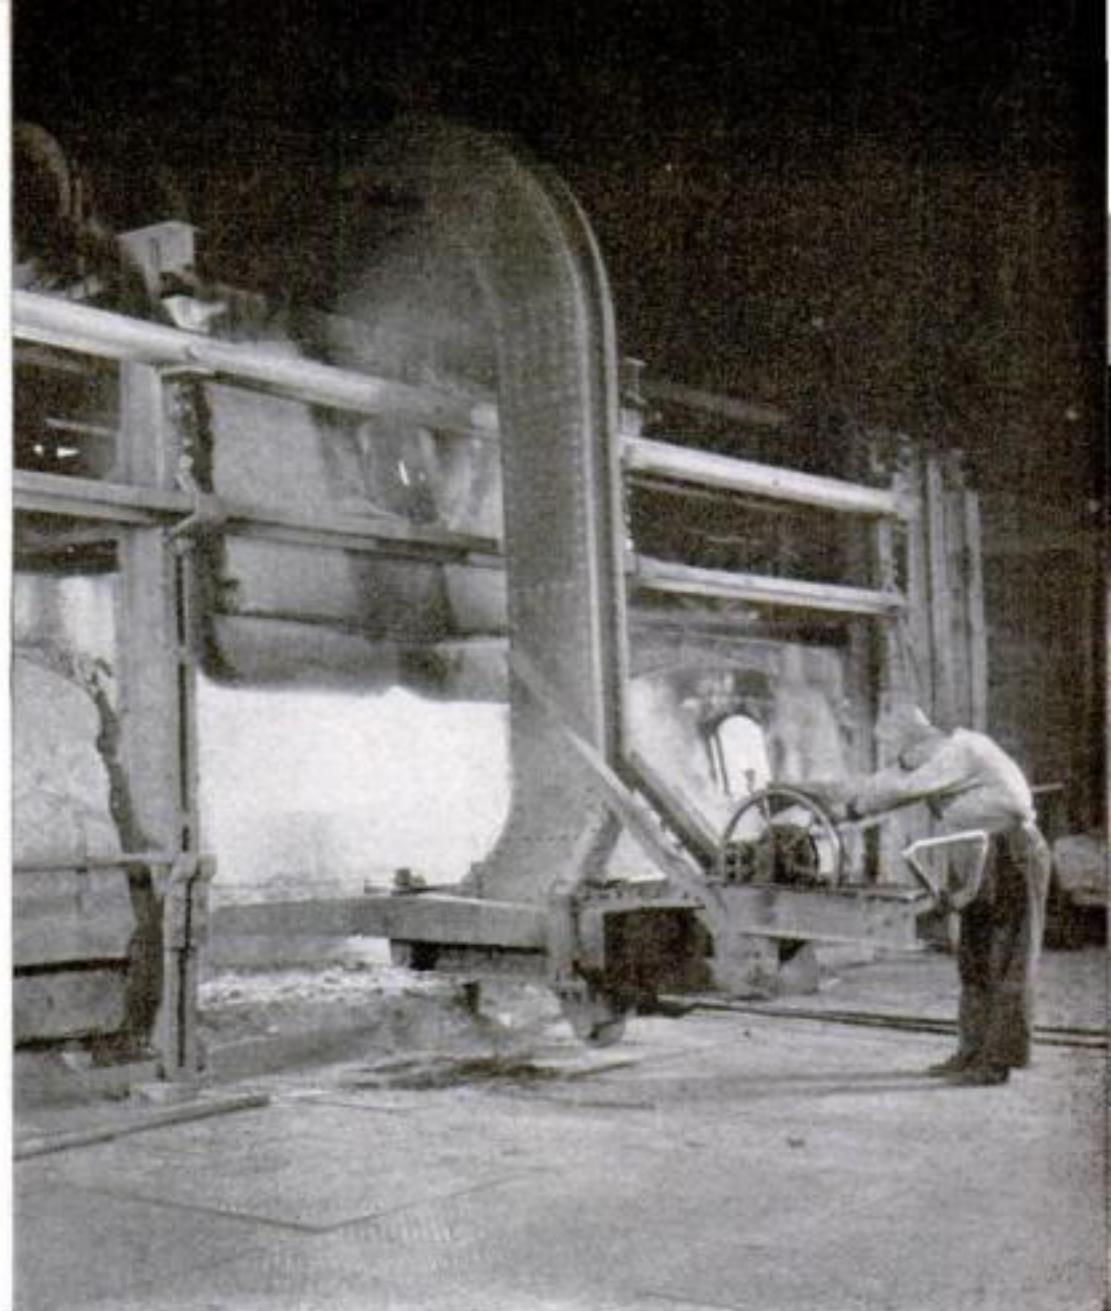


2 The batch of ingredients is now put into huge clay pots which are inserted in this high-temperature furnace. Merely by varying the materials that go to make up the batches, the Corning Glass Works manufactures as many as 300 types of glass

4 Shown below is one of the long cast-iron tables on which the plate glass will rest during grinding and polishing. Plaster of Paris is spread on the table to hold the glass securely when the table is pushed under the battery of grinders shown in the background


5 Looking like enormous phonograph disks, spinning swiftly on turntables, this series of polishing wheels puts the finishing touch to the surface of the glass. Prior to this, the glass has been ground from rough to smooth. For abrasives, sand is used in the grinding, and iron oxide in the polishing

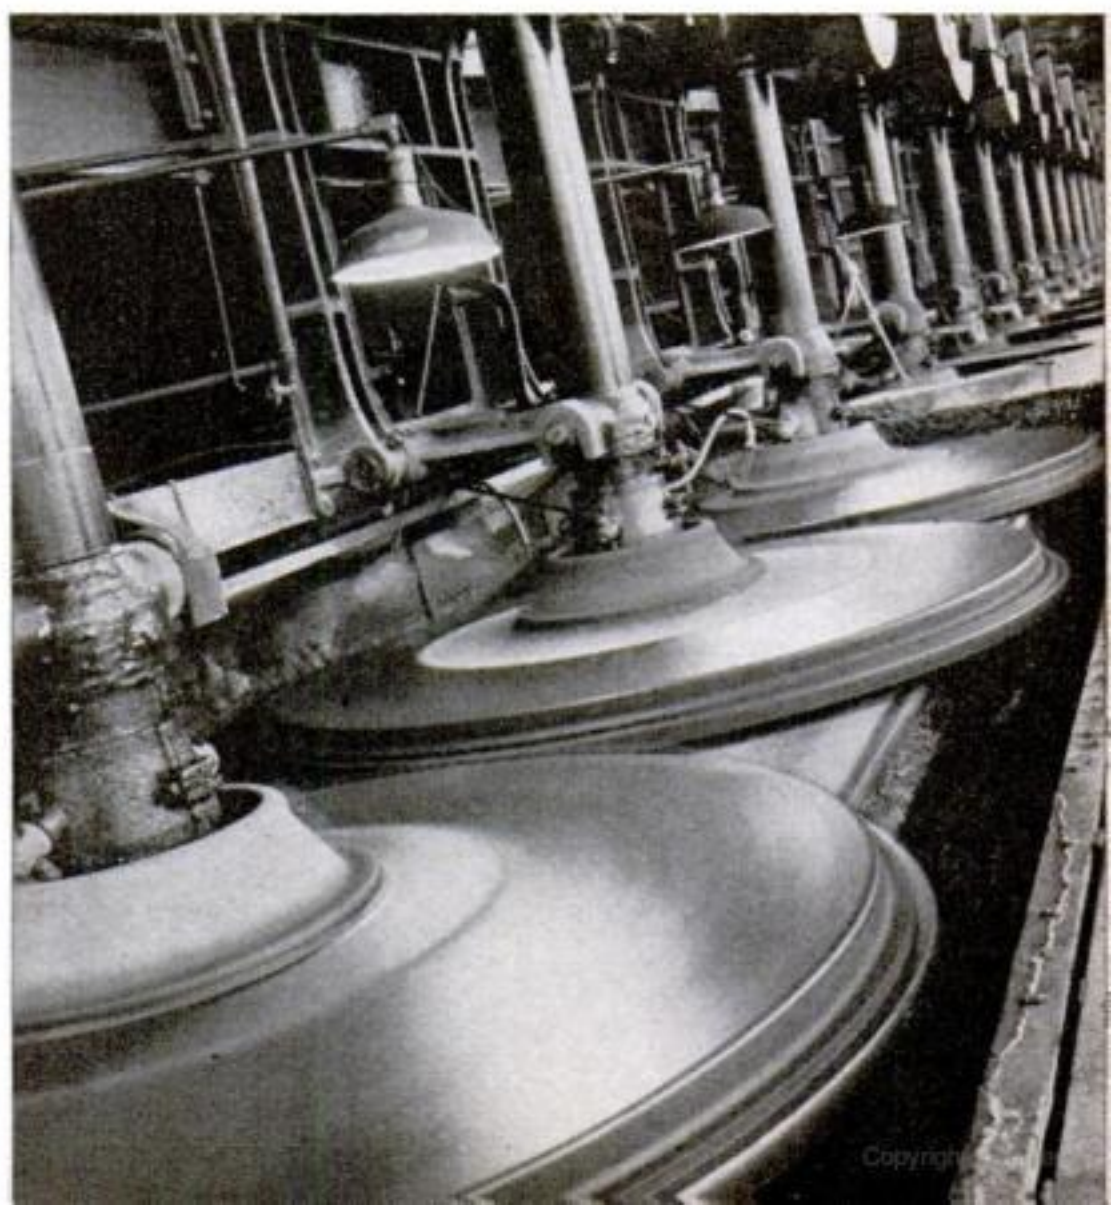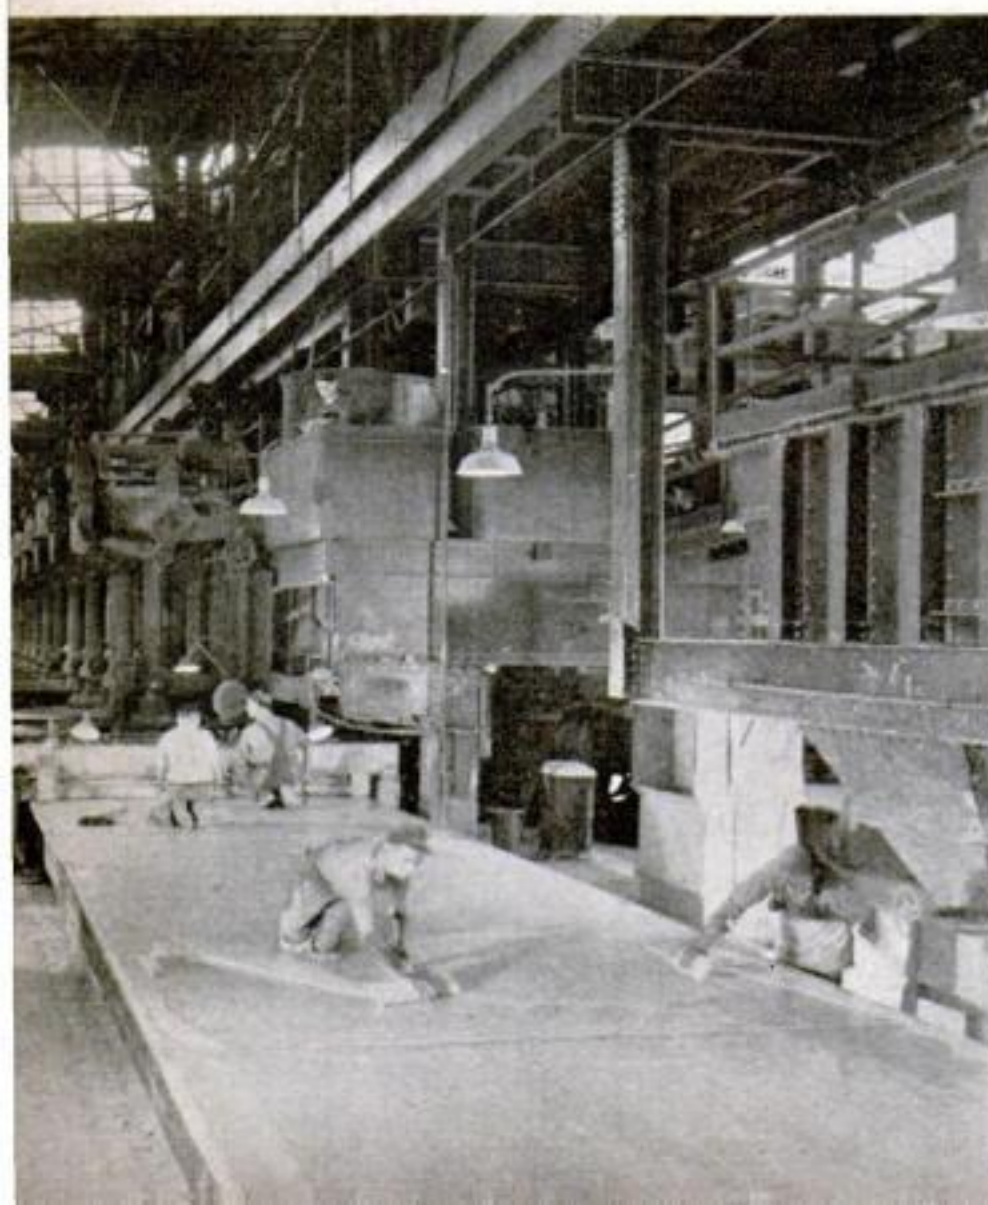

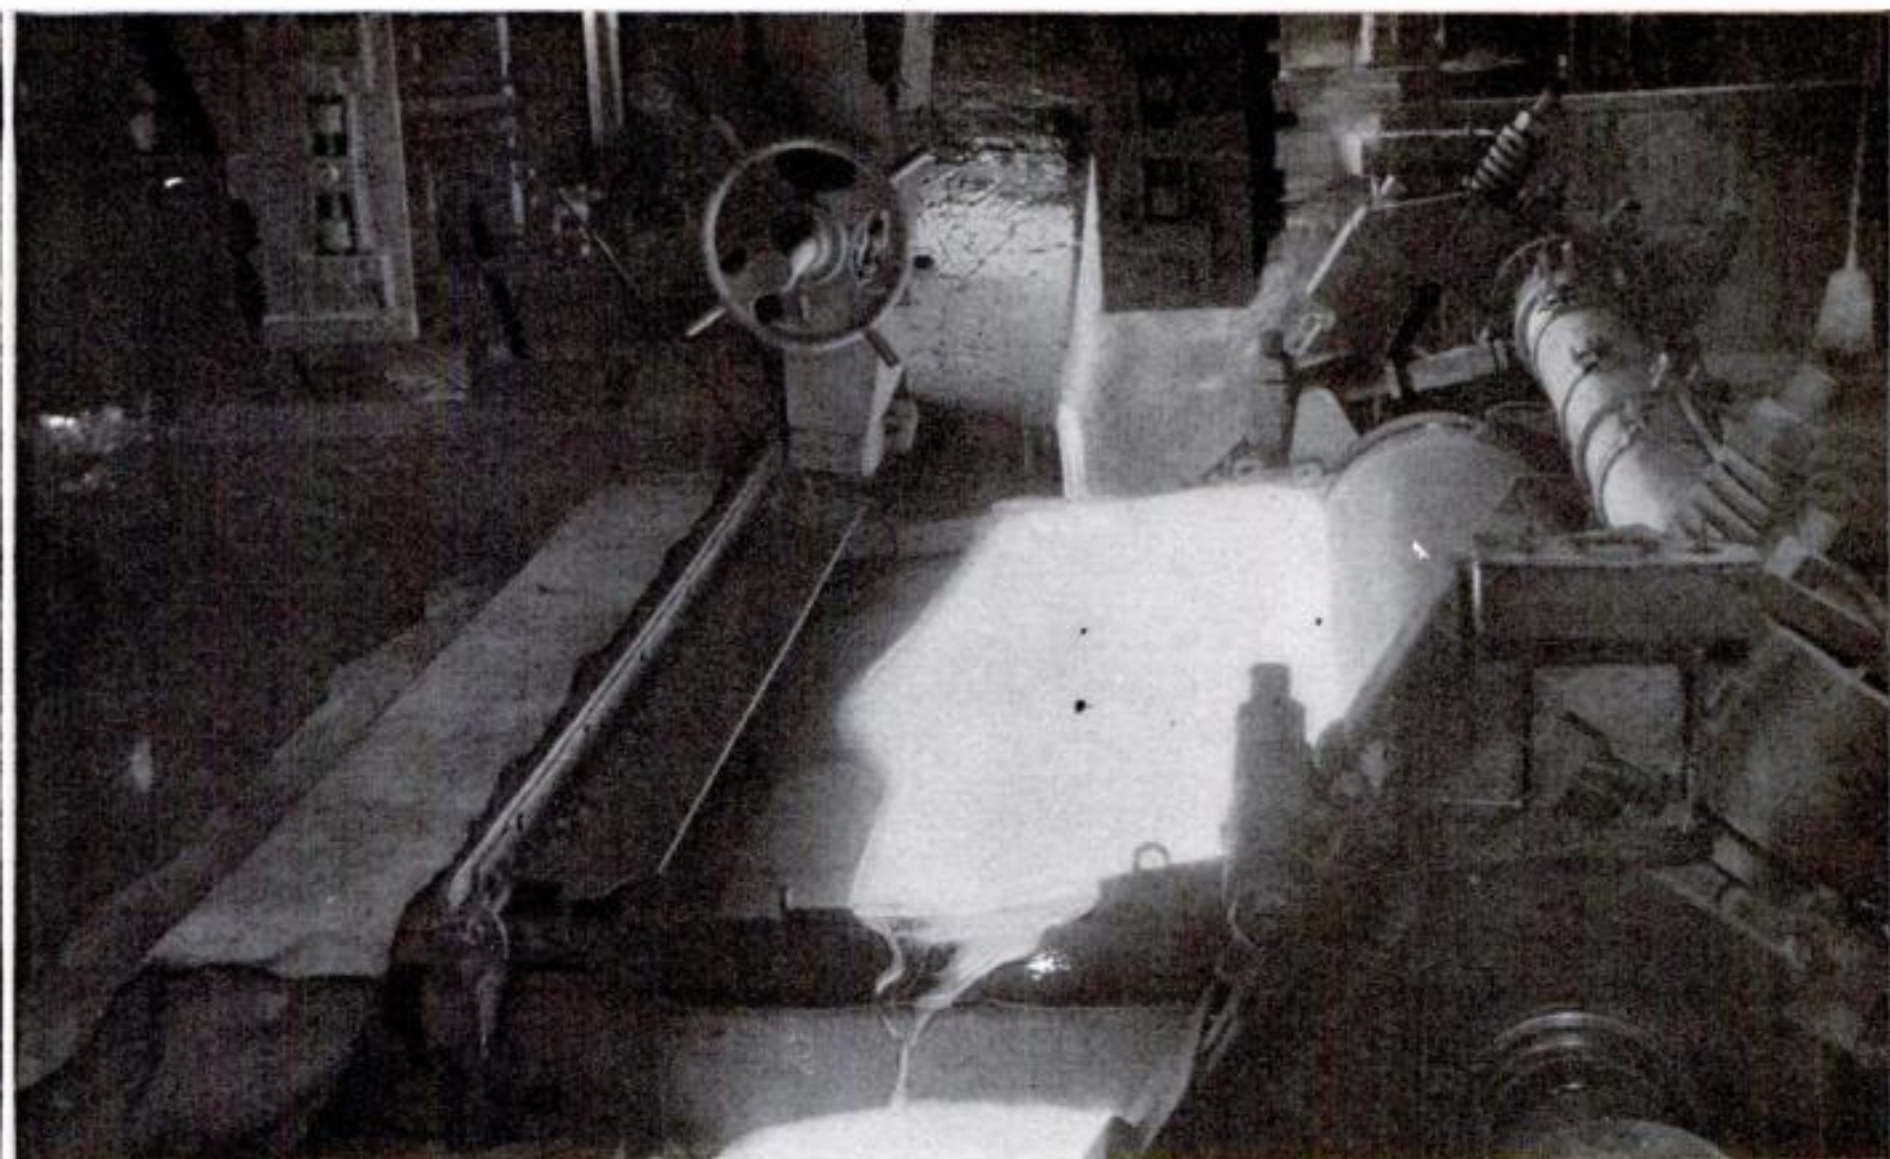

3 From the furnace, the molten glass is carried to this machine by means of cranes. Here the glass is shown being poured from a pot into the rollers which flatten the glass to the desired thickness. As soon as this thickness is attained, the hot glass is passed along on rollers to the annealing room—a long brick tunnel through which the glass moves slowly. In this manner the plate glass is carefully cooled, finally emerges as rough glass, and is ready to be ground and polished

6 Following the polishing process, the glass plates are washed and dried, and then by means of raising and lowering platforms, they are stood up on edge and carefully examined by highly trained inspectors. Should imperfections occur, they are marked on the glass, which is then sent to a room where it is cut on automatic machines. When the imperfections have been eliminated, the glass is ready for shipment. Although the entire process is one of delicate measurements and skillful operations, from the time of the melt to cutting the glass for market it actually takes but a few hours

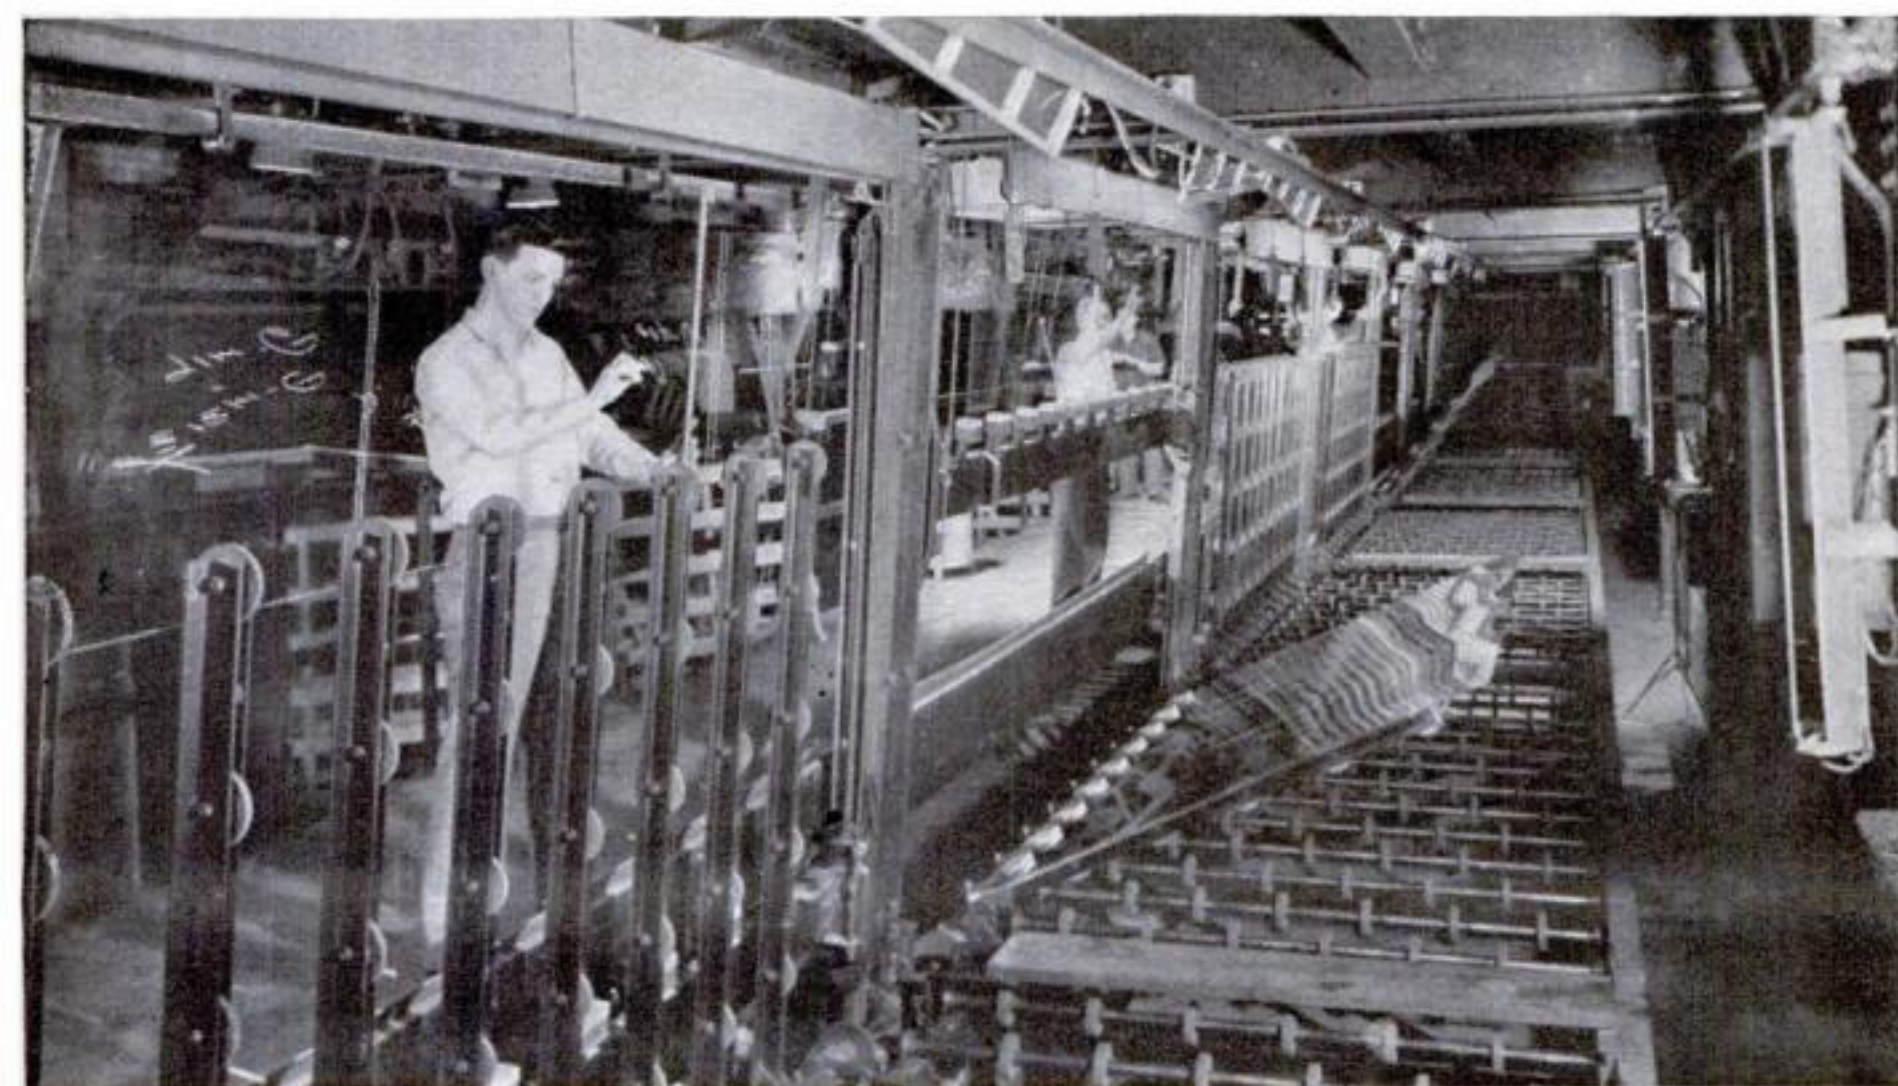


estimated by the Navy to have saved 6,000,000 pounds of aluminum in the first eight months of the war. This glass is also being utilized for camouflage, is replacing asbestos in electrical equipment, and is being spun into textiles for military purposes. Improved manufacturing methods now permit the glass used as electrical insulators to be formed into intricate shapes having threads, holes, and other design details. Glass plumbing is beginning to replace lead, steel, and copper, and a new tempering treatment makes the glass pipe suitable for hot-water service.


Two discoveries in particular have helped make these applications possible and hold great promise for the future. They are an extremely hard plate glass manufactured under various trade names by the Pittsburgh Plate Glass Company and others, and a 96-percent silica glass developed by H. P. Hood and M. E. Nordberg of Corning Glass Works. The importance of the latter glass, the discovery of which has been hailed as one of the outstanding scientific achievements of the century, lies in the fact that it is almost pure fused silica, and very nearly closes the gap between glass and quartz. It has unusual chemical stability, an extremely high softening point, remarkable

transparency to infrared and ultraviolet radiation, and great resistance to thermal shock; it can be heated white-hot and thrust into cold water without damage.

In devising methods of manufacturing the 96-percent silica glass, Hood and Nordberg found that they could begin with a borosilicate glass of about 75 percent silica. This was of great importance, for it enabled them to avoid the high temperatures necessary to melt a glass of very high silica content. The melting point of the high crystal form of silica, for instance, is 1,710 degrees centigrade, which can be reached only in specially built furnaces. After melting the borosilicate glass in the usual manner, the product is subjected to a heat treatment which causes it to separate into two distinct phases, one of which is very high in boric and alkali oxides and is soluble in 3N-HCL, or 5N-H₂SO₄, at about 98 degrees centigrade. After being immersed in one of these solutions one day for each millimeter of thickness, the soluble phase is completely leached out, but the other, which is almost pure silica, is not affected. The glass is then washed and dehydrated at high temperatures, a process which causes it to shrink about 20 percent and closes all of the large number of minute pores. The

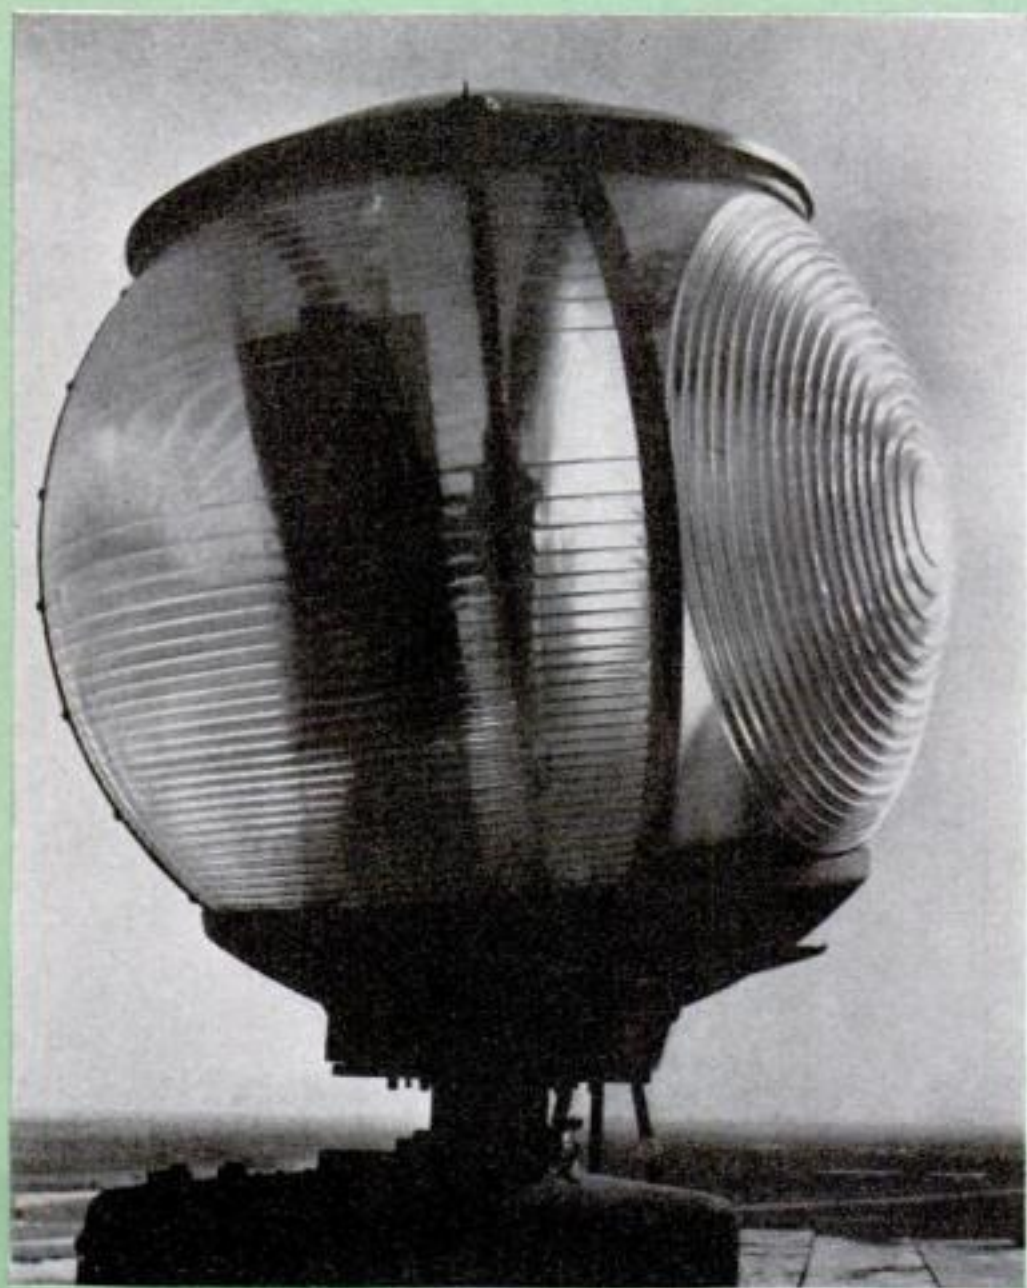

GLASS NOW DOES

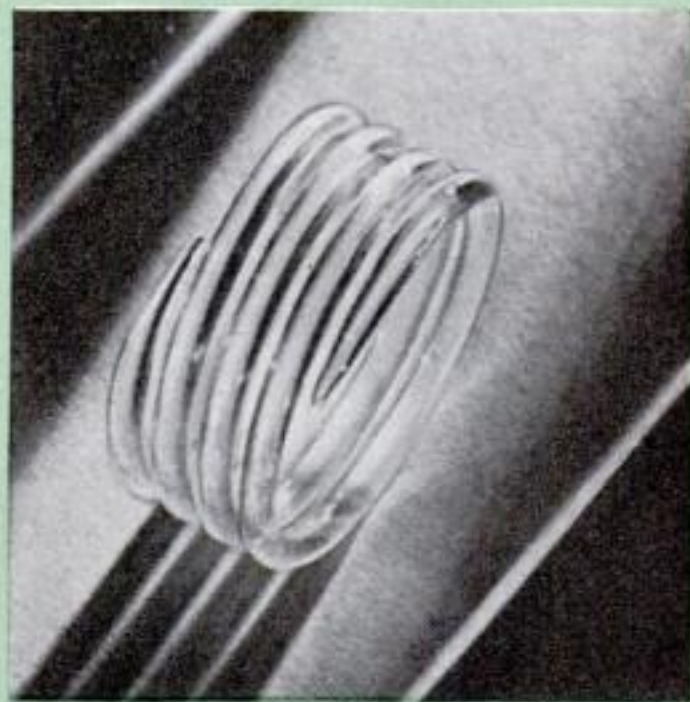

Springs made of glass have proved to be one of the marvels of modern engineering. Recently one of these glass gadgets was put in a flexing machine and left there for a few days. When it was finally taken out it was in excellent condition—after eight million deflections! The lenses in the modern revolving airport beacon at the left are among many products made by Corning Glass

result is a nonporous, transparent glass. Because of the remarkable method of manufacture, it is generally known at Corning as "resurrection glass."

The new hard glass, a tempered plate glass made by a quick annealing process which neutralizes the forces of expansion and contraction, has many of the characteristics of the 96-percent silica glass, and in other respects approaches the glass-maker's dream of malleable glass. It can be bent while in a plastic state and tempered in almost any shape and at any desired angle. It is $4\frac{1}{2}$ times as strong as ordinary plate glass, and is heat resistant up to 550 degrees Fahrenheit. A pane of this glass, resting upon a cake of ice, is not damaged when molten lead is poured upon the upper surface, while a two-pound steel ball, dropped from a height of six feet, will bounce off without leaving even a scratch. A sheet of hard glass, supported only at the ends, will hold a three-ton elephant.


A surprisingly large number of chemicals, each of which must be as nearly pure as possible, enter into the composition of the various types of commercial glass made in the United States, but most of them are added to the melt in small quantities to

give the glass certain definite chemical and physical properties. The basic ingredients of every mixture, or batch, are silica, or sand, to the extent of from 60 to 80 percent by weight; limestone, burned or raw, about 13 percent; and soda ash in approximately the same proportions. Two other substances which are almost always included are sodium sulphate, to reduce the amount of seed and bubble and act as a refining agent; and cullet. The latter is glass of the same composition left over from a previous melt. It assists in the melting, and bears about the same relation to glass making as scrap iron does to the manufacture of steel.

If the glass scientist wants to increase the permanence and viscosity of a glass, he adds a little aluminum oxide to his formula. Barium is used in special optical glasses to increase the index of refraction. Boron will both increase the fusibility of glass and reduce the coefficient of expansion. Cerium helps cut out infrared radiation. The number of different glasses manufactured is even larger than the number of substances which may enter into their composition. In an average year one company alone, the Corning Glass Works, will melt almost 300 different types of glass.

THE "IMPOSSIBLE"—AND PROMISES TO DO A LOT MORE

This evaporation dish is one of the first of the 96-percent-silica glass items made by Corning. Molten metal can be poured into it when it is thoroughly chilled and it will not break or crack

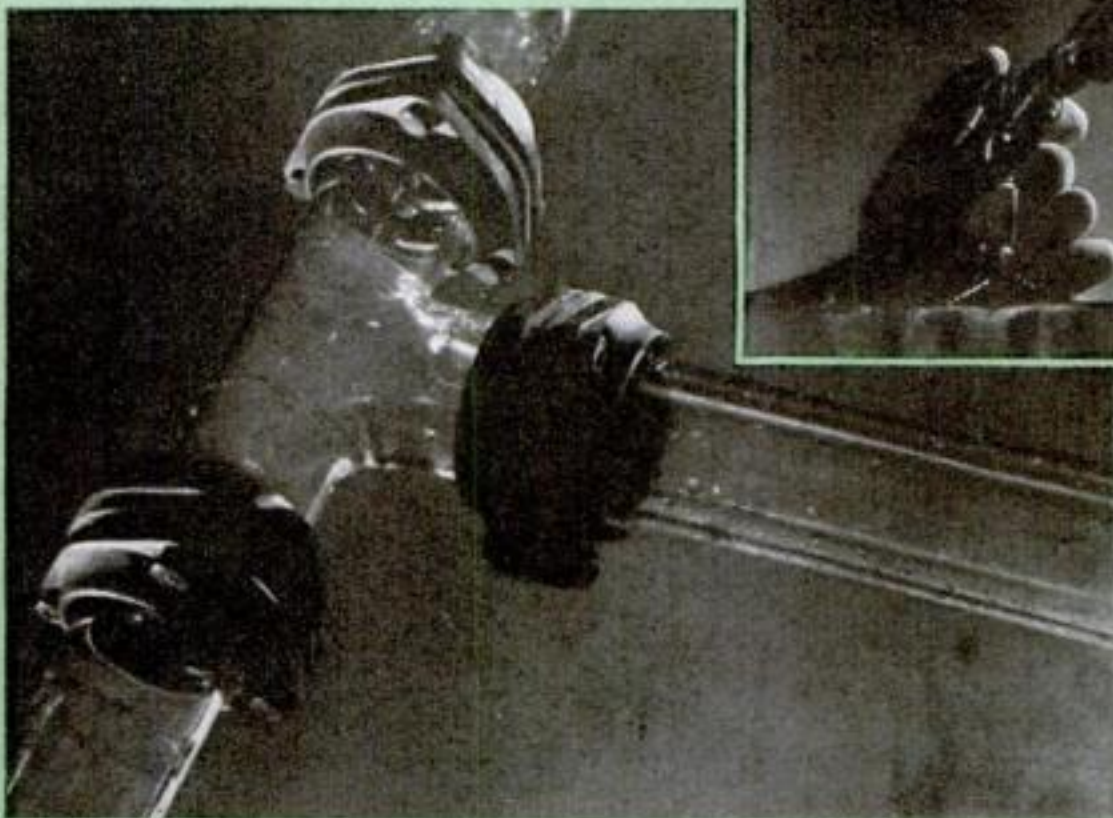

Glass tubing has now been made so sturdy that it is beginning to replace lead, steel, and copper in plumbing. A new method of tempering the glass makes it suitable for any type of hot-water service



What does the American flyer look like? Here are the measurements of the typical pilot, average of 1,871 young men in the Air Forces:

Height	5 feet 9 inches.
Weight	154.3 pounds.
Arm span	71½ inches.
Reach	35 inches.
Shoulders	17¾ inches.
Chest diameter	8 inches.
Waist diameter	8 inches.
Chest circumference	36¼ inches.
Waist circumference	30 inches.
Head (7⅛ hat)	22¼ inches.
Biceps	11½ inches.
Forearm	9½ inches.
Thigh	20⅝ inches.
Calf	14 inches.
Height, seated	36¼ inches.
Back to knee, seated	23⅜ inches.
Knee to floor	21¾ inches.
Breadth of seat	14 inches.
Foot length	10½ inches.
Hand length	7⅝ inches.

ANTHROPOLOGY SHOWS YOU

THE TYPICAL AMERICAN FLYER

By HICKMAN POWELL

Photographs by William W. Morris

SHORTLY after America entered the war it was discovered, in the testing of an experimental bombing plane, that while a flyer of average size could easily squeeze through the escape hatch to bail out of the ship, a big flyer could not possibly make a jump without first taking off his parachute. The hatch had been made too small.

This embarrassing "bug" was immediately corrected by the manufacturer, but meanwhile it had performed an immensely useful service. It had emphasized and dramatized an important fact which was beginning to be realized at the Aero-Medical Research Laboratory at Wright Field: designers of flying equipment did not have enough precise knowledge of the shape and size of the young men who were going to use it. [*\(CONTINUED ON PAGE 100\)*](#)

Anthropology plays its part in the design of flyers' masks. Here Lieutenant Randall checks a model with sliding calipers

Finishing touches are put on one of the clay heads in the Army's series





Plaster cast of the average
U. S. flyer's head, in profile
and three-quarter view, taken



II

Here is a composite of all the minimum dimensions of 1,453 flyers. They were the ones measured whose nasion-menton (nose root to chin tip) span came within a millimeter of that of the typical flyer on the preceding page



IV

Short faces, roughly a third of the flyers studied, are combined in this cast. The nose-root to chin-tip measurements varied from 145 millimeters to 102, and this one was taken from all those in the shortest 15-millimeter class



VI

Composites were also made of the extremes. This cast combines the average features of the 16 flyers who had the shortest of all the 1,871 faces measured. These 16 had a nasion-menton dimension of but 102 to 108 millimeters





III

And in this corner is the composite of the maximum dimensions in the same group of 1,453 nasion-mentons. Oddly enough, this one resembles a Roman emperor, Head II is a hatchet face, and the typical boy could well pose for collar ads



V

This head represents the long faces, all those falling in the upper 16-millimeter nasion-menton range. For fitting oxygen masks, long face, his short-face opposite, and the typical boy, Head I, are the most important in the lot



VII

To complete the seven heads, this one is a composite of the 16 longest faces among those studied. Their nasion-menton spans were all from 138 to 145 millimeters. The Army has given sets to mask-makers, the Navy, and our Allies



To avoid trespassing on the flyers' physical limitations, as designers strained to make the best use of every ounce and inch of an airplane, it became more and more important to have such knowledge.

In one special field it was immediately and urgently needed—the design of oxygen masks for high-altitude flying. This kind of flying has been made possible by improvement in oxygen equipment no less than by development of engines and planes; but the masks in use are still far from perfect, even though the late models are guarded as prime military secrets. One great problem is to design a mask, preferably not of rubber, which can be turned out by mass production in as few sizes as possible and will operate with a minimum of leakage on the great variety of faces to be found on the thousands of flyers in the Air Forces.

When Thunderbolt meets Messerschmitt at 30,000 feet, a mere one-percent advantage in mask efficiency may well mean the difference between victory and death. And mask efficiency is a matter of anatomy.

Col. Otis O. Benson, Jr., chief of the Aero-Medical Laboratory, consulted Prof. Earnest A. Hooton, the noted physical anthropologist of Harvard University, and together they worked out a program of research aimed to classify the physical characteristics of the American flyer. Hooton picked out four of his star students, experts at using slide calipers, spreading calipers, anthropometers, and other precisely scaled instruments for measuring the topography of the human body. Last February they set to work in two teams at Air Force replacement centers, making detailed studies of the heads, limbs, and bodies of the young men entering the Air Forces.

Today the first tangible results of that study are embodied in seven sculptured heads, representing precisely measured composites of all the types of faces found among 1,871 young men. Graduated from long to short, the seven heads present a graphic demonstration of the broad range required in a satisfactory form-fitting oxygen mask.

Since autumn, plaster replicas of these seven heads have been in service in the designing rooms of all manufacturers of oxygen equipment, serving as embodied specifications. Varied as the faces may seem, they actually represent a simplification of the problem, for in relation to the physiognomy of the people as a whole, flyers run pretty much to type. Earlier advances in mask design were made almost entirely by medical doctors who, lacking any large group of aviators as models, tried out their devices on the faces of hospital

patients. Obviously the air force cadets, selected for youth and physical fitness, will have a different range of facial contours from any collection of invalids.

Engineers working on mask design are able to mold their experimental masks directly on the faces of the plaster casts, knowing that with certain allowances for flexibility they can fit almost anybody in the air force.

Dominant among the seven heads is the central figure, designated as Head I, representing the average flyer, the grand mean of all the measurements taken from the 1,871 specimens. By luck rather than by artistic intent, he turned out to be the best-looking one of the lot, with a strange resemblance to both the Prince of Wales and the Arrow Collar Man as they appeared in the early 1920's. As the composite of the youngsters who have just lately been getting their wings, he is the American Flyer: 1943 Model.

The creation of these heads, which is merely the first step in the building of life-size manikins embodying airmen's physical characteristics, represents a fortuitous blending of practical engineering and pure science. They are the result of the collaboration of the young man who is probably America's foremost expert on the anatomy of the gorilla, and the plastics-industry pioneer who invented the "Frank Buck hat," now the standard tropical helmet for the American and British armies.

By last July, when the statistical analysis of all the measurements was complete, the anthropology team had dwindled to one man, now a second lieutenant in the Air Forces, 29-year-old Dr. Francis E. Randall, from New Philadelphia, Ohio. At Western Reserve University, Randall had specialized in comparative anatomy, working with Prof. T. Wingate Todd, who had the greatest collection of gorilla skeletons in this country. When Todd died, Randall continued his work. When the Japs struck at Pearl Harbor, he was just putting the finishing touches on his Harvard Ph. D. thesis, on "Growth in Gorillas." One gathers, talking with him, that Randall felt pretty much out of things, as though his specialty were far from wartime realities. But no sooner had he finished his studies than the Army grabbed him, to put his special training to work on the quest for the perfect mask.

When Lieutenant Randall presented his report last summer, senior officers looked at it with a blank, bewildered stare. It comprised numerous closely typed pages of little else but figures, about as intelligible as Egyptian hieroglyphics.

"Now you've got it, what are you going to do with it?" a general finally managed to say.



Designing an impromptu mask for one of the head models in the set of seven made to measurements that will fit the entire range of faces in the Army Air Forces. In stratosphere flying it is important that the oxygen masks allow no leakage



G. Walter Borkland, head of a plastics company and designer of many oxygen masks, fits this one to the contours of the model face. He made the original clay models of the heads themselves to the measurements furnished by Lieutenant Randall

The men at Aero-Medical had a quick answer. Turn these figures into sculptured figures. The value of such figures was already apparent. At Wright Field they had been using, as a model for trying out assemblies of mask, goggles, earphones, and helmet, an aluminum head which a sculptor had made for the purpose. It was a good, anatomical head of an individual, but measurement now showed it to be far from the norm of the Army aviator of today. The thing to do was get a sculptor quick.

A noted sculptor was called on the long-distance phone. How quickly could he produce five heads, made to measure? The artist said it would take at least two months; he couldn't do it a bit sooner. The Army reluctantly said he wouldn't do. They had to have speed.

Then a Wright Field engineer spoke up. He knew a business man in Chicago who he thought could do the job, G. Walter Borkland, president of the General Plastics Corporation. As a sculptor Borkland was only a talented amateur, who practiced the art as a hobby, but he was a professional with modeling clay. He was in the habit of designing such things as transparent plastic lighting fixtures, rapidly and strictly to specification. He was ingenious, as shown by his develop- *(Continued on page 223)*

And now the finished mask covers the entire face up to the goggles, a precaution against freezing cheeks in sub-zero temperatures. It has space for a microphone, and is also provided with an escape valve over each cheek for the exhaled air



AIRPLANE CONTROLS can now be studied, and their operation quickly learned, with the scale model shown at the right. Here an aviation student at Franklin and Marshall College, with his hand on the "stick" and his feet on the "pedals," puts the model through precisely the same maneuvers that he will have to perform in an actual plane. Although he may have had considerable "black-board" training up to this point, it isn't until he gets his hands on the model that he sees for himself exactly what happens to the plane when he manipulates the controls. Besides helping him in the essential factors of timing and co-ordination, the model plane does something even more important—it gives him the "feel" of a plane.



PLASTIC SCABBARDS for bayonets, which will help to lighten a soldier's equipment, are now being issued to U. S. troops in all parts of the world. Made of Tenite, a plastic material made from cellulose acetate butyrate, the new scabbard, besides being light, is tough and durable, and comes as a welcome replacement to the old scabbard which was made of leather and wood. It conforms in every detail to Army requirements, and can stand hard service in any climate.

TEST RUNS on new Pratt & Whitney airplane engines are now being utilized to generate electricity in one of the company's New England plants. By means of equipment developed by engineers of the company and General Electric, the engines, instead of turning propellers during their testing, now turn generators and pump electricity into the plant's power system. Lines run from the engine to dials and indicators in a soundproof room where operators study the readings to determine performance.




HANDLEBARS attached to a .50 caliber antiaircraft machine gun make firing the weapon seem much like riding a bucking motorcycle at high speed over a bumpy road. The photograph at the right, taken on a patrol vessel somewhere on the Pacific, shows a steel-helmeted Coast Guardsman in action.

As compared with aiming by a shoulder rest, the handlebar grip is said to be less fatiguing to the gunner, since the bars absorb some of the vibration of the gun. It also allows better leverage and freer sweep for following fast-moving planes across the sky.

The trigger mechanism is operated by means of a squeeze grip on one of the handles, just as the throttle of a motorcycle is controlled by one of the rider's hands.

A Coast Guardsman "rides" a machine gun on patrol in the Pacific. The antiaircraft weapon is aimed by means of handlebars

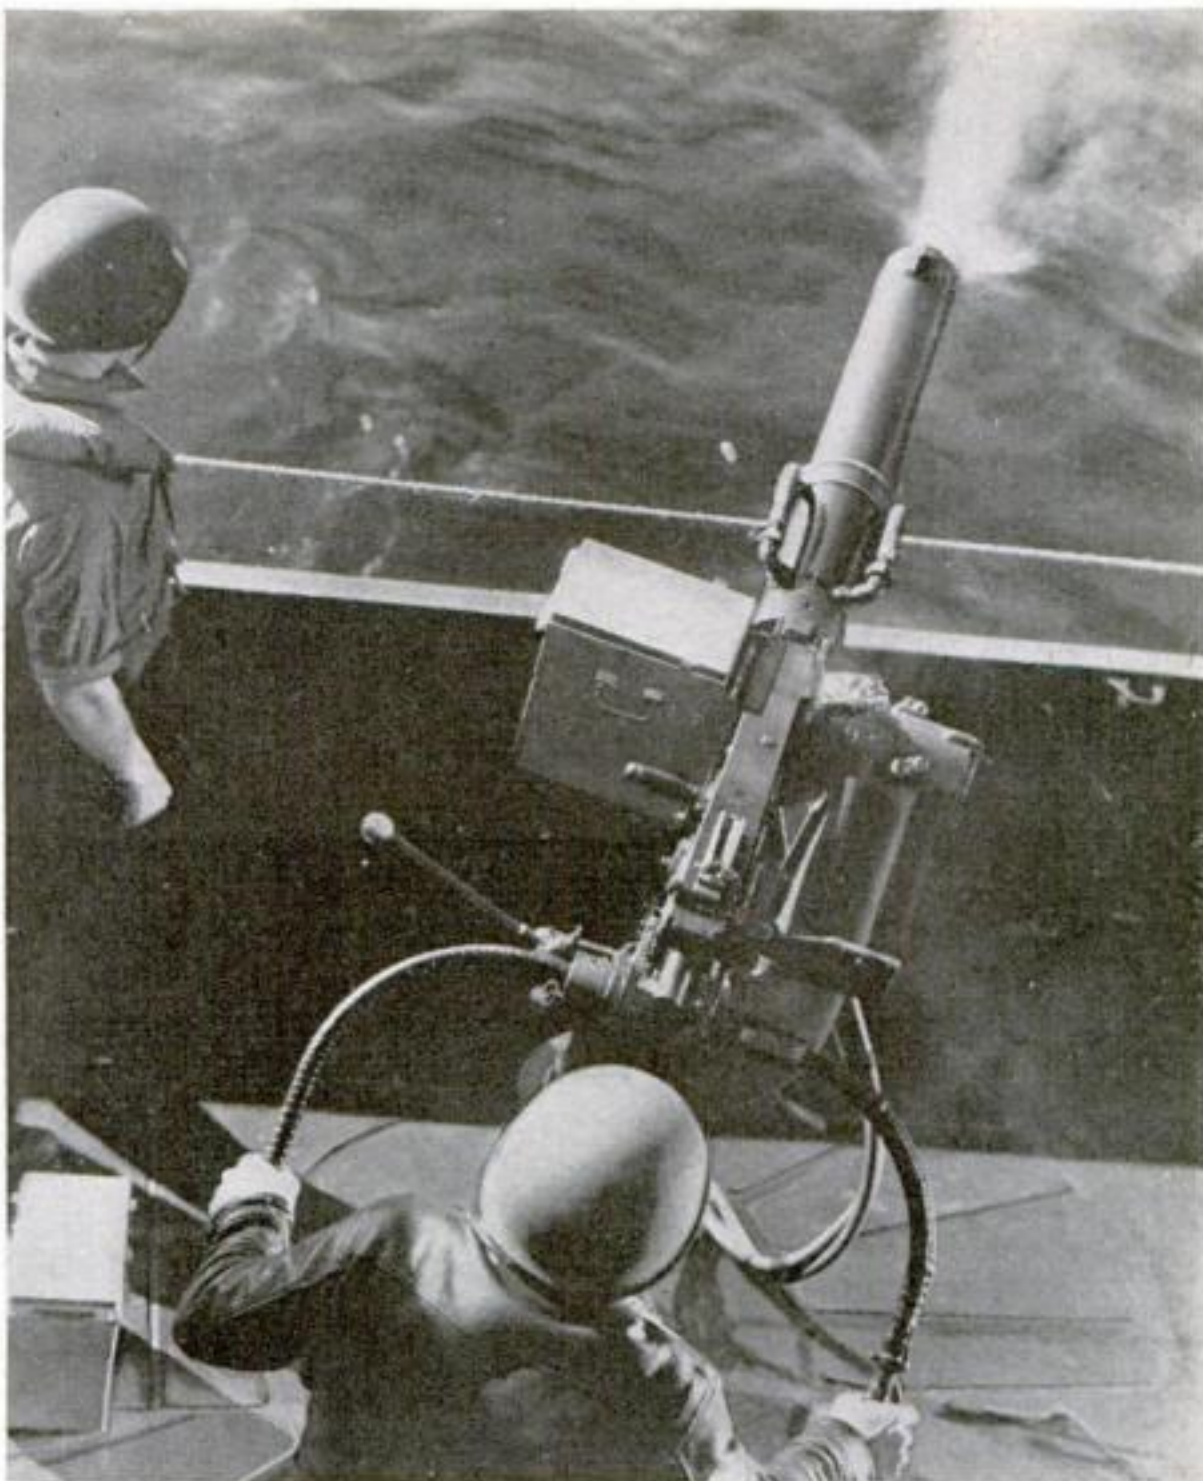

RUBBER FROM THE FARM has become a reality with commercial production of Agripol by Reichhold Chemicals, Inc., Detroit, Mich. Made from soybean oil and ethyl alcohol, the chemurgic rubber is not now offered as a substitute for natural rubber in automobile tires but will be used for many industrial and domestic purposes. Clinton Braidwood, one of the developers, is shown with a sample of Agripol. Before him are jars of the ingredients and lumps of raw rubber made from them.

AIR-RAID WARDENS and other civilian-defense workers have enlisted an "electric sentry" manufactured by the Zenith Radio Corporation to listen for urgent telephone calls. A transmitter unit plugged into an outlet near the phone, as below, relays the ringing of the bell to a receiver unit plugged in anywhere about the house.





THE "SENTINEL" is the Army's latest fast-climbing, highly maneuverable liaison plane. Capable of landing in or taking off from a cow pasture, it has been designed to hover at low speeds so that its observer can "hang" in the air to direct artillery fire and troop movements by radio.

UNDERGROUND production of aircraft is speeded up in this British plant by means of a tiny railroad which carries parts from one shop to another. Visiting American plane builders are shown getting a ride.

COMMAND BOATS for use by the Army in the landing of invasion forces are one of the many types now being turned out by Chris-Craft. 42 feet long, and particularly seaworthy, the boat carries guns fore and aft, and has been especially designed to meet all requirements of transporting officer personnel.




Nature's "Modern" War Weapons

Drawings by Gus Mager, based on an exhibit at the American Museum of Natural History

MOTHER NATURE was the first war inventor. To protect her creatures against their enemies, or to help them hunt their prey, she has provided them with weapons and tactics that in many cases anticipated the vaunted "new weapons" of modern human warfare. The skunk was a past master of chemical warfare long before men ever thought of using gas to demoralize their enemies; warring ants display organization worthy of larger belligerents. In many weapons man has consciously copied nature; in others he has arrived scientifically at results she achieved through evolution.

SMOKE SCREENS are old stuff to the octopus. When he finds himself in a tight spot, he ejects a fluid that clouds the water and allows him to maneuver unseen. Use of smoke to hide the movements of naval vessels or ground forces is merely a human adaptation of this old trick

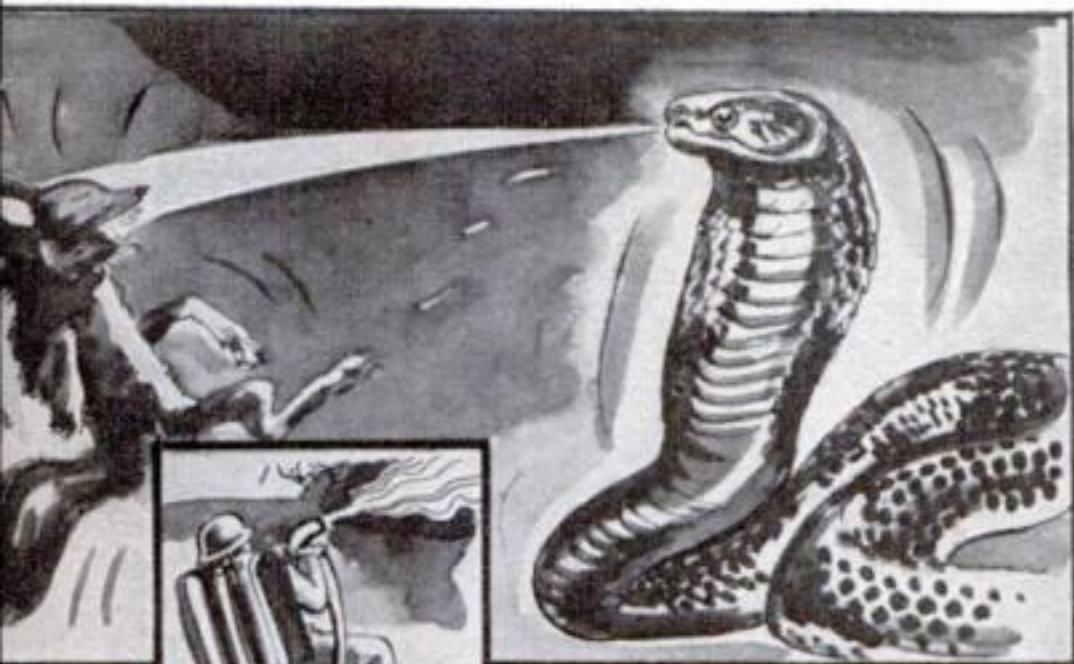

FLAME THROWERS would not impress the cobra. He squirts his venom into the eyes of any unwary fox or other animal that molests him. One squirt is usually enough

CAMOUFLAGE is one of nature's favorite stratagems. Lizards, birds, and other creatures are marked to match the ground or vegetation in their normal habitat. Man can learn many tricks from them



AIR-RAID SHELTERS are improvised on the spur of the moment by lizards, which burrow into the ground when feathered Stukas dive after them in search of a meal

ARMOR PLATE on tanks and other war machines is a direct steal from old shellbacks such as the turtle. Even the lines of his one-piece, rivetless turret could serve as a model for a modern juggernaut





Stitcher Speeds Surgical Sutures

AN ADAPTATION of the sewing machine's "uninterrupted thread supply" to surgical suturing has resulted in a new stitcher that cuts precious minutes from operating time and eliminates the danger of spreading infection. The secret of the instrument's speed is that the needle can shuttle back and forth without stopping for fresh thread with every stitch. When it is inserted, the needle is driven in only far enough to allow the surgeon to catch the loop of the suture, so that no part of



the thread is needlessly contaminated. The surgeon then knots the thread, snips it with the sharp lance point of the needle, and, with a slight pressure of his thumb, releases sterile thread for the next stitch.

A novel feature of the suturing unit's metal container, which has been designed for military use, is a bayonet that can be extended from the side of the case and driven into the ground. The surgical stitcher was developed by the Singer Sewing Machine Company.

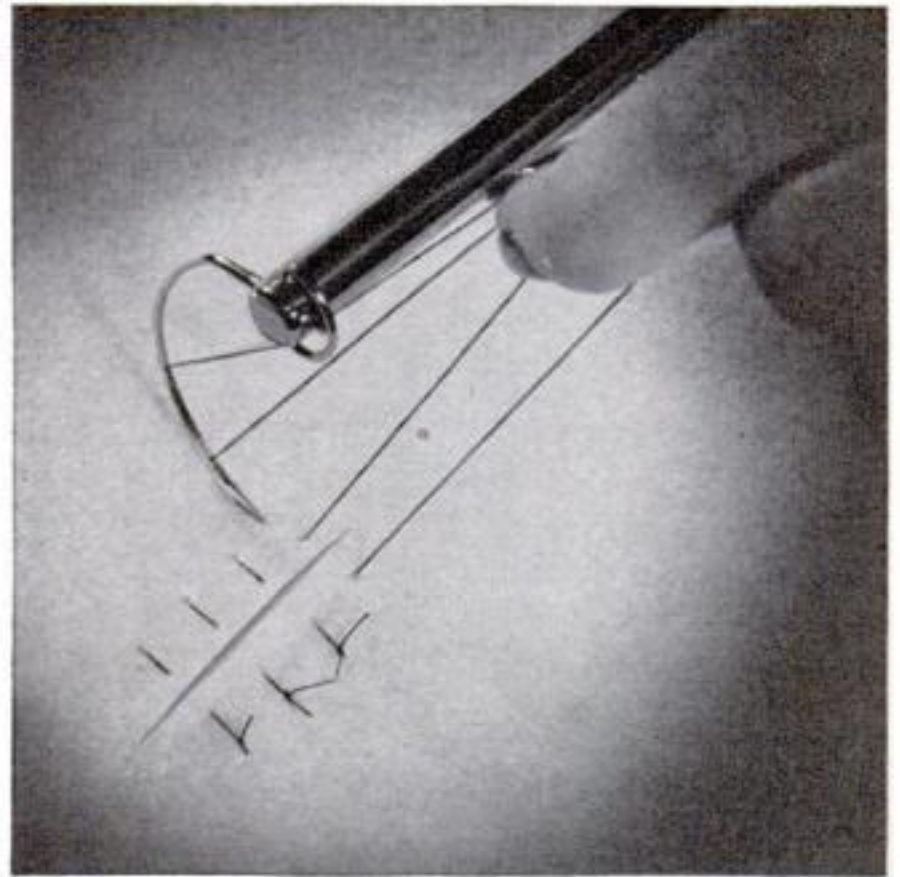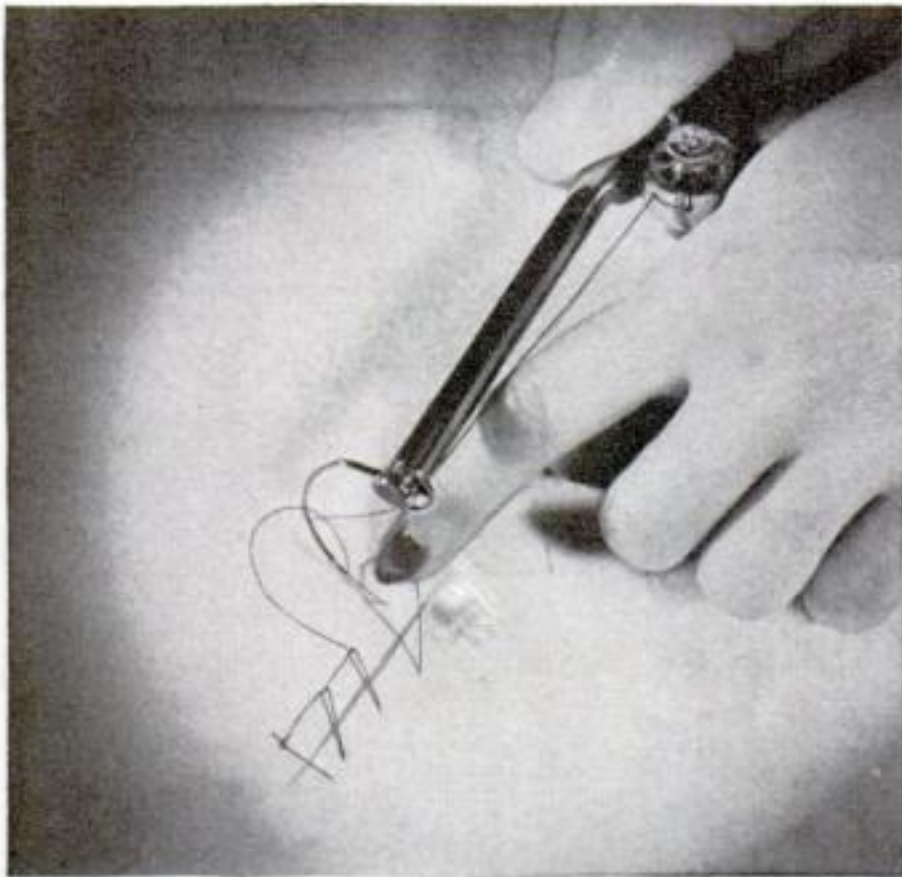

A wide variety of sutures can be performed with this "double-eyed" needle. At the upper left is shown a "continuous" suture; at upper right, an "interrupted" suture

At right is the suturing unit complete with needle holder, needles, spools for the thread, and the metal case with its bayonet attachment. Below, a diagram view of the new instrument

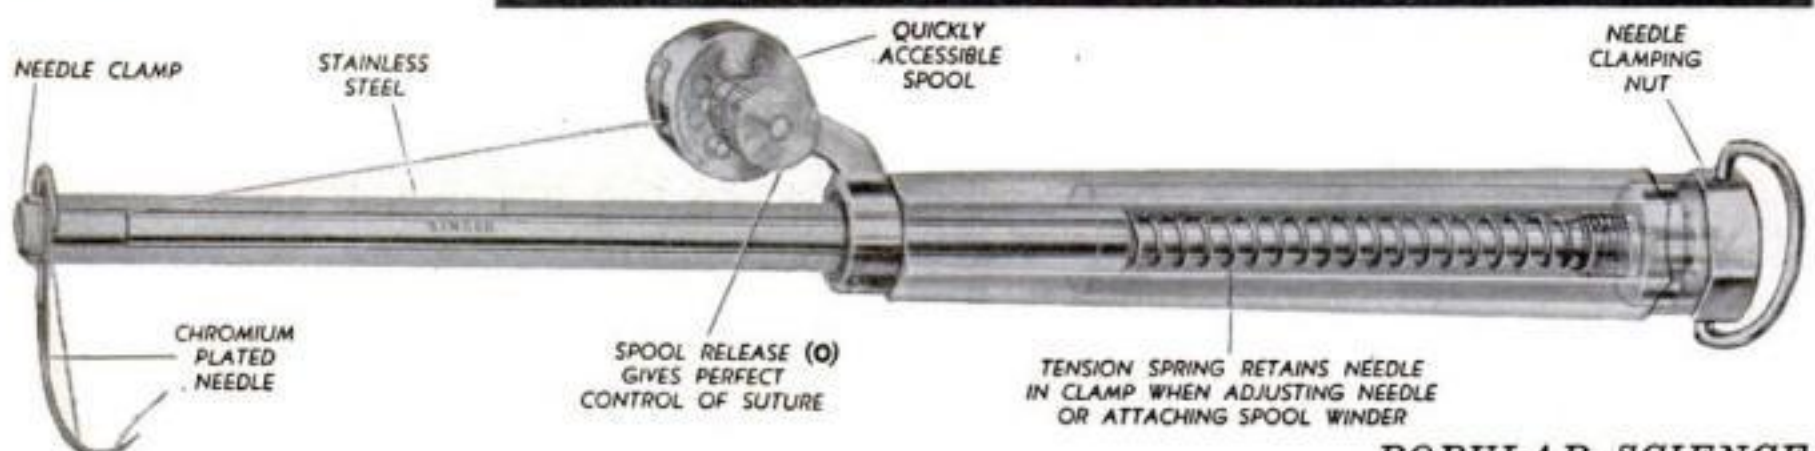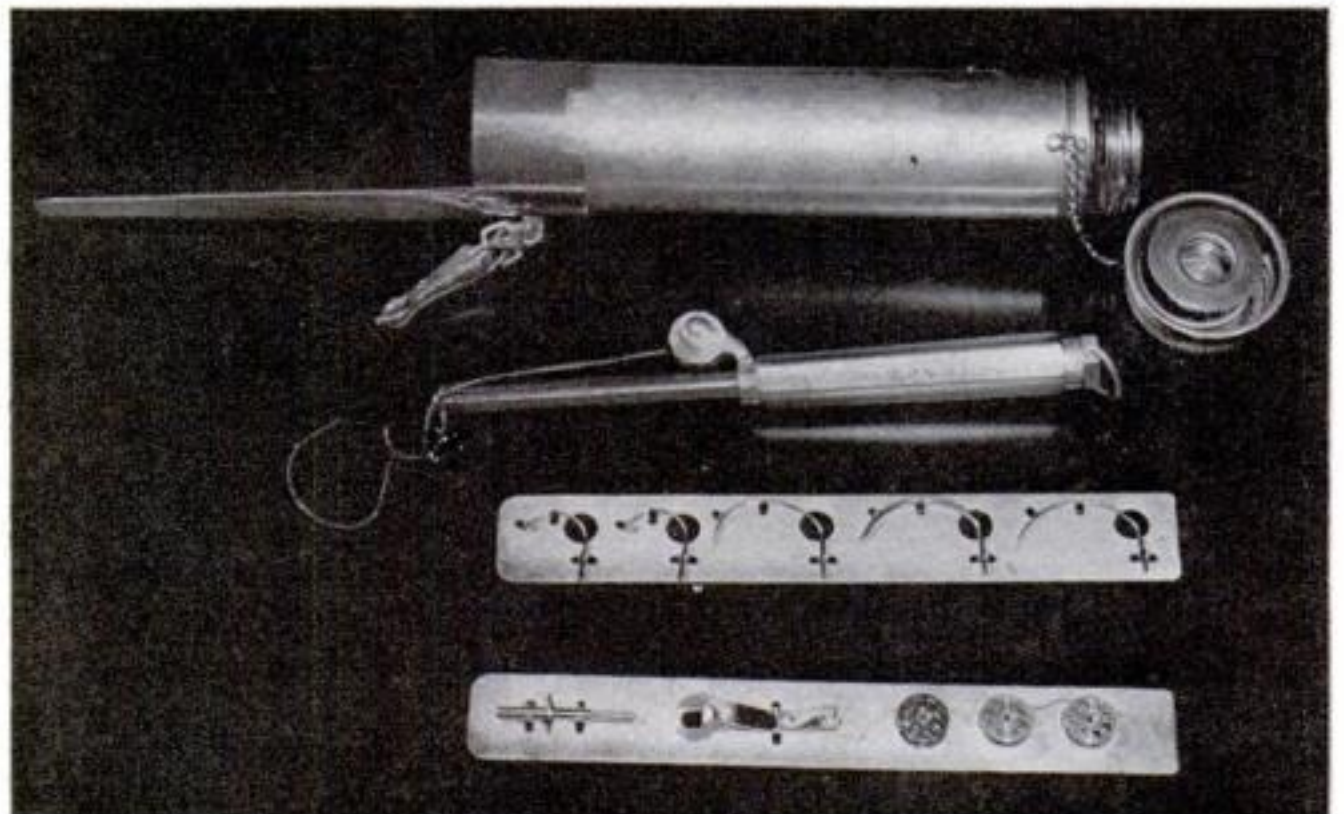

POPULAR SCIENCE



Because he's "good at "math," this high-school senior is doing inspection work in a plant making war materials


War Drafts Young Scientists

YOUTHFUL student scientists are now getting a real break at the Alexander Smith & Sons Carpet Company in Yonkers, N. Y., largest carpet manufacturers in the world. Looking ahead to the time when their technical personnel would be reduced by war demands, the Smith company last summer began employing, as "junior specialists," Yonkers High School seniors who had shown a marked proficiency in science courses. The aptitude that these 17-year-old students—four boys and one girl—have shown in jobs of physical and chemical testing has surpassed all expectations, and the company now plans to make use of additional students in other types of scientific work.

One of the reasons the youngsters get such a kick out of their work is that, aside from their own scientific interest, they realize that the materials they are testing will be used to make canvas duck and blankets for our fighting men all over the world. Another reason is that they don't get a chance to get bored, for the company periodically shifts them from one job to another, the theory

being that they are to be given a broad, general training in laboratory procedure.

The only hitch to the plan is that these young scientists might be drafted. But as the authorities point out, what they learn now will help them when the war is over.

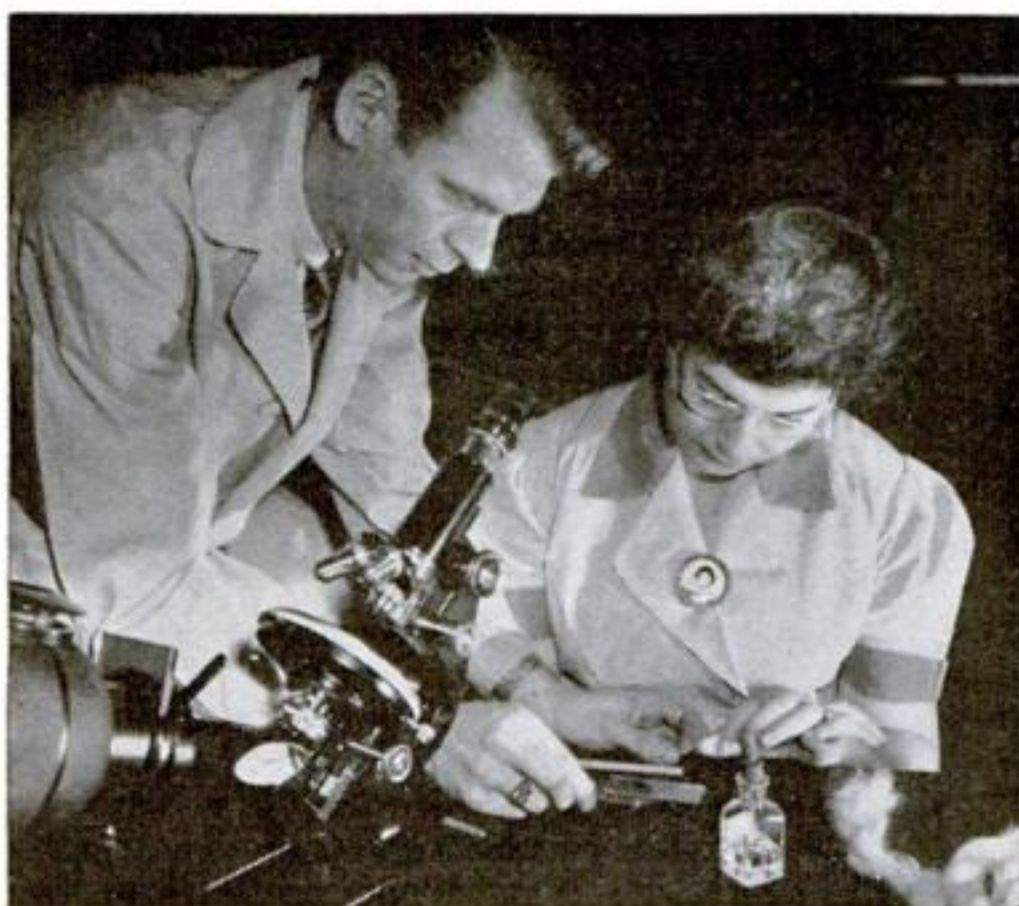

Another Yonkers High School student, Rebecca Moskowitz, learns how to make microscopic inspection of rayon fiber



Ready to shoot—with film or Tommy gun. Part of the crew of one of the Army's new mobile photo assignment units atop their carryall. Specially trained crews like this are with our troops on all fronts

Studios on the Battlefield

DAREDEVIL CAMERAMEN SHOOT HISTORY'S MOST PHOTOGRAPHED WAR


By JACK O'BRIEN

CAMOUFLAGED machine-gunners wriggle to the edge of a thicket and peer into a clearing below. We see their faces at close range—strong, alert faces with the same purposeful glint as their guns. Then we get a view of the other side of the small valley where a second machine-gun detachment is crouching among the trees. The men strain forward, fingering the triggers of their guns. A big, heavily armed reconnaissance car crawls into the clearing, and is immediately enveloped in a crisscross of machine-gun fire. Its occupants slump. Several tumble to the ground. The car jerks to a halt, and the two ambush parties take over. The image fades; another "war picture" has ended.

But this is the real thing. Thanks to some unsung newsreel hero, we have glimpsed a distant battle scene from the safety of an air-conditioned American theater.


We pick up our morning newspaper. Black headlines tell of a new offensive, and there before our eyes rises the smoke of battle in a four-column picture. A photographer was on the job. A big warship is attacked and battered into a flaming mass of steel. There it is before us. We see our own tanks blasted and blasting the enemy; we see our own planes roar over their targets; we see enemy planes attack and fly away, or fall smoking from the sky. Lensmen inside and outside of our armed forces are risking their lives daily to show us what's going on.

This is the most photographed war of all time. In the first World War we were lucky to get views of our troops marching off to war, of our convoys sailing, of generals meeting far behind the front, of Y.M.C.A. doings and Red Cross parties. Once in a while we saw a picture of some shell-shattered buildings, but never did we get a picture of actual combat. That last touch of

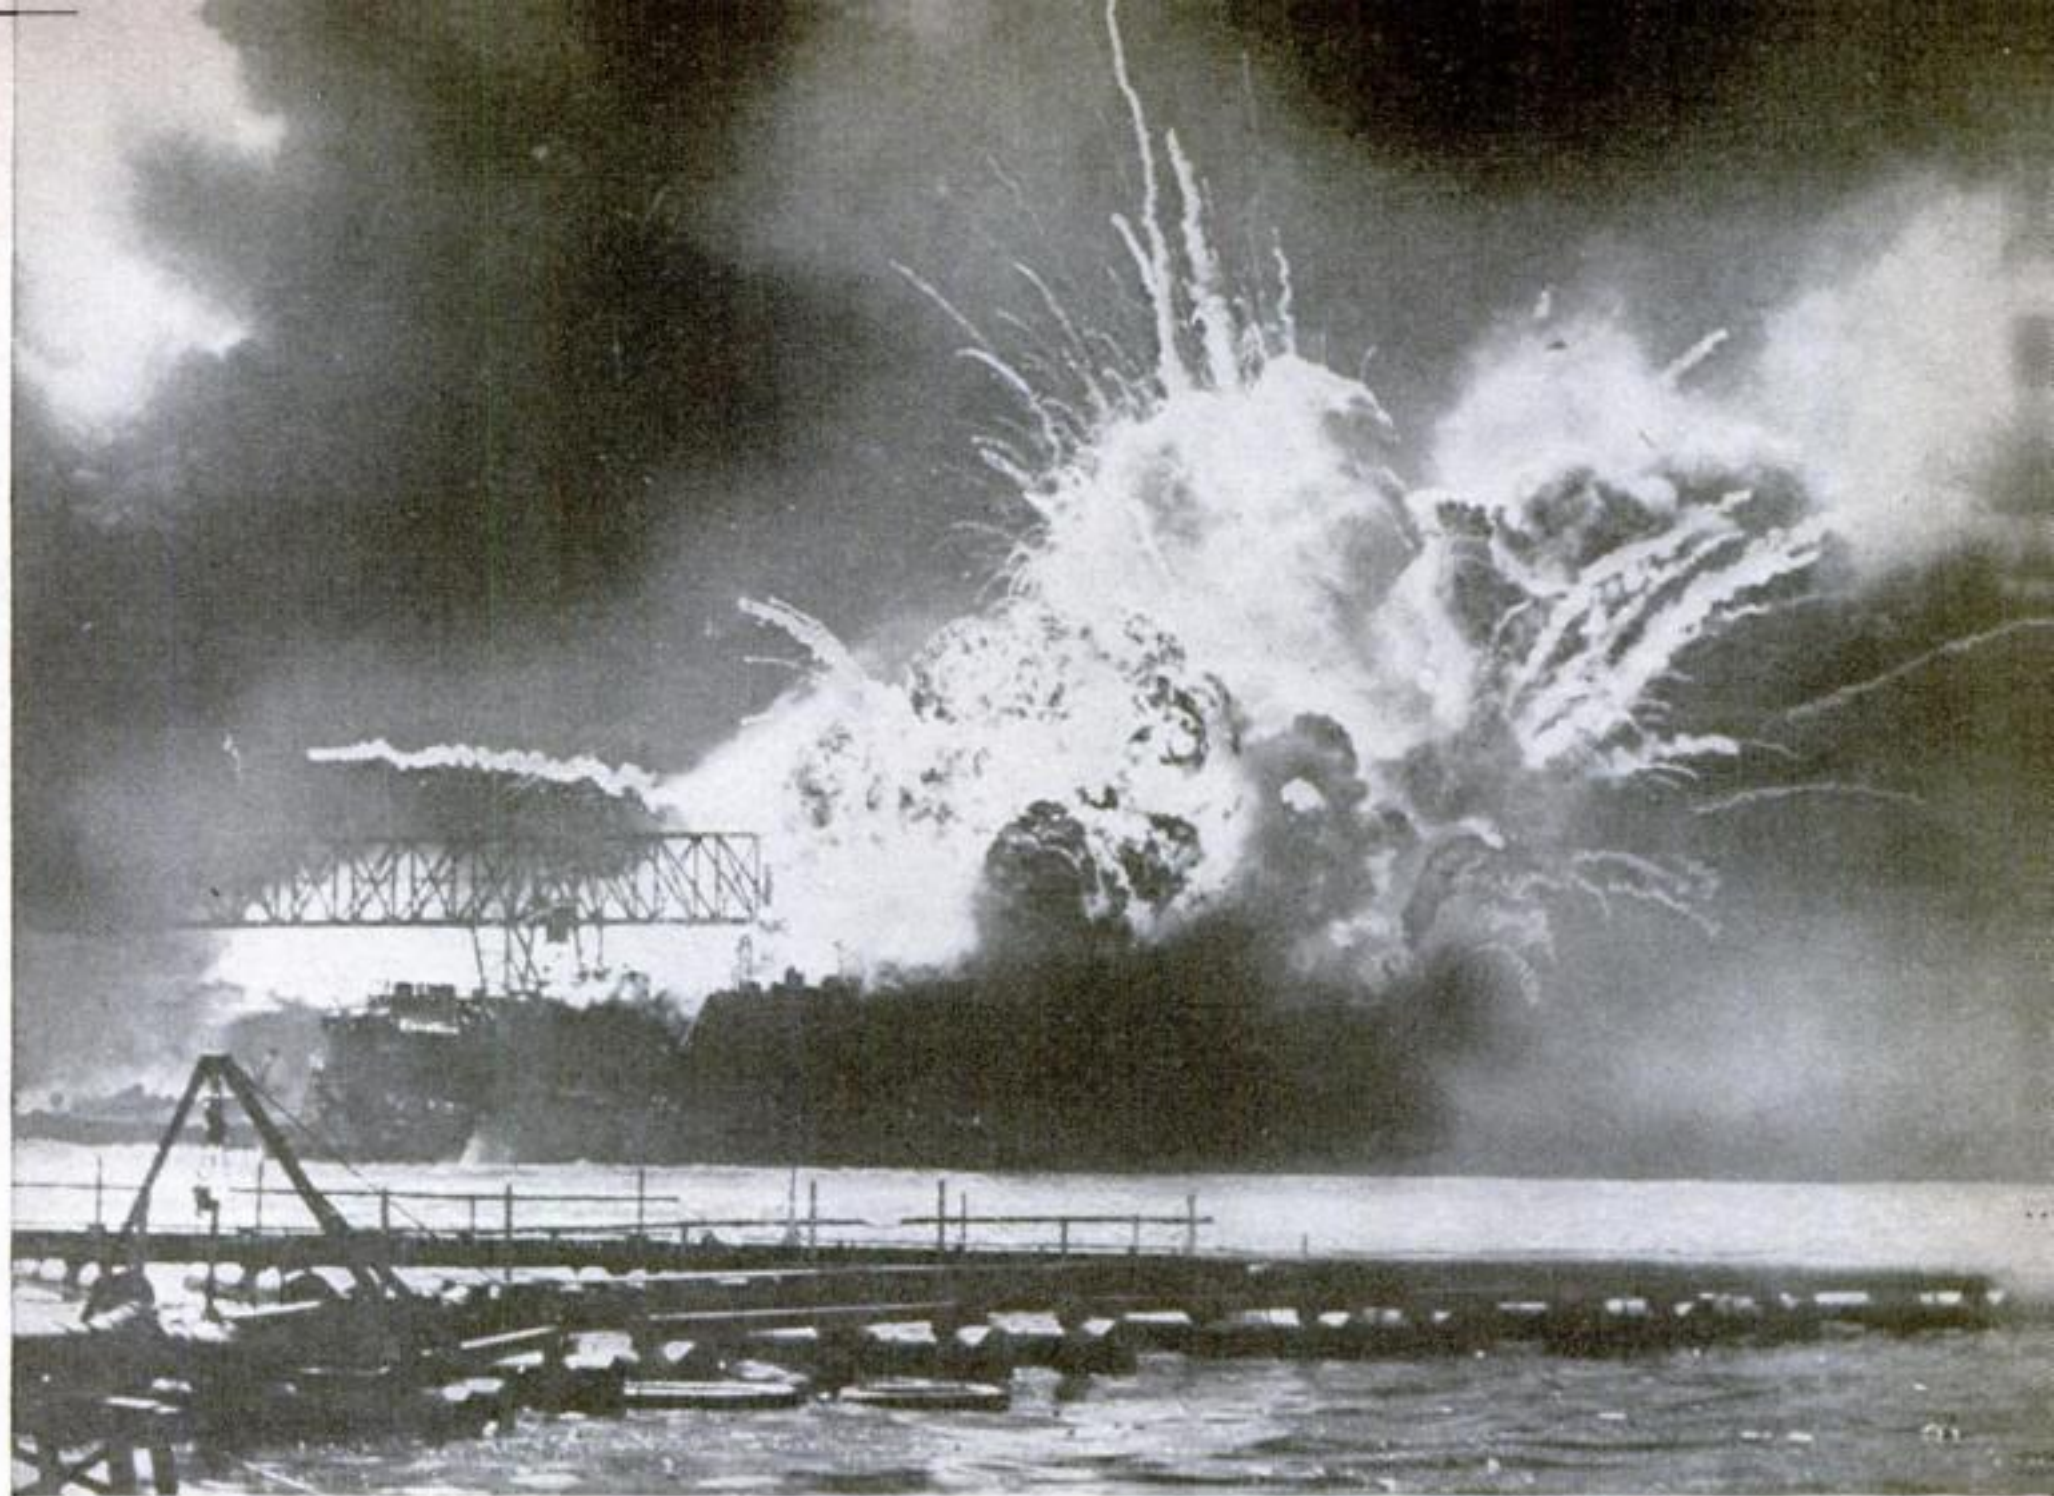

One of the greatest pictures to come out of the war is this shot made by a fighting U.S. Navy photographer at the height of the sneak Japanese attack on Pearl Harbor. His lens caught the destroyer Shaw as her magazine exploded, sending billows of flame and rocketlike streamers into the smoke-black sky

Another remarkable Navy picture shows the tanker Saga soon after the torpedo of an Axis submarine set her ablaze in the Atlantic. The fire was later brought under control, but not before the aerial camera had recorded the scene. Naval photographers are documenting history's greatest clash of sea power

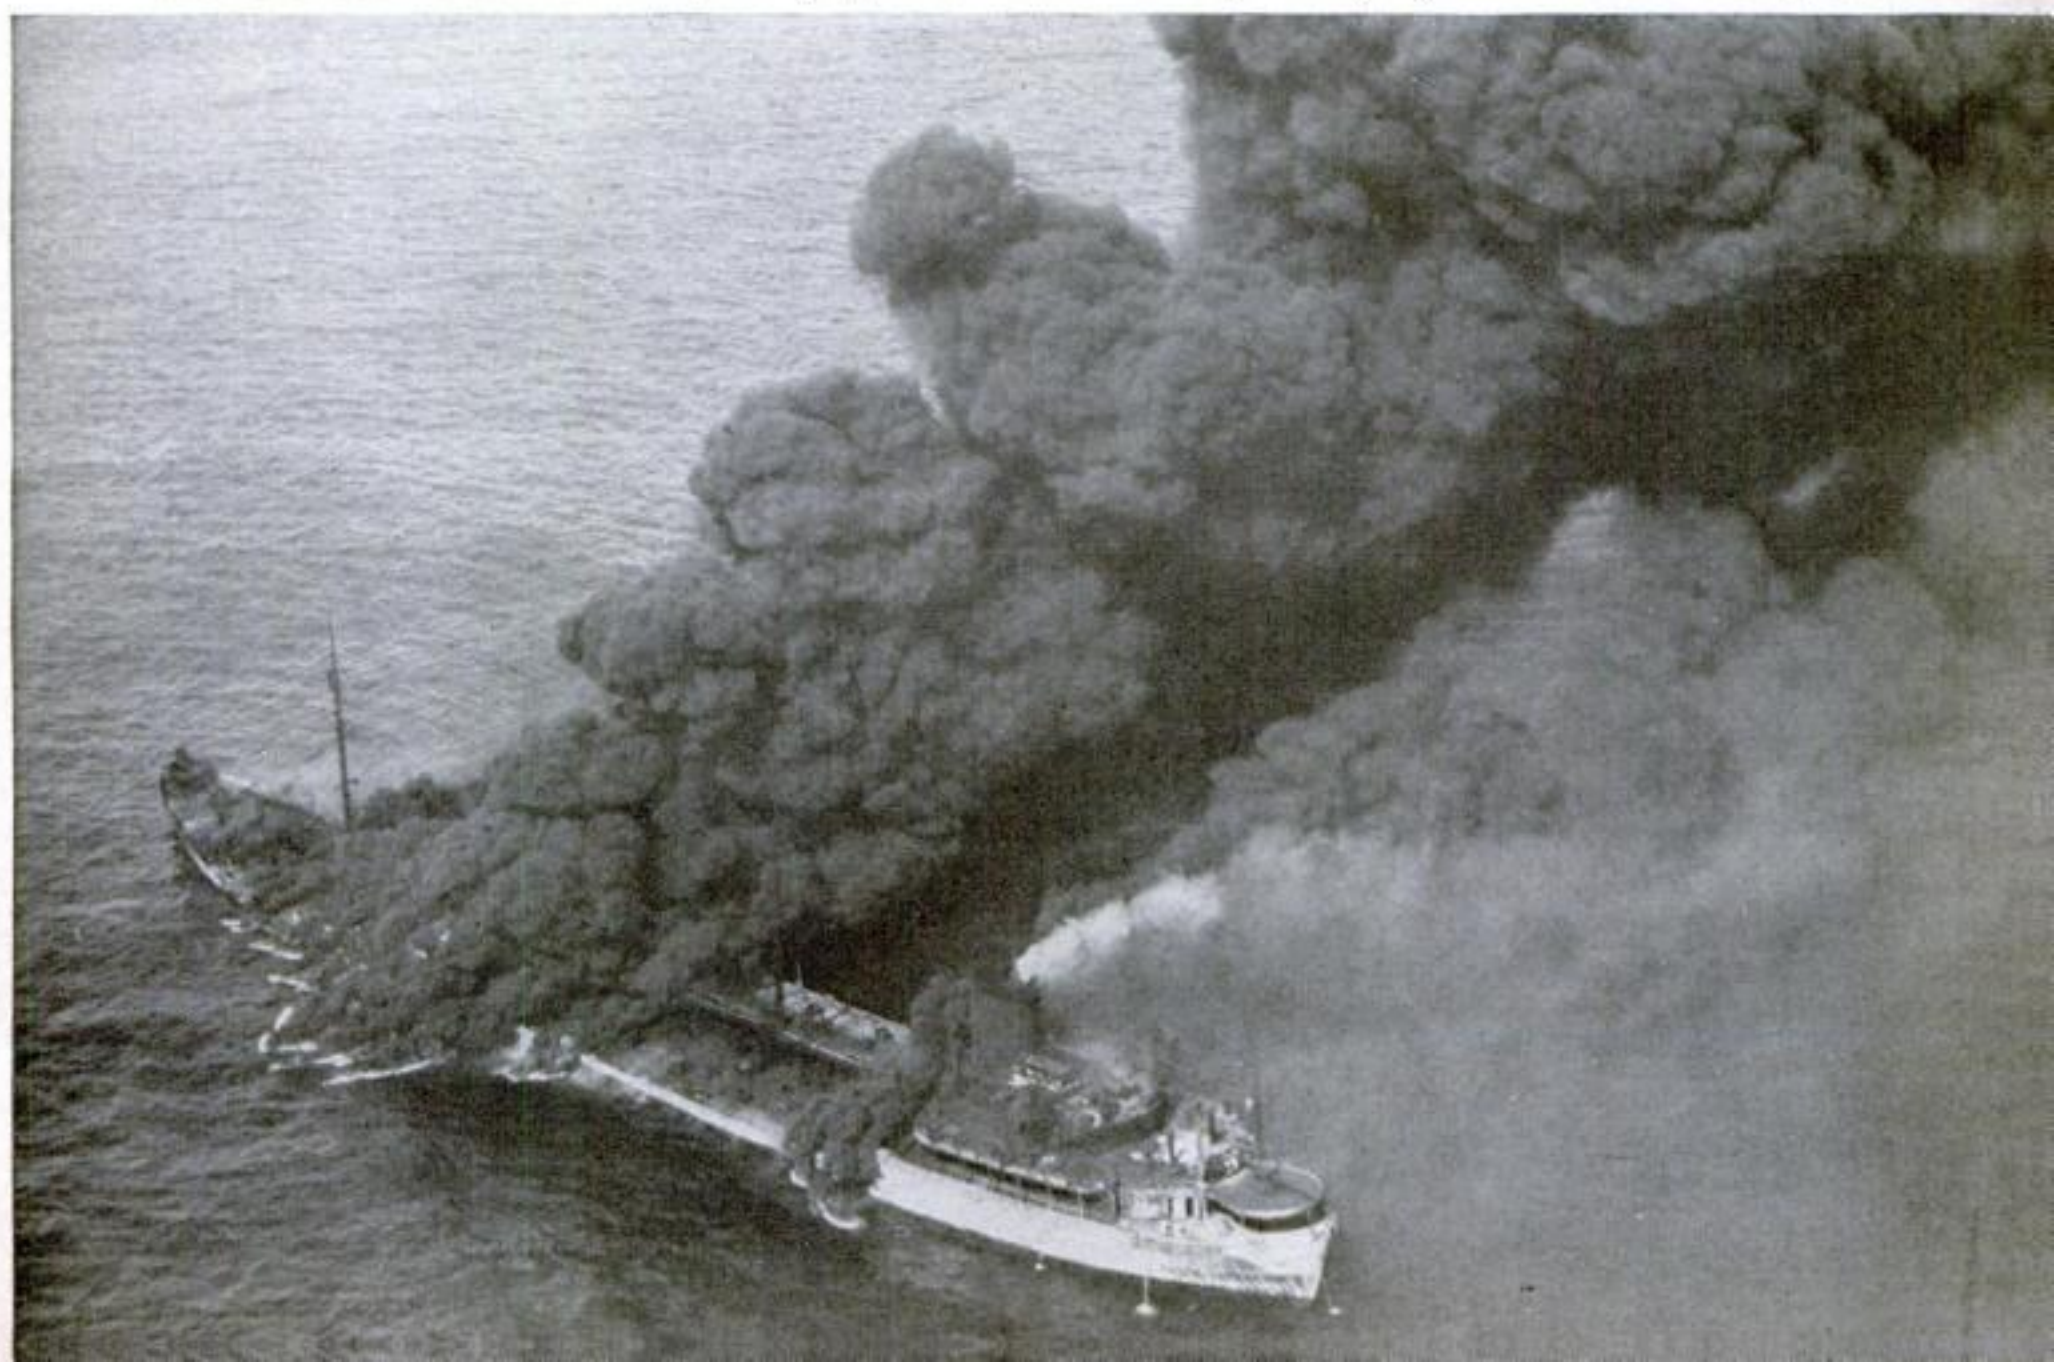



On the Russian Front: a Red Army photographer risked his life for this shot of a high-powered rifle blasting a tank

U. S. Marines about to land in the Solomons. A newsreel man attached to the expedition got this view of the convoy as it approached Guadalcanal with crews manning guns and men ready to go over the side





One of the most remarkable amateur photographs of the war shows the scuttling of the German pocket battleship *Graf Spee* off Montevideo on December 17, 1939. The end of the marauder was snapped by a passenger aboard a neutral vessel that happened to pass the scene shortly after the German commander, Capt. Hans Langsdorff, had stood in a launch and set off the explosion with an electric switch

realism was saved for the fighting forties.

Behind the film front of World War II is a story of courage and cunning, skill and sacrifice. Hitler was the first world leader to discover in films a new weapon of war. Some of our cameramen saw his plan in embryo while they were covering the 1936 Olympic Games in Berlin. They stumbled upon it in looking up German cameramen they had known in America. Inquiries brought out the amazing fact that 120 of the Reich's best lensmen were living at the same address under military conditions and taking orders from Hitler's official cameraman, Leni Riefenstahl. These Germans formed the nucleus of the force of 500 cameramen that Hitler sent to the front when the war started.

Great Britain was slow to realize the importance of the new weapon with which Hitler began terrorizing neutral countries and emitting propaganda barrages. While the Germans were shipping off thousands of feet of film laden with sadistic, nerve-freezing attacks of dive bombers and tanks, the British were content to distribute films of troops behind the lines in France, drilling and playing football. When Britain decided to send an expedition to Norway,

only one cameraman was permitted to go along—one man to film a continental expedition of the British Army—whereas 32 cameramen had been assigned to cover the Grand National Steeplechase!

But Britain learned—and so did the United States. Today our film coverage of the war has surpassed that of the Nazis. In the air, on land, and on the high seas, our cameramen and photographers are in action, and their films are making a thrilling record, an astounding informative pattern of war for our military leaders and our citizenry.

Soon after we got into the war, American newsreel and news-picture agencies worked out their plans. Co-operating closely with the War and Navy Departments, the agencies formed pools to receive and distribute not only the films of their men in the field but also those of the growing corps of Army and Navy photographers and cameramen and those of our Allies. They arranged with Washington to send men to all the far-flung fronts to which our fighting men were going. The pools were set up in New York—the Roto Pool (for still pictures) and the Newsreel War Pool. Now into the two pools go all photo material of the war for



On the beach at Guadalcanal. Here the newsreel man turned his back on Japanese snipers and machine-gunners to record the historic scene as Marines swarmed ashore from landing boats to seize the beachhead on the island

This Is the Army's Mobile Photo Unit



Here is the Army's answer to the demand for close-up pictures of our fighting men in actual combat: a complete and self-contained photo assignment unit as set up by the Signal Corps. Personnel consists of a motion-picture cameraman and assistant (1, 2); man with 16-mm. camera (3) to supplement the 35-mm. films of the tripod job; two still photographers equipped with Speed Graphics (4, 6); lieutenant (5) commanding the unit, with a miniature camera for still pictures; and a driver (7) who does his shooting with a Tommy gun. The carryall provides transportation and a camera platform



An Army photographer adjusts the synchronizer on his Speed Graphic while waiting for an assignment. Note his helmet and Tommy gun



Returning from picture tasks, lensmen turn their film holders over to a worker in the company's trailer laboratory. Here the film is developed and prints are made

Making a contact print. Other equipment, designed for compactness, makes enlargements when necessary



Record clerk works with a typewriter at a collapsible desk set up beside the trailer. A filing-cabinet drawer slides from an opening in the outside wall of the laboratory, and an awning forms a roof





An Army enlisted man photographed this action scene of a 75-mm. howitzer landed from a transport plane going into action in support of U. S. paratroops on an airfield. Note how the camera caught the belch of smoke as the piece was fired. Pictures like this are of immense military and historical value


immediate public showing, once the censors have given the green light. Members of the pools share the expenses of keeping men at the front and divide coverage equally.

Charter members of the Roto Pool are Acme, International News Photos, The Associated Press, and *Life Magazine*, each of which has seven photographers in the field. But the pool is open to any photo agency, newspaper, or magazine meeting the requirements, chief of which is to share coverage expenses. Insurance is one of the most costly items, amounting to as much as \$1,200 a year per man. Other expenses, including equipment, supplies, living costs

and uniforms, bring the total to about \$80,000 a year for each member—a small price for the superb pictures obtained.

Civilian war photographers and cameramen are given the same rating as war correspondents, once they are assigned to a combat unit. That is to say, they enjoy the privileges of officers. They must be accredited in Washington before they are eligible for duty abroad, and they lose their civilian status to the extent at least that they are subject to the orders of the military or naval command to which they are attached and must accompany it into battle or wherever it goes, unless ordered to do otherwise.


(Continued on page 216)

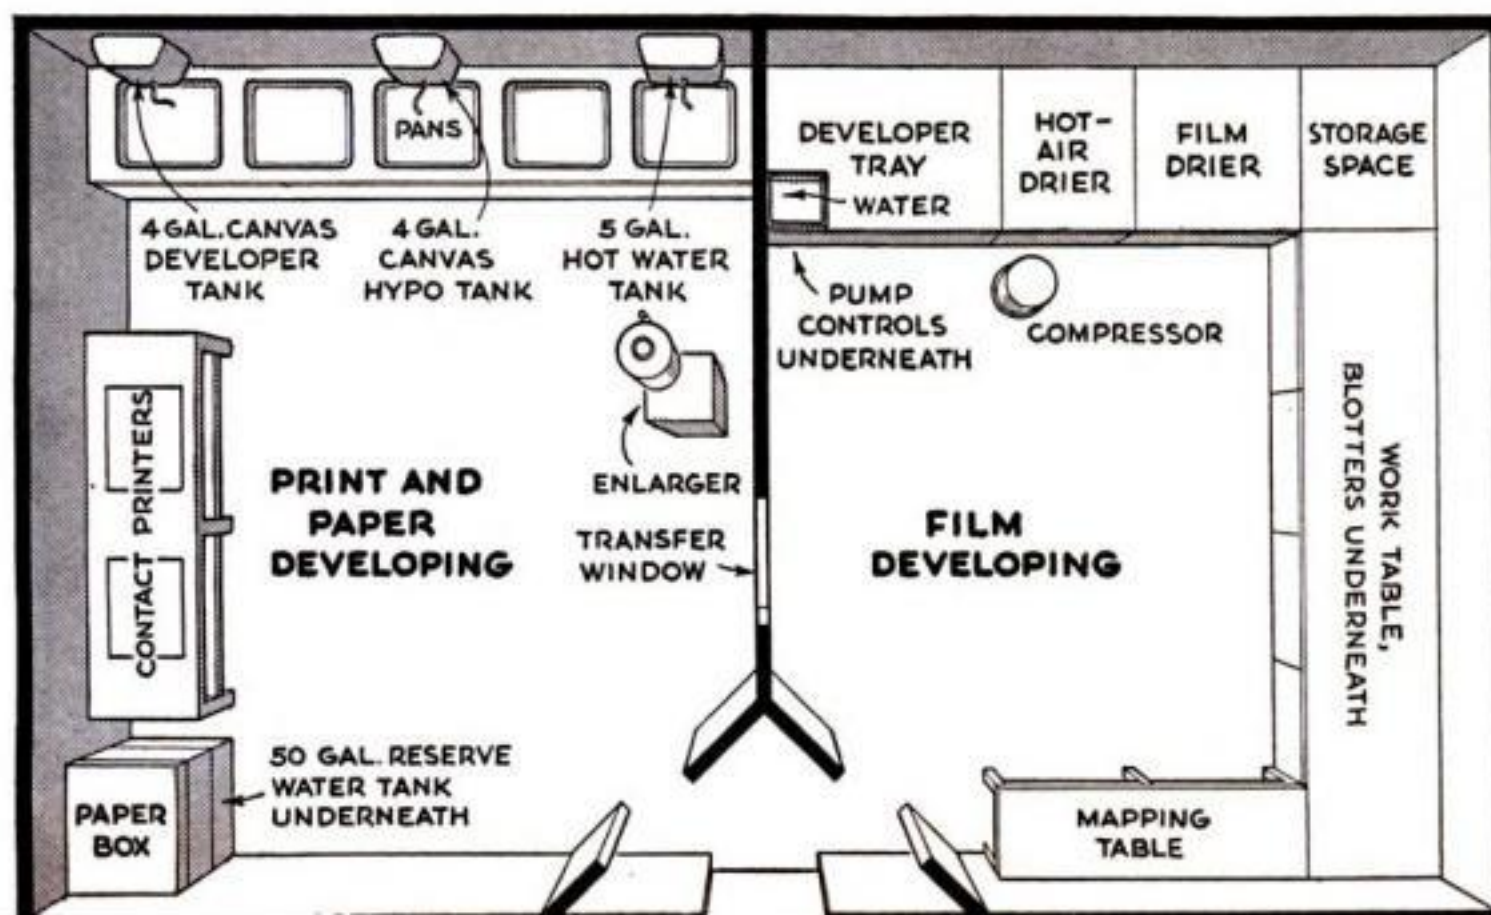

Floor layout of the Army trailer photographic laboratory. One of these will serve a photo company, which may include a dozen or more assignment units

new Tools

DIRECT READINGS are possible with a new caliper for machinists, which measures down to $\frac{1}{32}$ of an inch and has a maximum capacity of four inches. Its white scale markings on a black background are easily read even in a poor light, and the simplicity of its operation makes it an accurate and speedy tool to use. Design is such that measurements can be made over a bead or rim.

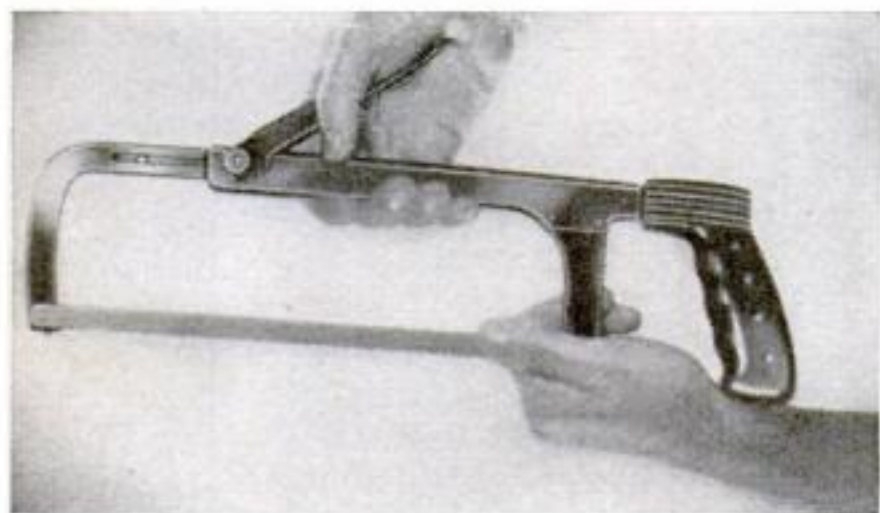


A CAM-ACTION LEVER LOCK, which quickly sets up or releases the blade of this hack saw, makes it possible to replace or reposition blades in a fraction of the time required in frames of ordinary design. By pulling out a pivot pin, sliding the frame's forearm in or out as desired, and then snapping the pin back into place, the frame can be adjusted to 8, 10, or 12-inch blades. Positioning the blade in any one of four directions is done by placing the blade over either of two sets of fixed pins.

TACK-WELDING SHIPS' PLATES is simplified by an electromagnetic machine for holding bulkhead stiffeners to the plates during the welding process. Tack-welding ordinarily is an involved procedure requiring the use of U-shaped pieces of metal called saddles which are welded to the plates and then later must be ground off. By eliminating the saddles, the new machine, designed by an employee of an East Coast shipyard, has reduced the time of this phase of construction by 50 percent. The stiffener, shown lying horizontally on the floor, is straddled by the electromagnet, which lifts the steel plate to the desired height and holds it there for tack-welding. After one section has been welded, the machine moves down the stiffener on rollers and the process is repeated. Lowering and raising the magnet is controlled by a large handscrew.





How To Fight The New Explosive Incendiary

A NEW type of incendiary bomb carrying a delayed-action explosive charge, now being used extensively by both Germany and Japan, has made it necessary for the Office of Civilian Defense to revise its instructions on fire fighting. Because it is impossible to tell when the bomb will explode—the time fuse can be set to ignite anywhere up to seven minutes after the bomb has struck—it is necessary to use the greatest caution in fighting the blaze which is set immediately on impact. Instead of water sprays, sand, scoops, grabs, and snuffers, a strong jet of water must be used. And most imperative, the user should be behind a four-inch brick wall, or other barrier equally strong, to protect himself from the bomb's powerful fragmentation. Water is the best agent for combatting this type of bomb, and civilian defense authorities are emphasizing the need of keeping adequate supplies on hand. Hot-water tanks, or storage tanks for water heaters, can be used provided they can be drained quickly. Once the bomb has exploded, sand, sprays, and other means formerly advised, can be employed to extinguish the fire.

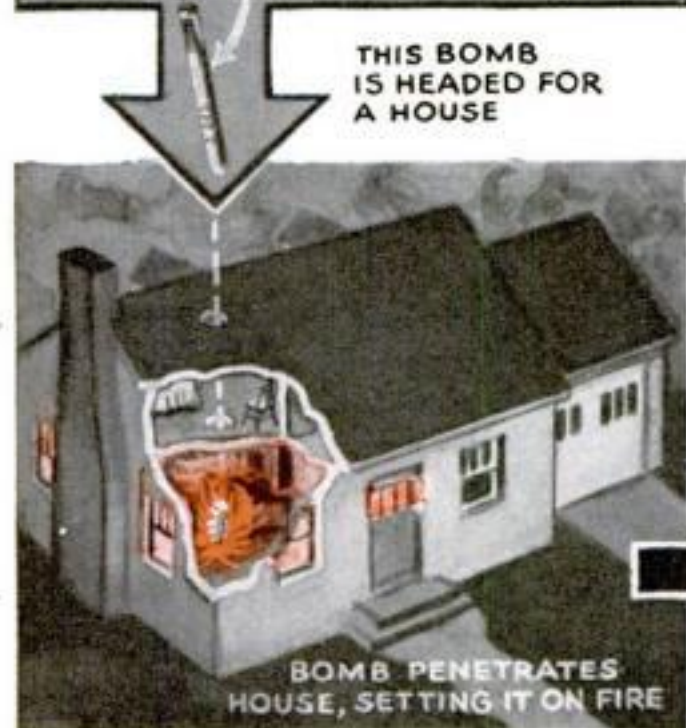

Dropped in clusters from containers, incendiaries scatter over factory or residential areas. Fighting technique, illustrated at right, calls for the use of jets of water applied from behind a brick wall or similar barrier

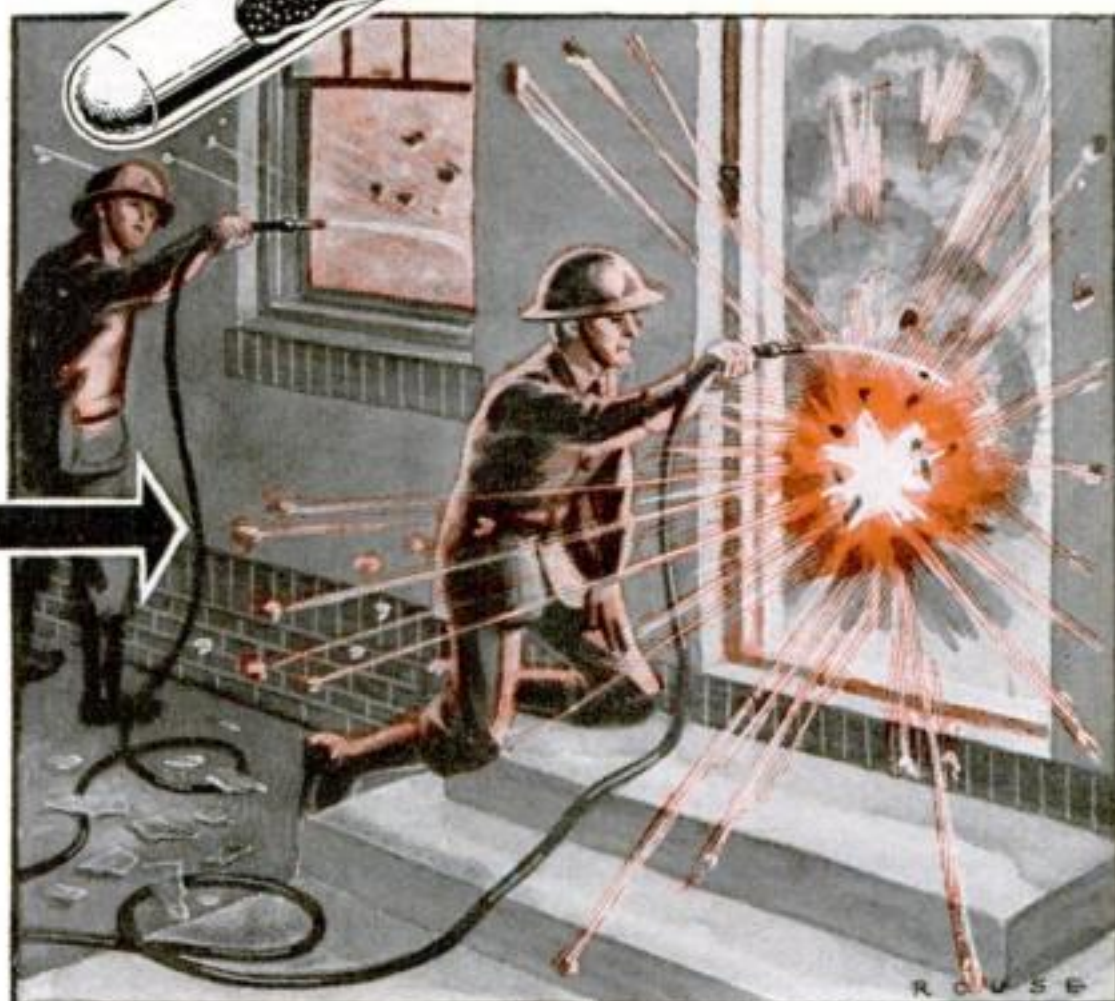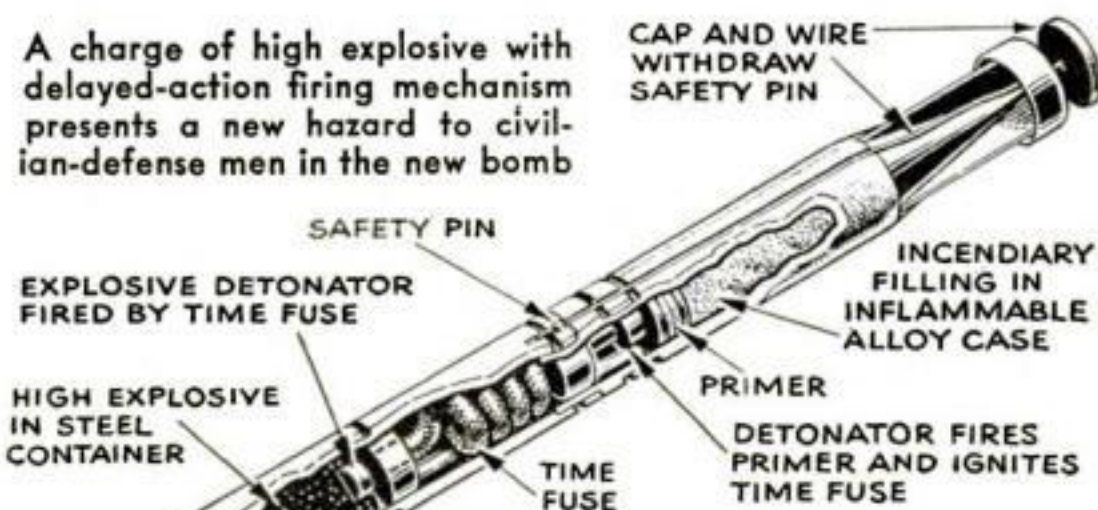



Jane Frazee is no chemist, but she knows ink stains can be removed by soaking the material in raw milk, or in tomato juice that has been boiled in a little water for 10 minutes

By **ANDREW R. BOONE**

Photographs posed by Jane Frazee, Universal Pictures starlet

ABOUT your clothing and other textiles around the house: better keep 'em clean. Most of them must survive the war, because goods of that sort are disappearing from the market. So be prompt in cleaning them, for all stains, from blood to ink and perspiration, get tougher with age.

How should you proceed? Here are a baker's dozen of the most common stains. Try the remedies recommended, and you'll be surprised how well they work.

BLOOD. Never start by using hot water, because it will set the protein and multiply your trouble. On washable material, soak or rub the article in cold or lukewarm water until the stains become light brown. Then wash in hot water. If you prefer, soak washable material in a solution containing two tablespoonfuls of household ammonia to one gallon of water until the stains loosen. Then wash in the customary manner. Ammonia chases old stains better than soap. To get out the last traces, sponge the spot with hydrogen peroxide to which you

**YOUR CLOTHES HAVE TO
LAST LONGER NOW—AND
IT WILL HELP IF YOU
KEEP THEM SPOTLESS.
HERE'S HOW TO DO IT:**

have added a little ammonia water. Apply the peroxide with a medicine dropper or a glass rod, and rinse carefully to prevent possible destruction of the fibers, especially in cottons and linens.

BLUING. Most likely you are using a soluble variety of Prussian blue. This type of bluing reacts to alkali left in clothes unless they are thoroughly rinsed, and needs the same treatment as iron rust. To remove both bluing and iron-rust stains, spread the material over actively boiling water and squeeze a lemon over the stained area. This treatment, slow but sure, will not injure even the most delicate white cottons and linens.

Stains from ultramarine blue, which comes in balls or blocks, may be removed by soaking or rinsing in cold water. In persistent cases, laundering with soap will get them out. Heavy stains of this type will vanish if soaked in a 10-percent solution of acetic acid or hydrochloric acid diluted with four times its volume of water.

CANDY. Ordinary laundering usually is sufficient, but on nonwashable materials sponge with clear warm water. If this doesn't chase chocolate stains, stretch the material over a bowl and drop Javelle water on the stain with a medicine dropper. Make sure the Javelle water does not remain on the fabric more than one minute, after which apply a solution containing one-quarter ounce of sodium thiosulphate (hypo) and an eighth ounce of 36-percent acetic acid in two quarts of water. Then rinse well.

Grease solvents will take out the fat content of the stain from nonwashable fabrics, while the remainder may be removed by hydrogen peroxide. Soaking the stained portion of a washable fabric in wood alcohol

Home Spotters' Guide

made alkaline with ammonia solution is particularly effective. Should any dye remain, soak the material all night and dry it in the sun. A hydrosulphite, available at the drug store, is the most efficient dye chaser if properly applied. The hydrosulphites are effective on nearly all stains unless they are greasy, but should not be applied to colored materials unless they are handled rapidly and the material is rinsed well once the stain is removed. However, they may remove color from the fabric.

COFFEE. On washable fabrics, fresh stains and most old ones will disappear with ordinary laundering. If a slight trace remains, dry the material in the sun. Pouring boiling water on a fresh stain from a height of two or three feet is also effective. A solution of potassium permanganate, made by dissolving one teaspoonful of crystals in one pint of water, applied by a round-end glass rod and per-



She does a good job on hubby's Panama by brushing it with soapy water and ammonia, then rinsing and fan-drying it

THESE MATERIALS WILL MAKE YOUR CLEANING EASY AND THOROUGH

- Javelle water
- Potassium permanganate
- Oxalic acid
- Ammonia water
- Carbon tetrachloride
- Glass rod with rounded ends
- Heat-resistant bowl
- Pads of muslin
- Medicine dropper
- Small sponge
- Milk, Lemon
- Stiff brush
- Corn meal, Talcum powder
- White blotting paper





Either corn meal or salt will do an efficient job of absorbing grease—and they don't leave a ring

mitted to remain about five minutes, will do a good job. The remaining permanganate stain can be removed by applying hydrogen peroxide turned slightly acid by adding tartaric acetate, oxalic acid, or hydrochloric acid, followed by a thorough rinsing. Lemon juice is an excellent cleaning agent for cotton or linen. On nonwashable wool, sponge with cold or lukewarm water and remove any remaining cream with a grease solvent such as ether, denatured alcohol, gasoline, or benzol.

FRUITS AND BERRIES. Stains of uncooked fruits and berries usually may be washed out by pouring boiling water from a height of three feet, so that the water strikes with some force. For this treatment, stretch the section taut over a bowl. "Cooked" stains, on the other hand, usually require different treatment. Try the method given above, and if necessary moisten any remaining stain with lemon juice and expose it to bright sunlight. Hydrosulphites are also satisfactory when dealing with white fab-



To clean a coffee stain, stretch the material over a bowl, apply a solution of potassium permanganate with a dropper, then let it dry for five minutes

rics, and Javelle water works wonders on white cotton and linen, but not on wool or silk.

GREASE. This includes butter and other fats, with or without complicating dirt ingredients. First step, of course, calls for scraping off the surplus with a knife. Next, use either a soapy, warm water solution, an absorbent or a solvent. Soaps containing kerosene or naphtha are particularly good.

As an alternative, apply fuller's earth, white talcum powder, brown paper, corn meal, or chalk to absorb the grease. Corn meal and salt are particularly efficacious on rugs. These materials do not leave rings, as may water and grease solvents. If the stain does not wash out or absorb, however, you may try a solvent. Place a pad of clean cloth or blotting paper under the stain, and apply a sponge moistened with a solvent. Change the pad when it becomes soiled. Use small quantities of the solvent, and work in from the outside to keep the stain from spreading.

INK. If it is freshly spilled on the carpet, apply an absorbent immediately—talcum powder will do—working it around with a dull knife and brushing well after each application. When the dry material no longer takes up ink, make it into a paste and apply again. White garments may be dipped in raw milk. Tomato juice, boiled 10 minutes in a little water, is good; or, baking powder, followed by lemon juice.

MILK AND CREAM. These stains, as well as stains from ice cream, are similar, but may require slightly different treatments. Because milk consists largely of protein and fat, rinse washable material in cold or lukewarm water and follow this with hot-water-and-soap laundering. If the fabric may be injured by laundering, sponge with carbon tetrachloride, gasoline, or other solvent and then sponge carefully with cold water after



If a grease stain won't wash out or absorb, then try a solvent. Place a pad of clean cloth under the stain, and sponge well with naphtha or benzol



A "must" in cleaning is that you do a thorough job, for any remaining stain of blood, milk, meat juice, or egg will become "set" in the process of ironing

the spot has dried. Ice-cream stains also contain sugar, fruit flavoring, perhaps eggs, and frequently chocolate. Should a stain from these sources remain after the ice cream has been removed, clean them as you would fresh or cooked fruits, berries, coffee or chocolate. If the stain is not highly colored, wash with soap and water, or sponge. After it has dried, attack the stain as you would a grease spot.

PERSPIRATION. You may be unable to restore colors changed by perspiration, but hot water containing a little ammonia usu-

ally will take out the stains from washable materials. Soak the stained part in cold water for 30 minutes, then soak in hot water containing ammonia, and finally launder in sudsy hot water. Use less ammonia if the colors threaten to run. If you prefer, launder and bleach in the sun.



To remove fresh-fruit stains, first boil the material, then stretch it taut over a bowl of boiling water, and apply lemon juice. But be careful colors don't run. At left, an absorbent, repeatedly applied and brushed off, will clean blankets



America's new standard medium tank, the M-4. Heavily gunned, fast, and mechanically dependable, it is more than a match for anything the Germans, Japs, or Italians can send against it

WHY AMERICA'S TANKS ARE THE WORLD'S BEST

Guns, Speed, Armor, Durability

—These Have Given Us the Lead
on the Proving Grounds of War

By
ARTHUR GRAHAME

THE battlefield value of a tank depends on three qualities: the power of its guns, its ability to take those guns where they can do the greatest possible damage to the enemy, and its mechanical durability.

In the fighting on the African desert which was climaxed by Rommel's rout, American light and medium tanks lent-leased to the British—a few of them handled by American crews—consistently outmatched German tanks of their classes in all of these qualities. Our 13½-ton light tank proved itself to be the hardest-hitting, fastest, and mechanically most dependable light tank on the vast and dangerous proving ground. Our M-3 medium tank, which the British call the General Grant, outshot, outspeeded, outlasted, and generally outperformed the German 18-ton Mark III and 22-ton Mark IV mediums which had been more than a match for the British Valentines and Matildas of the same respective weights.

As soon as they got into action, the American medium tanks proved that they had more powerful guns than the German fighting vehicles. They also proved to be much better than the German medium tanks for the job of carrying their guns and gun crews through heavy fire. Their superior speed and greater maneuverability made them harder to hit, and when they were hit the armor-piercing projectiles from




Tanks advancing with infantry following in carriers. This drawing, based on an illustration in the U. S. Army's Armored Force Field Manual for light and medium tank companies, shows an important use of tanks

the German gun-howitzers which had punched through the 2½-inch main armor of the British mediums had much less effect on their tougher and possibly thicker plates. Even the much-touted German 88-mm. high-velocity antitank guns weren't sure death to the sturdy General Grants—one of which sustained eight hits by 88-mm.

projectiles without being penetrated by them.

In mechanical dependability and durability our tanks were almost immeasurably superior to those of the enemy. Ninety of our light tanks went through an entire month of battle-front service with only 12 minor mechanical failures. A captured report of a German workshop company shows

HERE ARE SOME OF THE POINTS IN WHICH OUR TANKS EXCEL

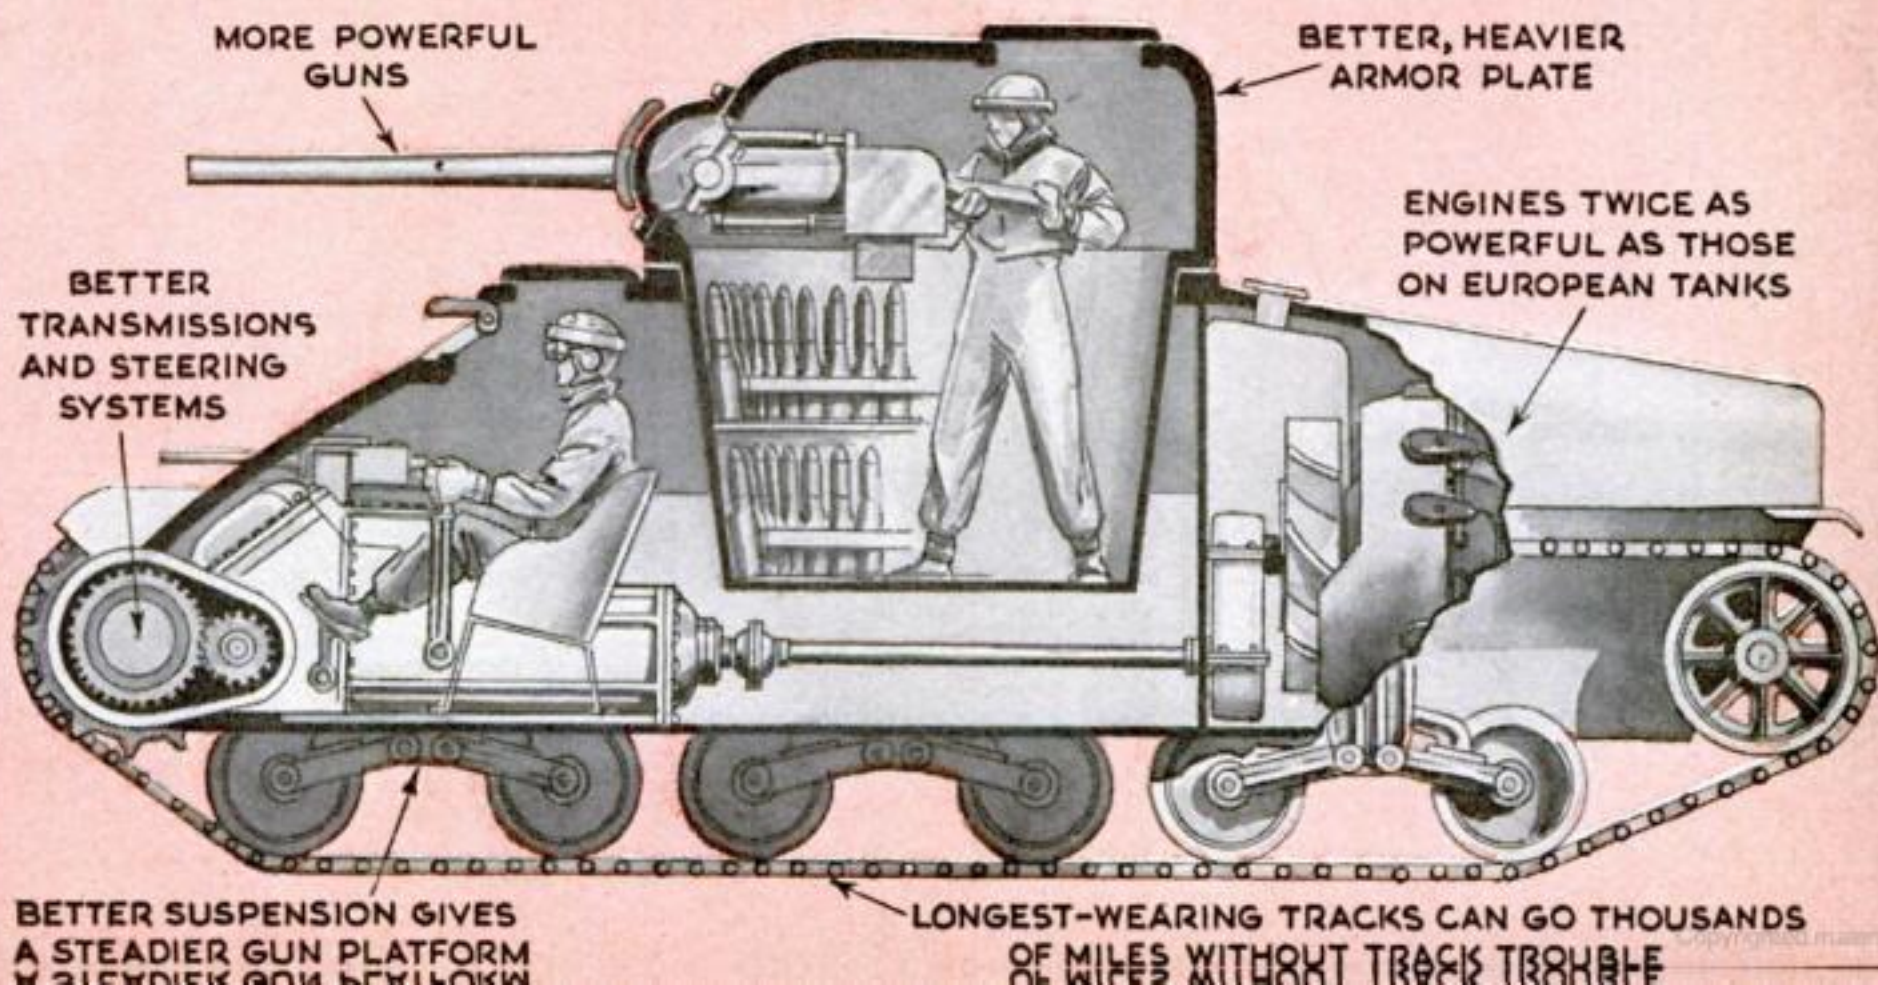

WHAT TANKS SHOULD NOT DO



It is bad business for advancing tanks to lay a smoke screen that will blow back on them. Drivers will be confused and tanks will be good targets



Attacking artillery frontally is asking for trouble, as it gives the enemy gunners plenty of time for training their guns on the tanks as they approach

WHAT TANKS SHOULD DO



Smoke should be laid with the wind toward the enemy. As it drifts past the positions under attack, it will cover installations in the enemy's rear



Correct procedure is for a few tanks to cover the artillery with long-range fire from the front while others circle to attack from the flanks and rear

that after a 900-mile desert trek 44 out of 65 Mark III's were out of service because of serious engine troubles which included frozen pistons and broken connecting rods.

These American-built tanks were early models of types which now have been greatly improved. Maj. Gen. Jacob L. Devers, chief of our Armored Force, says that they wouldn't stand a chance against the tanks now coming off our production lines.

Our new tanks are the best in the world because they have been made that by over 20 years of hard work, careful planning, and patient experimenting and testing by the tank experts of the Army Ordnance Department, ably assisted by some of the outstanding engineers of the automobile industry serving on tank committees of the Society of Automotive Engineers.



When the United States entered World War I, the tank, first used by the British in 1916, had been developed into a moderately efficient and highly spectacular weapon which appealed strongly to automobile-minded Americans. In France several battalions of our newly organized Tank Corps, using equipment borrowed from the British and French, fought in our St. Mihiel and

Meuse-Argonne offensives and helped the British break the Hindenburg Line. On this side of the Atlantic, Army Ordnance officers and civilian automotive engineers worked almost as hard over the difficult job of designing and building American tanks.

The first of their conceptions to get beyond the blueprint stage was the gas-electric tank built in 1918 by the Holt Tractor Company—pioneer producers of endless-tread tractors—and the General Electric Company. It was powered by a 90-hp. gasoline engine which drove a generator that supplied current to two electric motors which drove the tracks.

The next tank produced in America was a 50-tonner designed and built by the Army Engineers. It was driven at a top speed of four miles per hour by a pair of 250-hp. steam engines and its principal weapon was a flame thrower intended for attacks on concrete pillboxes—an idea which the Germans have made use of in this war. Another of the very early American tanks was the Skeleton—a daddy-longlegs tractor with a small armored body slung between its nine-foot-high and 25-foot-long tracks.

None of these experimental tanks per-

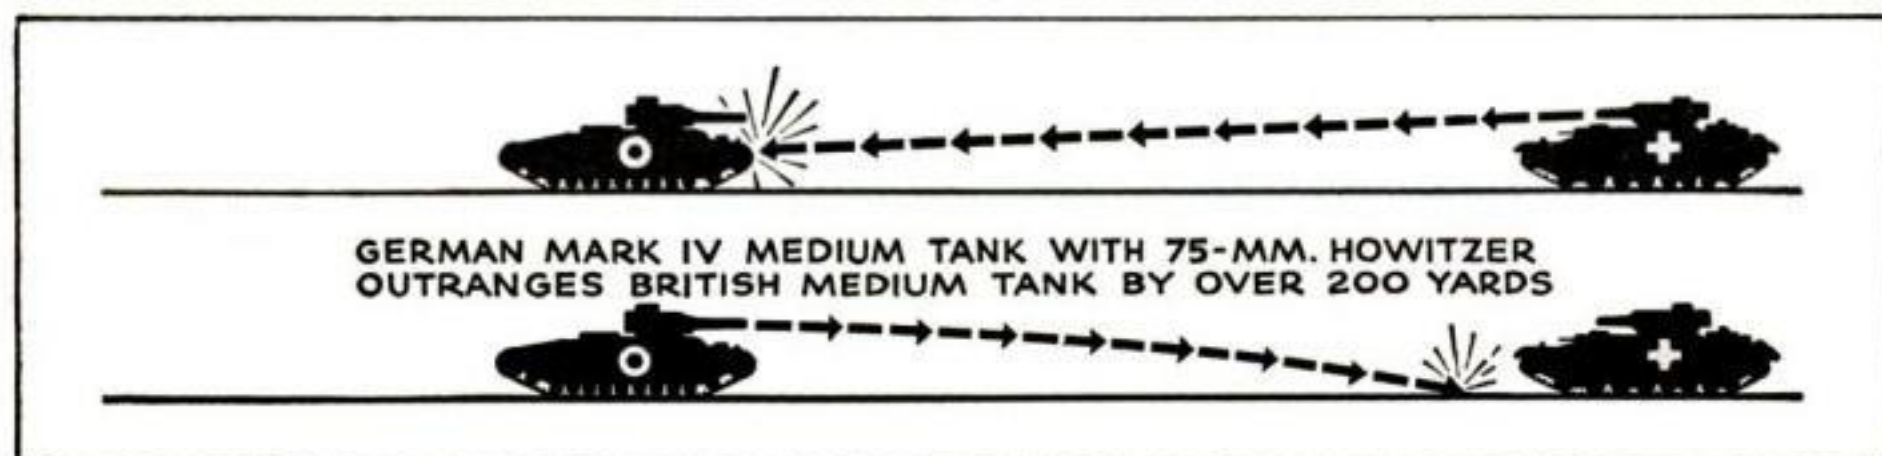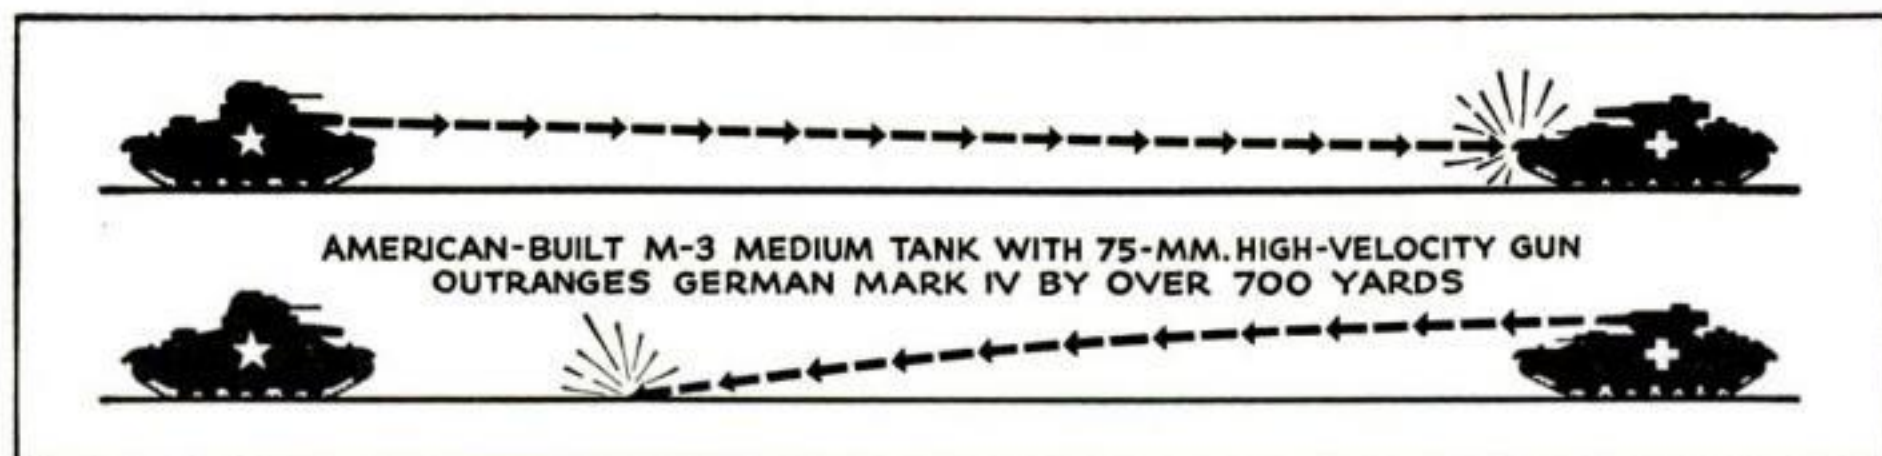

OUR TANKS HAVE BETTER GUNS IN EVERY CLASS



Our M-3 light tank, with its 37-mm. gun supplemented by machine guns, outshoots the German tanks of its class. American light tanks serving with the British were nicknamed "Honeys" by the Tommies



The 75-mm. high-velocity gun in the M-3 medium is the one that outranged the German Mark IV's as shown in the drawing above. Following its example, British mediums are being rearmed with heavier guns

In the M-4, the high-velocity gun is mounted in a 360-degree turret. As in other U. S. tanks, a stabilizer of secret design provides a steady gun platform for accurate firing while in rapid motion

Carrying a high-velocity gun of immense power, our heaviest tank (57 tons) can batter opposing mechanized units as easily as it crushed an automobile under its treads in the demonstration shown below



formed impressively enough to encourage the building of a second model. As tanks were needed badly, the Ordnance Department arranged with several manufacturers for the building of a copy of the French Renault, which was called the Six-Ton M 1917 Tank. Over 900 were produced in 1918 and 1919. For years they were the only usable tanks in the Army, and some National Guard companies still were equipped with them when they were ordered into Federal service in 1940. The Ordnance Department also built 100 Mark VIII 43-ton tanks of modified British design. The first one finished was tested two days after the war ended. This old Mark VIII is the tank represented on the collar insignia of the Armored Force.

Only a few of these American-built tanks were sent overseas, and none of them were used in action.

The 15 years following the end of World War I were very lean ones for the Army. Far-seeing officers were urging the necessity for a degree of mechanization, but Congress wouldn't provide the money to buy the machines. Appropriations were so meager that the three Ordnance officers who deserve chief credit for the peerless American tanks of today had to cut a lot of corners to go on with their experimental work. One of these officers is the Army's present Chief of Ordnance, Maj. Gen. Levin H. Campbell, Jr. The other two are Gladeon M. Barnes and John K. Christmas, both now brigadier generals and key men in our gigantic tank-production program. J. Walter Christie, former race driver, worked in close collaboration with the Ordnance men. The suspension and many other

superior mechanical features of our tanks were of his invention.

Between 1920 and 1935 European armies built tanks by the thousands. We built a total of 31—but each of those experimental models was an improvement over the one which had preceded it. Engine power was increased steadily. In 1929 an air-cooled engine was used for the first time. Sliding-gear transmissions replaced the old planetaries. Speeds were increased from the five or six miles per hour of the 1918 models to over 20 miles per hour. Steering and suspension methods were improved, making tanks more maneuverable and steadier gun platforms. The toughness of tank armor was increased; in 1933 the first all-welded tank hull was produced at the Watertown Arsenal.

From those fifteen years of hard work our Army Ordnance tank specialists acquired



HOT AND COLD ROOMS at the Armored Force Medical Laboratory, Fort Knox, Ky., test men for reactions to tropical heat and arctic cold. Above, a tanker gets a sea-sickness test on a tilt table. At left, a tank crew discovers what 30-below-zero cold will do to a machine—and to its own efficiency

BOGIES

These are the wheel assemblies that roll inside the tracks of a tank to support its weight. Our light tanks have four bogie wheels on each side; mediums, six; heavies, eight. At right, massive bogies and hulls for M-4's meet on an assembly line in one of our big war plants




LIGHT TANK



MEDIUM TANK




60-TON TANK

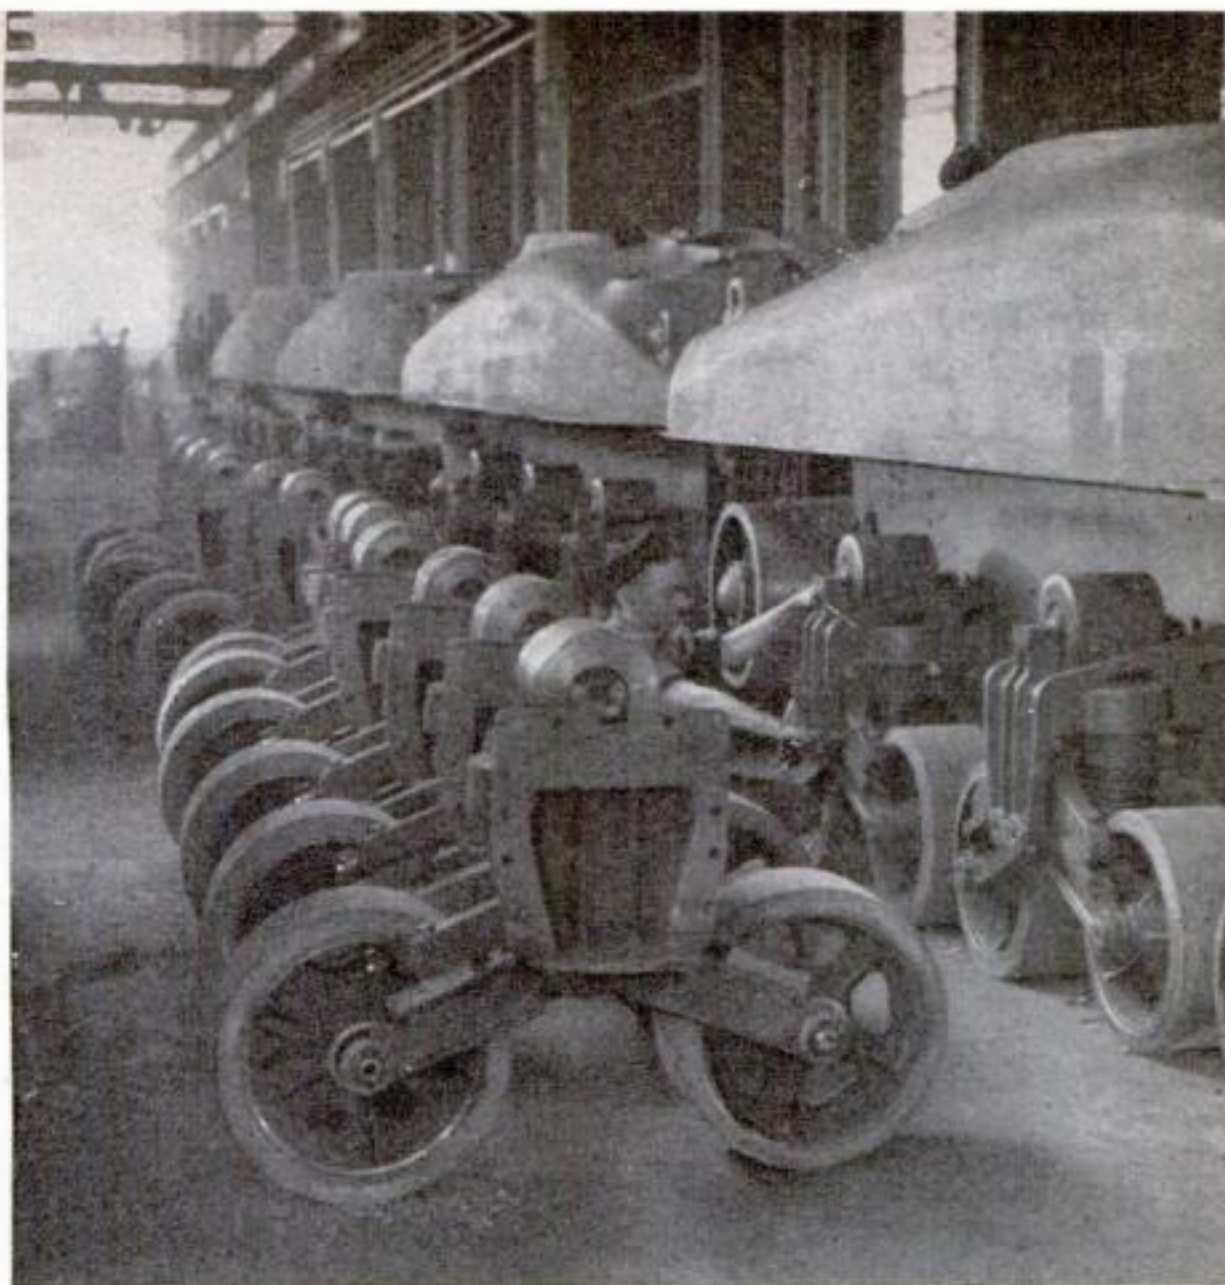

the know-how to design and build tanks that would compare favorably with those of any other army. When at last Congress heeded the urgings of Gen. Douglas MacArthur (then Chief of Staff) to the extent of appropriating funds for the building of 283 light tanks, they were ready with the design of the M2A3. It weighed 10½ tons, and its 270-h.p. air-cooled airplane-type

engine gave it a road speed of well over 35 miles per hour. Its tracks, driven by front sprockets and rolling over four bogie wheels on each side which supported the weight of the body, were made of a newly developed long-wearing and heat-resisting rubber composition set in steel blocks. Infantry tanks had double turrets; the mechanized cavalry [*\(Continued on page 218\)*](#)


On the lookout for Axis tanks in Algeria: This is our M-5 tank destroyer, a wicked 105-mm. gun on a self-propelled mount. In addition to the big piece, it carries a smaller gun for defense against planes

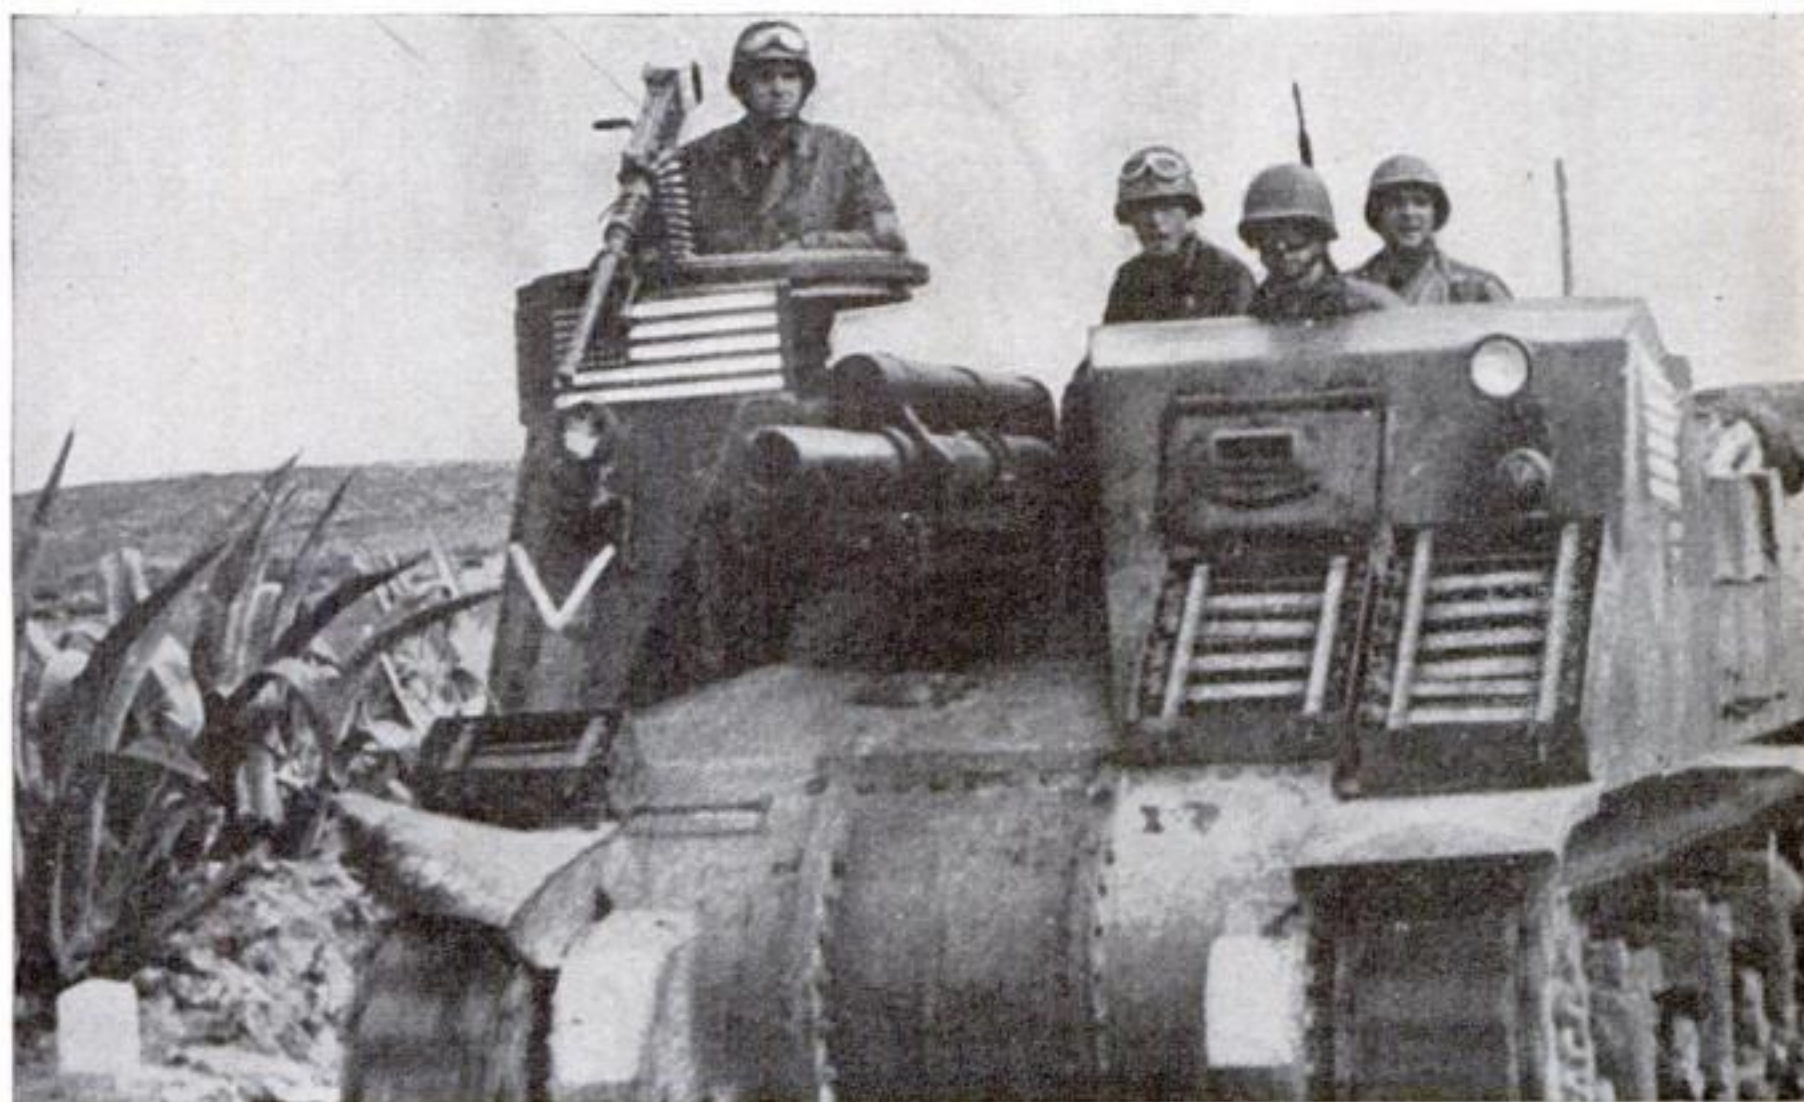

EVOLUTION OF AMERICA'S MECHANIZED MIGHT . . .




1917 First production model built in the United States was the six-ton M1917, styled after the French Renault. Over 900 were made in 1918 and 1919, and they were our Army's only usable tanks for many years

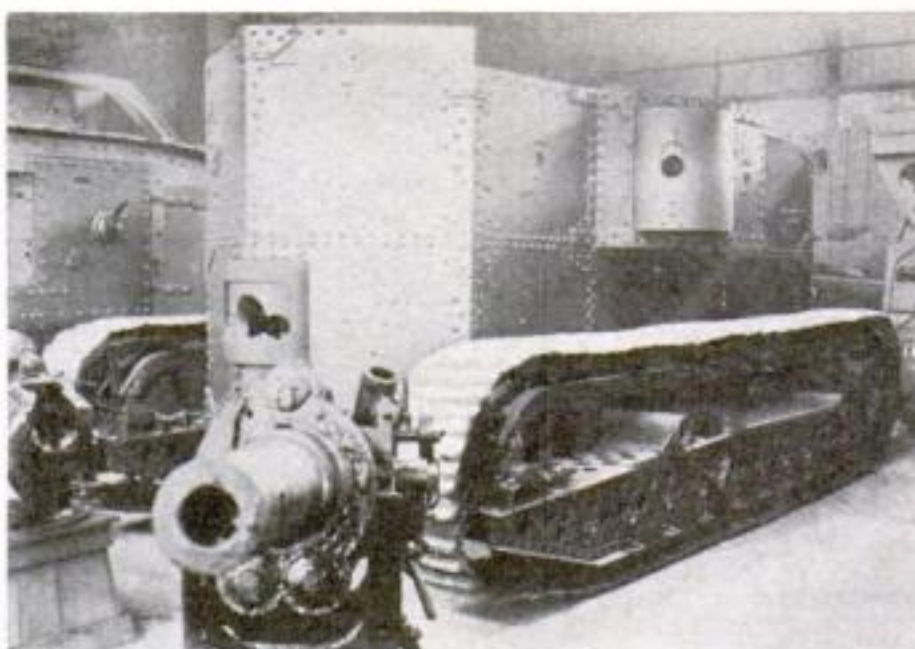


1918 First experimental U. S. design was the gas-electric built by Holt Tractor Company and General Electric. It was driven by a gasoline engine through a generator and electric motors



1929 Another experimental model of the lean between-wars years was the T1E2. It weighed 8.9 tons, and its 132-horsepower engine drove it at 16 miles an hour. Carried a 37-mm. gun, one machine gun

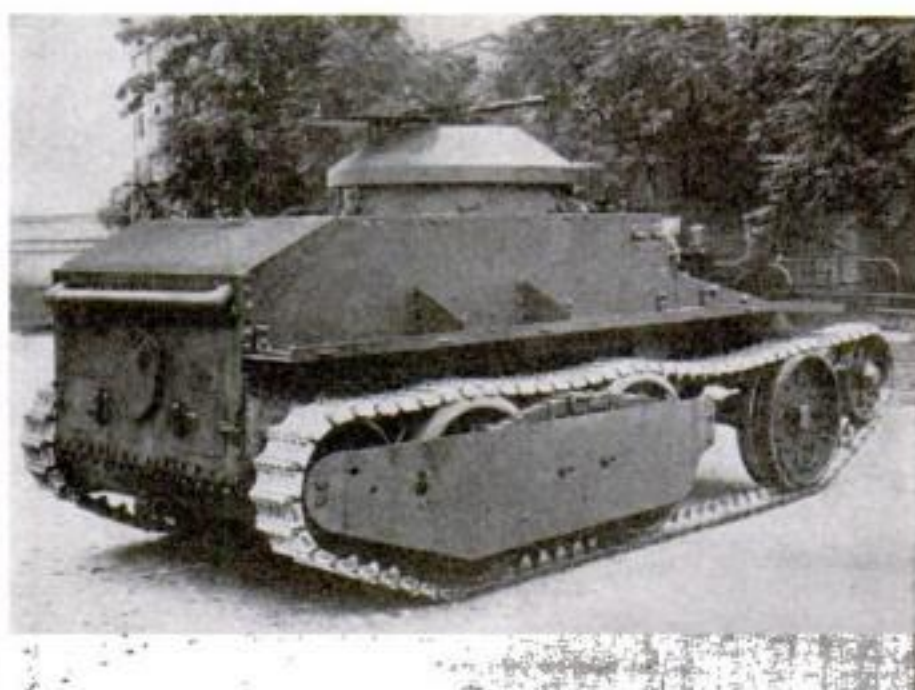

1931 J. Walter Christie, former racing driver collaborating with Ordnance experts, conceived this convertible tank and armored car. It ran either on tracks or on rubber-tired road wheels

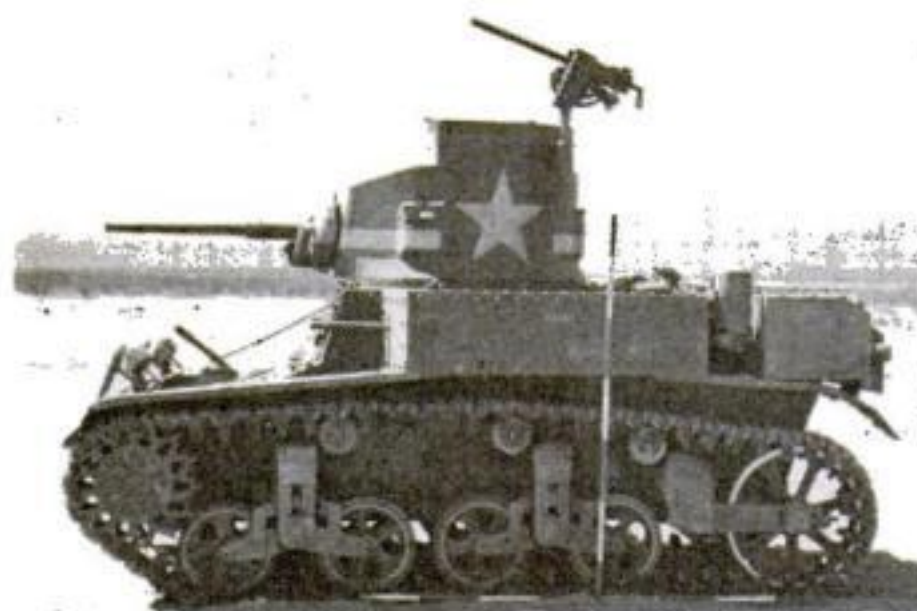

1941 Our present M-3 light tank is a direct descendant of the M2A3, first modern fighting vehicle issued to the Army. Tanks of this type got their baptism of fire when the British hit Rommel in Egypt




1942 The M-3 medium also won its spurs in the desert. The side-mounted heavy gun proved to be a mistake, but this has been corrected in the greatly improved M-4 medium, seen at right


OUR TANKS FROM 1917 TO TODAY—AND TOMORROW



1919 The Mark VIII 43-tonner is immortalized in the collar insignia of the Armored Force. We built 100 of these on a modified British design, and most of the parts were obtained in England

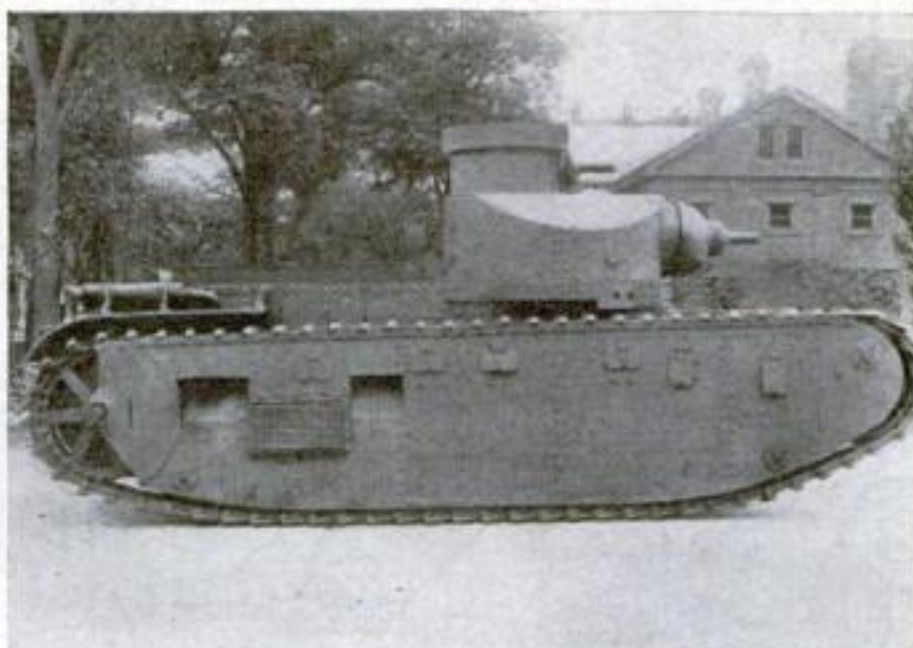

1925 This 23-ton medium was an experimental job of the Ordnance Department. Powered by a six-cylinder water-cooled Packard V-8 engine, with planetary and sliding-gear transmission, it was fairly successful

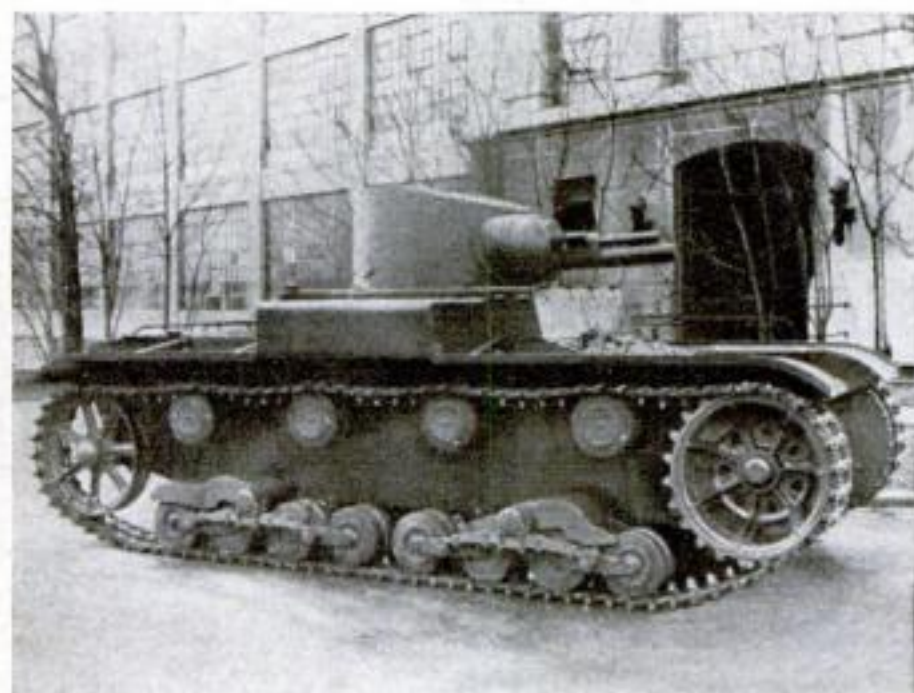


1932 The light T1E4 used the present system of putting the engine in the rear and driving from the front. Carried a 37-mm. gun, one machine gun. Powered by a V-8, 140-hp., water-cooled engine



1940 When rumblings of approaching war brought appropriations for real tank production, Ordnance experts were ready with plans for the 18-ton, 32-miles-per-hour M-2 medium, shown here on maneuvers



Putting a Stop to

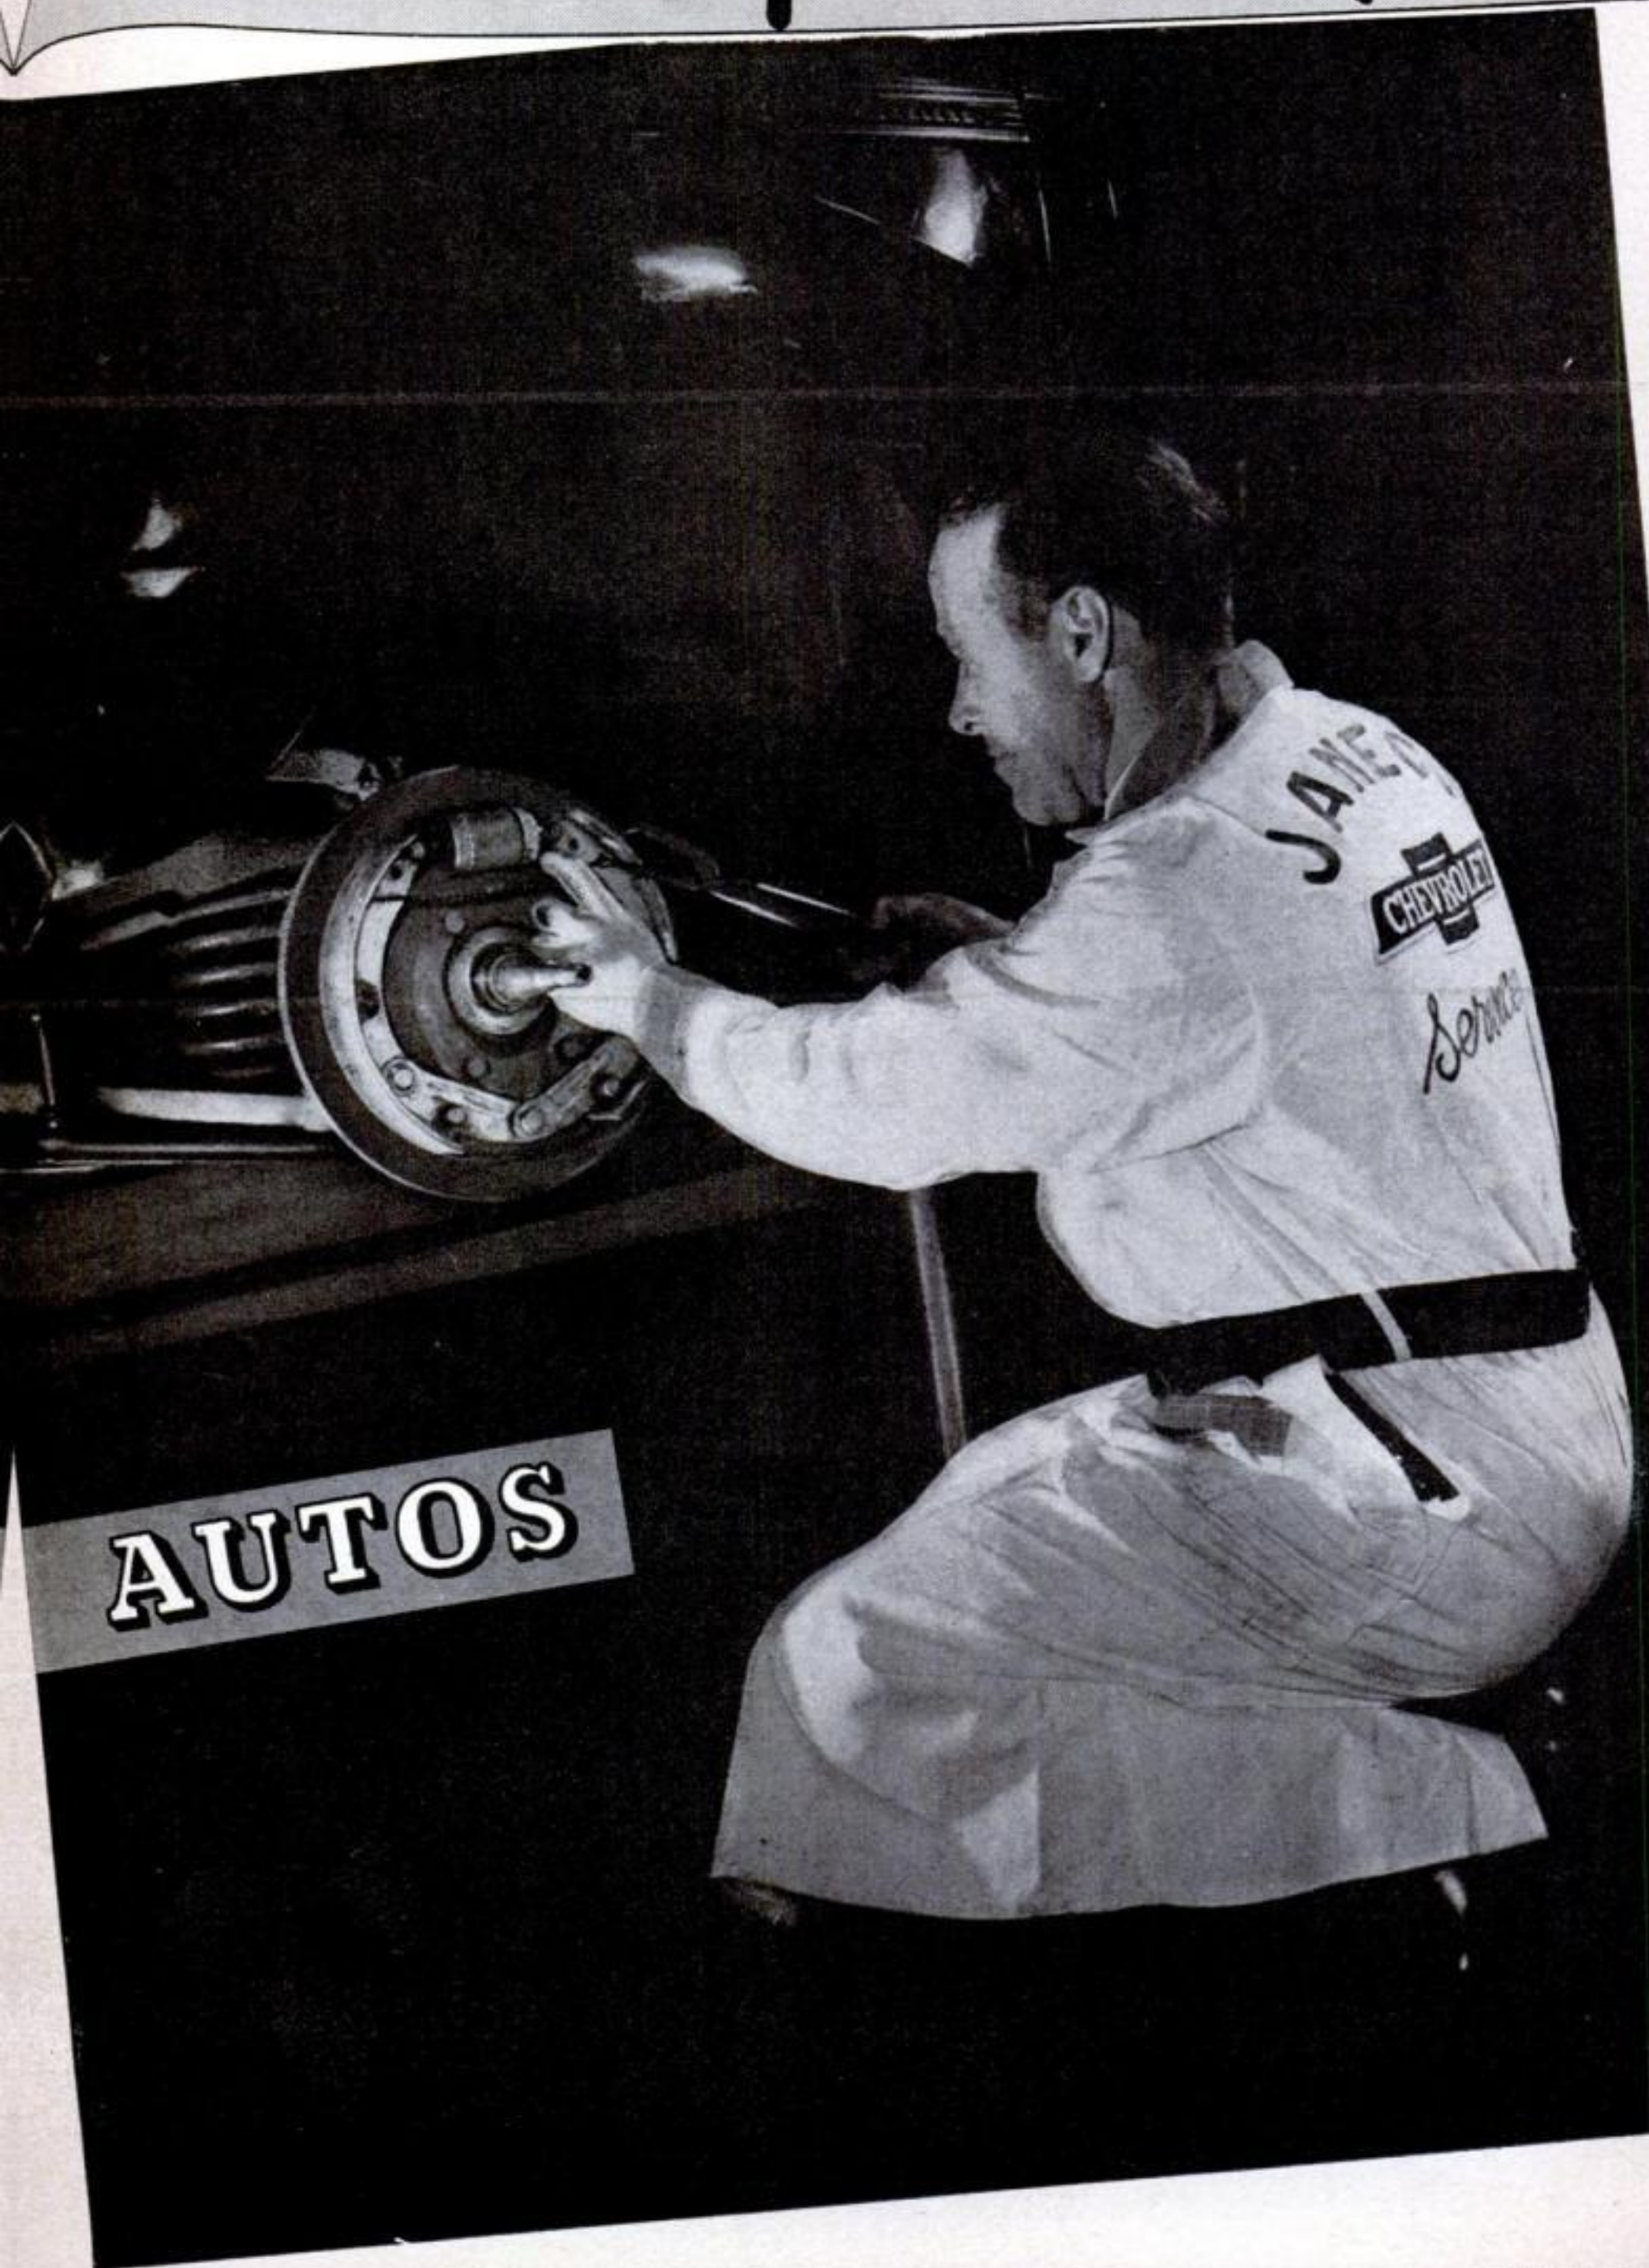

Brake Troubles

HYDRAULIC SYSTEMS CALL FOR PERIODIC CHECK-UPS

By RALPH ROGERS

CHECKING and servicing your own automobile regularly becomes of primary importance now that more and more mechanics are being called into war work and parts are becoming harder to replace. And in your periodical check-up, do not fail to test your brakes and readjust them when necessary—their efficient operation, aside from the safety factor, will save wear on many other parts.

Most cars made since 1936 have hydraulic brakes employing a master cylinder that displaces fluid from its reservoir by a piston movement when the brake pedal is depressed. This displacement results in a pressure build-up through lines connected to similarly actuated wheel cylinders, forcing the brake shoes against the drums.

Every time brakes of this type are adjusted, and also after every 2,500 miles, the fluid level in the cylinder should be checked and, if required, replenished. Use only a fluid of approved type.

When disassembling a master cylinder, make careful note of the position of all parts so that they can be reassembled correctly. Examine the cylinder bores for rust, pits, or scoring; if they are present, the cylinder should be honed. Obtain, if possible, a hone of the proper size, and chuck it in an electric drill clamped in a vise; then slide the cylinder back and forth a few times over the revolving hone to clean up the bore,

removing only the amount of material absolutely necessary. Next, check the fit of the piston in the cylinder with a feeler gauge. If the clearance is in excess of .005", put in new parts. Inspect the check valve, and should the seat be pitted or the rubber washer swollen, replace the assembly. New rubber piston cups should be installed if the old ones are swollen or distorted.

Before assembling, clean all parts thoroughly in denatured alcohol, being especially careful that the bypass port in the cylinder barrel is clear and that all sediment is removed from the cylinder.


Three types of wheel cylinders are in general use: the Lockheed, for which adjustments must be made on cams at the brake shoes, and the Bendix and Chevrolet types, which have adjustable end caps. When servicing, remove the end boots from Lockheed-type cylinders, or the end covers from Bendix or Chevrolet cylinders. The pistons, cups, and spring can then be pushed out. Clean, inspect, and recondition all types as you would a master cylinder.

Bleeding is necessary whenever a brake line has been disconnected or when a leak has allowed air to enter the system. A leak is usually indicated by a spongy brake pedal. When air, which is compressible, is trapped in the system, it prevents the full brake-pedal pressure from being transmitted to the brake shoes.

All four wheel cylinders must be bled if the main line from the master cylinder is

HOW TO DIAGNOSE THE CAUSE OF TEN COMMON BRAKE FAILURES

- 1 Inadequate brake-pedal reserve indicates worn lining, air or vapor in the hydraulic system, low fluid level, leakage, or a worn master-cylinder piston.
- 2 If all brakes drag after adjustment, check for a clogged filler vent, pedal not returning to its stop, swollen rubber due to improper fluid, or clogged piping.
- 3 Drag on one brake indicates insufficient shoe-to-drum clearance, weak or broken shoe-return spring, stuck wheel-cylinder pistons, piping clogged, shoes stuck, or loose wheel bearings.
- 4 If the car pulls to one side, look for grease or fluid on the lining, improper adjustment, piping clogged or crimped, backing plate or wheel bearings loose, wrong type of lining, primary and secondary shoes reversed, tires unevenly inflated or tread wear uneven, charred lining, brake drum scored or out of round, damp or muddy shoes, weak or loose chassis springs, or loose U-bolts or kingpin.
- 5 A spongy or springy brake pedal usually means air or vapor in the system.
- 6 The need for excessive pedal pressure indicates incorrect type of lining, lining ruined by grease or fluid, or improper brake adjustment.
- 7 If brakes are harsh, look for a loose brake backing plate, slight amount of grease or fluid on lining, moisture, charred lining, scored brake drums, or improper lining.
- 8 If brakes squeak, check for twisted brake shoes, bent backing plate, metallic particles or dust embedded in lining, or loose rivets or lining.
- 9 Knocking brakes indicate insufficient clearance at the anchor, adjusting slot in shoe out of square, or roughly refinished drum.
- 10 After adjustment, if there is no pedal reserve, the pedal-stop lock ring is probably out of its seat in the master cylinder.

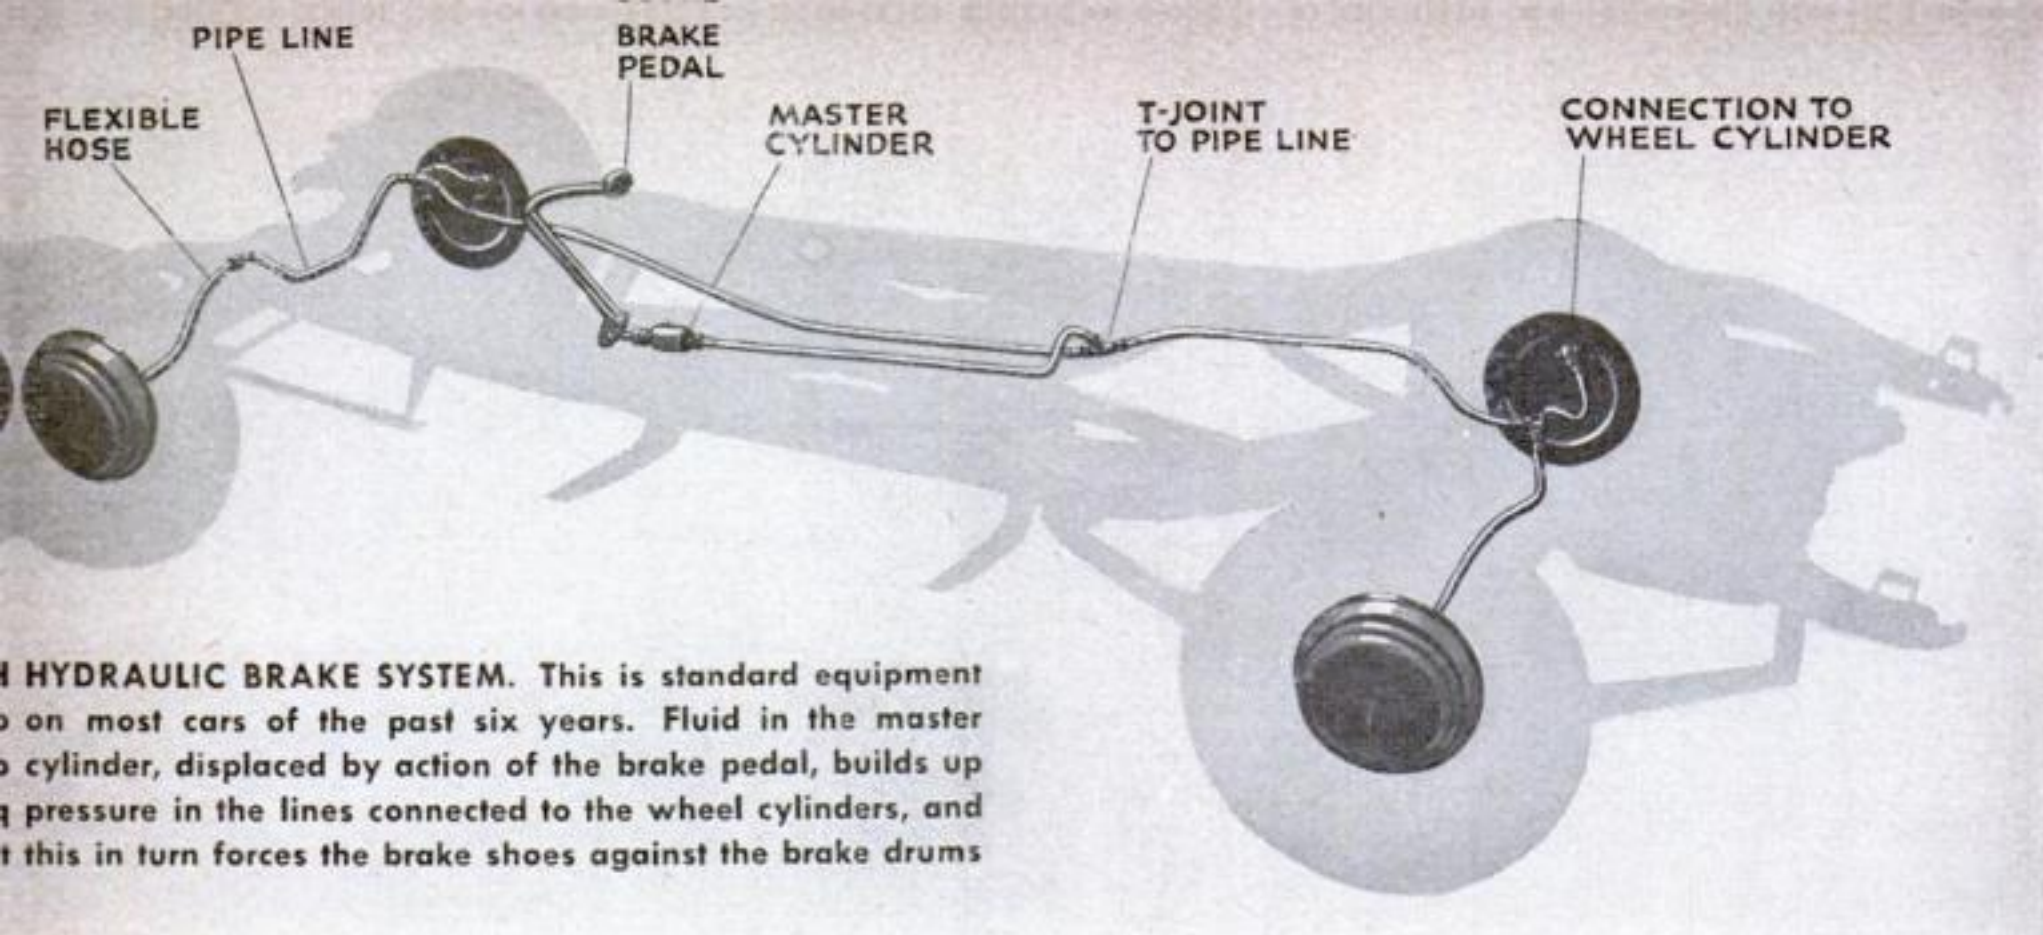


HYDRAULIC BRAKE SYSTEM. This is standard equipment on most cars of the past six years. Fluid in the master cylinder, displaced by action of the brake pedal, builds up pressure in the lines connected to the wheel cylinders, and this in turn forces the brake shoes against the brake drums

pedal while drums are removed from the wheels.



Fill the reservoir with fluid. Remove the bleeder-valve screw at the wheel cylinder, and attach a drain tube, allowing it to hang in a clean jar. Loosen the bleeder valve about three quarters of a turn, depress the brake pedal a full stroke, and allow it to re-

FOUR TYPES OF HYDRAULIC BRAKES IN GENERAL USE

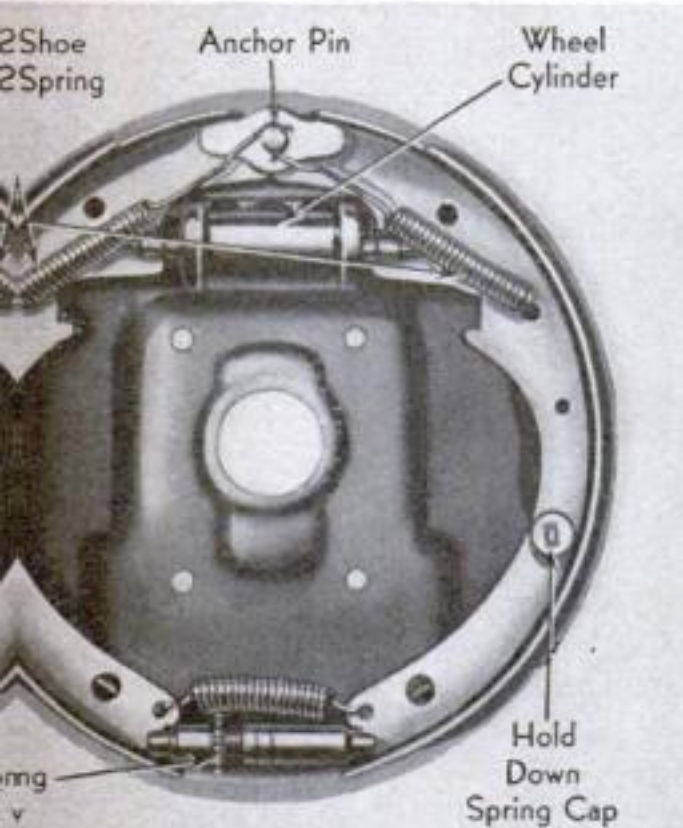


The Bendix brake at the left is adjusted by turning the adjusting screw until the brake drags, and then backing it off about 20 notches for correct lining-to-drum clearance


Turn the eccentric for each shoe on the Bendix brake at right until it drags, then back both off until free. Finally, turn the screw, as above, and back off about 12 notches

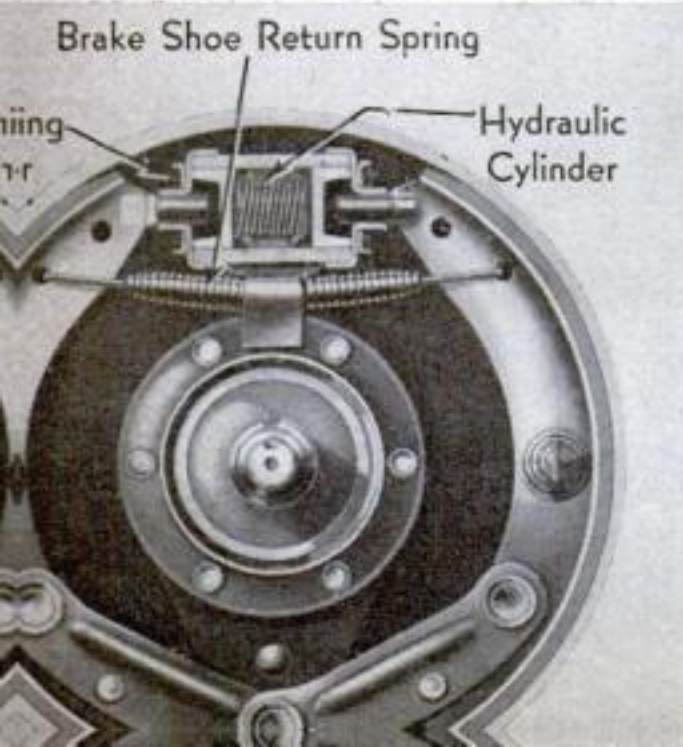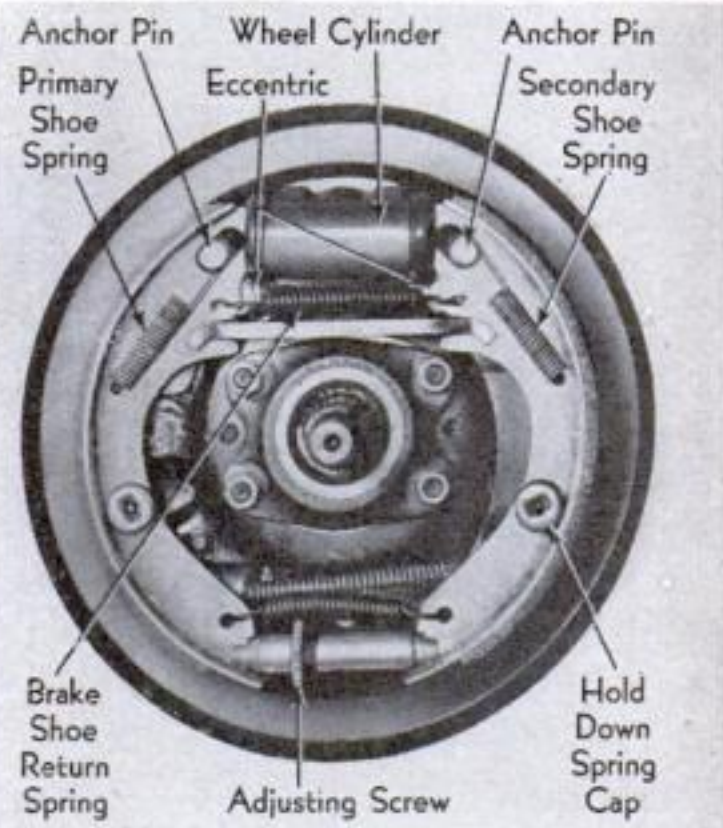

At left is a Chevrolet brake, adjusted by turning the two covers at the ends of the wheel cylinder. A close-up is shown on the facing page


Another type of popular brake is the Lockheed at the right. Adjustments are made on this brake simply by turning the two cams at the brake shoes

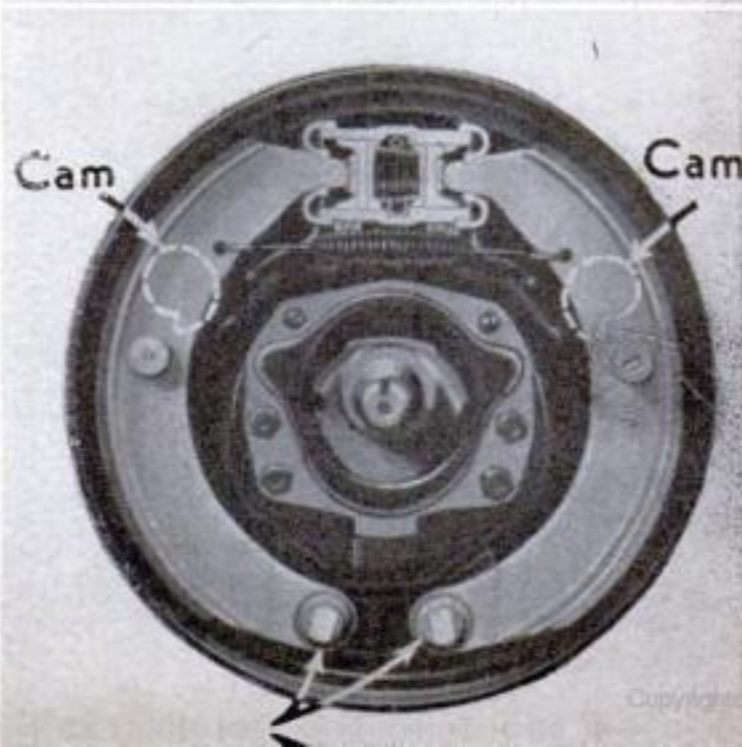

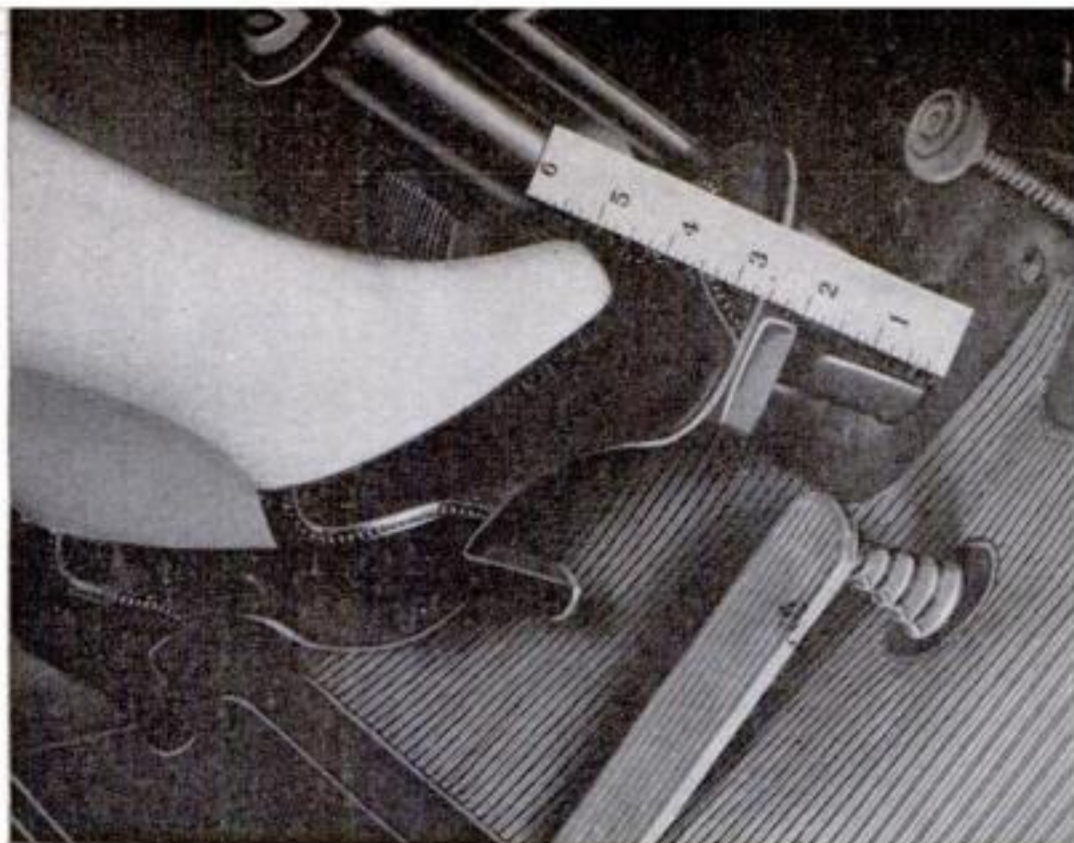


Experts urge a 2" margin of pedal reserve to counter expansion of the brake drums caused by quick stops that make drum temperature rise as high as 1,400 deg.


turn slowly. With the end of the tube below the level of fluid drained into the jar, continue to operate the brake pedal until the drained liquid is free from air bubbles and a solid stream flows. Then tighten the bleeder valve and remove the tube. Repeat for the other wheels. Replenish the reservoir with fresh fluid—not that withdrawn—after each wheel is bled.

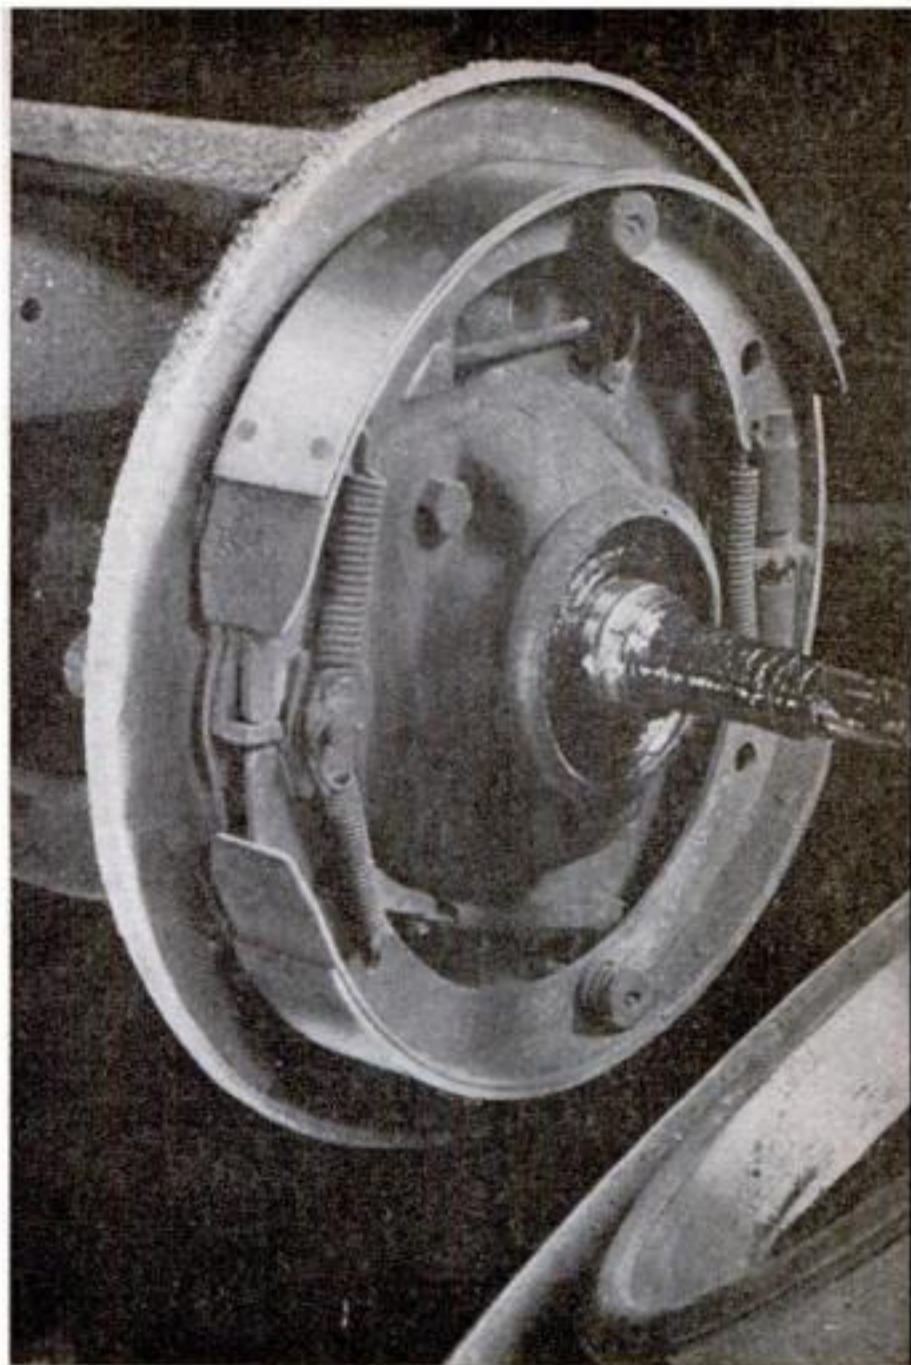


Here is a brake job that should have been done sooner. The brake-shoe lining has worn down to the rivet heads, which have scored the brake drum. The shoes must be relined, and the drum either refinished or replaced.

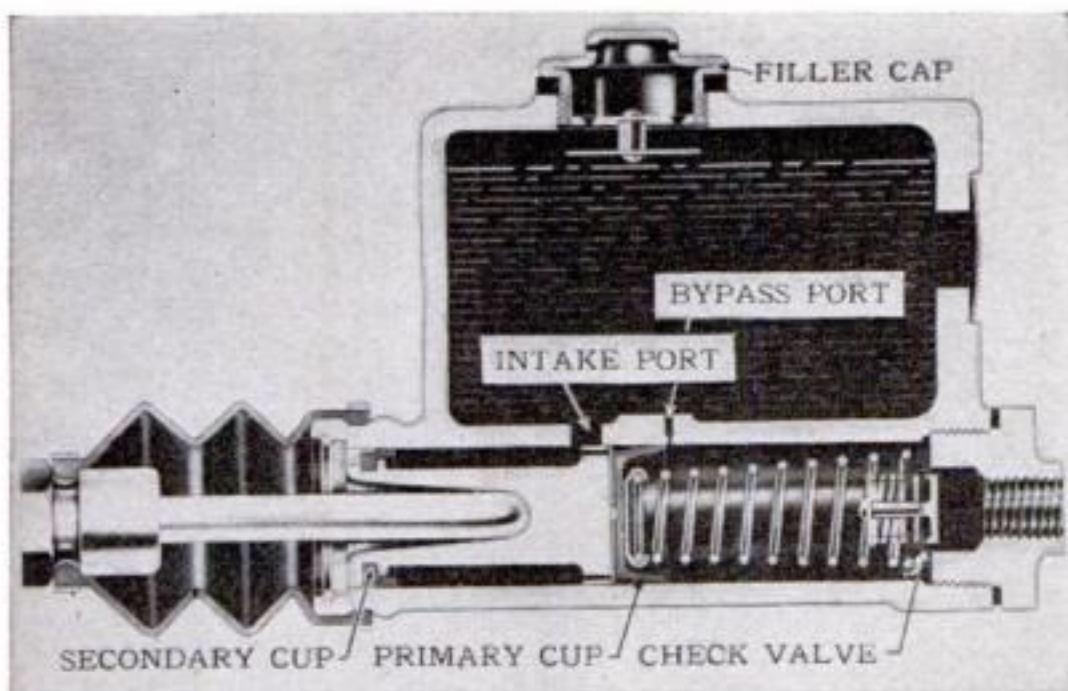

Above, cross section of the master cylinder in a hydraulic brake system. When cleaning, leave no sediment to clog the bypass port. Below, close-up of a Chevrolet wheel cylinder

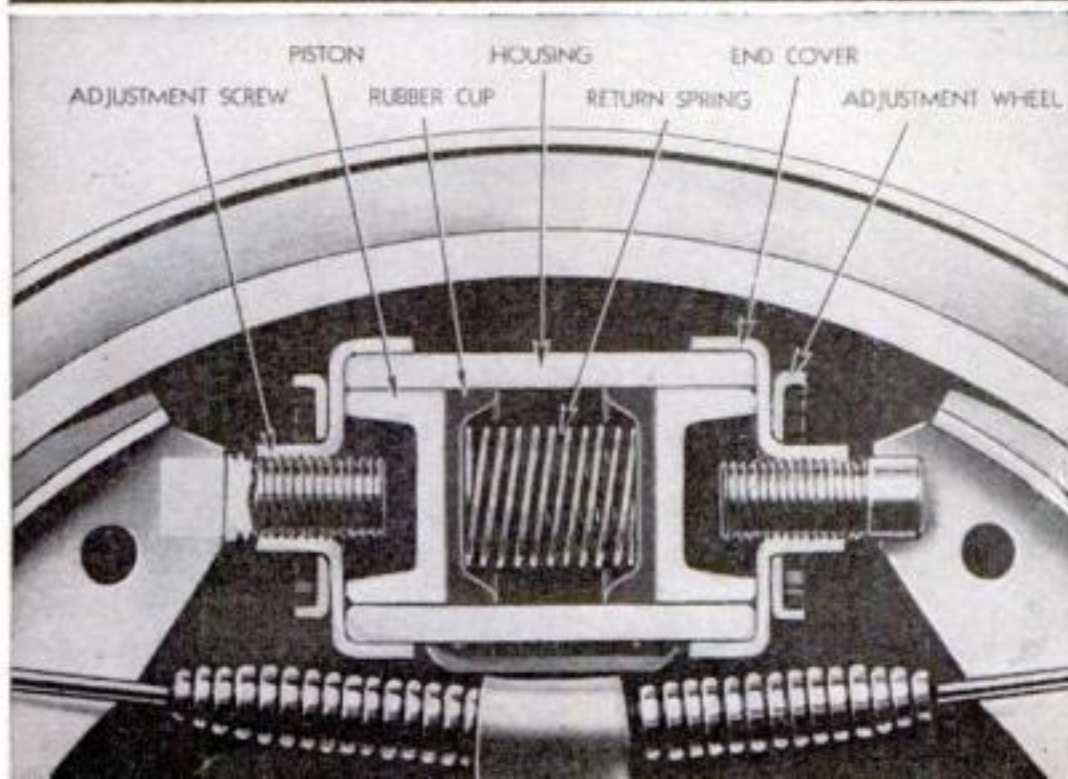


Bleeding is required if fluid in the brake system gets low and admits air. Refill the reservoir, remove the bleeder-valve screw, attach a drain tube, as below, and loosen the bleeder valve. Then depress the brake pedal, allowing it to return slowly. Repeat until no bubbles drain out with the liquid.

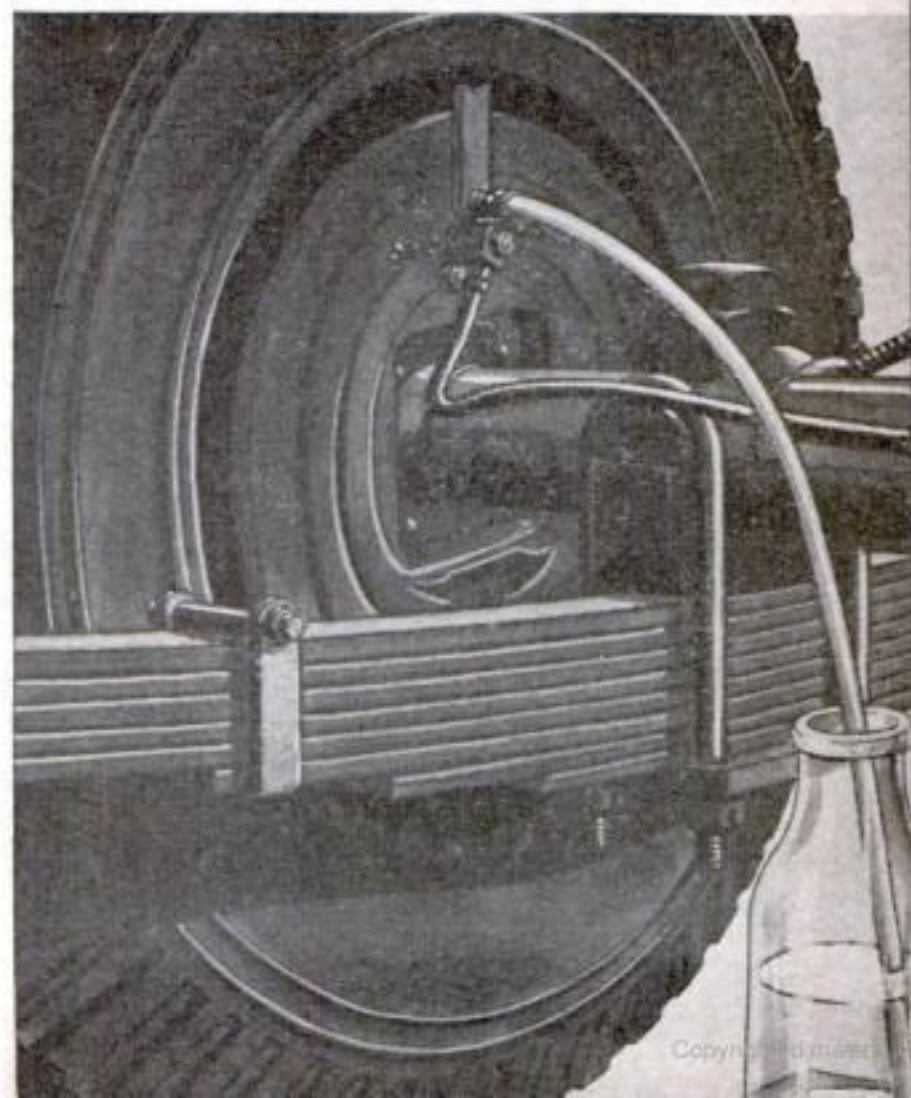

Auto Ideas

GIANT TRAILER TRUCKS 73 feet long, like the one shown below, are to haul bomber parts from factories to assembly plants 1,300

miles away. Two of these units, which were designed to relieve rail congestion, are equivalent to seven freight cars and can be loaded in less time. Each has five axles and eighteen wheels, and weighs from 50,000 to 63,000 pounds when loaded. Two high-speed motors under the cab can be pulled out on extension mounts for quick repairs, and if necessary a new engine can be installed in as little time as 15 minutes.

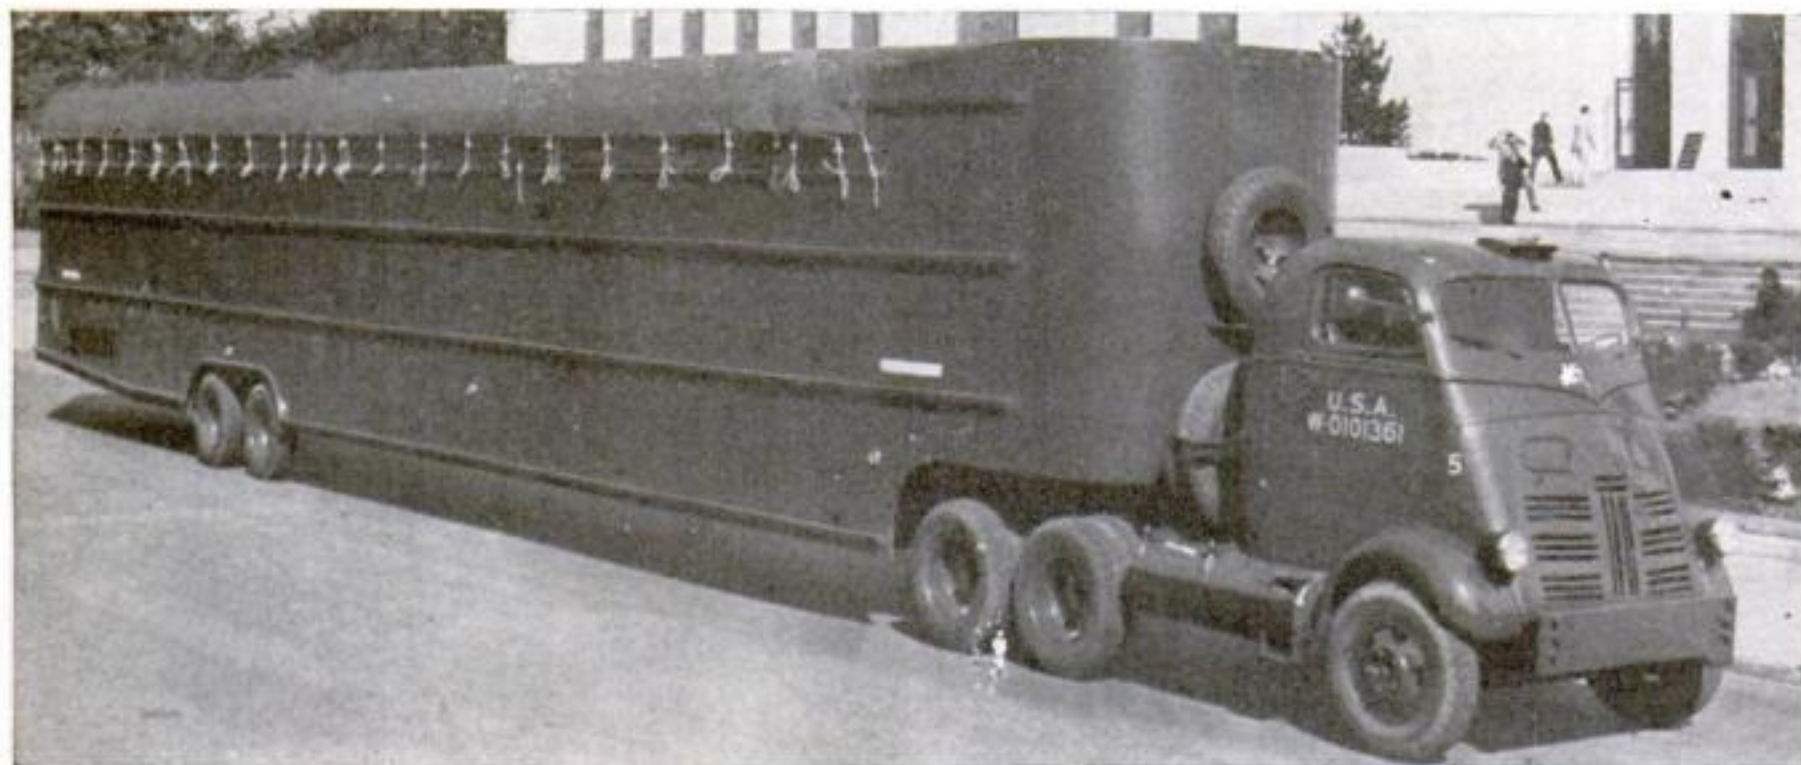


How Neglected Puncture Holes Can Destroy Your Tires

TIRES may be sabotaged from within, points out A. L. Murray, president of the Auburn Rubber Corporation. If tiny holes in the casing due to punctures are neglected, the destruction of the tire is only a matter of time.

The average car owner, Mr. Murray says, looks only at the outside of his tire and doesn't realize that while the tread is its wearing surface, its true strength really lies in the inside structure. When a puncture occurs, the driver has the tube repaired with a rubber path, overlooking the fact that the puncture in the casing must also be sealed. If this is not done, water enters the opening, eventually rots the fabric, and produces a "bulge." Soon an apparently inexplicable blowout ruins the tire beyond repair. More tires are destroyed this way than ever wear out, according to Mr. Murray.

Car owners will do well to have their tires inspected inside and out, and any breaks in the casing patched or vulcanized so that water will not work into and rot the fabric. The tube should be inspected at the same time for incipient rim or bead cuts. These should preferably be vulcanized.

CARBONIZED VALVE GUIDES are quickly cleaned with a set of five interchangeable brushes, which remove hard or soft carbon without scratching the side walls. One handle takes all brush sizes, and the metal shank is sufficiently long to protect the hands from projecting studs. Brushes are evenly spiraled to give full contact with the part being cleaned, and re-fills may be obtained either individually or in sets.

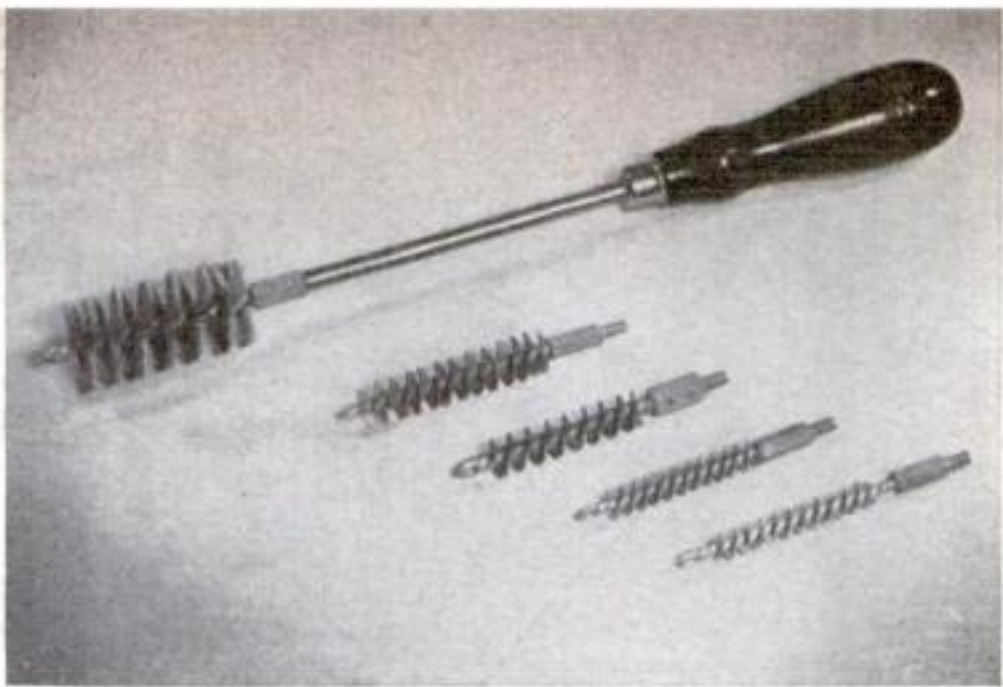

New Headlight Hoods Solve Problems of Dim-Out Driving


A SALESMAN motoring to New England a short time ago was stopped seventeen times by the local police between New York and Boston because his lights did not comply with various local wartime regulations. There were, he found, different rules in different areas, and while some enforced dim lights or none at all, others required

that head lamps be as bright as usual.


To solve this problem of widely varying restrictions without having to remove or apply black paint or friction tape every few miles, an adjustable dim-out hood is now available. It consists of a fiber collar with a removable mask of simulated leather and a lightproof visor, and allows the driver to quickly shift interchangeable filters to meet local requirements, or to take the mask off entirely for normal driving.

The fiber collar is firmly attached to the headlight. This need not be removed at any time, but may remain on for the duration. The mask is then fitted to the collar—not to the lamp itself—and opaque black or frosted white filters are inserted in the openings in various combinations, some of which are shown below. However, the top slot is left open at all times, as its light cannot be seen from above because of the visor.


A tail-light mask also may be obtained in two sizes to fit different makes of cars. It is made of asbestos-lined cardboard, and slips over the bulb as shown in the drawings. The light is visible through two holes in the end cap.—ARTHUR MILLER.

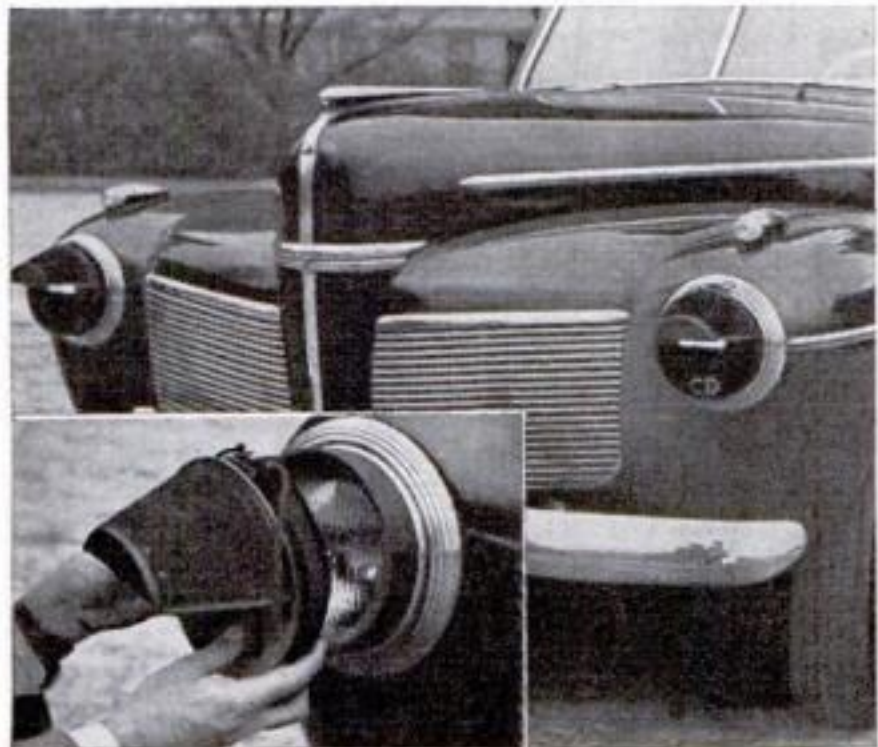


Car equipped with hoods for dim-out driving. Inset shows the mask being placed over the fiber collar

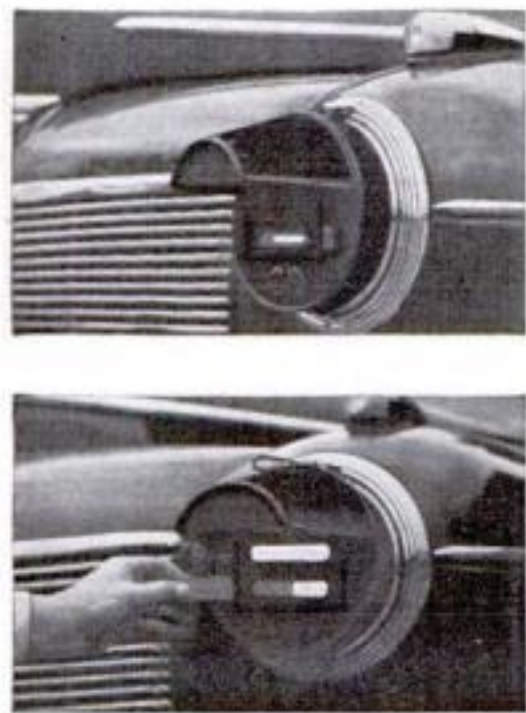


Two ways in which headlights can be changed to suit rules

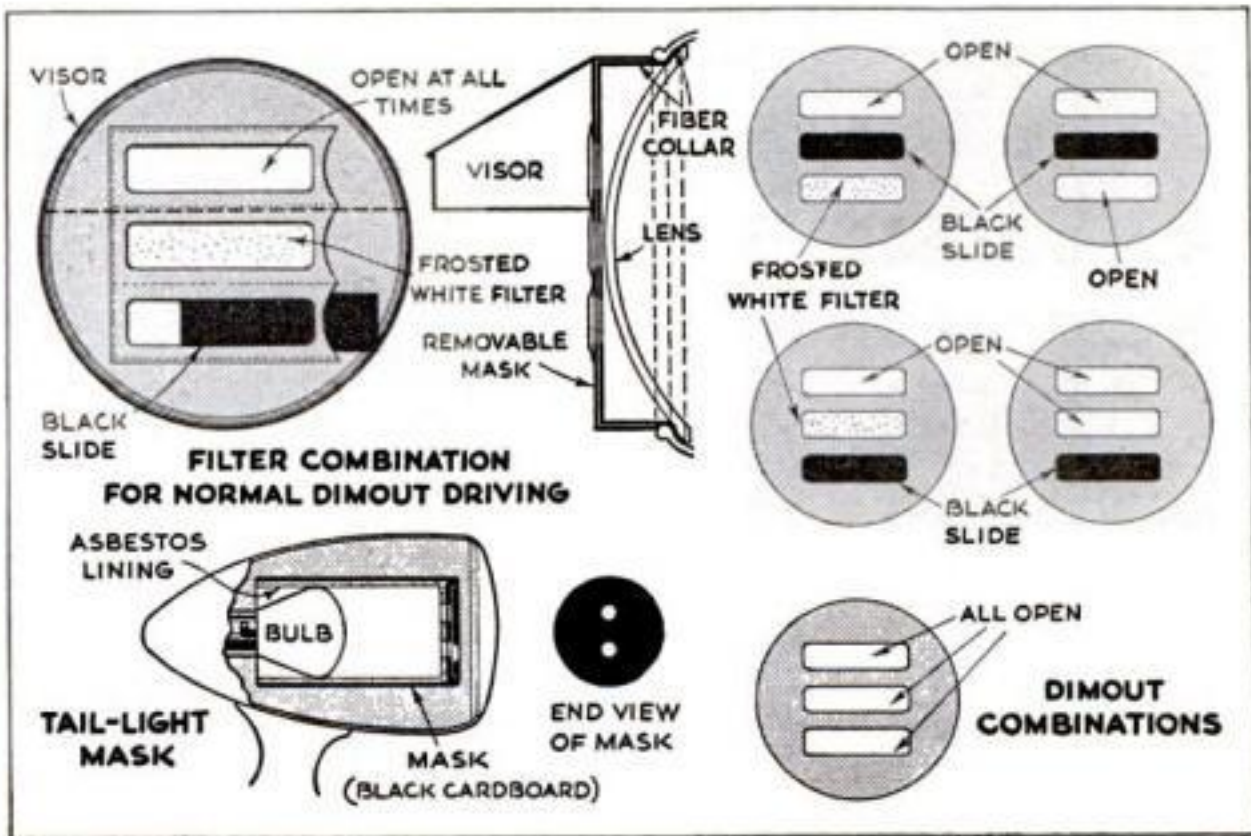

USEFUL AUTO HINTS

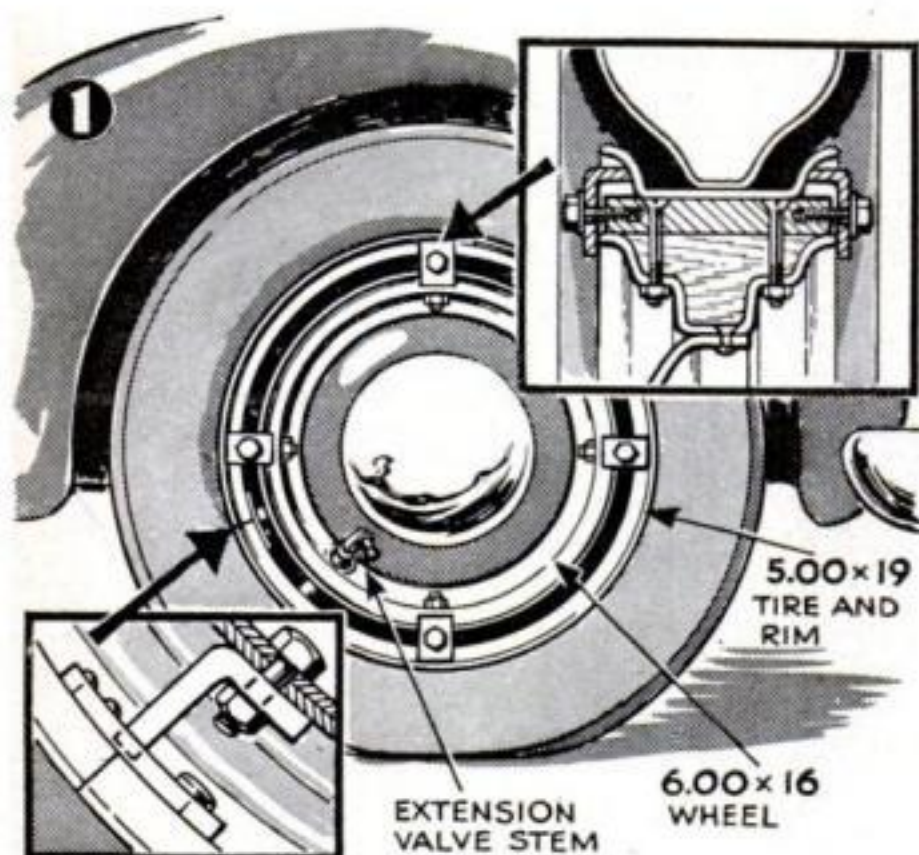

1 OLD-STYLE TIRES of large rim diameter can be made to serve on small wheels by the use of the adapter shown in the drawing. Here a 5.00-by-19 tire and rim are mounted on the rim of a 6.00-by-16 wheel, but with slight changes the method can be applied to other sizes. Bar stock, $\frac{5}{8}$ by 1 inch, and as long as the rim is wide, is bolted with countersunk bolts to the small rim through hardwood filler blocks, as in the upper right inset. Drill and tap the ends for bolts holding angle-iron lugs. Channel-shaped shims may be needed to center the large rim on the bars and eliminate looseness. An angle lug (lower left inset) engages the existing lug on the small rim. A right-angle extension valve completes the setup.—A. A. L.

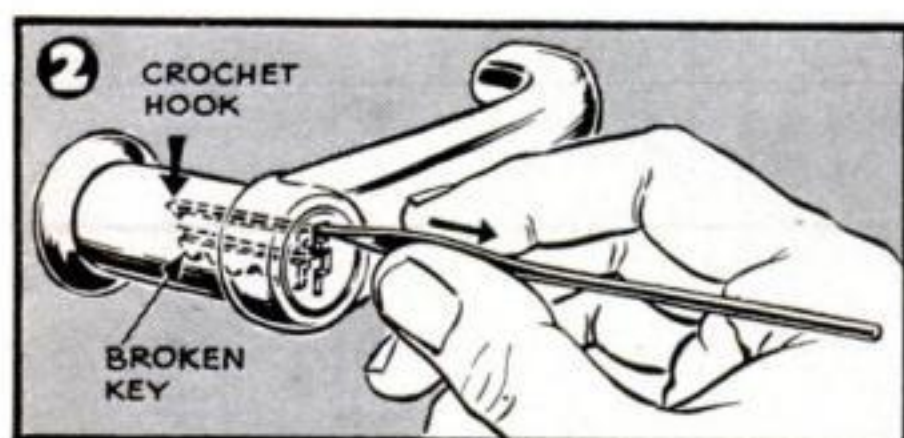


2 BROKEN-OFF KEYS are easily removed from car-door or other locks with the help of a fine crochet needle. Push the needle in above the key until the hook is past the end, and pull out carefully.—A. H. W.

3 BOTTLE-FEEDING A MOTOR may save a tow if the feed pump fails. Puncture the cap of a bottle and feed gasoline through it directly into the carburetor.—J. R.

4 ZERO-WEATHER PRIMING can be done when necessary through the windshield-wiper vacuum line. Pull the hose off near where it enters the intake manifold, attach another hose and insert it in a bottle of gasoline. Turn the engine over a few times, remove bottle, and start as usual.—H. D. DE W.

Drawings by STEWART ROUSE

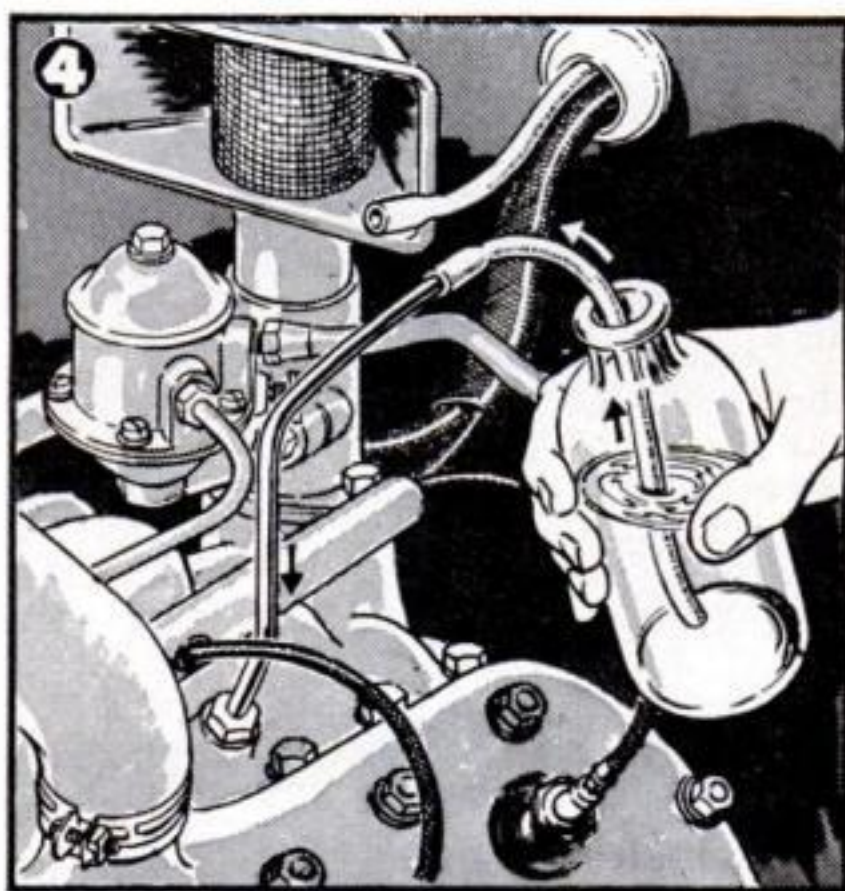



"New parts are hard to get," Gus said. "That's why I keep telling my customers to take care of their cars."

One on the House

Gus Foots the Bill as a New Mechanic Bungles a Job

By MARTIN BUNN

IT WAS a fine sunny morning, and Gus Wilson should have been whistling as he went about his work in the Model Garage shop. But he wasn't.

George Knowles noticed this the moment he came in. "What's biting you this grand and glorious morning?" he wanted to know. "First time I've ever seen you looking as though the world was too much for you."

Gus looked at him glumly; then his face broke into a crooked grin. "I guess I'll have to admit I'm not up to par," he confessed. "Trying to run an auto repair shop these days is a headache."

"Headache!" George said feelingly. "You ought to try running my business in war-time! But what's your particular trouble?"

"Getting spare parts and materials, for one thing," Gus told him. "But my toughest problem is finding a mechanic who won't do more harm than good. Wally, the grease monkey we've had for the last year or so,

was drafted last week. I'm not kicking about that—the Army needs men—but it did leave us in a hole. Joe Clark put an ad in a city paper, and snapped up the only fellow who answered. But the man wants to do everything his own way. Well, that's enough about *my* troubles, George. How about yours?"

"The one on my mind right now," Knowles said, "is my car. It runs well enough at thirty on the level, but it misses badly when I tramp on the accelerator to pick up at lower speeds and whenever I go up a hill. I know you're busy, Gus, but I'd appreciate it if you could get it fixed up by late afternoon. I've got to drive to an air-raid wardens' powwow." A horn honked outside. "There's Peggy. See you later, Gus."

Knowles went out. Gus kept on working on a job he'd promised for noon. Presently Henry Knight, the new mechanic, came in from the office, where he had been arguing with Joe Clark. "Well, what do you want me to tackle next?" he growled at Gus.

"You might bring in that green sedan, and check it," Gus told him mildly. "It belongs to one of our oldest customers. He says the engine misses at low speeds and on upgrades. It might be a burned valve."

"It might be a lot of things!" Knight grumbled. He got the car and drove it into a corner as far away from Gus as possible, and after some time Gus saw that he was removing the cylinder head. That



Gus pressed the starter again, watching the tester dial. "It's blowing past the rings," he said. "If it were a valve, this reading would be same as the first."

done, Knight drained the crankcase. Gus had told him to check the car, not to do a job on it, but he said nothing. Knight then went into the storeroom back of the office, and came out with a new cylinder-head gasket.

Gus finished his own job, then drove out for a road test. When he got back the Knowles car was standing outside. Knight was in the shop writing out a material slip.

"I finished that job," he growled. "There was nothing the matter with the valves."

"No?" Gus said. "Well, I guessed wrong."

"When I took the head off to check the valves," Knight continued, "I saw some drops of water in No. 3 cylinder. So I drained the crankcase, and a lot of foamy oil and some water came out. The block wasn't cracked, nor was the cylinder head, so it had to be the gasket—I'd noticed it looked bad. I put in a new gasket, and filled her up with oil. Here are the slips on the job, filled out the way you want 'em."

"O. K.," Gus said. "Take them in to Joe."


All the rest of the day Knight went on doing things in his own way. Gus made no suggestions, but he was glad when, at five o'clock sharp, the new mechanic put on his coat and went home. When George Knowles came in a half hour later he found Gus whistling cheerily.

"Got over your grouch, hey?" Knowles grinned. "That new man must have turned out better than you expected."

"I think he's a good mechanic, but I know he's a pain in the neck," Gus said. "He worked on your car—put in a new gasket, and filled the crankcase with fresh oil. You shouldn't have any more trouble."

Knowles went out to his car. Gus heard the engine start, and knew from its sound almost at once that it was missing. He hurried to the door, but Knowles was already in the street and didn't hear his shout above the noise of the motor.

Gus watched him drive off, shrugged, and

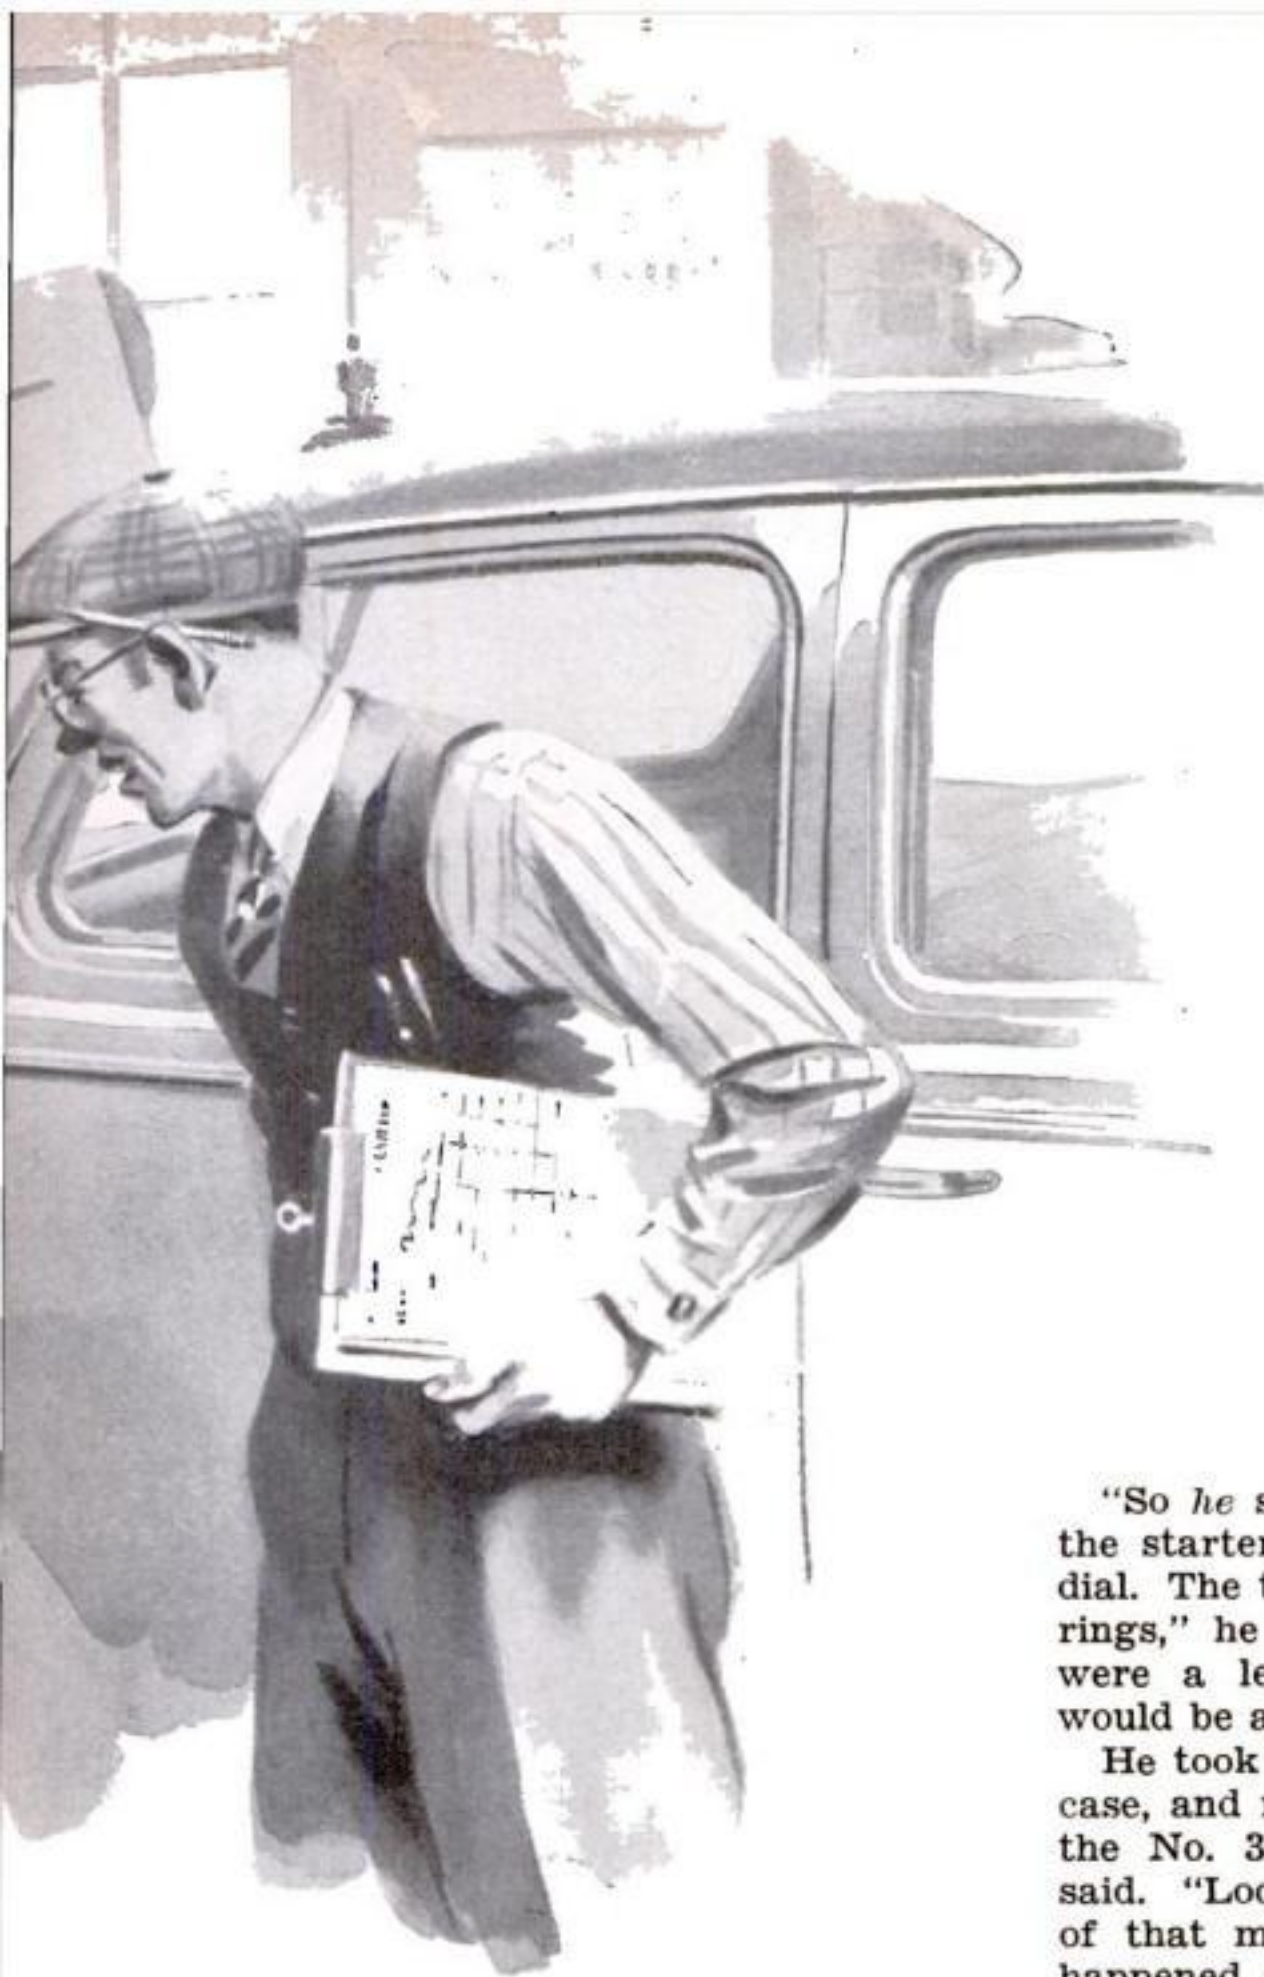

went inside. He had supper late, then returned to finish a job. It was close to midnight when he decided to quit.

Just as he was washing up, the telephone rang. George Knowles' voice came over the wire. "I'm in trouble over at the county courthouse. My motor missed all the way here and now it sounds as if it might shake itself apart. I'm afraid to start home—I don't want to get stuck. All the garages here are closed."

"Stay right where you are," Gus told him. "I'll be there in half an hour."

When he got to the county seat, he found Knowles apologetic for having brought him out so late. "Forget it, George," Gus said. "You ought to be cussing me, not apologizing. I should have checked your bus myself. Need it early tomorrow?"

"No, but I'd like to have it by six."

"I'll get at it first thing," Gus promised.

He got down to the shop an hour early, and tackled Knowles' car. When he stepped

on the starter the engine took off promptly. After letting it warm up, he switched off the ignition, took out all the spark plugs, poured a spoonful of penetrating oil into each cylinder, and turned the engine over with the starter to distribute it. Then he got out the compression tester, pressed its rubber adapter into the No. 1 spark-plug hole, opened the throttle all the way, and punched the starter button. The hand moved up to the 100-pound mark. Cylinder No. 2 registered 102 pounds. But on No. 3 the reading was only a little over 50. The remaining cylinders tested 100 or more.

As Gus was pouring in a little heavy oil on top of the No. 3 piston, being careful not to get any on the valves, Joe Clark came in. "What's the matter?" he asked on seeing Knowles' car. "Knight took care of that job yesterday, didn't he?"

"So he said!" Gus answered. He pressed the starter button again, and watched the dial. The tester showed 80 pounds. "Leaky rings," he said. "The oil seals 'em. If it were a leaky valve, the second reading would be as low as the first."

He took off the head, dropped the crankcase, and removed the piston and rod from the No. 3 cylinder. "I'll be darned!" he said. "Look at this, Joe. About an inch of that middle ring broke off, and as it happened, didn't damage the cylinder wall, but stuck fast in its groove directly under the gap of the top ring. The result was a blow-by that killed compression and caused missing. Well, George will have to pay for a ring job. By gum, Knight was right about the cause of the trouble at that—a hundred to one it was water leaking past that bad gasket that made the ring break."

Joe looked at the shop clock. "Where the dickens is Knight?" he asked. "He's half an hour late. There's the phone."

He went into the office. A minute later he came back. "Bad news, Gus," he told his partner. "Knight has quit. He phoned to say he's taken a job in the city."

"I'll say it's bad news," Gus growled. "I wanted to fire him! He knew he hadn't fixed Knowles' engine, but just wouldn't admit it. When you make out George's bill, leave off what Knight did. That'll have to be on the house."

"Profit and loss," Joe said. "Mostly loss."

"Yes," Gus agreed. "Like Henry Knight!"



PROJECTING

Your
Black-and-Whites

SLIDES MADE FROM ORDINARY NEGATIVES
PRODUCE BRILLIANT IMAGES ON THE SCREEN

By **WALTER E. BURTON**

FOR a new thrill in photography, try making black-and-white slides for projection, instead of prints on paper. An ordinary print is seen by reflected light, but the maximum beauty of a photograph is best brought out by transmitted light. Transmitted light pictures, or transparencies, are capable of showing a fuller range of tones, and possess greater brilliancy. Of course, the most effective way of viewing such transparencies is by projecting them on a screen.

Lantern slides, besides squeezing the last bit of beauty from an ordinary snapshot, have other advantages. Making them can be a fascinating hobby in itself. Schools have found them an effective teaching medium, and they are being widely used for instructing civilian-defense workers, emergency police, and air-raid and fire wardens.

There are two popular lantern-slide sizes. The older, 3¼" by 4" measured along the outside edges, is used mainly in large auditoriums. The newer 2" by 2" slide is popular because of its convenience and low cost. It, too, can be projected for large audiences.

Photographic manufacturers offer a variety of supplies for making black-and-white slides. The most popular sensitized materials are listed in a table on page 148. All film used for projection transparencies should be of the safety-base type, to reduce fire hazards. In addition to films or plates, the following auxiliary supplies are generally used:

Cover glasses are clear, flawless sheets of glass to protect the photographic image. One cover glass is required for each plate, or two for each film transparency.

Printing a lantern-slide plate by contact. The platen of the printing box seemed to exert too much pressure, so a padded weight was substituted

Binding tape may be cellulose film, gummed paper, or cloth. It is used to bind and seal the edges of the plate and cover glass, or of the two glasses used to cover a film transparency.

Locating dots—small disks of gummed paper—are useful for indicating the position of the slide in the projector, and for numbering or coding.


Masks cut from paper are bound with slides to form opaque frames around the picture areas. Sometimes the binding tape serves as a mask.


Varnish or lacquer, applied over the emulsion, prolongs the life of the slide by retarding fading or other deterioration. It is especially advisable in damp climates.

It makes little difference whether you use film or glass plates, so long as you produce a good image. There are several methods of printing positive transparencies. Often the process is complicated by the fact that the image must be smaller than the original negative, which must therefore be reduced. If the slide image may be the same size, it is simply a matter of contact printing.


To make a lantern slide by this method, you clamp the plate or film against the negative and expose as you would when printing on paper. A conventional printing box or frame may be used. The speed of the emulsion on lantern-slide plates and films varies considerably, but in general it is greater than that of paper. So you will need a less intense light (10 watts). If the printing-box platen seems to produce too much pressure on a glass lantern-slide plate, you can use a weight instead to hold the plate against the negative. A layer of felt, cloth, or blotting paper will prevent

This easily made holder may be used instead of a printing box. One frame of a 35-mm. negative is in position. At left is a lantern-slide plate

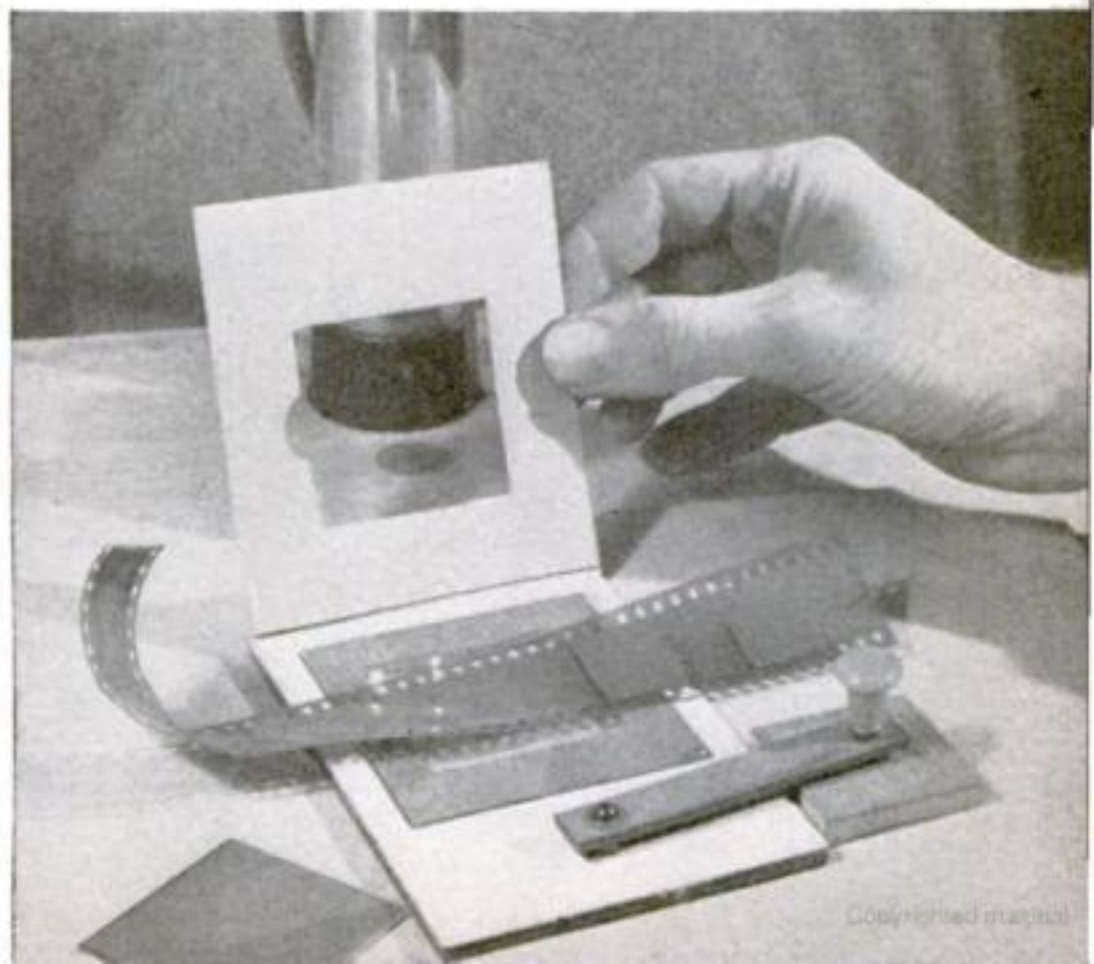

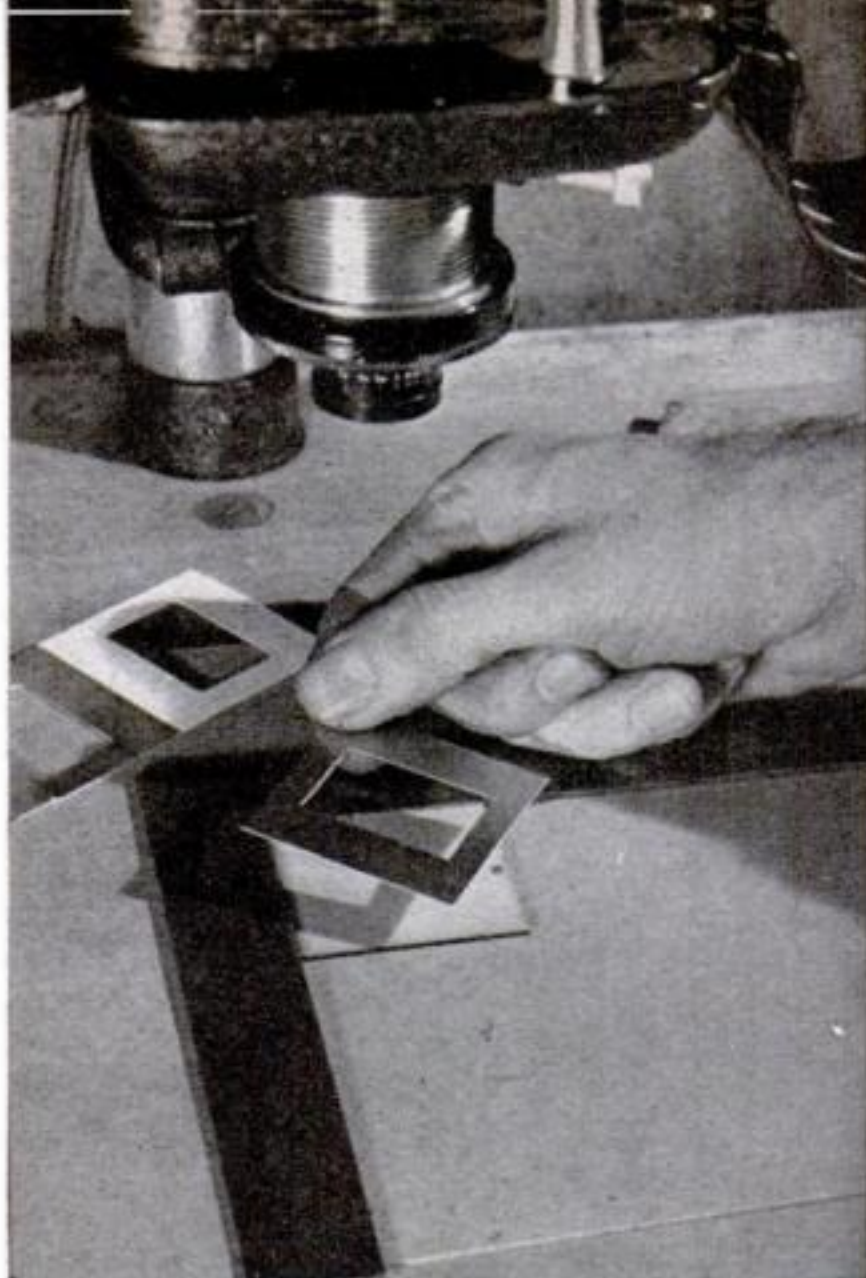

In projection printing, the lantern-slide plate rests against a steel square. Lay a mask on the plate while focusing, but remove it for exposure. A safety filter or focusing plate will be needed

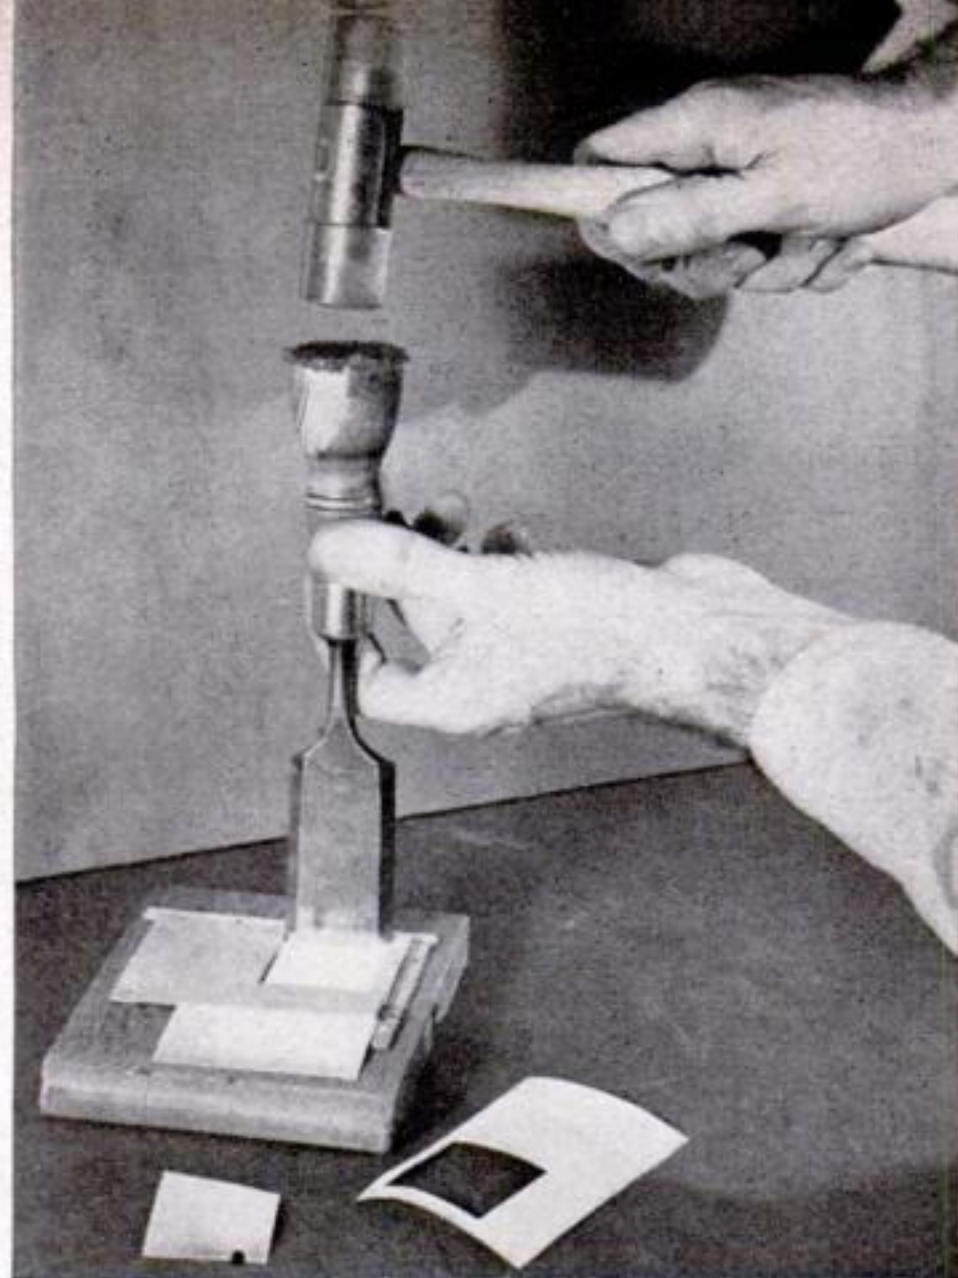

Masks may be cut with the help of a variety of tools and templates. Here a 1½" wood chisel is being used along with a simple cutting guide. The wide sides of the masks are trimmed off later

SENSITIZED MATERIALS FOR SLIDE MAKING

Material	Contrast	Uses
Positive film	Normal	Slides from average negatives
Positive film	High	Copies of printed matter, drawings, and so forth
Direct-positive film	Normal	Direct positives of any subject without use of negatives, copies of other transparencies and prints
Process film	High	Slides of printed matter, drawings, and the like
Negative film, preferably slow-speed	Normal	May be used when positive films are not available
2" by 2" glass lantern-slide plates	Soft	For printing negatives of extreme contrast
2" by 2" plates	Medium	Prints from average negatives
2" by 2" plates	High (antihalation)	Printed matter, line drawings, and prints from soft negatives
2" by 2" plates	High (special)	Fine detail and freedom from abrasion marks in reproductions of drawings
3¼" by 4" plates	Same as 2" by 2"	Same as 2" by 2"


Note: All film used for projection transparencies should be the safety-base type, to reduce fire hazard.

scratching or other damage to the glass.

Determining exposure is an art that develops with experience. Instructions available for some makes of lantern-slide plates contain suggestions for using enlarging paper for test exposures. Otherwise the test-strip method is generally used. That is, a plate is entirely masked except for a strip ¼" wide, and an exposure of 5 seconds is given; then another ¼" is uncovered and another 5 seconds given; and so on for the rest of the slide. One strip will show an exposure that is correct or nearly so.

Projection printing in which the slide image is bigger than that of the negative is essentially the same as enlarging on paper. Use a blank, undeveloped lantern-slide plate to focus on. Place it emulsion side up against an L-shaped piece of wood or metal resting on the easel. Put over the focusing plate a mask of the same size and shape that you intend to bind with the transparency, and focus the image in its opening. Then remove both the mask and the focusing plate, substitute an unexposed plate, and make the exposure.



To form a projected image the same size as the negative, the enlarger lens has to be moved twice its focal length from the negative; to produce a smaller image, it has to be moved even farther. You may substitute a lens of shorter focal length, use an auxiliary copy attachment or other positive

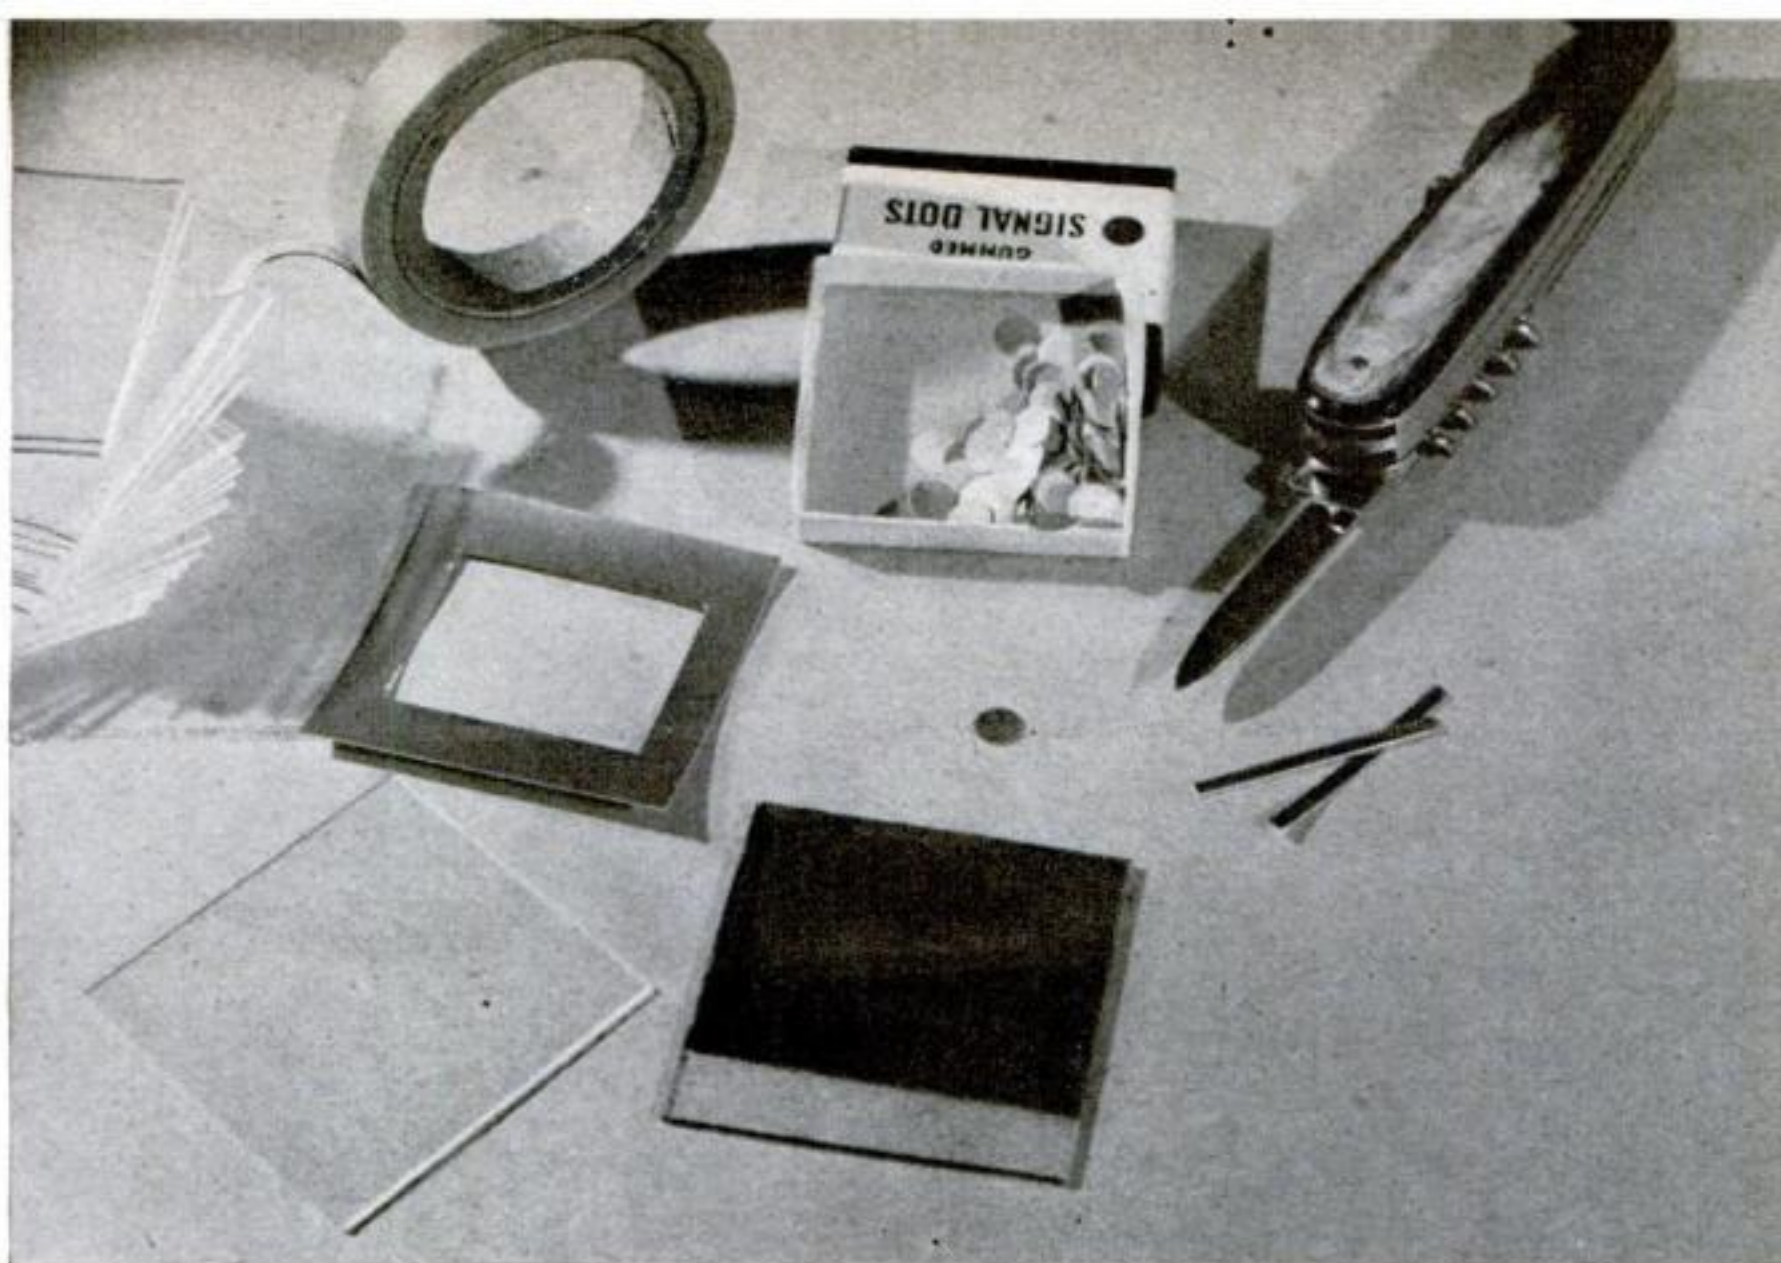

Tape, signal dots, penknife, mask cut from metallic paper, and cover glass are needed in binding the transparency shown with them above

(magnifying) lens over the regular enlarger objective to shorten the focal length, or mount the lens on an extension tube such as an empty tin can or a boxlike frame made of thin wood, or heavy cardboard, and painted dead black inside. Focus for maximum sharpness, using a magnifying glass if possible.



A third method of printing is to place the unexposed lantern-slide plate or film in a camera and photograph the negative, illuminated from behind. Typewritten sheets, book pages, line drawings, and similar subjects may be copied directly. The resulting negative image is suitable for projection. When direct-positive film is used, a positive image is obtained without

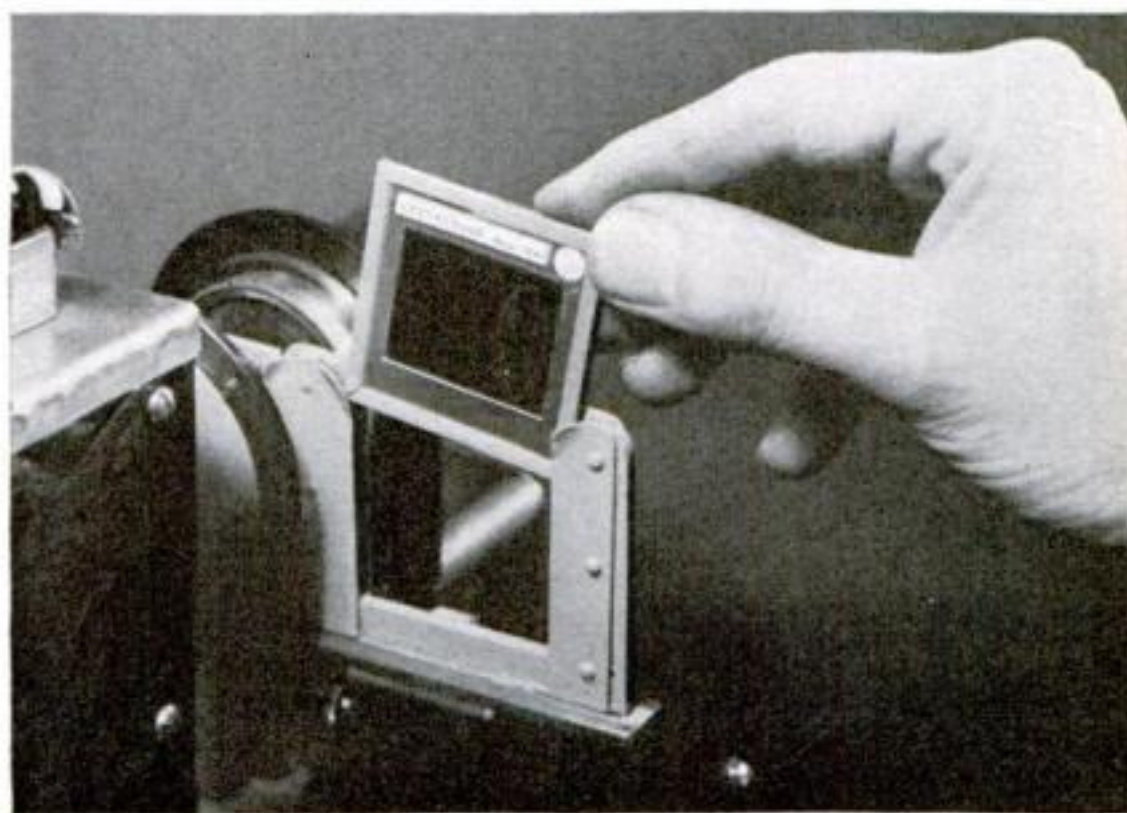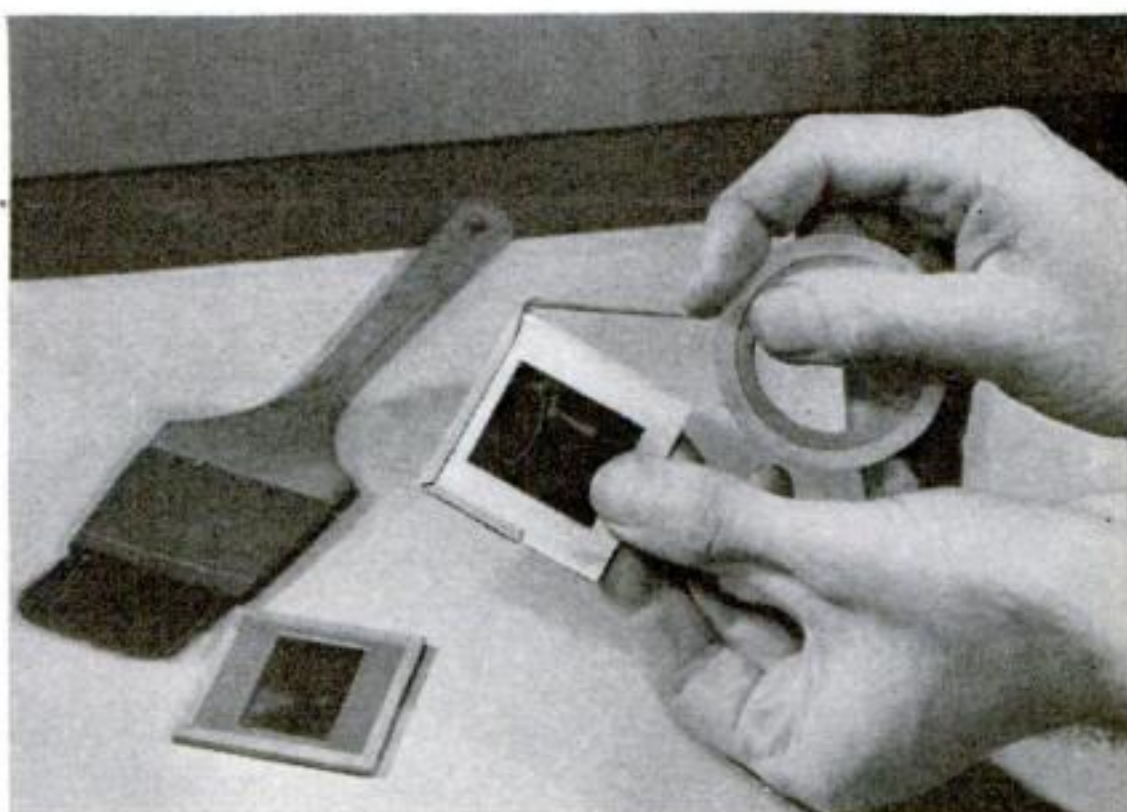

Taping is started at the bottom of the slide, as at right above, so the joint will be at the top when the slide is inserted in the projector. At the lower right, the lettering is in position for reading when the slide is filed

If white enameled trays are used in developing slides, the images will stand out, and may be viewed as work is done

Transparencies can be dried best in dust-free atmosphere. Stand them in a rack similar to the one below, which was made from small bits of scrap

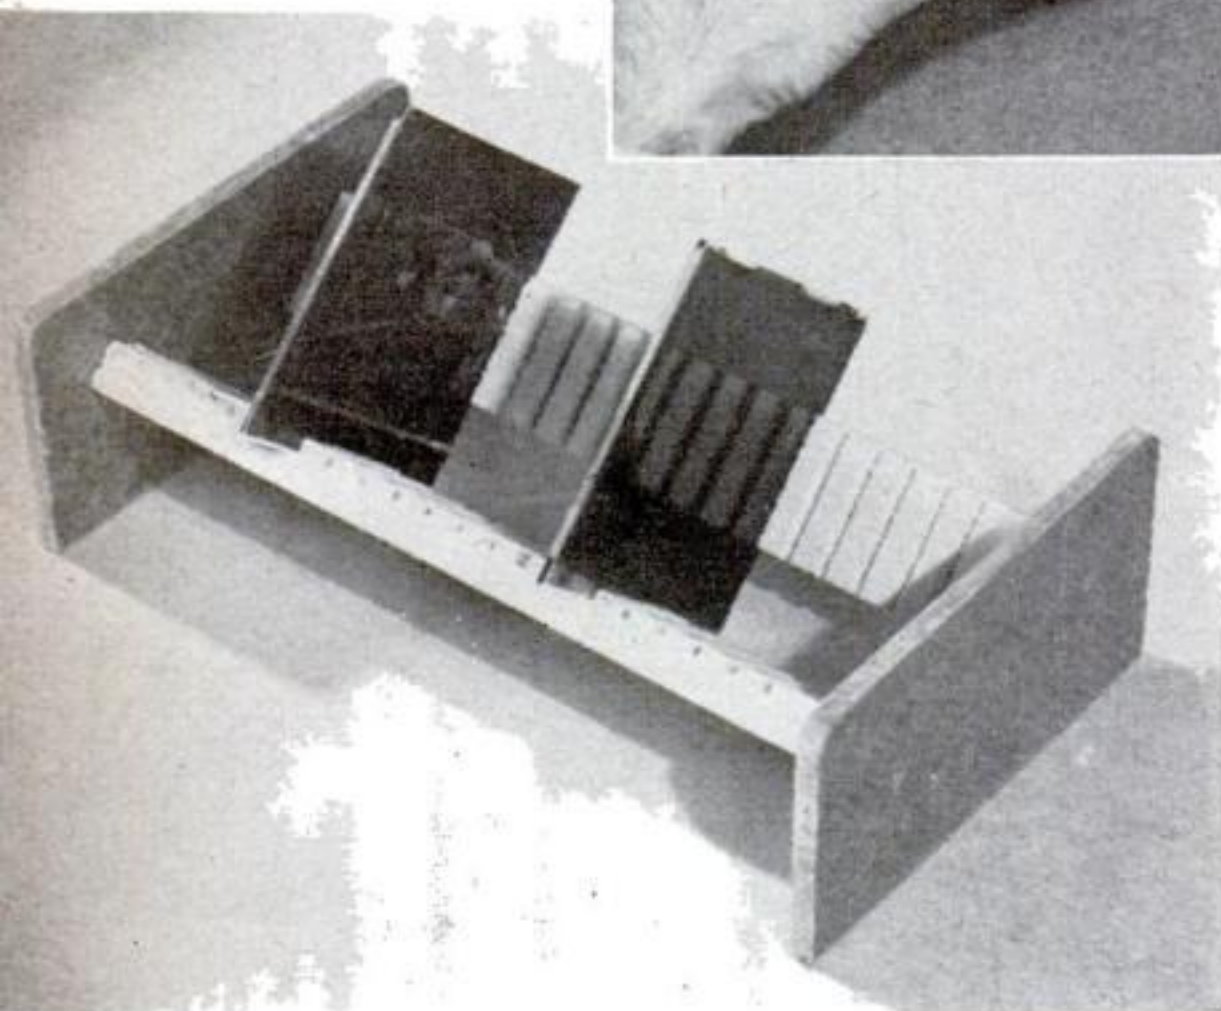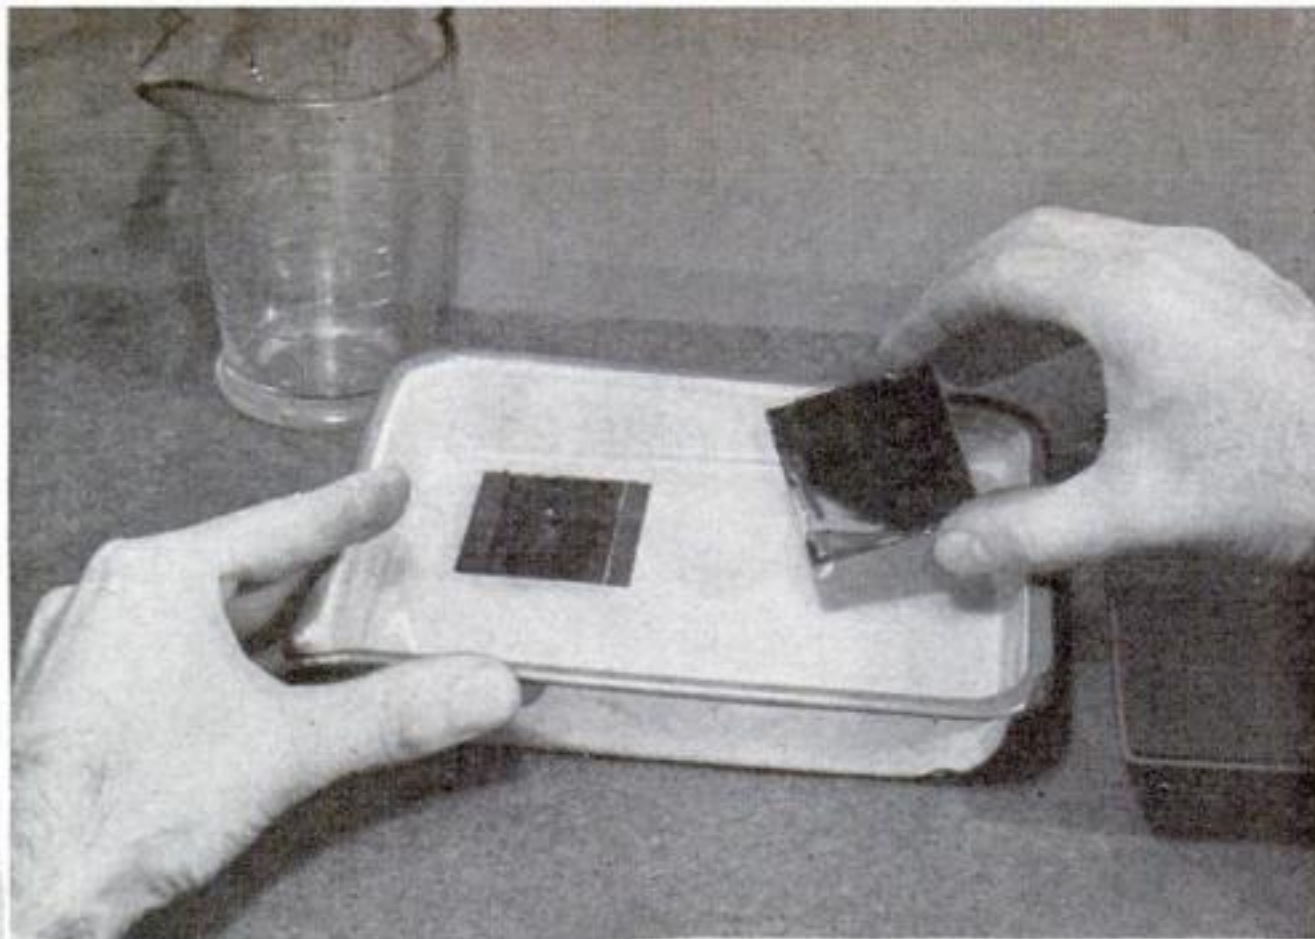

the use of a negative. The camera method is also used for copying other slides and making positives from negatives. In either case the original should be held in a frame and illuminated from behind by light diffused evenly through an opal-glass or similar screen.

Safety film may be cut into pieces of the required size, such as $1\frac{15}{16}$ " by $1\frac{15}{16}$ " (the dimensions of a 2" by 2" slide before binding with tape), and printed in the same way as glass plates. One method of printing 35-mm. film strips by projection is to load the film in a miniature camera from which the lens has been removed, and lay the camera on the enlarger easel in such a way that the image can be focused on the film. Focusing may be done through a red or orange filter.

The manufacturer's recommendations for developing should be followed. Expose so that, on full development—usually 1 to $3\frac{1}{2}$ minutes—the picture on the slide will be brilliant. The deepest shadows should be slightly transparent. The whitest high lights

should show a slight veiling. If the whole slide, including unexposed edges, shows a general veiling, it has been fogged either by chemical action in the developer or by stray actinic light. A treatment with a reducer such as Farmer's well-known formula will generally clear it up.

After development, fix the plate or film in fresh hypo solution containing a hardener, and then wash it in running water for about 45 minutes.

If projection reveals pinholes, retouch with water colors or other spotting pigments.

Standard masks may be purchased for 2" by 2" slides. If you cut your own, one side may be black, but have a white or metallic surface face toward the projector to reflect heat. You can make satisfactory masking paper by running an inked roller over one surface of white paper stock. For a 2" by 2" slide, make the opening no larger than $1\frac{1}{2}$ " square, a picture area the average color-slide projector will cover adequately. Some slide carriers have tabs that may project into this area. These usually serve no purpose and can be cut off. For a $3\frac{1}{4}$ " by 4" slide, the maximum opening is $2\frac{1}{4}$ " by 3".

Clean the cover glass to remove all traces of dirt, and dry. Just before binding, heat the slide to drive all moisture from the gelatin coating by laying it on a warm radiator, under a heat lamp, or near a light bulb.

Use $\frac{3}{8}$ " wide strips in taping. Have four strips, each cut to the length of an edge, or a single strip, about $8\frac{1}{4}$ " long for a 2" by 2" slide. Start the single strip near the center of the bottom edge so the overlapping ends will not have to enter the projector grooves. Corners are either folded over or notched.




A PLASTIC PROJECTION REEL with a patented threading feature and a self-locking film catch is now available to home-movie fans. It has a convenient slot in one of the reel arms for the film to slip through, enabling one to thread it quickly and easily even in

darkness. The film is then placed around the hub, which is open on one side to provide sufficient finger space, and is automatically locked when pulled down. Fully loaded, the reel will hold 400' of 16-mm. film.



EXPOSURE METER MANUAL. Issued by a manufacturer of exposure meters, this handy 97-page manual deals with the more scientific aspects of photography, particularly those relating to exposures. The technique of using an exposure meter is explained in considerable detail, and the text is illustrated with striking pictures by well-known photographers, and with diagrams and charts. One of these, shown at the left, illustrates by means of a tone scale across the bottom how black-and-white film renders colors as different shades of gray, ranging from almost a pure white to almost a jet black.

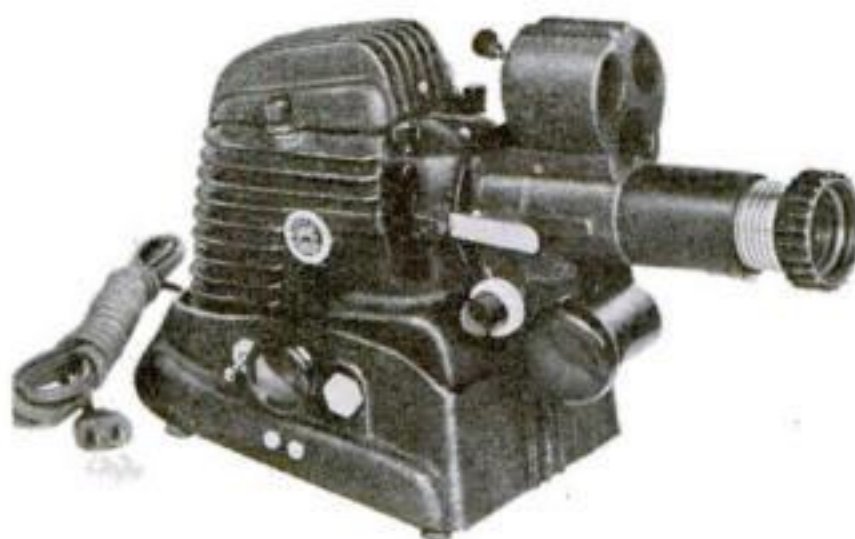

TRIPLE-PURPOSE PROJECTOR. Color slides, black-and-white slides, single- or double-frame film can all be shown with the portable projector pictured above. Film is held flat in the optical plane by glass pressure plates and is ready for showing again immediately after use without rewinding. The feed capacity is 300 single-frame pictures. An air blower and a heat-absorption filter safeguard slides or film against heat damage and permit the use of 300-watt lamps as well as smaller ones.

Pen Forms Handy Scoop for Photo Chemicals

FOR WEIGHING or otherwise handling small amounts of chemicals, a novel scoop can be made from an ordinary pen nib and holder.

The pen nib is placed point first into the holder, which forms a convenient handle for manipulating the scoop. With this you can place as small an amount as a crystal or a grain of chemical on the scales. It is convenient, too, for getting into small-necked bottles when spoons and all other implements prove much too large.—WILLIAM SWALLOW.



FAST, HEATLESS ENLARGER USES FLUORESCENT TUBES

Photo Editor:

*Can you give me any information on fluorescent photo enlargers?
I am interested in building one, but cannot secure data and plans.*

W. S., Pemberton, N. J.



To which John W. Campbell, Jr., replies:

READER W. S. is making a good choice. The fluorescent tube comes so close to being the ideal light source for enlargers that it seems a poor compromise to use anything else in homemade ones. Fluorescent tubes give a brilliant blue-white light of very high photographic value, and are so nearly heatless that negatives can be left in the carrier of the light box illustrated for several hours and still come out cool to the touch. There's plenty of visible light for focusing, and many times the actinic value of an equivalent wattage of incandescent light.

My homemade light box was originally equipped with a 150-watt Mazda floodlamp and an opal-glass diffuser. It took 20 to 40 seconds to make an 8" by 10" print on Velour Black, and a negative would show signs of dangerous overheating in three minutes. With four 14-watt fluorescent tubes and a ground-glass diffuser, I can make an 8" by 10" print from the same negative, at the same lens stop, in 1½ seconds!

The enlarger was designed with a fixed head and a movable table; such an arrangement is simple to build, and little affected by vibration. The enlarger head is fixed to the basement ceiling beams, and the easel slides vertically on two pipe members. The camera clamps onto the bottom of the head.

If you build this type, you may as well use large tubes. Should you trade in your camera for a larger one, the light box will still be adequate, and the big tubes cost less than the smaller ones. Because the tubes themselves provide a fairly even light, a single sheet of ground glass gives adequate diffusion. The tubes are available in ½", 1", and 1½" diameters, and in 15", 18", and 24" sizes. Special 8-watt, 8" by ½" tubes may also be obtained. Day-light blue-white is the best tube color; it gives a maximum of actinic

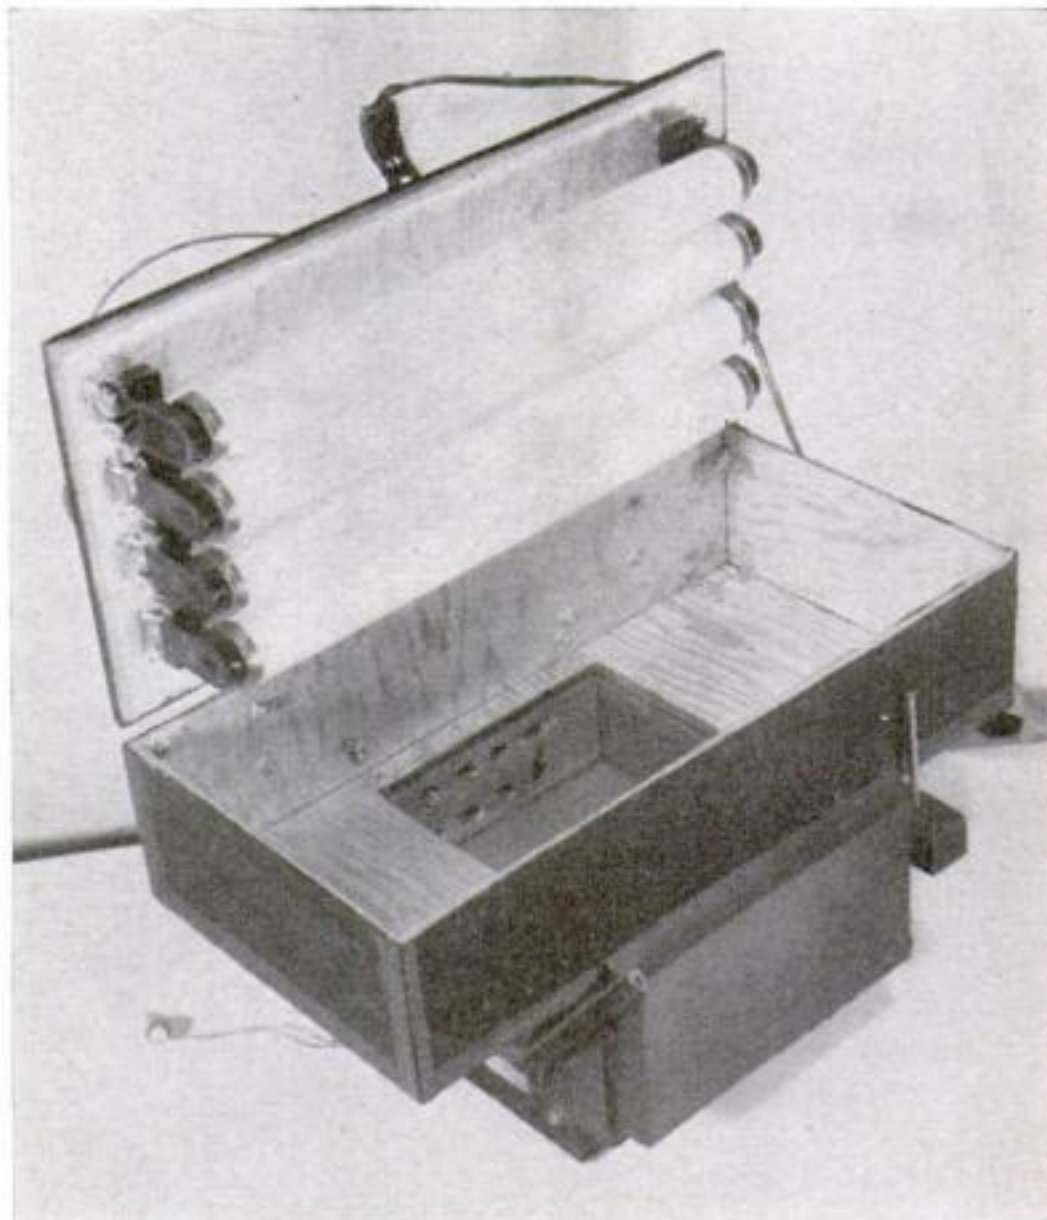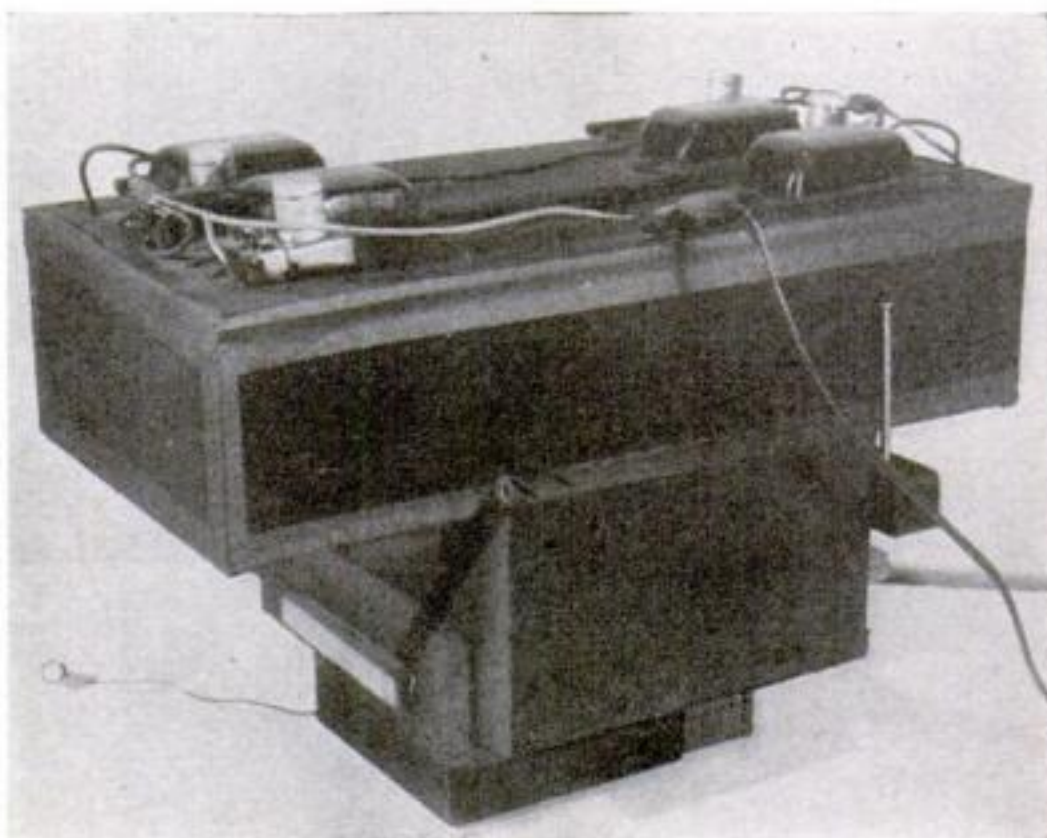

Ballasts, sockets, and their starter buttons are mounted on the lid of this fluorescent-tube enlarger lamp. Four tubes provide a diffused light for negatives as large as 5" by 7". The box is painted with aluminum lacquer inside

light along with maximum focusing light.

The distance from the tubes to the ground glass should be approximately twice the tube diameter to assure even illumination. The ground-glass surface should be about $1\frac{1}{2}$ " away from the negative carrier, so that it will not be in focus when the negative is being printed. The ground glass should have at least 1" overlap on all sides beyond the negative.

How many tubes to use will be determined by the size of the ground glass. The outermost tubes should be centered above the edges of it. Mount the tubes not more than half their own diameter apart; the closer you pack them, the brighter the image will be. The $1\frac{1}{2}$ " tubes are naturally the best for this reason. The light box pictured uses four 14-watt, 15" by $1\frac{1}{2}$ " tubes, and will handle negatives up to 5" by 7".

The inside of the light box is painted with aluminum lacquer, the outside with flat black. All edges are sealed with black tape. Vent holes are unnecessary with fluorescent tubes.

A drawback in the fluorescent lamp is the fact that it will not reach full intensity at once, so exposures must be controlled in another way. It is best to leave the lamp on continuously, and use a shutter mechanism to make the exposure. The simplest arrangement is a swinging arm carrying a black disk in front of the lens. On the enlarger illustrated, the arm is activated by a solenoid controlled by an electric timer.

After the war, cold-cathode fluorescent tubes will probably offer the perfect solution. Used with a high-voltage neon-tube transformer, they provide instant starting and stopping.

Flash Gun Is Adapted to Standard Plugs

OWNERS of flash guns that take special plugs for their miniature outlets are finding it difficult to get plugs. Such an outfit can be adapted simply to standard 110-volt plugs by slipping a so-called 110-volt "three-way socket" into the gun, as shown. The bulb can be screwed into this socket, and outlets are provided on each side for extensions using standard plugs.—LOUIS HOCHMAN.



Glass Palette Fitted in Flat Box Is Aid in Spotting Prints

HERE'S an easy way to do your print spotting without staining the family china. Take a shallow box like the ones in which cut films come, and fit pieces of blotting paper to both halves, inserting them snugly so they won't slip out. Then cut a piece of clear glass the right size to go into the bottom half of the box, and you have a palette on which to smear water colors for matching print tones.

Tubes of blue-black and burnt-sienna water colors supply the pigments for mixing any desired shade. The blotter in the top half of the box may be used to point up the brush before you apply the spotting to your prints. The box can be closed when not needed and presents both palette and blotter when it is opened.

The above photograph shows the outfit ready for use, with a bottle of brush moistener handy.—C. H. COLES.

🌲🌲🌲 **PINE** and other domestic woods now challenge the skill and ingenuity of balsa-minded builders of model planes. How to make best use of these materials is told by Frank Zaic in the following article

Building Model Planes Without Balsa

DOMESTIC SUBSTITUTES SERVE CRAFTSMEN AS MODEL MATERIALS MARCH OFF TO WAR

By FRANK ZAIC

WHEN war was thrust upon us, it became evident that model builders would have to do without many of the materials they normally took for granted. Rubber became very precious, and in January, 1942, the manufacture of rubber thread for model use was suspended. Steel, aluminum, and copper, used in making motors and electrical equipment, were severely restricted. Japanese manufacturers of covering tissue became our enemies. Balsa wood—so desirable in model construction because of its lightness and strength—was classed as a vital war material, and existing stocks were frozen last August.

The search for substitutes, then, is on! Luckily, domestic paper mills have been turning out satisfactory covering tissue for several years. But new rubber is definitely unobtainable, and unless you can use strips from old inner tubes for powering your craft, your modeling urge will have to vent itself in gliders and gas designs.

The restriction on balsa, however, is much more serious. One can best judge the importance of this wood to the model industry by noting that about 4,000,000 board feet of balsa were hitherto used per year. It weighs from 4 to 20 lbs. per cubic foot, as compared with 30 lbs. for domestic light woods—our best available substitutes.

Spruce, white and sugar pine, poplar, basswood, and hemlock may be placed in this class, and of these, sugar pine seems to be the best now available for model making. It has many of the characteristics of balsa. It lacks the stringy grain that seems common to most woods, and can be crosscut without difficulty. Furthermore, it does not necessitate any variation from the aerodynamic design you used in balsa construction. As for tools, a good, sharp penknife is most important, as well as a jig saw or a coping saw with a fine-tooth blade. A block plane is essential also.

Of course, the select grade of sugar pine is

now also on the priority list, but it is believed that other grades will remain available, and there will no doubt be stocks on dealers' shelves for some time to come. Most home workshops and school manual training departments, too, will have some of this material on hand. It can be ripped into suitable strips on a small power saw if a sharp blade is used and a wooden table insert with a very narrow slot is substituted so that the stock is supported right up to the blade.

Basswood promises to be the next best choice to sugar pine. It is slightly heavier—in the neighborhood of 35 lbs. per cubic foot as compared to 30 lbs. for pine. It is equally easy to work and should prove quite satisfactory. However, pine has larger "pores" than basswood, and its medullary rays (the lines radiating from the center outward) are much more pronounced, so that sheets cut along them are extra stiff and make excellent ribs.

The use of sugar pine or basswood involves no radical changes in structural design. In time we may find better ways of using it, but for the time being standard practice seems to work out very well. Pine spars and longerons will have to be smaller than those we made from balsa if their weight is to be within reasonable limits. However, the reduction should be in the thickness and not in depth, so that the beam strength will be preserved.

A wing design that proved to be good is shown on the drawing. The sheet covering the leading edge need not be more than 1/64" thick for models up to 200 sq. in., while 1/32" sheet takes care of all other sizes. This system makes possible the use of a small leading-edge spar. If the wing is small, one additional spar on the lower camber will be enough. Larger wings such as for gas jobs should have additional spars. Be sure to use sizes which have generous depth proportions. The trailing edge should have the standard tapered section. Unless the spar is placed close to the trailing edge, the covering will warp it. Some manufac-



turers supply trailing edges already shaped. If you have to cut one, be sure that it has a true taper and not just a round corner.

Most present-day designs have wings with an aspect ratio of about 8 to 1, so you can copy balsa models fairly closely in working with pine or basswood, simply making structural members one half as thick, but as deep as specified for balsa. Ribs may be cut from $1/32$ " sheets, provided the chord is not more than 5" and that there are several spars to prevent the ribs from weaving. Sheets $1/20$ " thick will do for most "B" gas designs and large gliders, while $1/16$ " material will take care of large "C" gas models. Some may think of lightening the ribs by punching holes in them. I do not recommend this practice, as the saving of weight will be small and the loss of strength great.

Fuselage construction, too, can be kept to established standards by the use of smaller longerons and stringers. For example, if $1/8$ " square hard balsa is specified, $3/32$ " square pine will do. It has about one half the area of a $1/8$ " cross section, so the weight will remain almost the same as that of the balsa member. However, the smaller pine strips will require a greater number of uprights to keep them from bending under load. To prevent buckling of longerons, the spacing of uprights should not be more than eight times the square dimension; that is, spacing for $1/8$ " square longerons should be 1". This can be increased, however, if the longeron is curved; therefore fuselage outlines should have a curve all along them. The covering will then keep the strip under compression, whereas if the longeron is straight the covering subjects it to tension, with resultant wrinkles and structural failures, as shown in the drawings. Note, too, how the segments of round bulkheads should be made to overlap, with deeper stringers at these points.

When using pine or basswood for longerons or spars, always consider the forces that will be placed on it, and remember that the resistance against bending is squared when the depth is doubled.

If a builder designs his own model, the ideal wing would be tapered as shown. Note that some of the spars do not run the full span. For the time being we are using simple tips that can be shaped from trailing-edge stock. Regular round or elliptical tips can be built from sections as is done with balsa, but the stock will have to be quite thick to prevent warps. Since we are only beginning to use pine, and the chief problem is to keep weight down, such fine points can well be left for later decision.

At the very outset of the search for a balsa substitute, the need for rib-making material was most pressing. Hardwood spars and longerons can be purchased ready-cut, and no work other than trimming to length is needed. But ribs have to be cut to a curved outline. I tried to cut wide sheets from sugar pine, and found that the regular balsa-sawing equipment did the job well, and that the sheets had smooth surfaces. I cut the stock to quarter grain as is done for balsa sheets intended for rib work. The crucial test came when I tried to cut the ribs out with a razor blade. I found that sugar pine up to about $1/16$ " thick can be readily cut this way for making ribs, bulkheads, and other flat shapes.

At first I was worried about the ability of model cement to join pine, but actual trials have shown that it can be safely used. It is, however, necessary to be generous and to go over the joints several times, extending the coating over a larger area than on balsa to obtain good anchorage. When this is done, the dope by which the covering is held in place will soften the cement at the




Light Wing




NOTE DEEP SPARS




Multispar

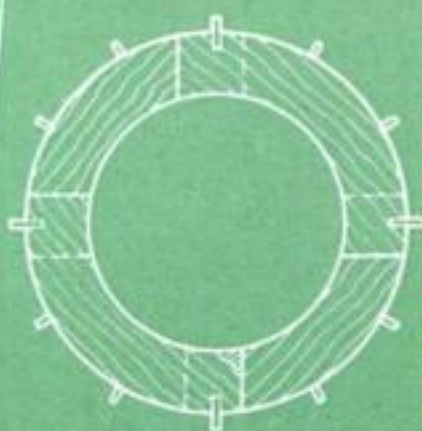


NOTE OVERLAP OF SECTION AND DEEP STRINGERS

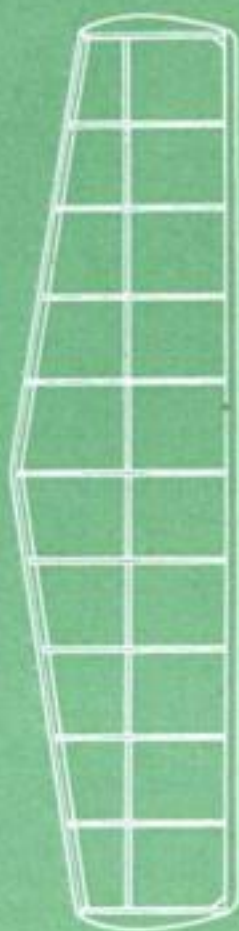


Recommended Surface Construction

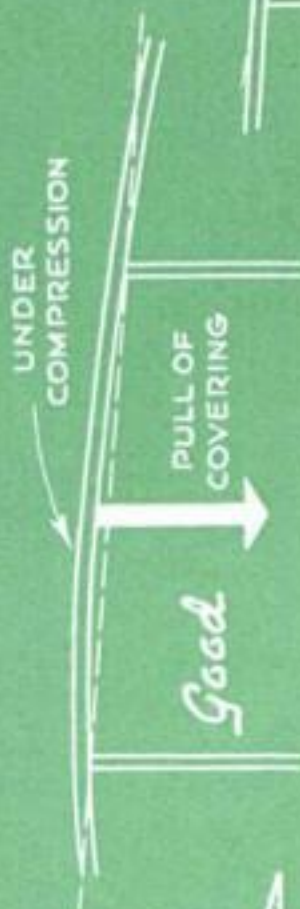

Action of Paper on Straight and Curved Longerons

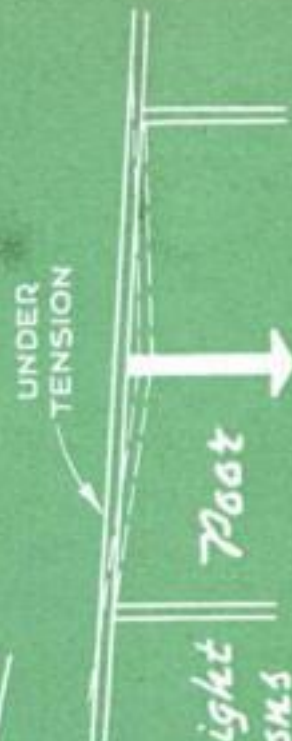

Large Wing

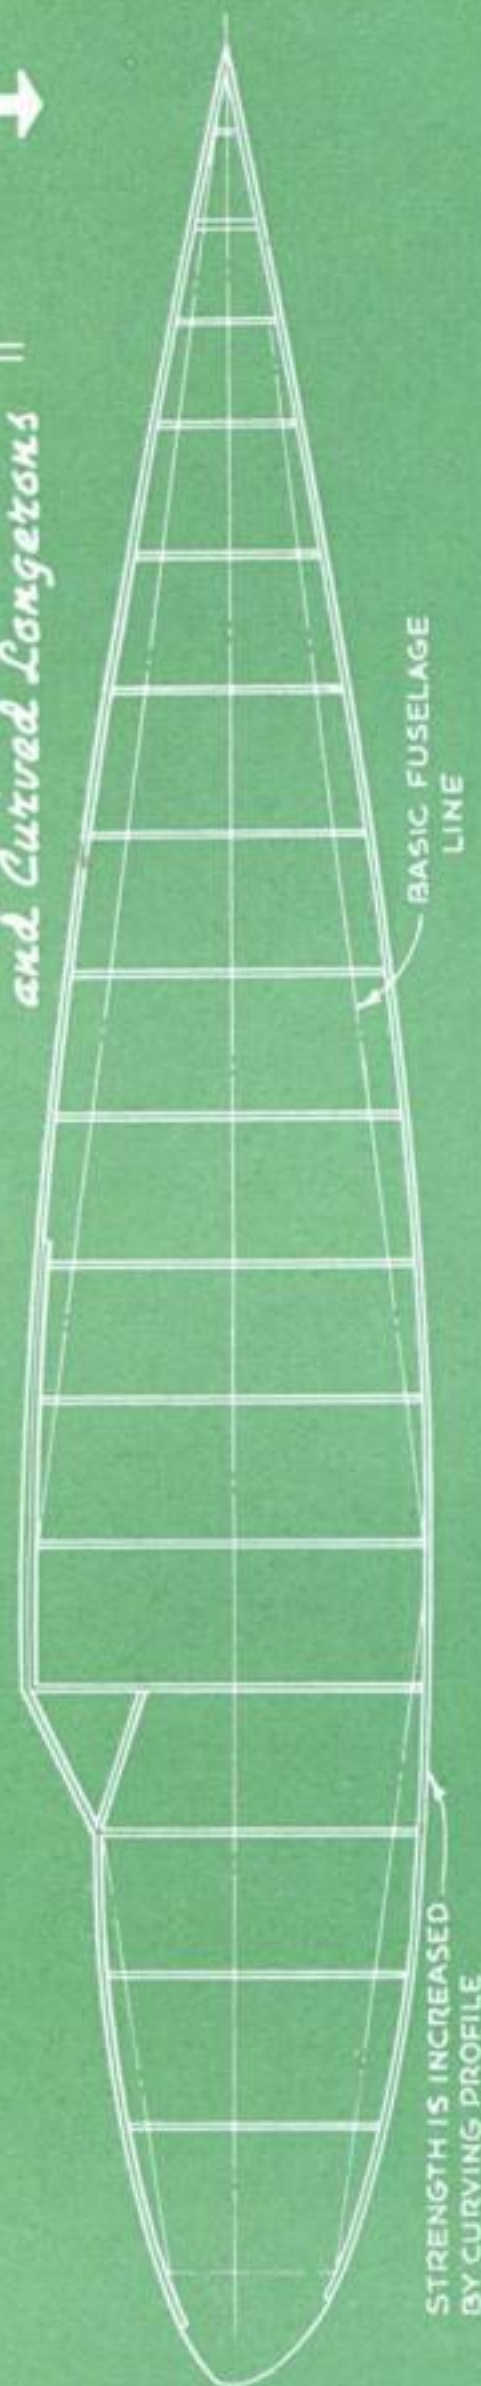

STRENGTH IS INCREASED BY CURVING PROFILE

joint and make it soak into the paper, thereby forming a gussetlike structure. It is recommended that work be left in the pin jig overnight while the cement is setting. Pine has more life than balsa and it is liable to break loose if the cement is not quite hard. One must not forget that model cement needs air to dry and that the surface always dries first, leading one to believe that it has set when it may still be soft inside.

The only substitute for cement, should this also become unavailable, would be casein glue. Ordinary fish glue seems never to set to a model maker's satisfaction, and damp weather is likely to loosen it up. Just what you will do for dope depends on what your paint shop has to offer. Lacquer thinned out 50 percent with lacquer thinner might be satisfactory.

To get a good idea of just how helpful balsa has been to us, one has only to look at models built by boys in Europe, who had to use hardwood all these years because of the tendency of their countries toward self-sufficiency. Although these models may be examples of fine workmanship, their aerodynamical layout makes them poor flyers and their actions remind us of our own early efforts of about 1927, when we knew very little about model aerodynamics. To our advantage was the fact that it is easy to build



or repair a balsa model in a few days and try out new ideas. A hardwood model requires more time.

This is the challenge to American model builders: Can we tackle the problems of hardwood construction, and in spite of our inexperience, do better work than European boys who have had a much more extensive background in this type of model building? I feel that our work will have many advantages. A good example is our use of thin white-pine sheets for ribs, while they use plywood, which takes

much longer and requires greater effort. Perhaps they tried thin sheets but did not know that quarter-graining was necessary. At any rate, it will be most interesting to note just how our hardwood models will compare with those of Europeans. Although most of our older builders are serving in the armed forces or are at work in war industries, I am sure that the younger craftsmen will not let us down in our expectations.

It cannot as yet be foretold which of the available woods will gain the greatest favor. Some dealers will stress pine while others may feature basswood, depending on the grades produced and the nearness of supply. Although this article may have dealt almost exclusively with pine, the methods outlined also apply to basswood or other softwoods.

CONVERTING DECIMALS TO FRACTIONS [CALCULATIONS]

MANY occasions arise in the shop when decimal dimensions must be measured with an ordinary rule graduated in fractions of an inch. To determine the fractional equivalent of a given decimal, multiply the decimal by the denominator of the fraction most convenient for your use.

For instance, in laying out a sheet of light metal to be formed into $6\frac{3}{4}$ " diameter pipe, it will be found that the circumference is 21.2058". The decimal, .2058, may be multiplied by any of three denominators, thus:


- .2058 times 8 equals 1.6464 eighths.
- .2058 times 16 equals 3.2928 sixteenths
- .2058 times 32 equals 6.5856 thirty-seconds

Using the last of these figures, for example, the circumference would be measured as 21 inches and 6.5856 thirty-seconds. Allowing for a slight reduction in the pipe diameter when the metal is curved, the width of the piece you lay out may be $21\frac{7}{32}$ ", exclusive of lap.


POPULAR SCIENCE MONTHLY SHOP DATA



Hop sacking or cretonne makes a colorful lid cover and bag for this light, sturdy wash-day clothes hamper

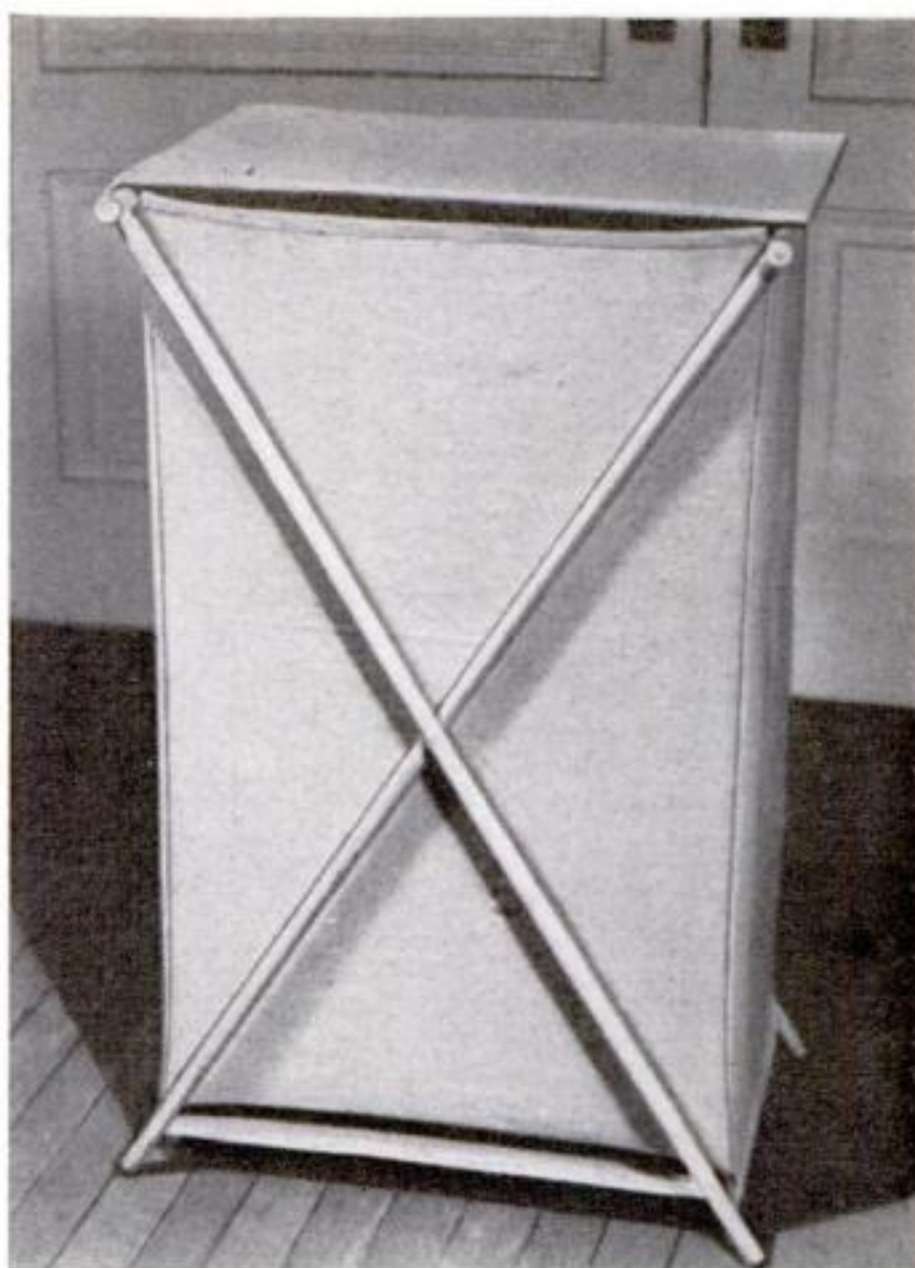

When folded, the hamper takes up little space in the laundry, and it can be easily carried back to its closet when washing is done

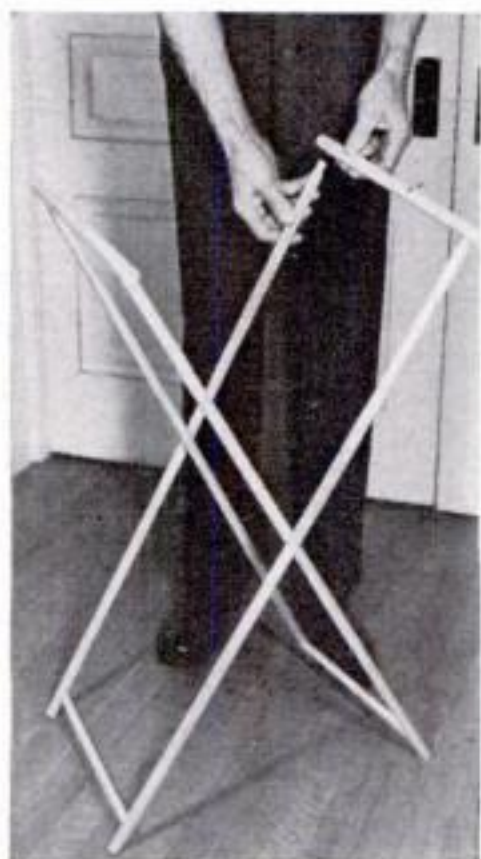


Collapsible Clothes Hamper

THIS attractive folding clothes hamper is easily carried to the laundry for sorting clothes before they are washed. The simple frame is made of dowels, while the cloth bag is so designed that the framework holds it open rigidly and, at the same time, allows it to be folded easily.

The lid consists of a piece of $\frac{1}{4}$ " plywood covered with the same material as the bag and attached to the framework as indicated in the drawing below.

To empty its contents, the hamper is inverted. This is easy to do because of its extreme lightness.

Dowels are used throughout in building the frame, which is put together with glued mortise-and-tenon joints and pinned pivots, as shown above and in the drawings

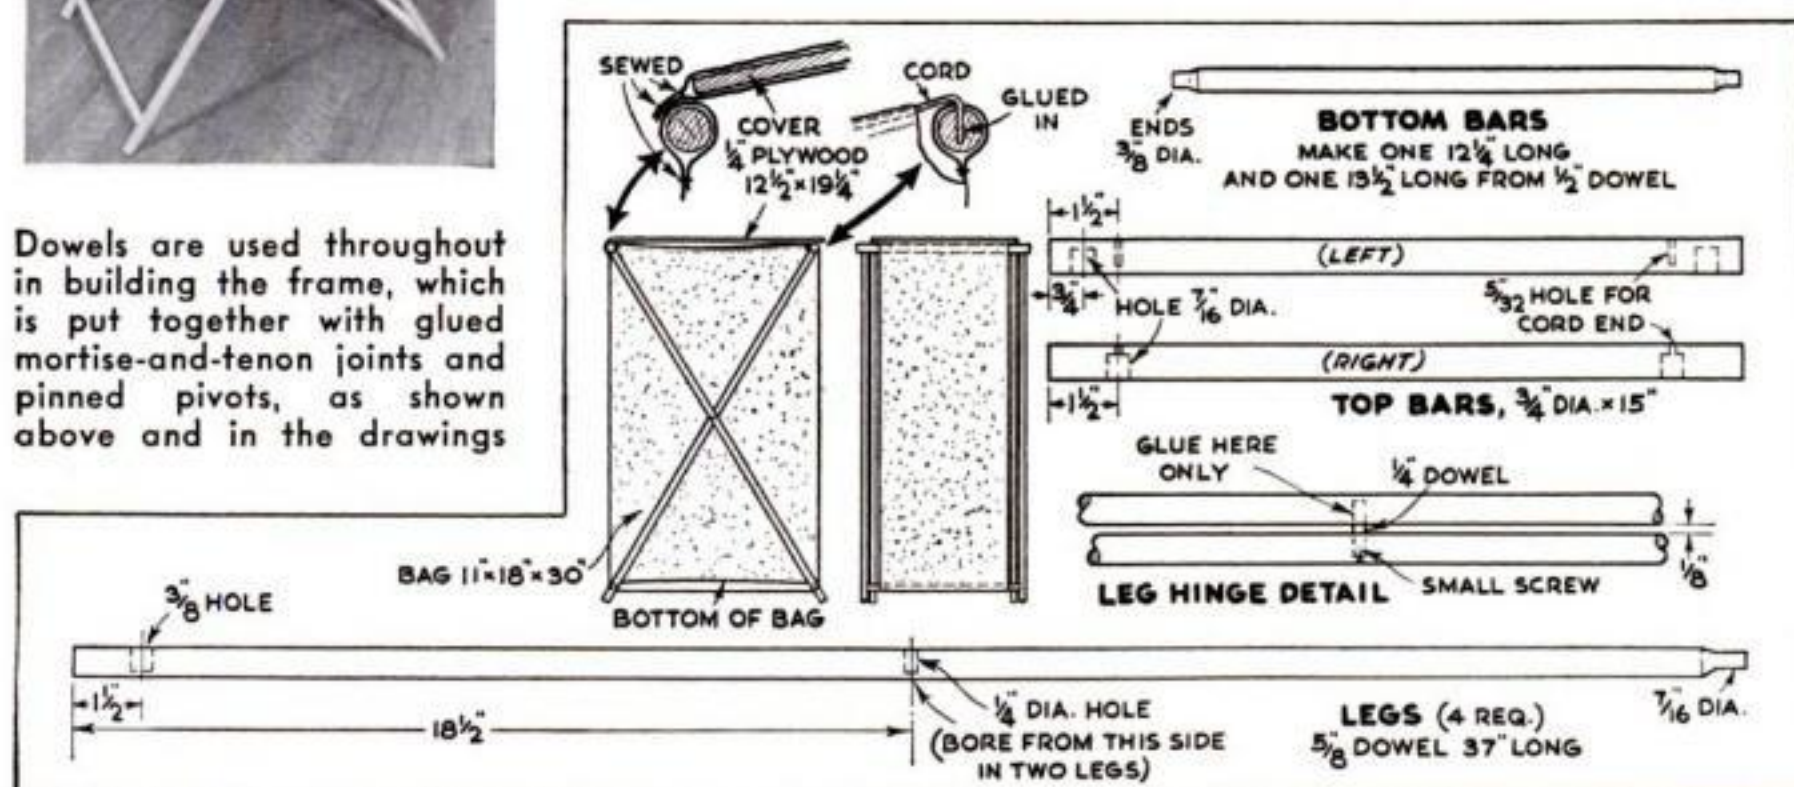



BLACKOUTS ARE CAMOUFLAGED from the inside through the use of the decorative shade above. Made of heavy black paper and absolutely opaque, it looks like a Venetian blind by reason of a design applied to its interior surface. It may be hung in place or rolled up for storage in a few seconds, and is available in four convenient sizes designed to fit almost any window in the home.




HERE'S WALL PROTECTION in the form of a transparent film that prevents dust and dirt from penetrating painted surfaces and washable wallpapers. The colorless flat finish is applied directly and dries in about twenty minutes. When walls become soiled, the film is washed off with water—no soap or cleaner is necessary—and a new coat is applied. A gallon of the fluid will cover about 1,500 sq. ft.

HW 6

OF INTEREST TO **HOME OWNERS**

MIDGET DOOR STOPS that slip under the pinhead of a door hinge take the place of more elaborate ones. They can be installed in a moment by lifting the hinge pin out of the hinge, inserting the pin through the hole in the door stop, and replacing the pin. The devices can be adjusted to stop doors at a 90-deg. or a 180-deg. angle. They can be removed at any time.

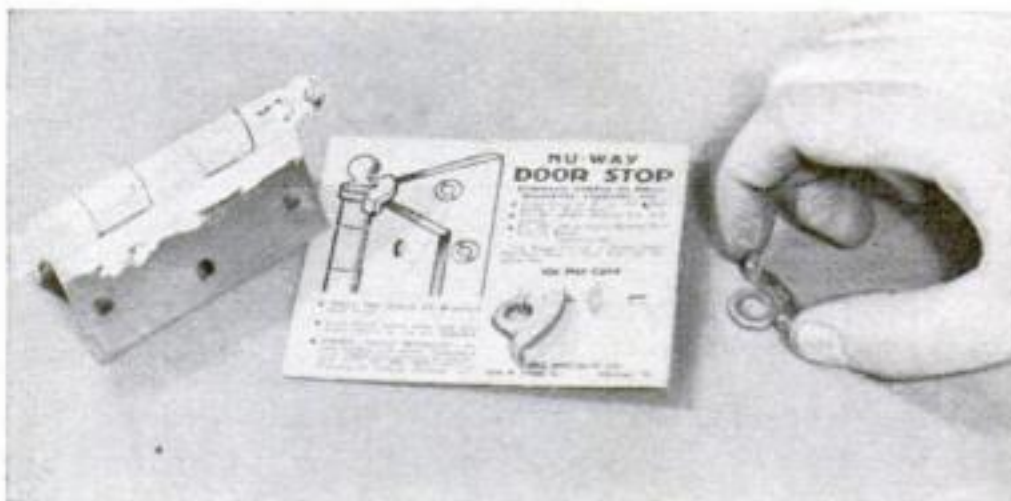

TILE BATHTUBS, built on the job, may save hundreds of tons of steel and iron that would otherwise go into the making of ordinary ones. The tub shown below was constructed on a wooden framework reinforced with wire mesh. It is roomier, easier to clean, and offers a surer footing than the old type, while the wide seat at the front is a distinct improvement. The interior is composed of pieces of unglazed ceramic tile, which is available in attractive color combinations. Such built-in tubs eliminate many transportation problems, and can sometimes be installed where others could not.







The full-size box spring above requires only 5 lbs. of steel. Instead of coil springs, there are ten birch slats, each 3" in width, suspended from double helical springs held by wire clips



Above, bedspring made of hickory slats, rope, glue, and nails! Right, spring band-sawed from one piece of wood. Right, below, four experimental types of springs. The large spiral one shown is of plywood

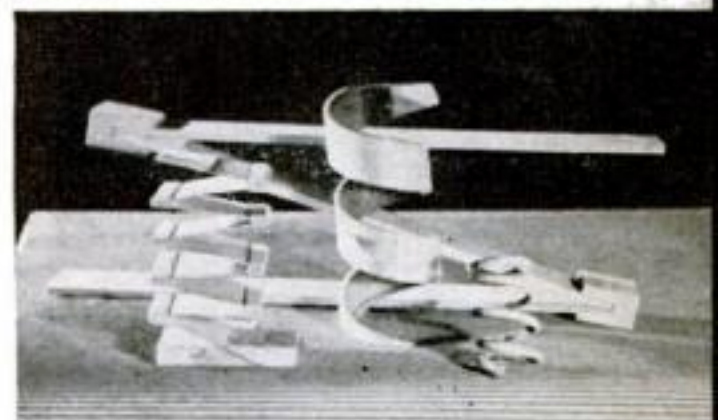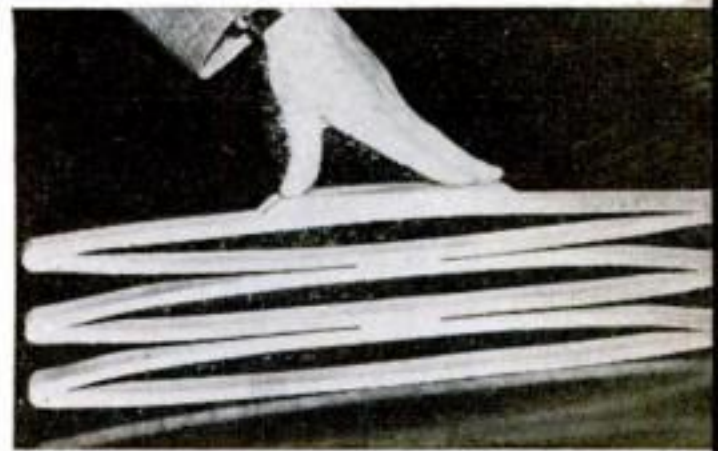



WOODEN FURNITURE SPRINGS may solve the problem raised by restrictions on the use of steel for such purposes. Experiments are being made with various types, one of these being a wooden bedspring which can be adapted to couches, chairs, and so forth. The resilient members are made of hickory, treated with a wood preservative, but not steamed or bent in any way. Oak, ash, and maple springs also are being tested. One manufacturer has combined wood with steel to make a full-size box bedspring, containing ten birch slats suspended from helical springs at both ends. The total amount of steel used, including that for the wire saddles or clips by which the slats are attached to the springs, is only 5 lbs.

FLUSH DOORS add new modern beauty to any home. A honeycomb grid between the faces is said to make the type shown below unusually sturdy. The grid consists of strips of insulating board halved together to form a rigid, nonwarping core. Frame corners

are made with wedged dovetail joints. The faces are composed of three-ply gum veneer, and completely seal in the core. All parts are fabricated with water-resistant resin glue, which fixes the two faces firmly to the frame and core.

Below and at extreme right, flush doors displaying the clean-cut lines and simplicity so desirable in modern homes. In the drawing, a cross section of the door shows the honeycomb core and the frame and face construction

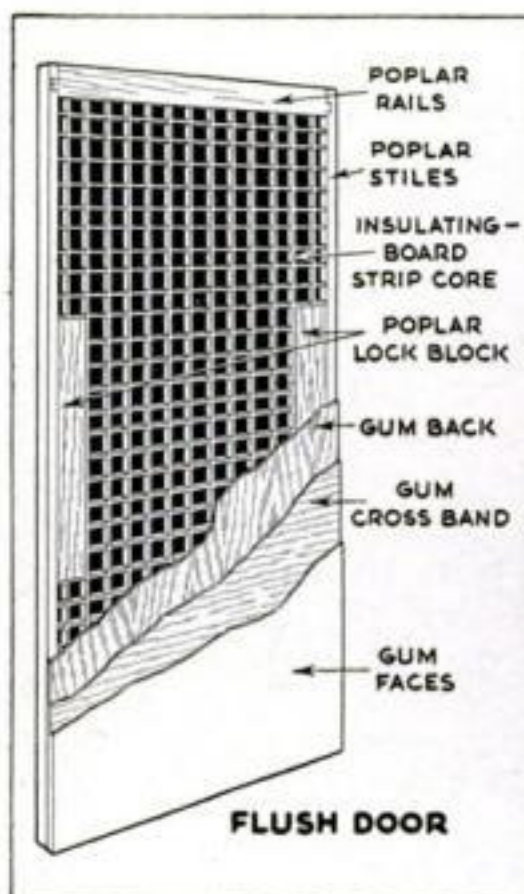

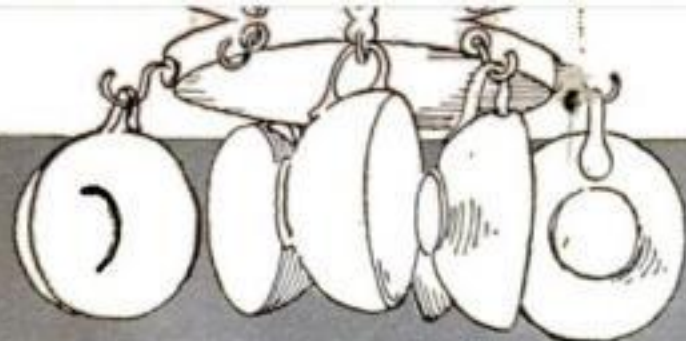

Cup Holder







Plate Rack

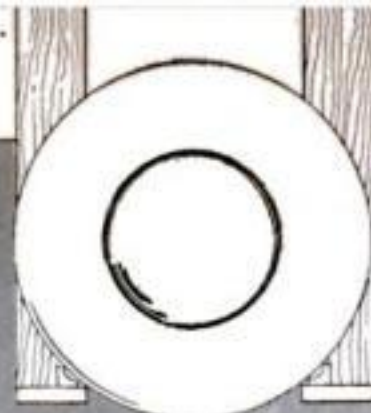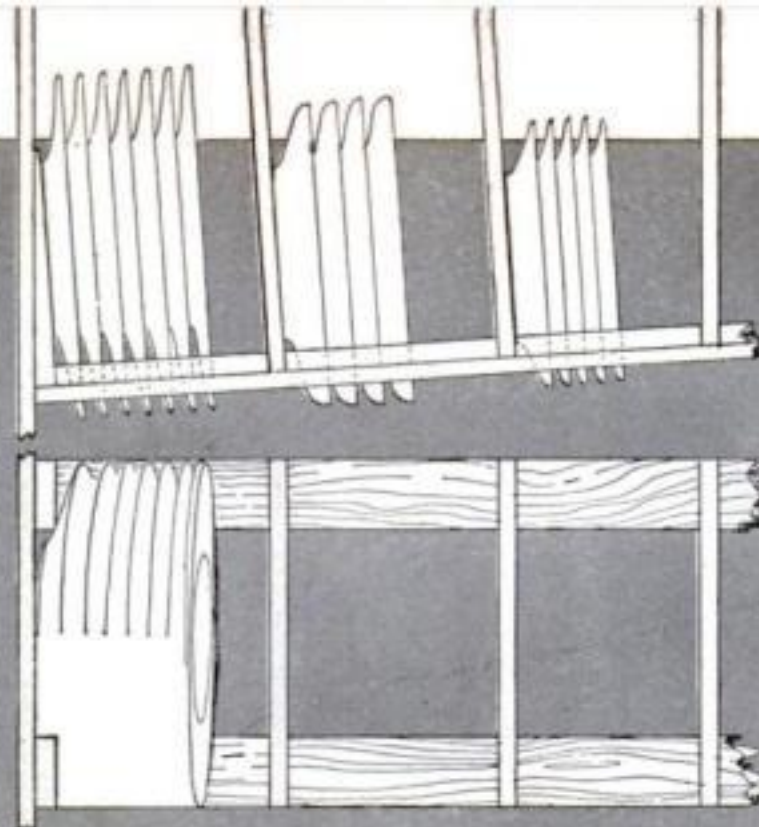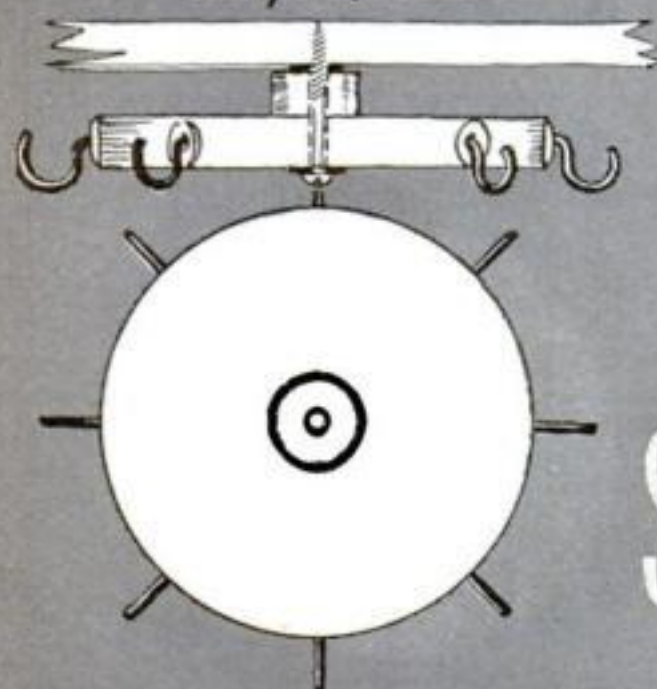


STORAGE UNITS FOR THE

By **JOSEPH ARONSON**


Interior Designer

Pot Closet



HOOK

RACK FOR COVERS




FOR complete modernization of a kitchen, a systematic method of storing equipment in use every day must be provided. Whether you are making a fresh start by remodeling, or already have some up-to-date units installed, it will pay to give additional thought to timesavers of this nature. Here are suggested designs, adaptable to the space you have available, for a pot closet, spice shelves, tray rack, revolving cup holder, and plate rack.


Pot closet. The old method of storing pots and skillets in low cupboards necessitated stooping and searching. A narrow closet taking less floor space will hold all ordinary pots in open view and within easy reach. One 15" deep by 24" wide and reaching to the ceiling will be sufficient. Put it near the stove. To plan the hanging arrangement, cut a plywood panel at least $\frac{3}{8}$ " thick to fit into the back of the cupboard. Lay it on the floor, and group the utensils in staggered order to utilize all space. Ball-tip screw hooks are the best hangers.

Pot covers may be kept in racks on the inner side of the door. Strips $\frac{1}{4}$ " by 3" are screwed to tapered cleats, leaving about $\frac{1}{2}$ " open at the bottom. The covers wedge themselves in and will not rattle.



Spice shelves. Disorderliness of small articles in a deep cupboard can be avoided by fastening shallow shelves to the inside of the cupboard doors. One of the sketches shows a type suitable for small packages and shakers of spices and small bottles of condiments and sauces. End-pieces shaped as suggested may be sawed out to support two or three shelves. Both the shelves and fronts may be of $\frac{1}{4}$ " plywood. Rabbet the

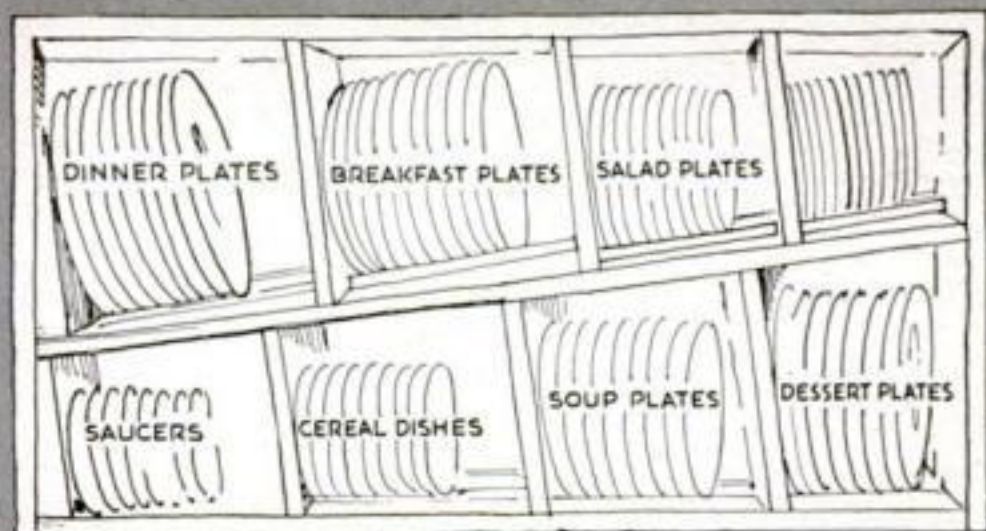

MODERN KITCHEN

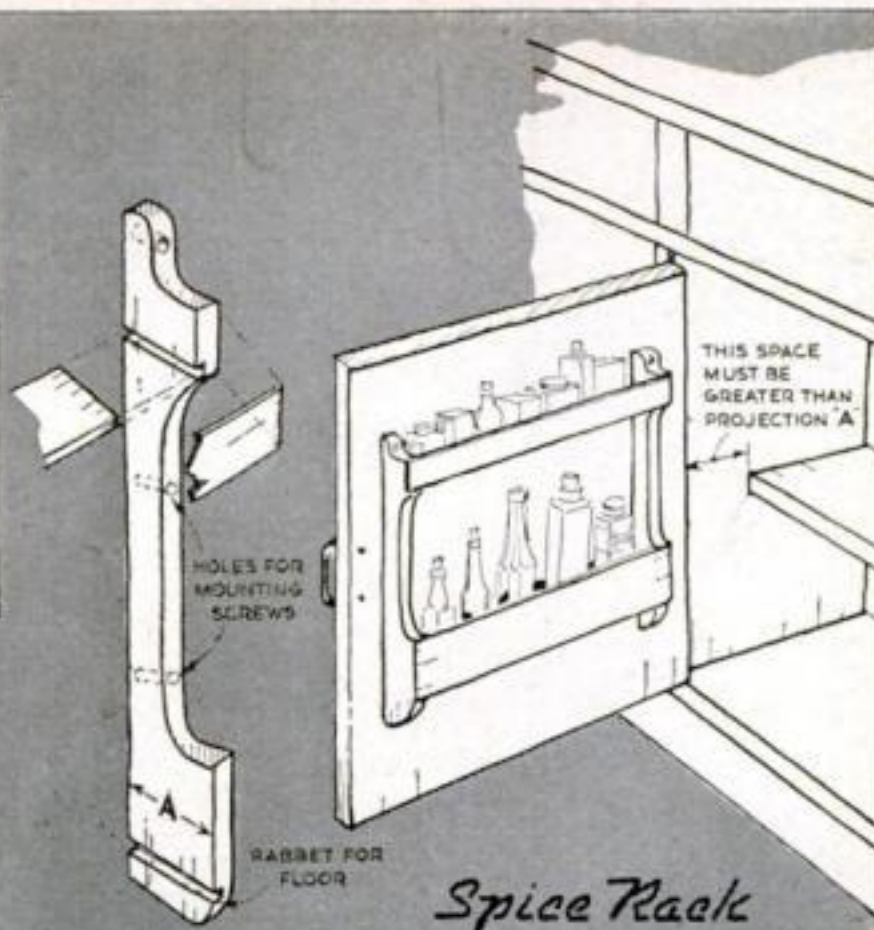

Tray Rack

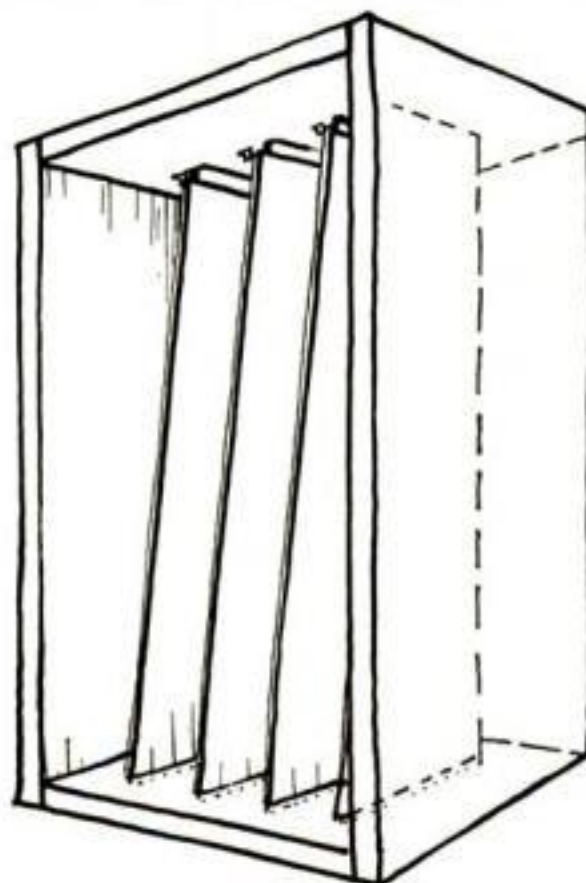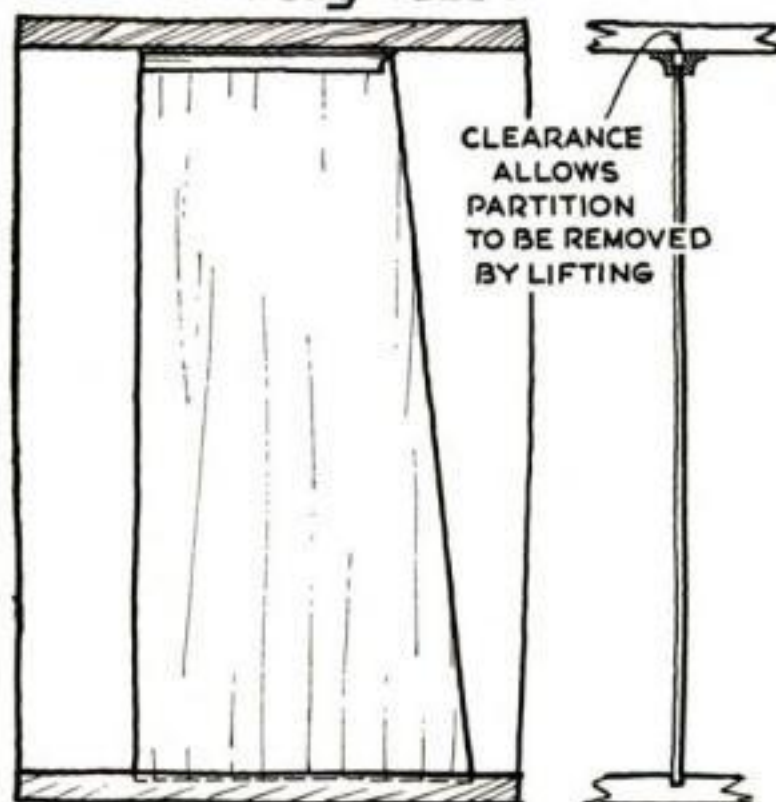

floors into the endpieces, nail or screw the fronts on, and screw the assembled rack to the door. Size is best determined by arranging all the articles to be stored in rows according to height. The most important detail is to cut back any cupboard shelves that may otherwise interfere with the closing of the doors.

Tray rack. Trays may be stored vertically, thus occupying some odd corner of unused space either high or low. The dimensions should be based on the largest tray in your collection. All trays should be kept separate by partitions of $\frac{1}{4}$ " plywood or composition board, each set loosely into a groove in the floor of the rack and supported at the top by two short pieces of molding. Do not let the partitions go all the way back. They are easily removed for thorough cleaning.

Revolving cup holder. Eight cups may be stored in a small space on a 6" diameter revolving disk of $\frac{3}{4}$ " plywood. Attach the cup hooks horizontally to the rim of the disk. Then fasten the disk to the underside of a shelf, using as a pivot a long screw passed through a small wooden collar and two iron washers as shown.


Plate rack. A system of storing plates on edge instead of flat not only saves space but reduces the danger of chipping. The usual way of piling plates means china on china, while in this rack we have the weight of the china resting on wood. Into the dish compartment, fix a pair of parallel stretchers at an angle of about 10 deg. and about 5" apart. Partitions should not be vertical, but at right angles to the stretchers, so that the dishes may lean against them. Space the partitions after measuring your dishes, but make allowances to avoid tight fits.

A $1\frac{1}{8}$ " cove molding placed to support the dishes at the edges as shown is helpful, as is also the use of weatherstripping as padding.

Colonial Plant Boxes

WALL HOLDERS MADE FROM A CHOPPING BOWL

By
JOSEPH
ARONSON

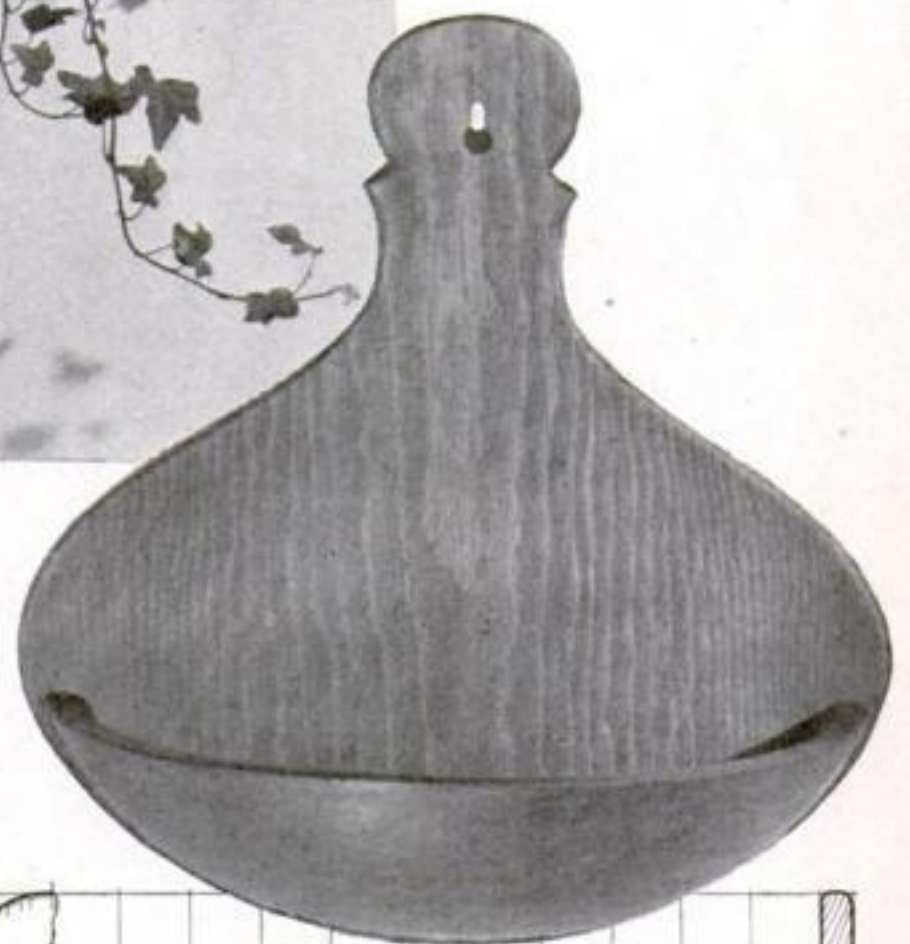


A PAIR of attractive wall holders for ivy or other potted plants can be made from one wooden chopping bowl and a little $\frac{1}{2}$ " lumber. For the two designs shown, a bowl 11" in diameter and $2\frac{3}{4}$ " deep was sawed in half with the grain, and each half was fastened to a wooden backboard with wood screws.

Two back profiles are shown, but if the plant boxes are to be hung close together, they should preferably be made to match. Use solid stock for the backs, rounding the edges, and cut an inverted keyhole slot in each to hang it up by.

Wooden chopping bowls are usually heavily waxed, and for finishing it is necessary to remove this wax with benzine. Stain both the bowl and the back panels fairly dark. Wax when dry.

Small flowerpots can be kept in place by filling the space around them with fine gravel or sand. To protect the inside of the bowl against dampness, coat it with paraffin or fit a metal liner of tin-can stock.

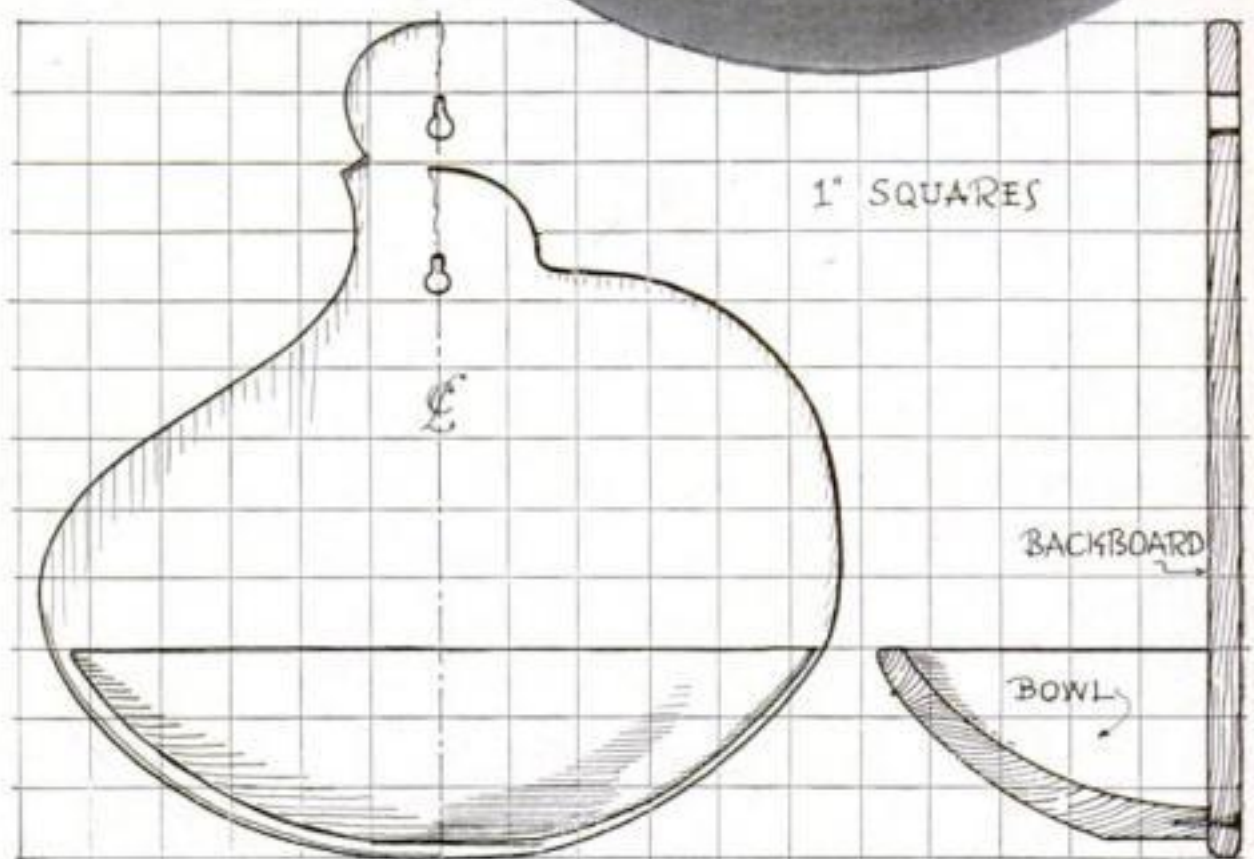

Lay out the backboards on 1" squares, following either of the two attractive designs above. Saw out the outline, and round the edges all around. Saw a chopping bowl in half with the grain, and attach each of the halves to a back by means of countersunk wood screws

Crescents and a circle make a lovely frame for lovely reflections, and add a modern decorative touch to this mirror

By
FRANK PIZARRO



Occasional Mirror

Has Three Shelves for Displaying Knickknacks


DESIGNED on simple, sweeping lines, this decorative mirror harmonizes well with modern furnishings. Making it is a comparatively simple job, although the work must be carefully laid out. The dimensions given are for an 11 3/4" mirror.

It is simplest to use a paper pattern, which will serve for both the main parts. Draw a circle the exact size of the mirror, and mark on it a diameter. Measure up from the center and to one side of the diameter, as shown in the accompanying drawing, to locate the center for the 8 5/8" radius of the shelf support. Similarly, locate the center for the 1 3/4" radius for the projecting curve of the middle shelf. Mark off the top and bottom of the shelf support by measuring from the original center.


Cut a 3/8" plywood back to the over-all outline of the pattern. The shelf support can be cut from 5/8" or even 1/2" stock. It is notched for the bottom shelf. Working carefully with a chisel, or with a routing bit

in the drill press, rabbet the back of the middle shelf projection to the thickness of the mirror. Nail and glue the two parts together; then fit the three shelves in place with a little glue and a few brads. Counter-sink the brads and fill in the holes.

A mirror clip and two hangers can be bought or made from thin sheet metal. The piece may be given a stain and varnish finish, but colored enamel or lacquer is appropriate for modern decorating schemes.

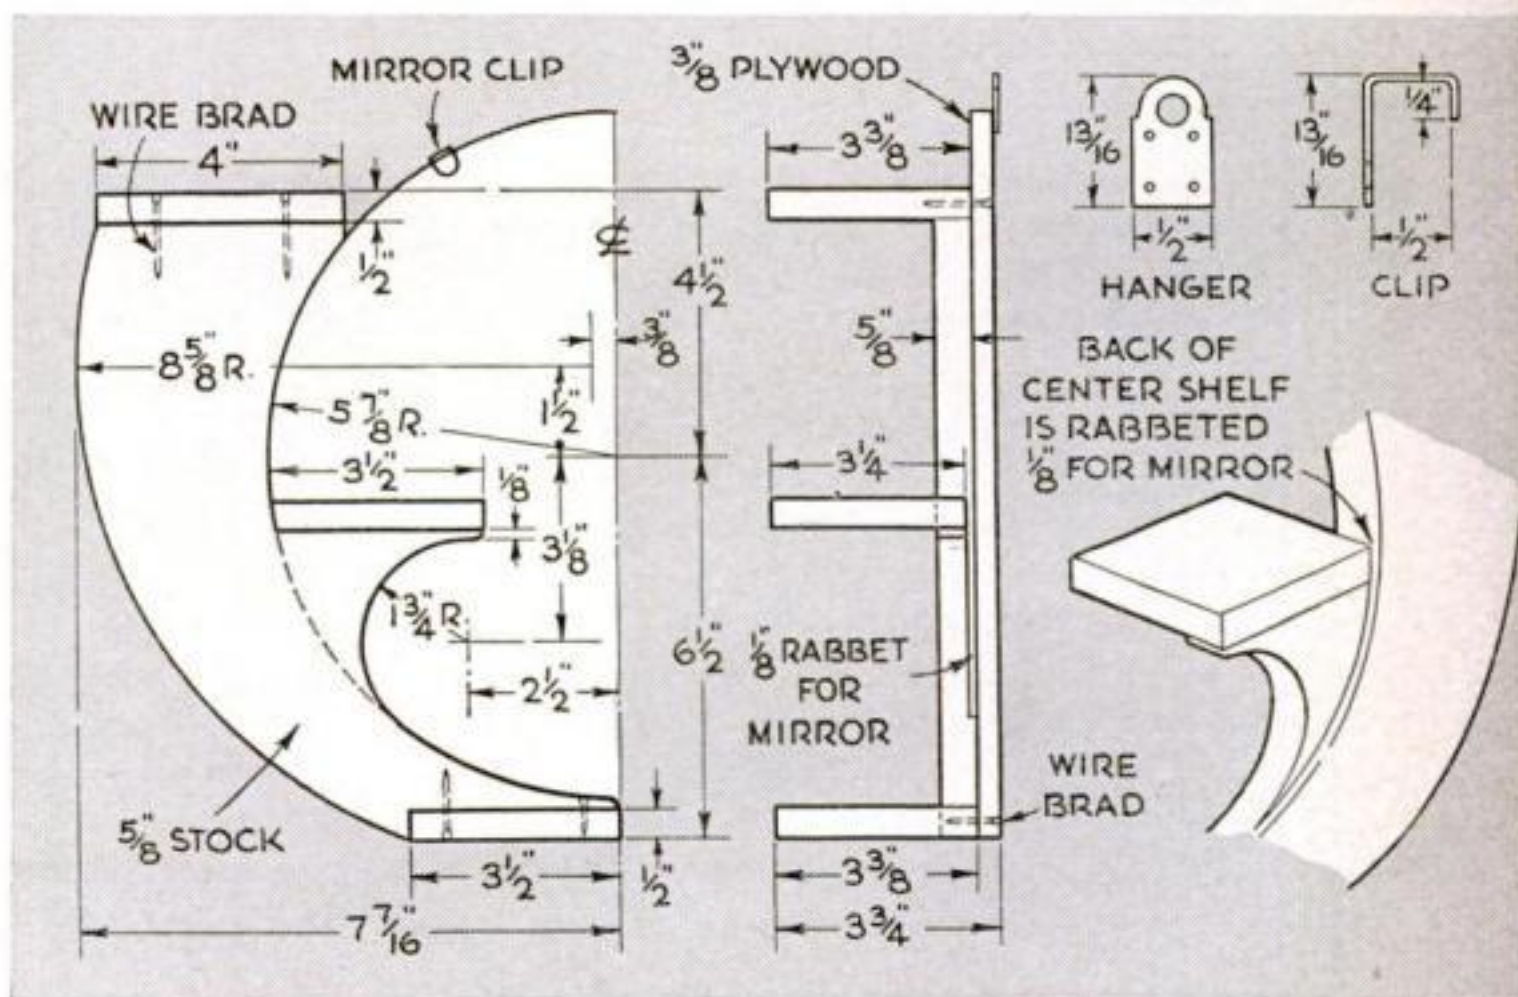


★ ★ ★ VICTORY SERVICE

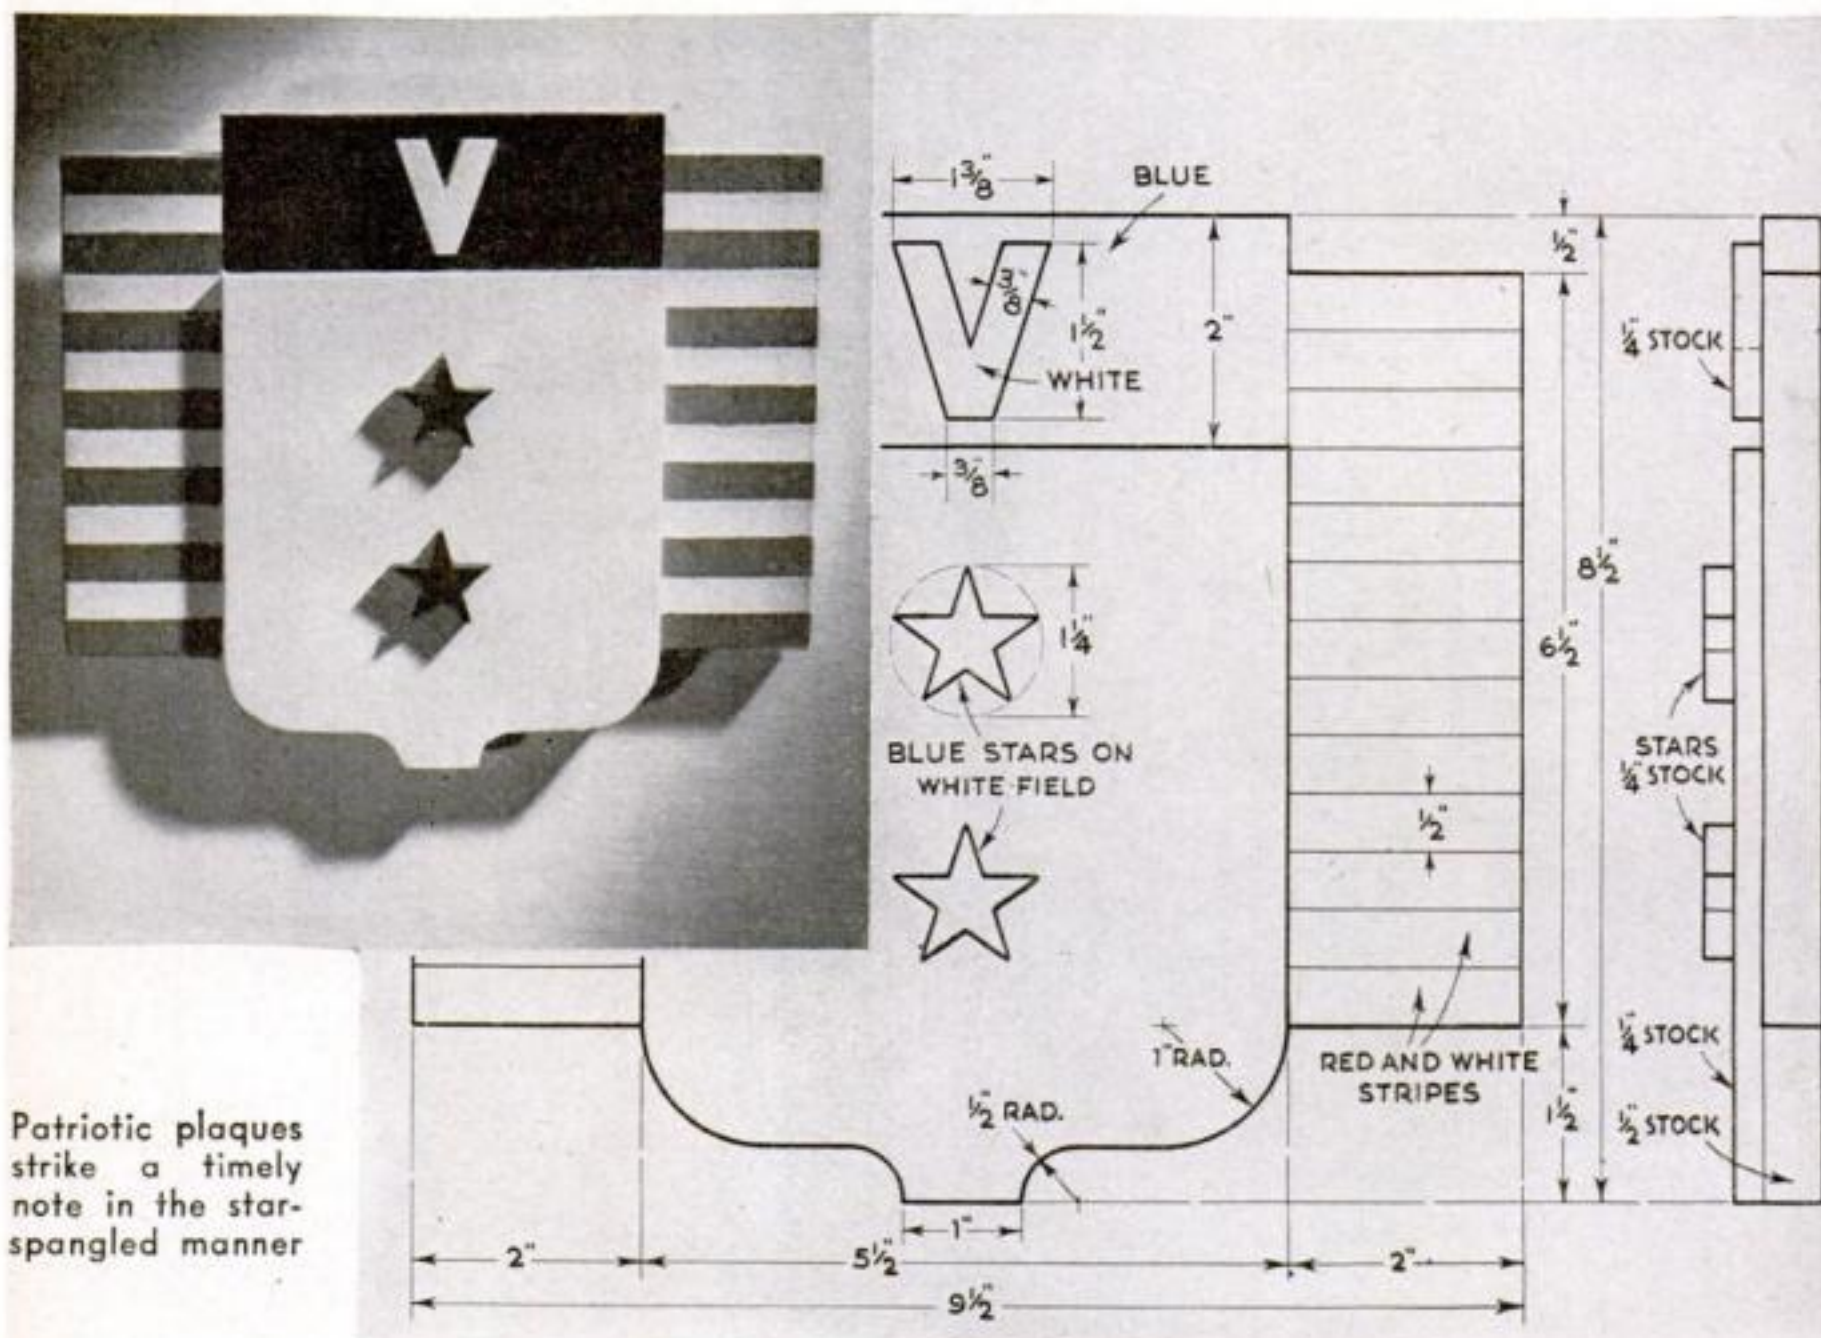

DRAWING A FIVE-POINTED STAR



[SHOP PRACTICE]

1. Scribe a circle the size of the star required.
2. Draw two diameters perpendicular to each other.
3. Divide radius in half at *A*.
4. Set compass from *A* to *B* and swing arc *B-C*.
5. Set compass from *B* to *C* and swing arc *D-C-E*.
6. With same radius, mark off *G* from *E* and *F* from *D*.
7. *F-G* should be equal to *B-E*, *E-G*, and so forth.
8. Connect alternate points with straight lines to obtain star.

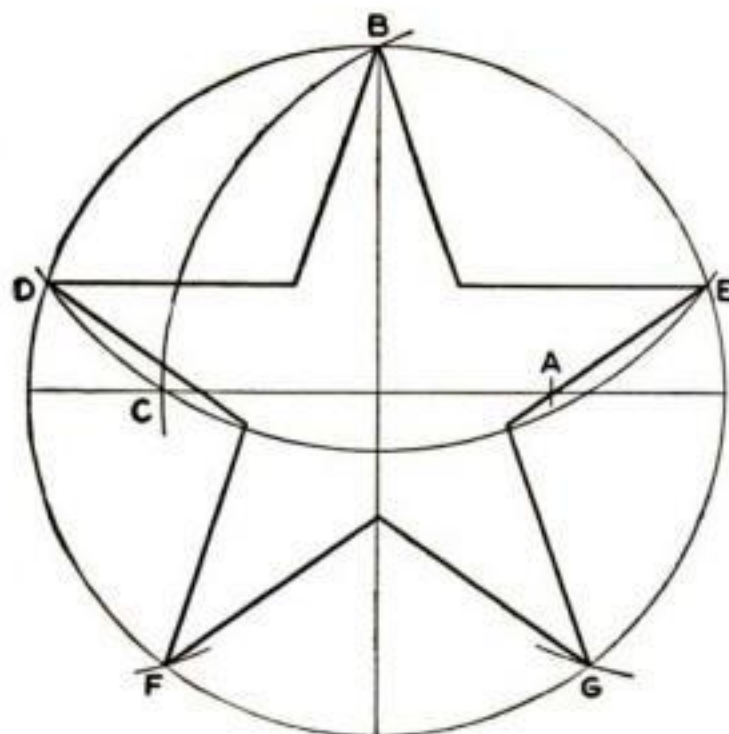

POPULAR SCIENCE MONTHLY SHOP DATA

PLAQUES

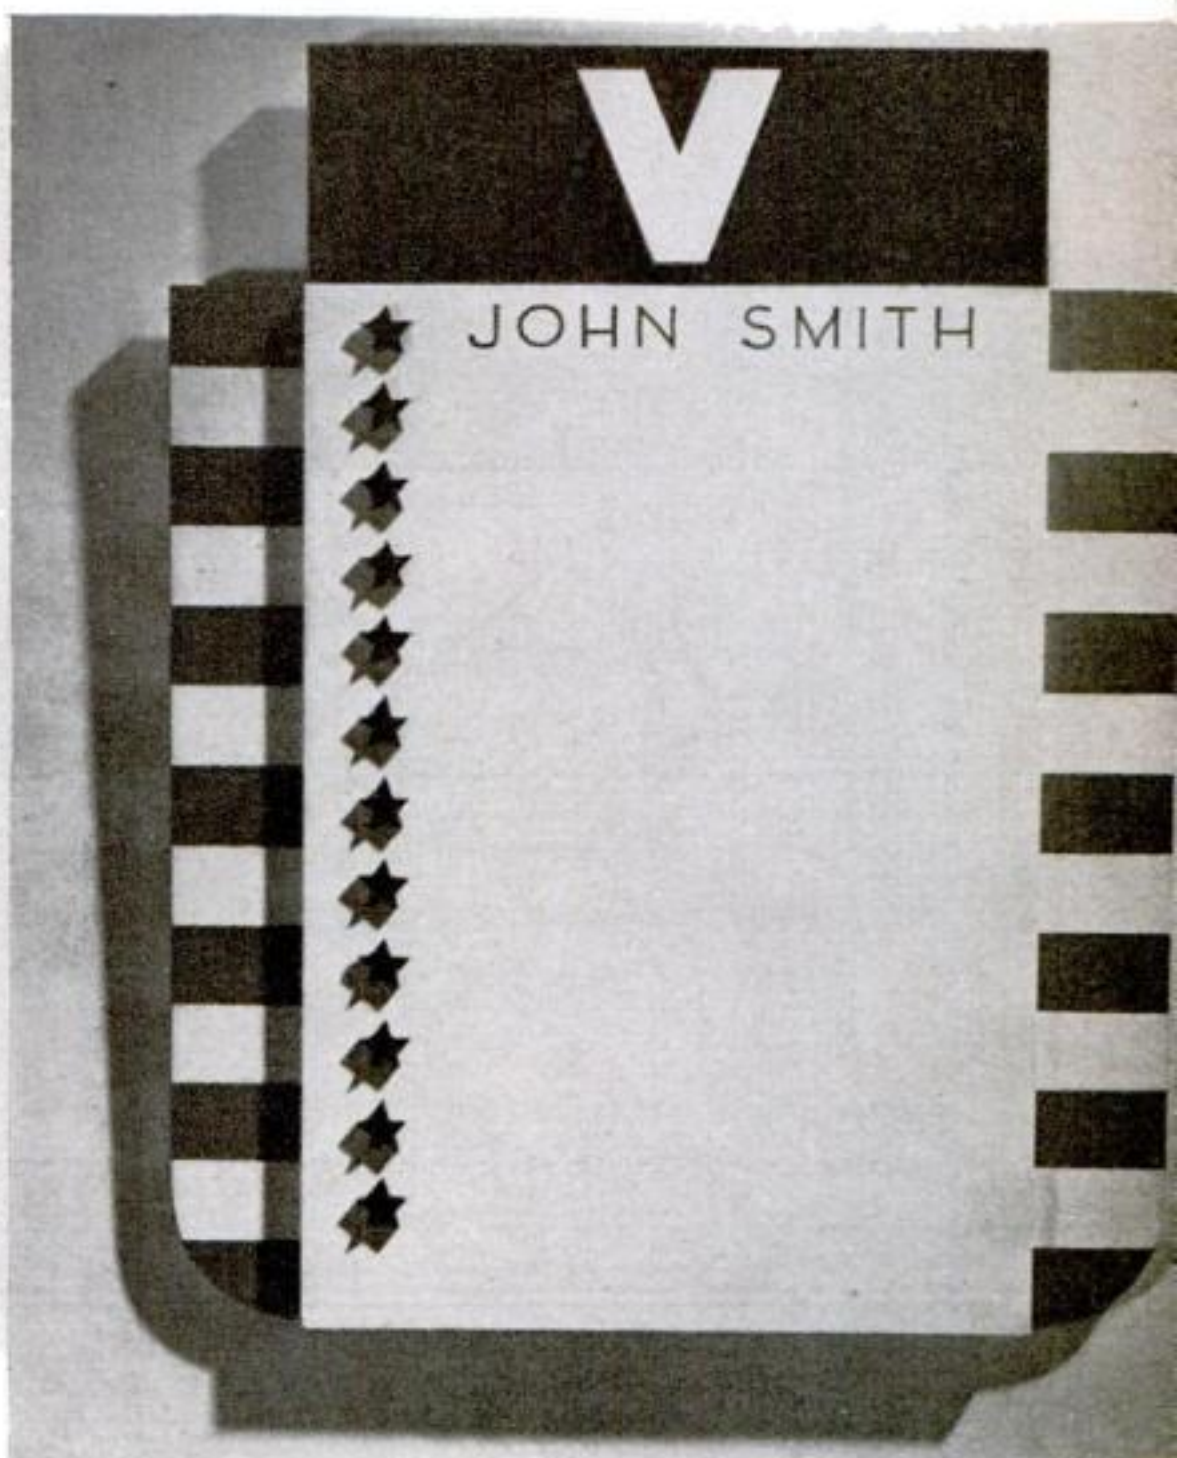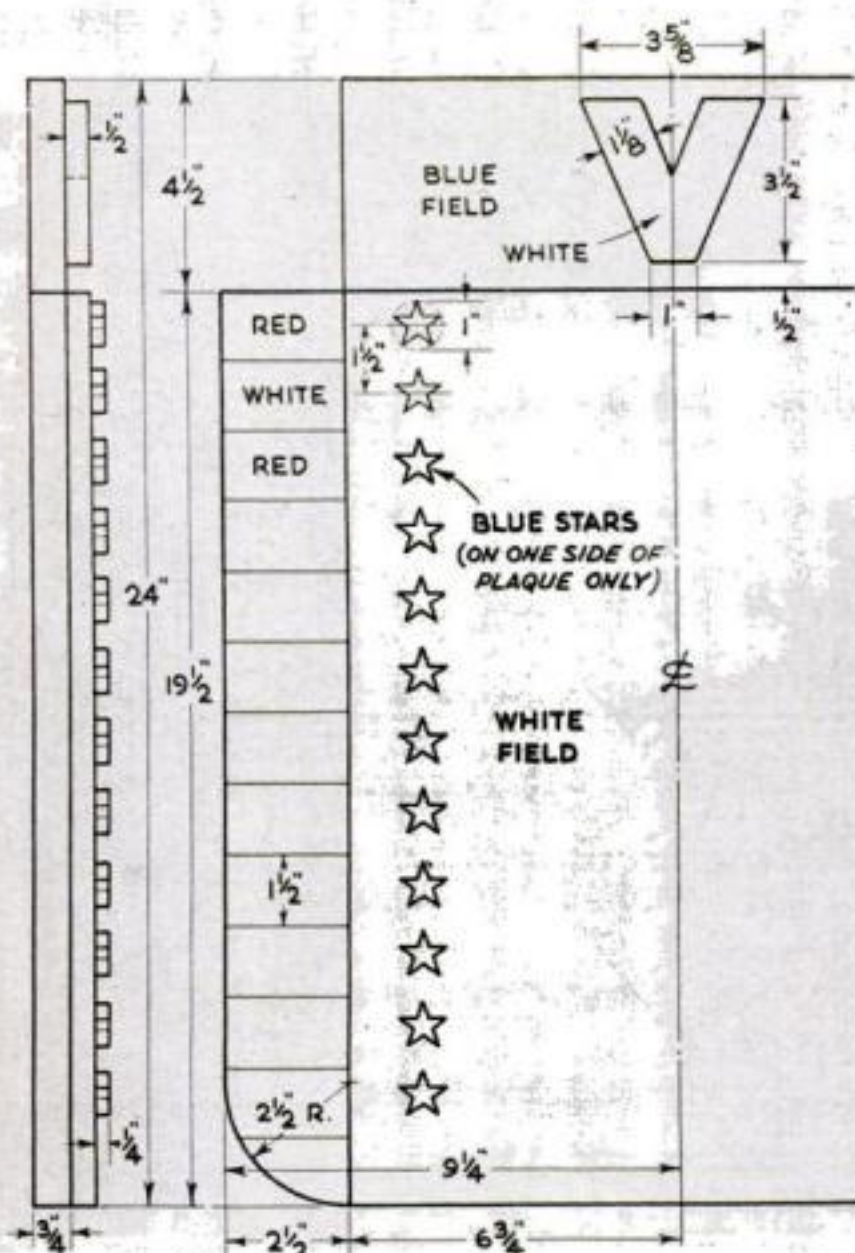

★ ★ ★ BY JUAN OLIVER

FROM thousands of American homes, offices, shops, and factories, men have gone forth to join the armed services of the United States. "Let's not forget them" is the slogan of those who stay behind, and to this end service flags and plaques of various kinds are displayed.

In a letter to *POPULAR SCIENCE*, R. J. Lamberth, of Chicago, Ill., writes that he is kept constantly busy in his home shop turning out wooden service plaques for clubs, fraternal organizations, and business houses, and he suggests that a suitable design for such pieces might be of interest to many readers. Illustrated on this page are two attractive plaques in modern styles appropriate for home display or as company honor rolls.


The plaques give an interesting relief effect, yet are easy to make either with or without power tools. Working to the dimensions shown, cut the back of the smaller one from $\frac{1}{2}$ " stock, saw the raised middle section out of $\frac{1}{4}$ " material, and glue or nail

these together. The "V" and stars are jigsawed from $\frac{1}{4}$ " stock. Finish separately before mounting these with brads. Stars can be made any size desired and spaced according to the number to be mounted.


Use $\frac{3}{4}$ " stock for the back of the large plaque. To this, glue and nail the $\frac{1}{2}$ " thick center section. Cut the large "V" also from $\frac{1}{2}$ " material, the stars from $\frac{1}{4}$ " stock. The names can be lettered on or cut from $\frac{1}{8}$ " stock. Pressed composition board is excellent for small cut-out letters, as it does not splinter.

Clear white pine or plywood is suitable for such plaques, but for outdoor use plywood must be the waterproof resin-bonded type. Use a good quality of red, white, and blue enamel. Masking tape will be of help in painting the stripes.

The five-pointed stars, which add to the decorative effect of these plaques, can be laid out on $\frac{1}{4}$ " stock in accordance with the diagram shown on the opposite page, and cut out with a jig saw.

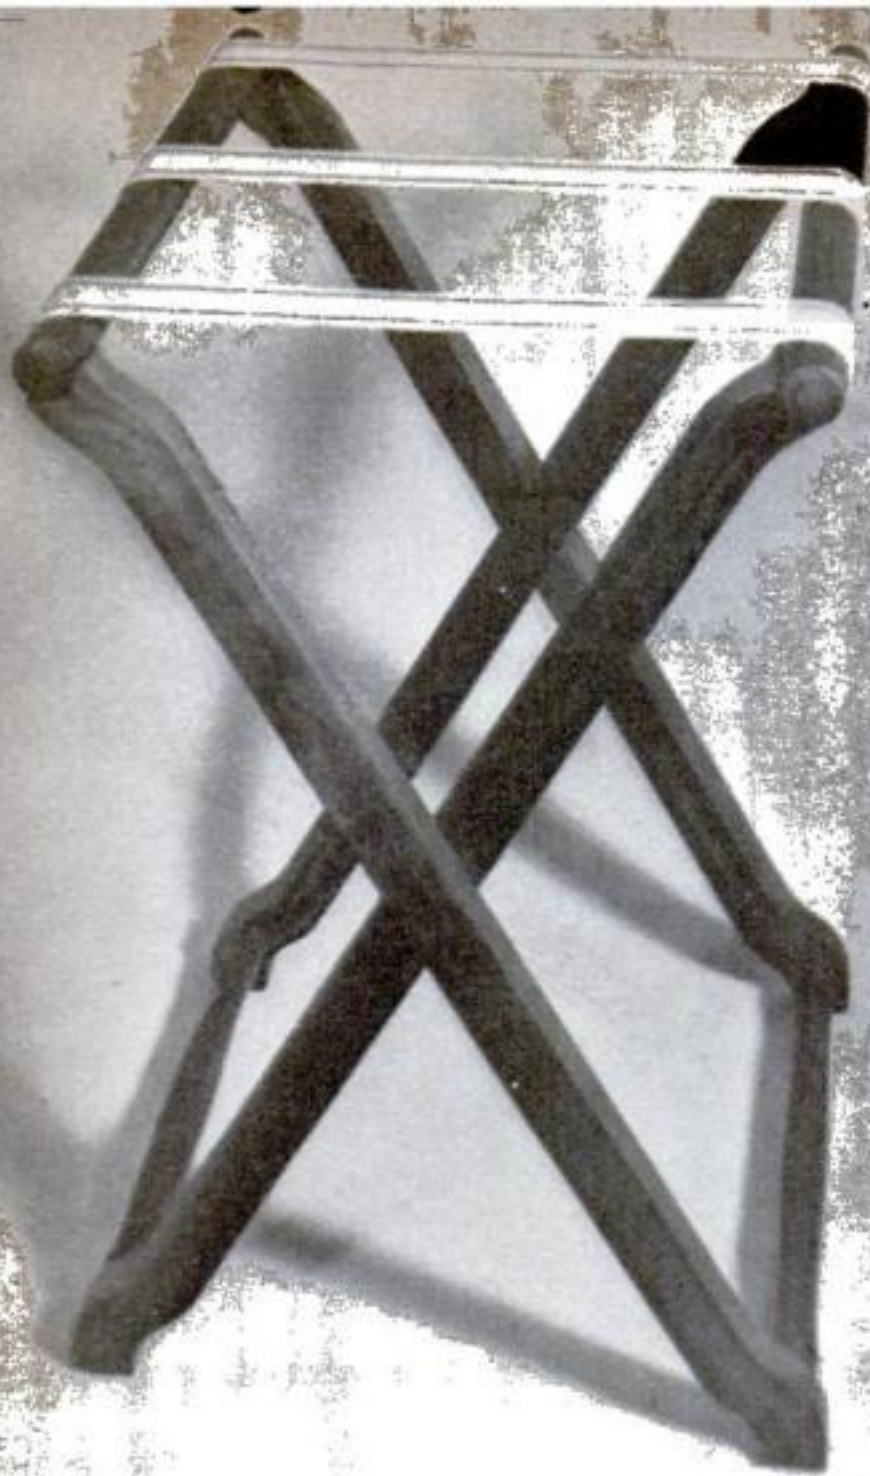

A stand like this is a useful accessory for your home. You can build it of wood to match other room furnishings, or finish it with a contrasting enamel.

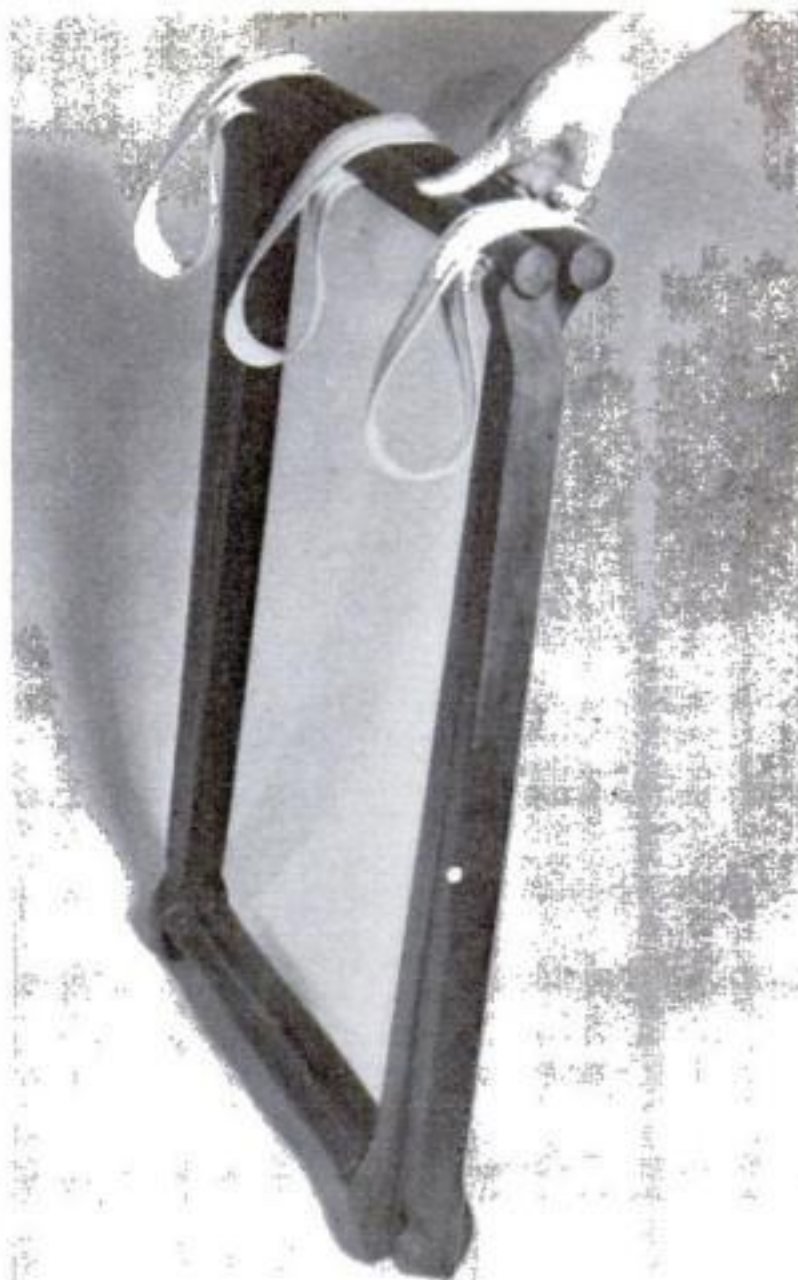

The stand when compactly folded, ready to be tucked into a closet. Notice how little space it takes up

Folding Luggage

Holds a Guest's Suitcase for Easy Packing and Unpacking

SOLVING the problem of where to put suitcases for packing and unpacking, this sturdy luggage stand saves wear and tear on bedspreads and furniture, and folds so compactly it takes up little room in a closet when not needed.

Although the one shown was made from walnut, any strong, durable wood can be used. The bottom spreaders are turned to the dimensions shown, with $\frac{1}{2}$ " dowel tenons at the ends. Note that the top turnings are alike in length, and that the dowel holes are spaced 18" apart in one, but only $15\frac{7}{8}$ " apart in the other. Both bars have blind grooves or saw kerfs cut in them to take the webbing, and these are at right angles to the dowel holes.

Band-saw the four legs all to the same pattern from 1" by 2" stock. Bore a $1\frac{1}{8}$ "


hole through the upper end of each; then saw across the diameter of the hole, rounding the cut slightly. Be careful in boring the $\frac{1}{2}$ " dowel holes for the hinge pins and bottom spreaders. In two legs these are bored from the same side of the piece, but in the other two the hinge hole is bored from one side, that for the spreader from the other.

Assemble the inner frame with glue, insert the hinge dowels, place the outer legs upon them, and assemble the outer frame. Be sure the top bars are glued on with the slots facing out. Finish the wood as desired.

Cut three 18" lengths of 2" wide webbing, which can be bought at large hardware and upholstery shops. Push the ends into the saw kerfs, and secure them with small hardwood wedges $\frac{1}{16}$ " thick driven in alongside.—BENJAMIN NIELSEN.




After a hole is bored into the upper end of the leg, the stock is sawed across to form a semicircular socket

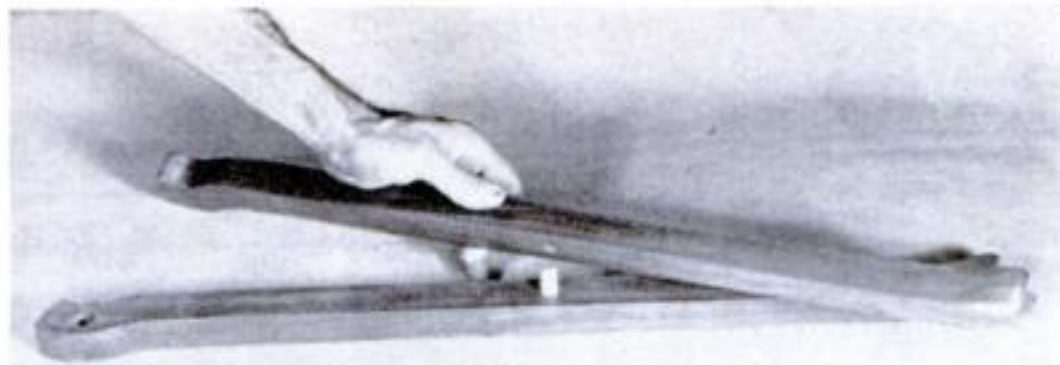

Above, how a pair of legs is joined by means of a hinge pin slipped into blind holes. These are bored in the two pieces so that they face one another



Below, legs are doweled to blind holes in the top spreaders. Webbing is wedged and glued into grooves

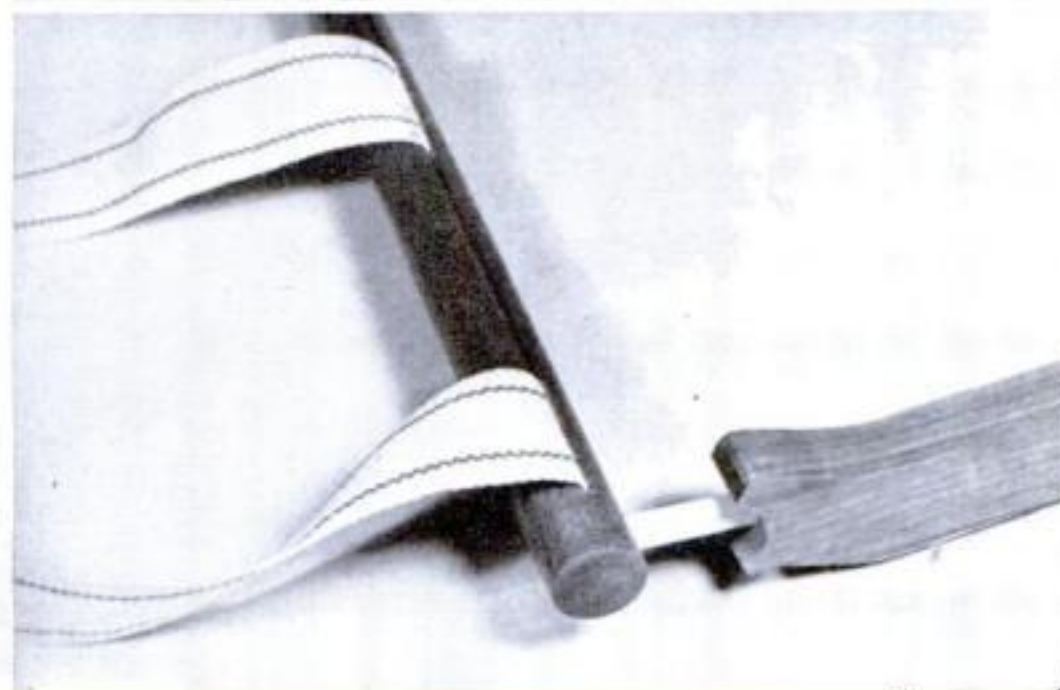

Stand

The slits or kerfs in the top bars are $\frac{1}{2}$ " in depth, and should be wide enough to secure strong canvas webbing by $\frac{1}{16}$ " thick wedges

WEDGE, $\frac{1}{16} \times \frac{1}{2} \times 2$ " FOR SECURING WEBBING (6 REQ.)

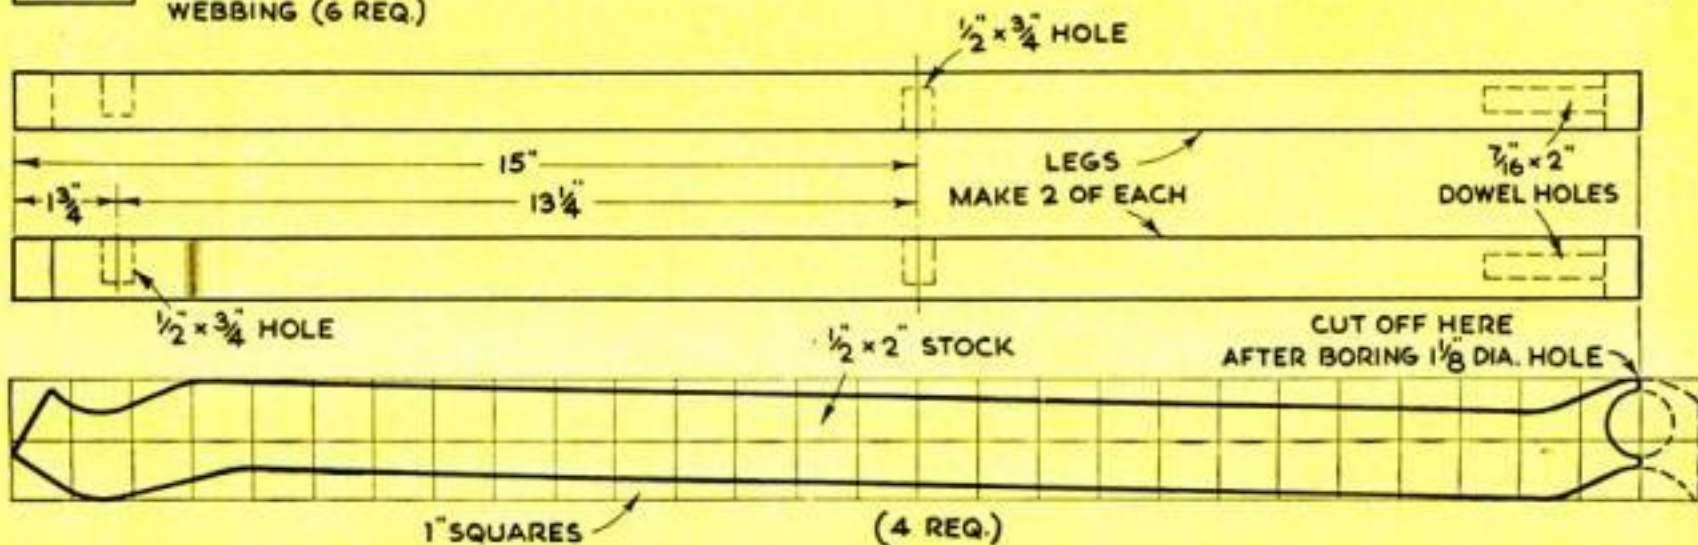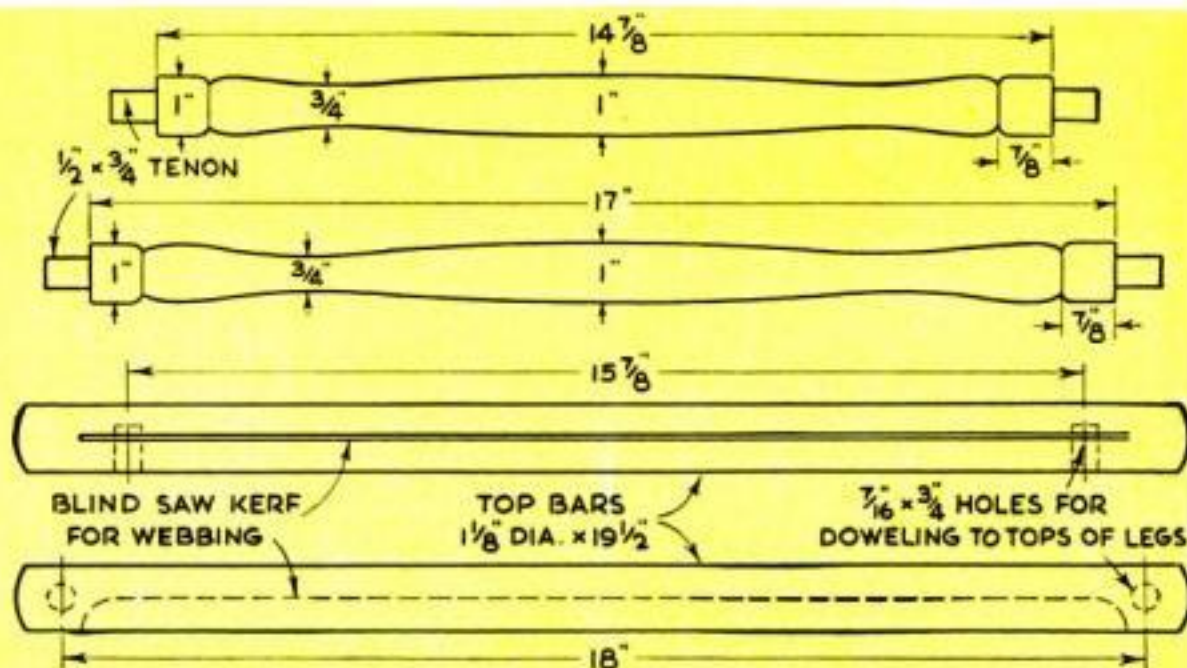



Bindings, sports equipment and all leather articles respond favorably to good treatment and will reward their owner with longer wear and fine appearance



Heat supplied by a reflector lamp allows the oil to work itself into the leather without burning. Use an infrared type therapeutic lamp or radiant heater

9 LIVES FOR YOUR


IF A SOCIETY for the prevention of cruelty to leather were formed, there is no doubt that many of us would be found guilty of abuse and neglect. These days, however, careful maintenance is the watchword for all goods that cannot be conveniently replaced, and leather—one of the oldest and most useful materials known to man—may have its life multiplied many times over with proper treatment.

Leather articles will, in spite of all care, become dirty. In the days when it was plentiful, rubber cement could be used to remove some kinds of dirt from fine leather surfaces. The cement was painted on the leather, left to dry for an hour or so, then rolled off with the fingers, taking the dirt with it. The rubber particles could be saved, dissolved in carbon bisulphide, and used again.

A wide variety of leather articles such as

gloves and belts may be cleaned by washing them with water and saddle soap, Castile, or any similar mild soap, then rinsing well, and drying. However, drying leather calls for a word of caution. Did you ever get your shoes wet, dry them on the radiator, and then wonder why they felt like wooden clogs the next time you wore them? A quick way of ruining leather is to dry it rapidly with heat or direct sunlight. Heat causes stiffening and cracking. The safest procedure is to place the wet article where a draft of air strikes it—in an open doorway, for example, or in the air stream of a fan. After drying, it is a good idea to applying polish or other dressing.

Some time ago a group of scientists and library experts made a study of leather-bound books, and they found that those handled every day lasted much longer than those that remained undisturbed for long

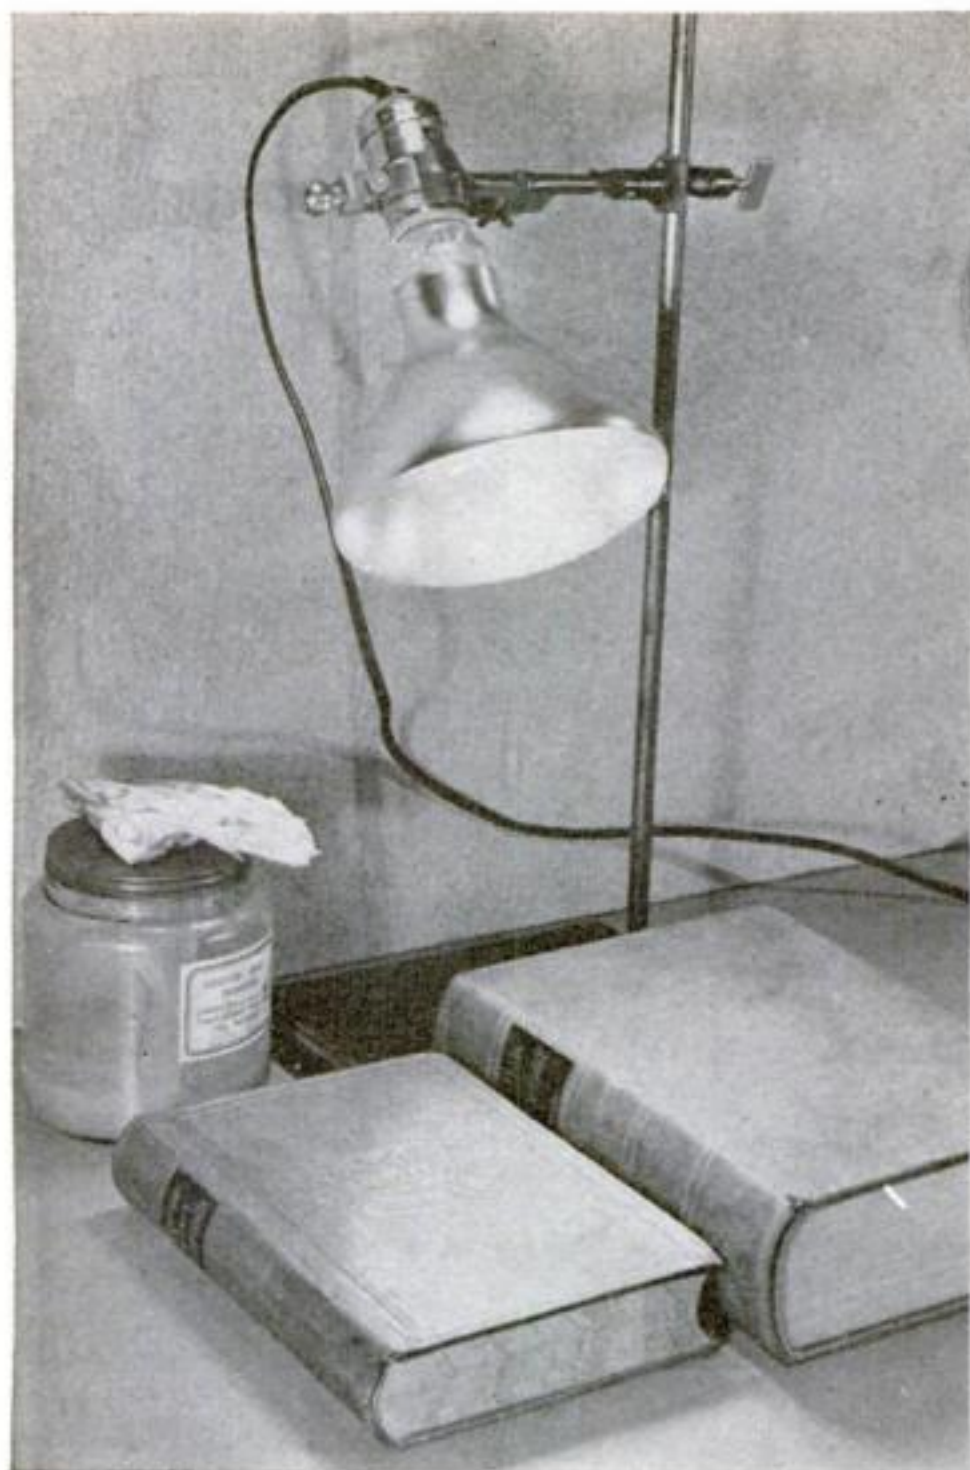

rather than to polish it, a dressing that consists essentially of oils and greases is most suitable. Dealers in shoe supplies usually handle such grease, but you can make your own preparation. A paste that I have used for a number of years on book bindings and other leather articles consists of 3 oz. of neat's-foot oil and 2 oz. of lanolin, by weight. Warm the mixture until the lanolin is distributed evenly through the oil, and use it warm. Apply it to the leather with a cloth, but do not put it on too heavily. Then place the article in a warm (but not hot) place to drive the preparation into the leather.

Another lubricant used in libraries consists of a mixture of castor oil and paraffin. Enough for a considerable number of books is made by heating $3\frac{1}{2}$ oz. of castor oil and adding $1\frac{1}{2}$ oz. of paraffin chips. Stir until the wax melts and blends with the oil. Apply lightly about once a year. The castor oil may be of the odorless variety.

A third leather lubricant is ordinary petroleum jelly. All of these dressings can be used on other leather articles as well as on book bindings.

The committee that investigated the preservation of leather bindings unearthed a lot of other facts. Books last longer if stored in open shelves not placed against the wall. Gas fumes, which create sulphuric and sulphurous acid in leather, are injurious. Likewise harmful is tobacco

smoke, which contains ammonia. This provides sound reason for those "No Smoking" signs in libraries. Books kept in a damp place are likely to mildew. Those kept in closed cases should be

LEATHER GOODS

periods. The reason was that oil transferred from the hands to the book bindings—an insignificant amount—acted as a dressing for the leather.

Leather must be "fed" at intervals with oil or grease if it is to give maximum service. The oil added to it in the manufacturing process will in time disappear through evaporation or other action; if it is not restored, the leather becomes dry and stiff, cracks, and often disintegrates into powder. After cleaning leather by washing or some other process, application of a dressing is always advisable.

There are numerous leather dressings on the market. Any good shoe polish will keep leather in good shape. However, leather authorities recommend that only a polish that dries to a dull finish be used, or one that has to be buffed to a luster.


When it is desired to feed the leather

removed and aired occasionally on dry days.


One man who hates to wear rubbers uses a commercial leather paste to waterproof his shoe soles. He smears the grease liberally on the sole and drives it in by baking, being careful to heat the leather no more than necessary. He used a soldering torch until he discovered recently that the new drying lamps and the older infrared therapeutic lamps would do the job without the danger of scorching the leather. Two or three treatments make his shoe soles water resistant for several months and improve their flexibility and wearing qualities.

Other lubricants used for making shoes and other leather goods water resistant are neat's-foot and sperm oil. The leather, particularly the soles, is well impregnated with one of these oils; then the shoes are set aside until the oil dries, after which they are polished. Neat's-foot oil dries a little

Sewing and Repairing Leather

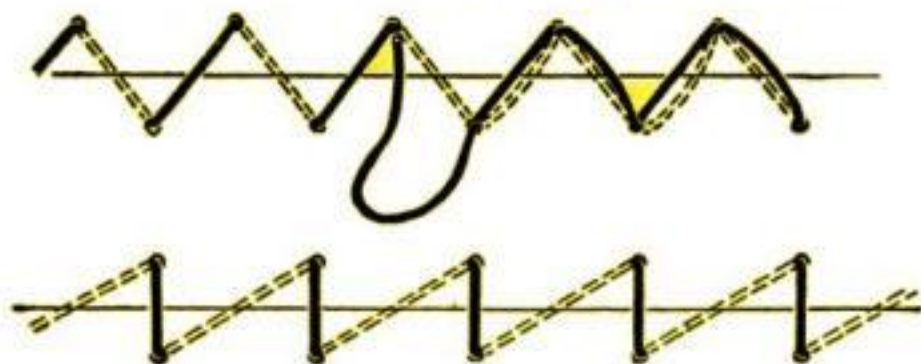

ALTERNATIVE STITCH

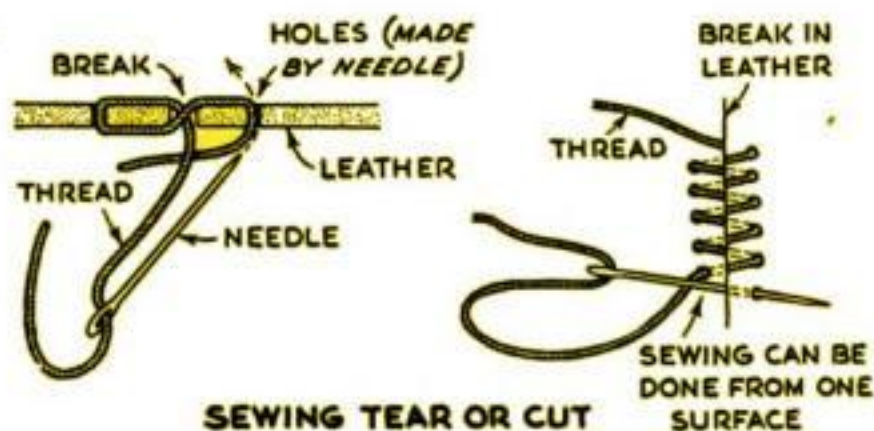

SEWING TEAR OR CUT



MAKING AN INVISIBLE PATCH

more slowly than sperm oil. There are on the market various waterproofing preparations that can be used in a similar way.

One of the best methods of prolonging the life of leather shoes is simply to polish them frequently. Use a good liquid or paste shoe polish that has to be buffed to produce a shine. Work it thoroughly into all cracks and seams, and particularly into the space between the soles and uppers. An old toothbrush is good for this.

When two pieces of unlubricated leather rub against each other, they cause a squeaking noise. In shoes the trouble is usually between two layers of leather forming the soles. One remedy is to make a small opening at the edge of the layers and introduce through it a mixture of castor oil and powdered soapstone. The opening is then closed by cementing or sewing.

A leather article may often be given a new span of life by patching it. If the damage is a mere slit, sewing with linen thread may be all that is required. For a larger hole, a cemented patch that can be made almost invisible may be used. Cut a paper pattern to cover the spot; then lay out a patch about $\frac{1}{4}$ " larger all around. It should be of the same kind of leather as the article being repaired. With a sharp knife, bevel the edges of the patch.

Lay the patch over the hole and dust around it with dressmaker's chalk or talcum powder. Remove the patch and, following the chalked outline, skive



A brief case is refinished with a leather dressing that will dye as well as polish




Tags of shoe leather are cemented down to prevent them from being torn off



Shoes may be waterproofed on uppers and soles. A commercial solution is used



If the leather at the lap joint of a belt loosens and rises, cement it immediately

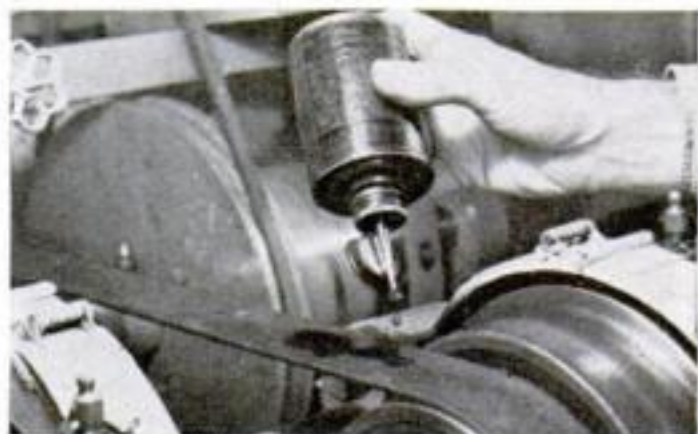

Liquid dressing applied to the back of a belt soaks through to provide lubrication

around the hole, beveling the leather to match the patch. Use pyroxylin household cement, waterproof leather-belting cement, or a good rubber cement to fasten the patch in place. If a hairline shows around the edge, use ink of appropriate color to cover it. Finally, polish the area in the usual way. This technique may be used to repair the tiny cracks or slits that often appear in shoes where the leather bends in walking. Use slivers of leather of a size and shape to fill the crack, and apply ink or leather dye to color them before polishing.

Many companies in war production have installed line shafts because of the scarcity of electric motors for individual drives. Since rubber belting is also hard to get, a good many leather belts are being used. The care of these leather belts differs according to their use and surroundings. In one plant, where lubricating oil gets on them frequently, they have to be taken down and cleaned often. The secret of good belt performance is proper lubrication to keep the leather soft and supple without making it slippery. A soft, pliable belt, combined with


good pulley design and belt tension, requires no sticky, friction-producing dressing to make it efficient. Heat generated by pulley friction dries out a belt, so a lubricating dressing has to be applied each week or so.

Belt manufacturers can provide prepared dressings suitable for any variety of belt, but good lubricants can be prepared right in the shop. One consists of about equal parts of castor and neat's-foot oil. Like all such dressings, it should be applied to the outside of the belt and permitted to soak through to the pulley (hair) side of the leather. Another dressing sometimes recommended is a mixture of about 7 oz. of tallow and 3 oz. of cod-liver oil, by weight. Rub this on the pulley side of the belt.

When a belt slips because it has become coated with metal dust and oil, it should be dry-cleaned. Any well-equipped belting supply company can clean it, but sometimes the job can be done in the shop by washing the leather in a standard dry-cleaning fluid or in a gasoline-turpentine mixture (about twice as much gasoline as turpentine). After the belt is dry, apply a dressing.


Mounting Stripped Bicycle Pedal

WHEN the threads of a bicycle pedal are stripped at the end, the pedal can still be made to serve by countersinking the crank on both sides, and beveling the pedal spindle on the grinding wheel, as shown in the drawing, so that good threads will project far enough through the crank for the nut to get a firm grip. Grind a bevel on the nut also, leaving about half of it untouched to provide a secure hold for the wrench employed to tighten it.—AXEL E. OGREN.

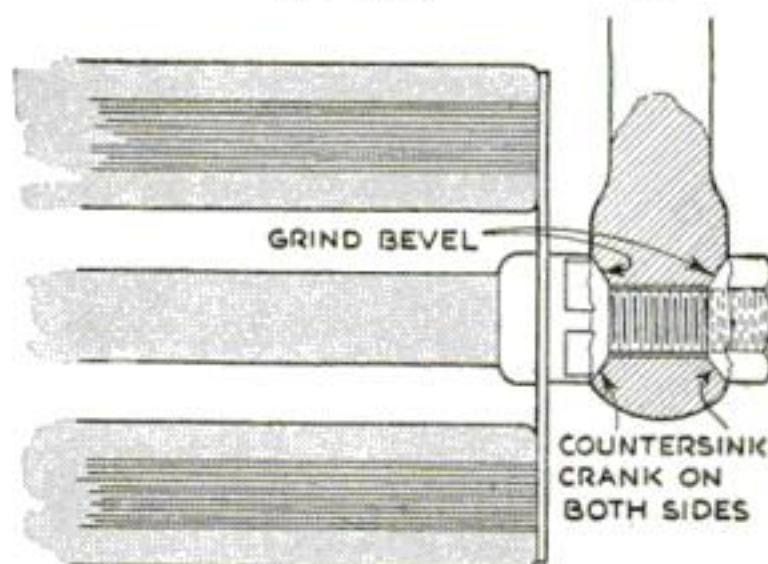

DRAWING ELLIPSES TO EXACT SIZE

[SHOP METHODS]

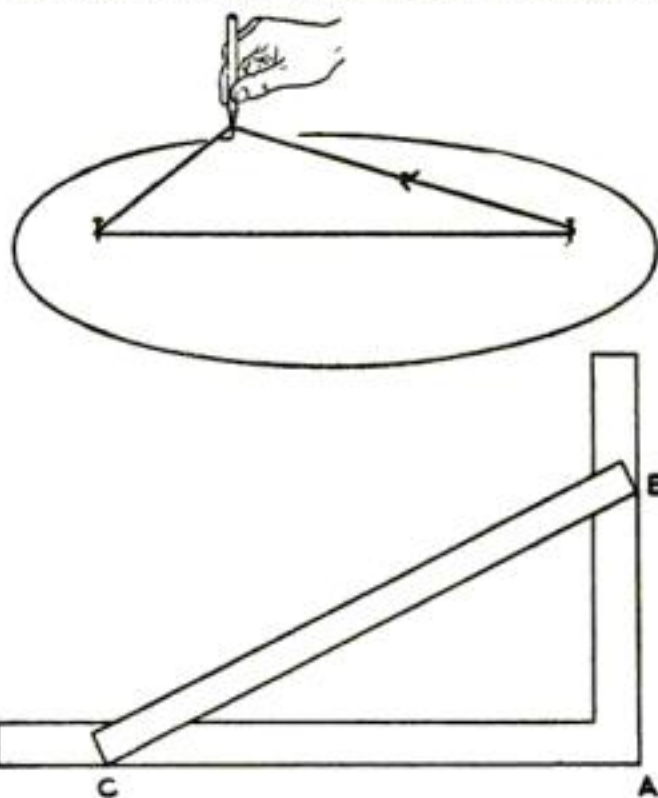

THE method of drawing a perfect ellipse with a pencil and a loop of string placed around two brads or thumbtacks, as shown in the diagram at the left, is frequently used in laying out work. An easy way to find the proper spacing between the brads and the correct length of string to be used is as follows:




Measure the breadth of the desired ellipse on one leg of a steel square, or any other right angle. This breadth is *AB* on the diagram. Now measure off the length of the ellipse from *B* to the intersection at the other leg of the square—*BC* on the diagram. The distance *AC* laid off on the leg of the square is the correct distance between the two brads. The sum of the distance *AC* and the length *BC* is the proper length of string in the loop.

POPULAR SCIENCE MONTHLY SHOP DATA

NEW SHOP IDEAS

QUICK-GLANCE SPEED CHARTS mounted on machine tools having step pulleys tell instantly how to obtain the nearest correct speed for working various materials, and do away with constant thumbing of the instruction book. The speeds obtainable on a drill press, for example, may be typed or lettered on paper and glued to the belt-guard, as in


the photograph at left. On lathes, speeds for both motor and countershaft belt positions may be posted in the same way, together with detailed information on direct and back-gear drive, as shown at the right. Varnish, transparent cellulose tape, or wax will protect the paper and prevent it from being loosened.—R. HANSCOM.

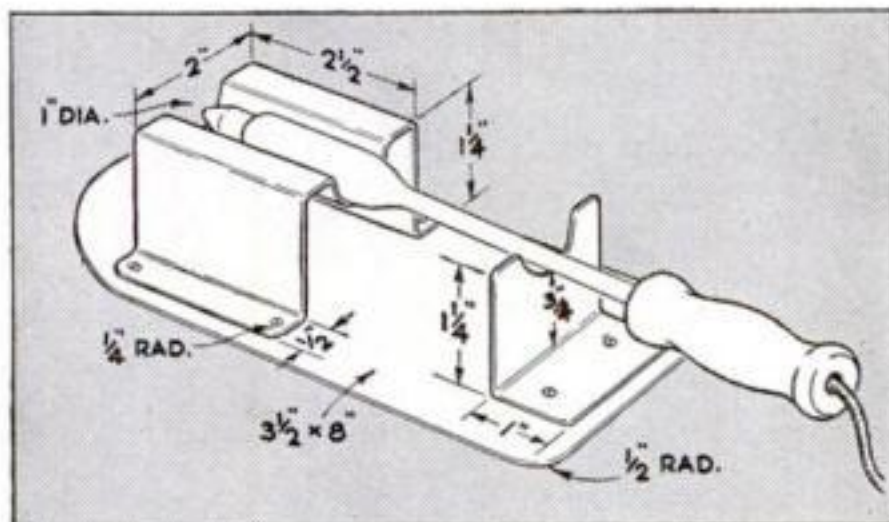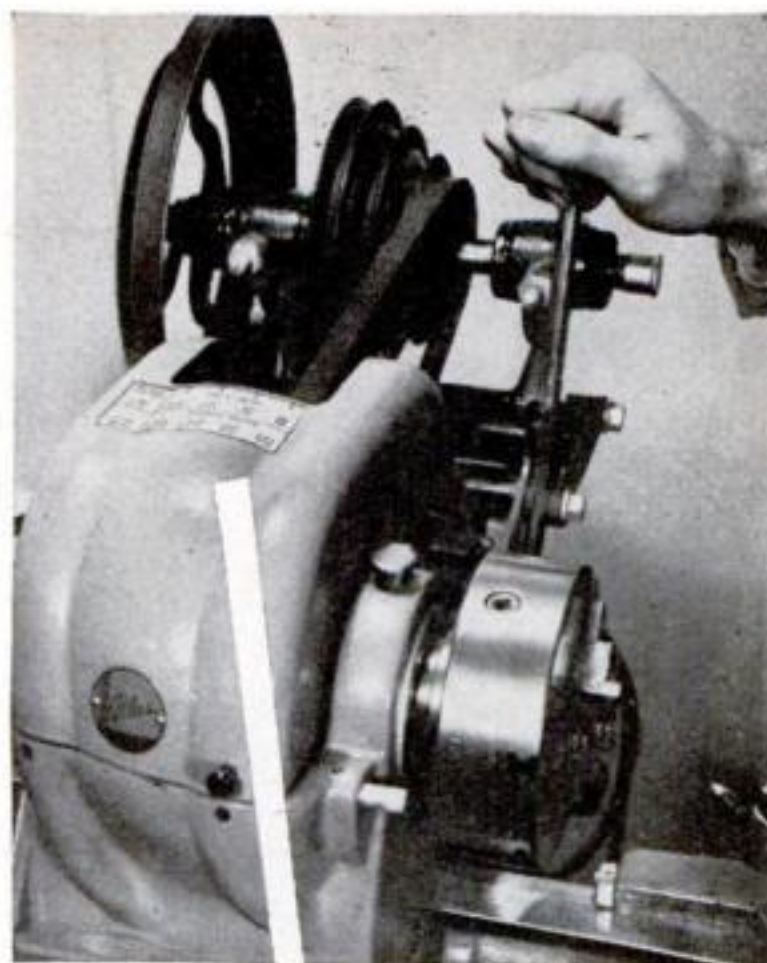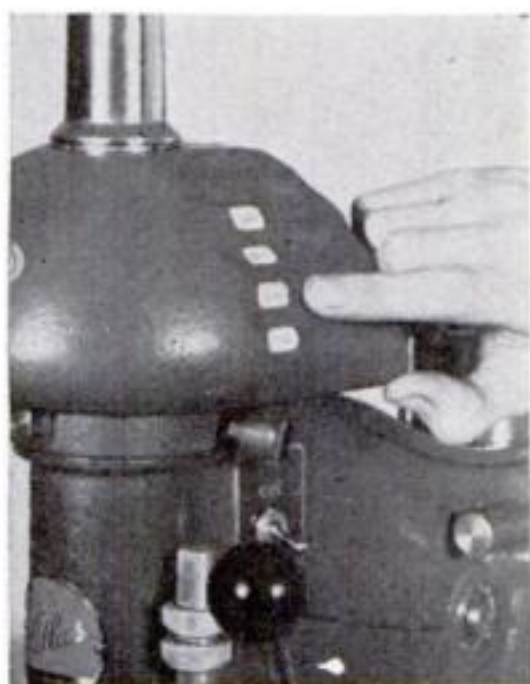

A STAND to hold your electric soldering iron while it is still hot but not being used will protect your workbench top from the heat and prevent accidents. The parts for the one shown in the drawing were cut out of 23-gauge sheet metal, although tin-can material may be used if no other is available. Bend the supports to shape in a vise, forming the rounded portion by hand or over a pipe. Holes are drilled for screws in the places indicated, and the holder may be fastened to a wooden block or permanently mounted on the workbench by means of these screws joining the parts. The sheet-metal base shown is optional.—M. ROSENFELD.

BURNED-OUT HEATING ELEMENTS can be repaired efficiently with powdered iron cement of the type sold at most hardware stores. Raise each end of the parted resistance coil, clean the first two or three loops with sandpaper, and interlock them. Do not join more than two or three loops of each end because this might reduce the resistance too much and cause the coil to burn out again. Mix a little iron cement with water, and apply the paste to the interlocked loops, filling and covering them, and smoothing down the top surface below the groove in the insulation. Let the cement, which is a fairly good conductor, set thoroughly before turning on the current.—W. C. WILHITE.

HOLES IN WELDING-TORCH TIPS or in the generators of gasoline blowtorches can be cleaned with steel bristles cut or pulled from a rotary scratch brush of fine or medium grade. Bristles of either of these sizes are fine enough to go through the holes without enlarging them. It will not impair the efficiency of a good wheel to have a few bristles cut from it, if an old wheel is not available at the time a cleaning wire is needed.—W. C. W.

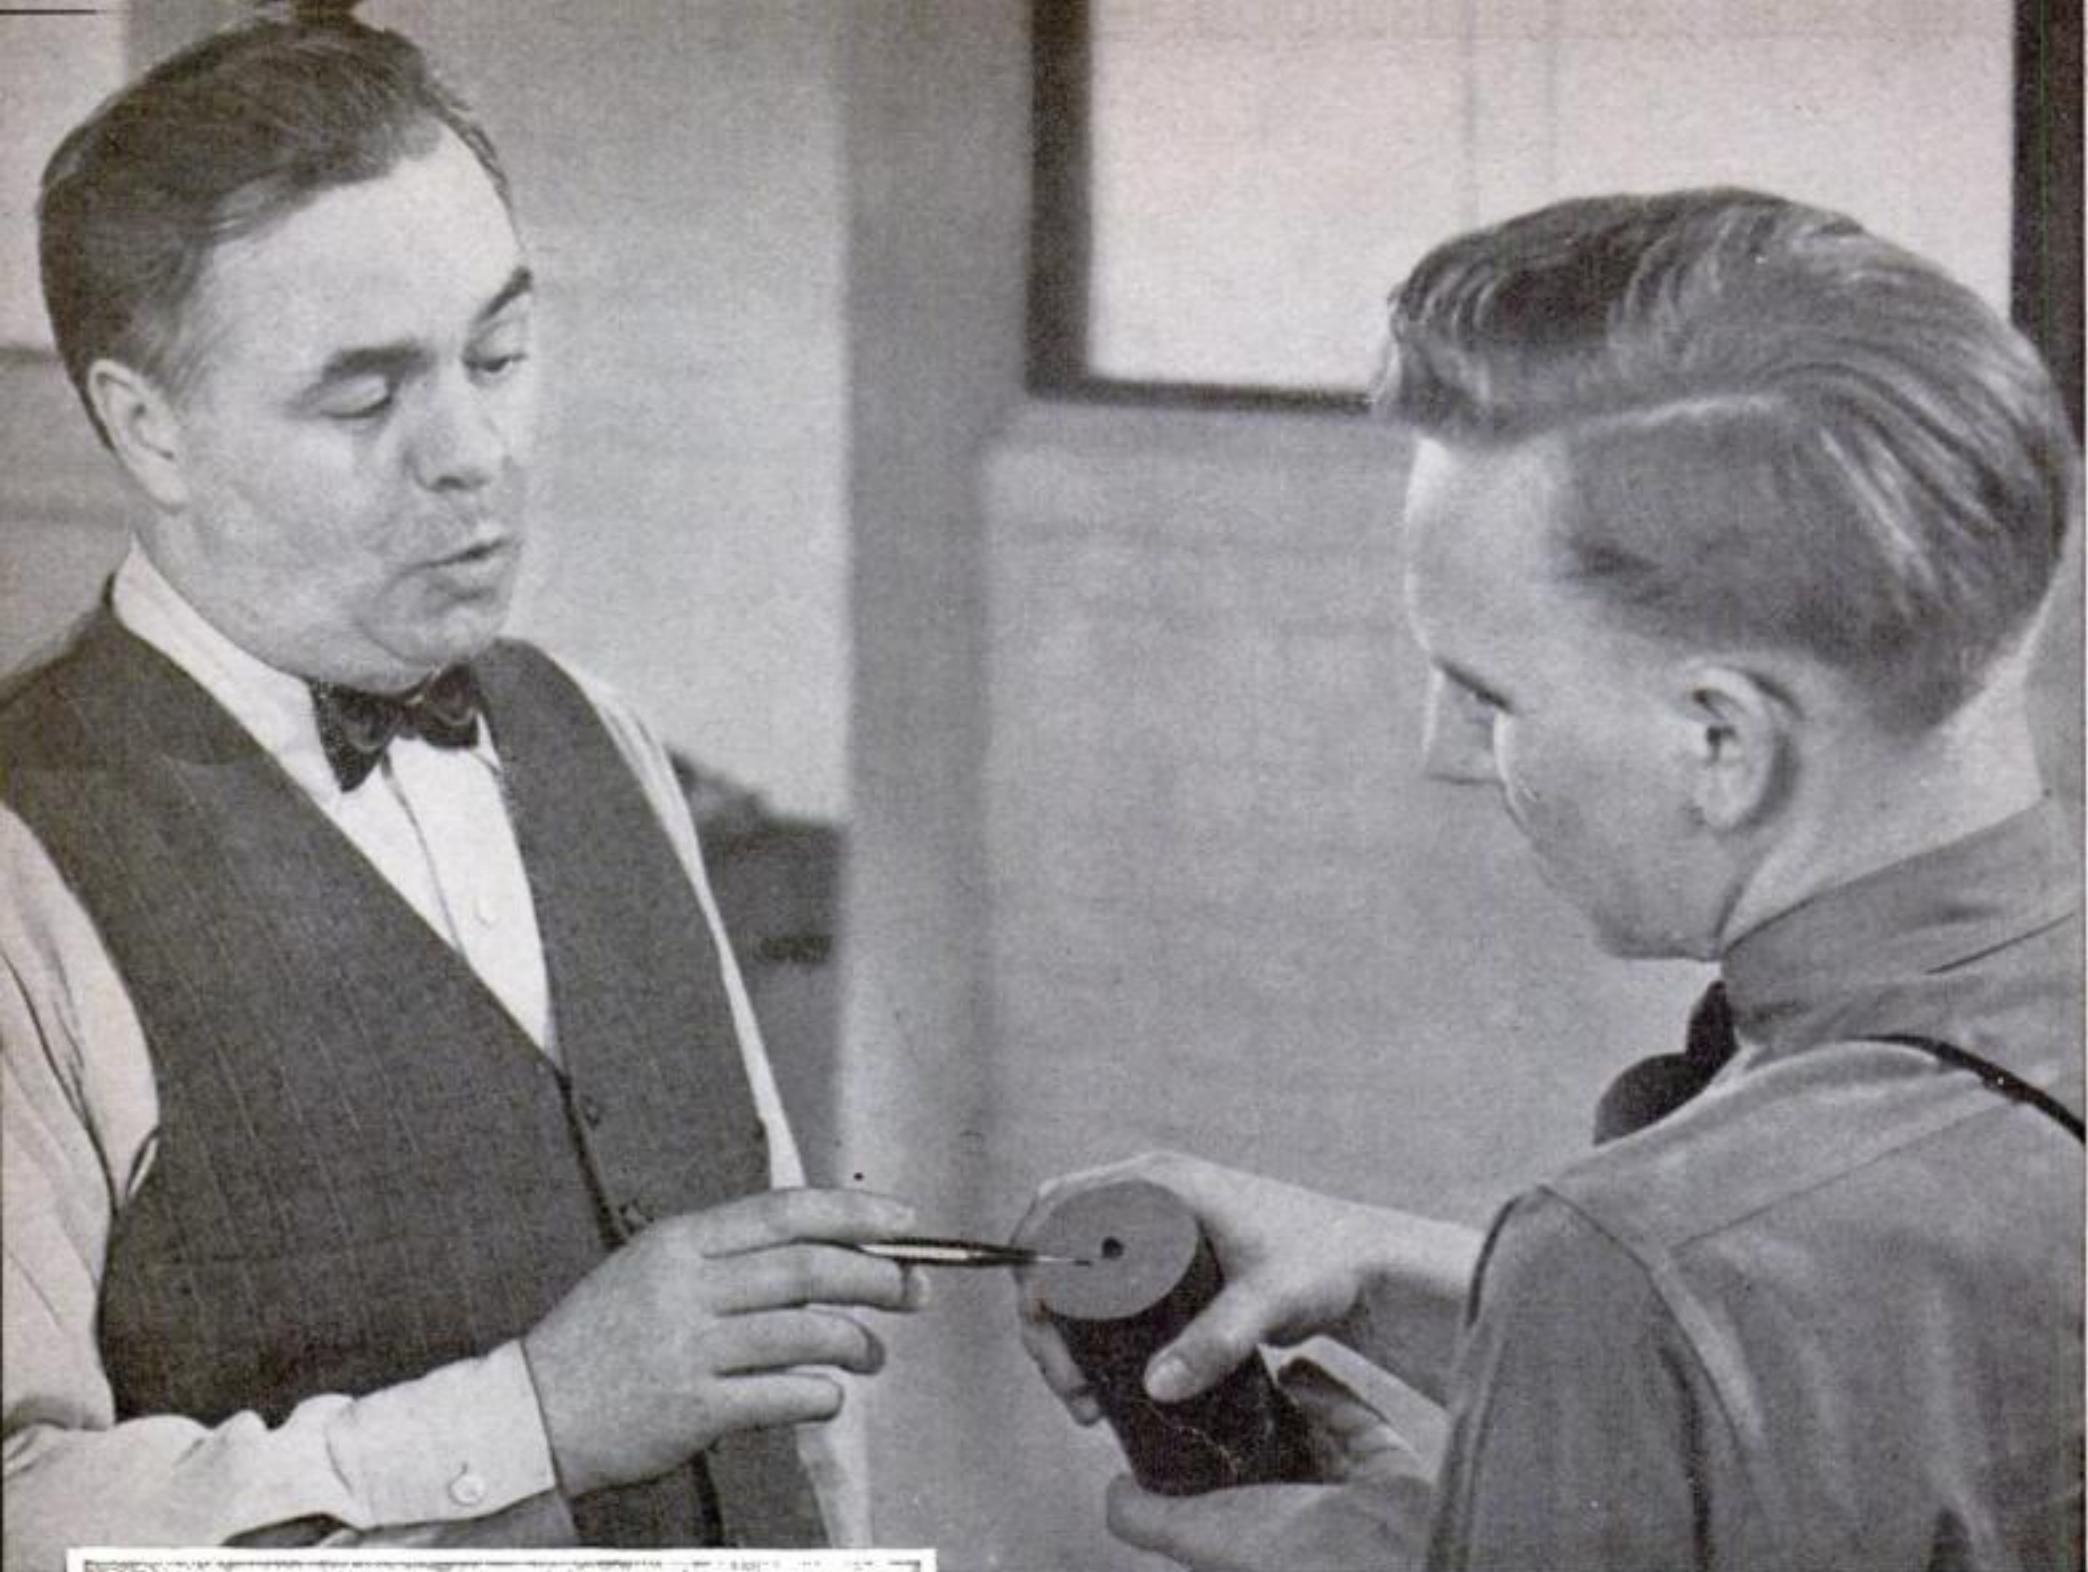

MACHINISTS FOR WAR WORK

1 "Here is that gear-blank job for you to start on, Roy," says the foreman as he hands the rough stock to the machinist. "As you see, it's already centered . . .


Turning Work of

*From the U. S. Office of Education Training
Film, "Turning Work of Two Diameters"*

Whether you're preparing for defense work or already in it, your advancement will depend on what you know. "Learn more to earn more" is a good slogan these busy days. To train war workers in the fundamentals of machine-shop practice, the U. S. Office of Education has prepared a series of 16-mm. sound films, one of which provided the material for the following article. These motion pictures, distributed for the Government by Castle Films, are of inestimable value to the shop student and beginner. Don't fail to see them if they are being shown in your community or at the plant where you are employed.


ALL the power that drives America's mighty war machines is transmitted through wheels of steel. These must be carefully designed and skillfully machined. In making the spur gear and shaft of a U. S. Army "blitz buggy," for example, time is saved and strength and precision are gained when both the shaft and gear are turned from a single piece of steel, eliminating the use of fragile pins, keys, or splines, such as would be required to lock the gear on the shaft if the two parts were produced separately.

The blank for this unit must be turned on an engine lathe, after which the teeth can be cut by a milling machine. A piece of rough stock in the capable hands of the lathe operator and a drawing from the shop foreman's desk are all that is needed for the making of the blank. The lathe job requires

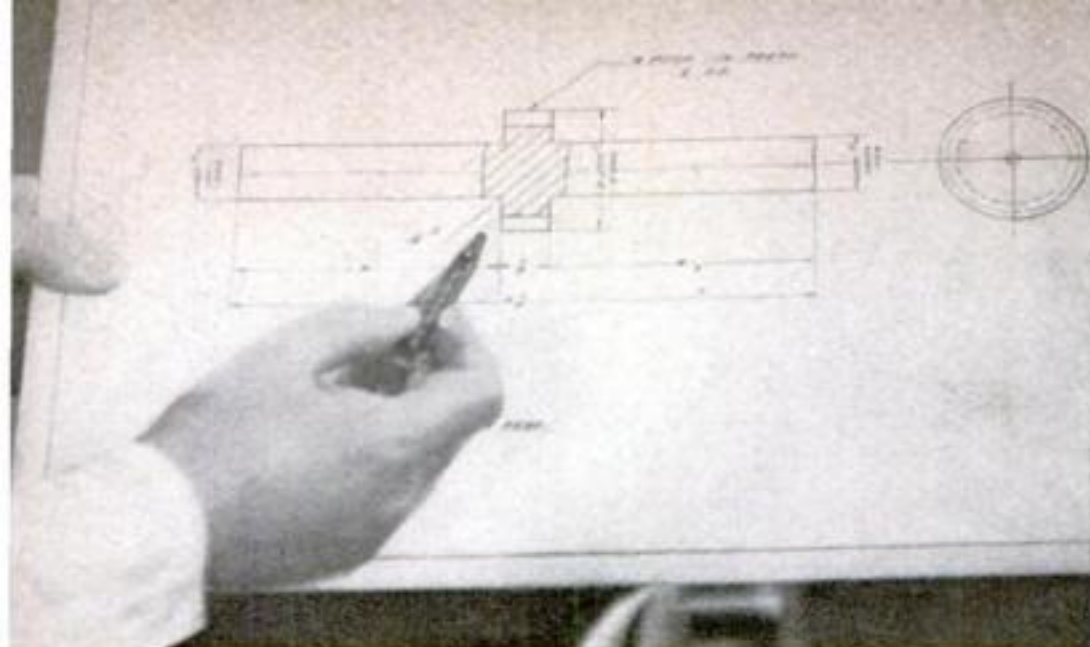

2 "Let's look at the drawing together," he goes on. "Notice that the collar diameter is $2\frac{1}{4}$ ", and that it is $\frac{3}{4}$ " wide, with tolerances as shown . . .

4 Roy first measures the stock to make sure it is big enough. Then he studies the drawing, notes diameter tolerances, and decides the order of cuts

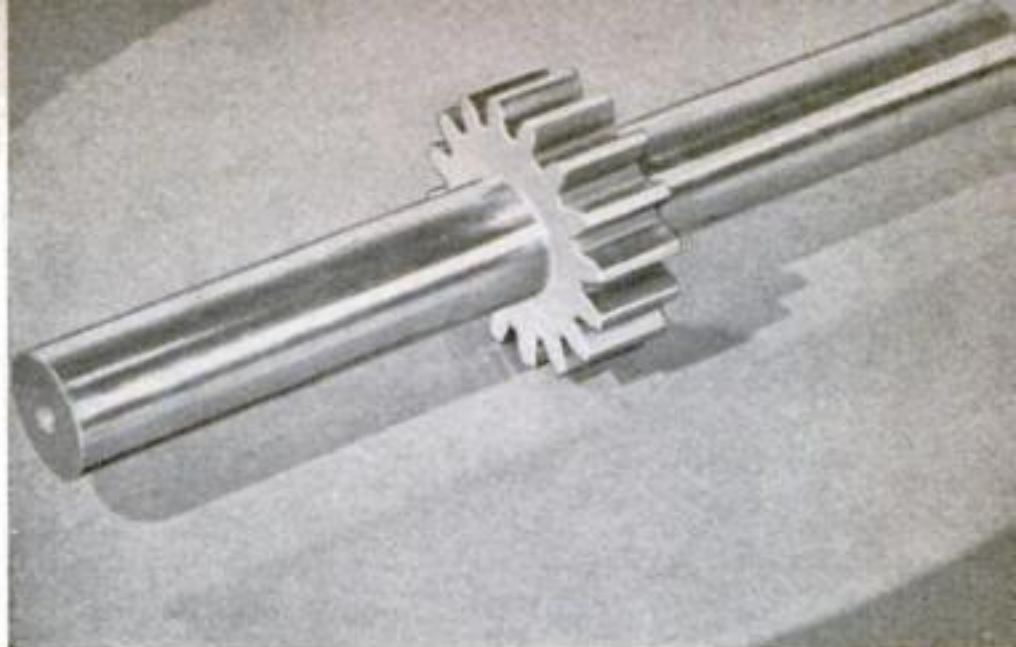

3 "On the finished piece, both shafts are 1" in diameter and 4" long on each side. Be sure to finish up fillets where the collar joins the shaft."

5 Using the right size of lathe dog is important. Roy picks one to fit the work closely, clamping it to one end of the stock with the tail facing out



Two Diameters

turning a piece of two diameters, and the collar that will later become the gear must be of a specified width and diameter and should be finished with fillets where it joins the shaft. The accompanying series of photographs shows step by step how the blank is turned.

The rough stock is a piece of machine steel, $2\frac{1}{2}$ " in diameter and 9" long, already centerdrilled. The foreman gives it to the operator and turns over a print of the drawing to him, pointing out the more important features of the work. As always, the machinist's first job is to study the drawing and determine the order of the cuts. Then he places the drawing on a blueprint board where he may refer to it conveniently, cleans and oils his lathe, sees that his tool rack is in order, and clears the floor of obstructions. As an efficient operator, he is dressed with due regard for his personal safety, with collar buttoned, sleeves rolled high, necktie tucked into his


shirt, and hair combed neatly and in place.

The machinist measures the stock, noting that the collar diameter must be brought down to $2\frac{1}{4}$ " and the shaft diameter to 1", with tolerances of .004" on the collar and .002" on the shaft. The collar width is $\frac{3}{4}$ ", the shafts are 4" long from each collar face, and the piece is $8\frac{3}{4}$ " long over all. He then selects a dog to fit the work—one neither too large nor too small—making certain that its tail is pointing to the headstock. He cleans the center holes, and lubricates the one to go on the tailstock center. Then the work is mounted in the lathe, and the tailstock spindle wheel is adjusted so that the piece turns freely but not loosely between centers.

Since the stock is rough, a truing-up cut must first be taken. The tool required for this must be sharp and properly ground so that it will remove stock rapidly. After a short trial cut is made, the piece is calipered and found to be $2\frac{1}{2}$ " in diameter. Now the




6 After carefully lubricating the center at the tailstock end, he mounts the stock between centers and brings the tailstock center up. The dog tail is in the slot of the faceplate, and the work should turn freely

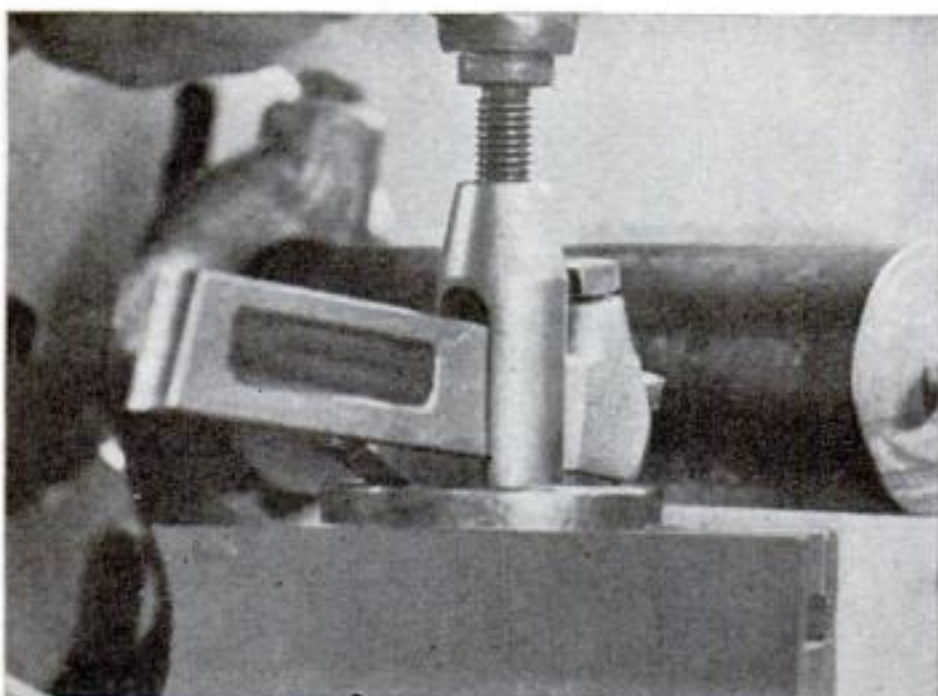

7 A correctly ground roughing tool, used to make the first cut, is adjusted in the tool post, with the cutting point set just above the center of the stock. For safe turning, there must be a minimum of overhang

8 The tool post is turned to bring the tool bit at a right angle to the center line of the work, which is revolved slowly by hand to make sure that all is clear. With speeds correctly set, Roy makes a short trial cut

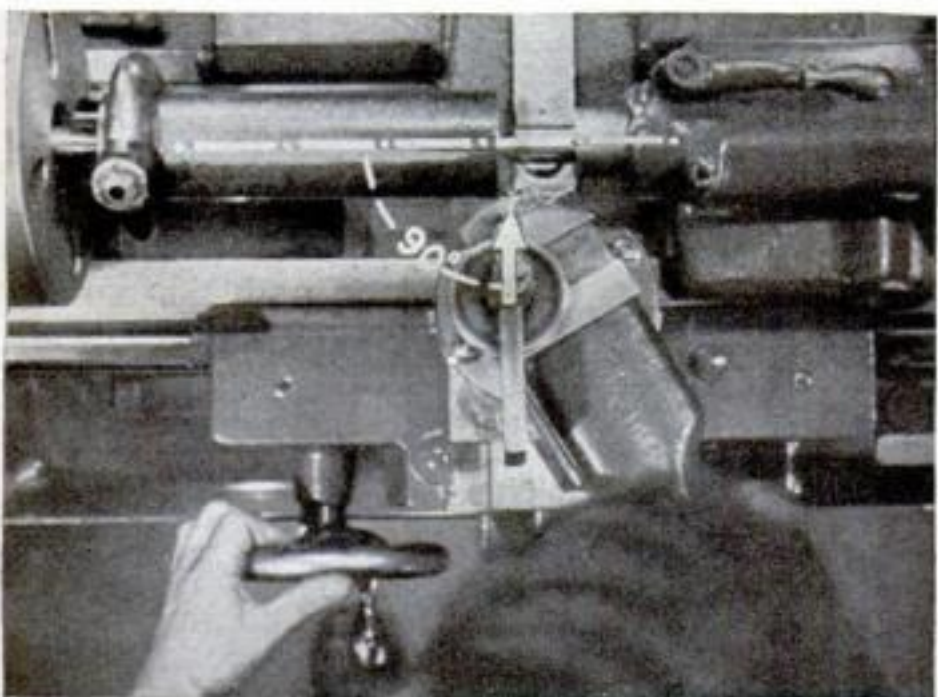

operator's problem is to bring the work down to the required $2\frac{1}{4}$ " diameter of the collar, which is the largest part, plus about $\frac{1}{32}$ " allowance all around for the finishing cut to be made later. This may be accomplished by setting the depth of the rough cut at $\frac{3}{32}$ ", or .093", thus reducing the total diameter by $\frac{3}{16}$ ". This cut is made as near to the revolving dog as possible, but always out of danger of actual contact. Care must be taken to keep the tail center well lubricated and properly adjusted during the cut to keep the work from expanding and binding between centers as it becomes hot.


To obtain a reference point for the width of the collar and the length of the two parts of the shaft, one end of the work is next faced off. A rule is then used to measure from this end, and the tool is set for turning a nick or groove that marks one face of the collar. Several roughing cuts follow to bring the shaft down to rough size, leaving $\frac{1}{32}$ " for the finishing cut. Then the face of the collar is turned, leaving the same margin for finishing, as well as a $\frac{1}{16}$ " shoulder for the fillet.

A preliminary finishing cut can be made with the roughing tool to within .010" of the final size. Then a finishing tool is used to take a cut of .005" (remember that twice the depth of the cut is removed from the diameter of the work). For facing the collar—the operation that brings this end of the shaft to finished length—a radius tool is used. Only the fillet remains to be done on this end.

The work is now reversed between centers. Exactly the same operations follow as were used in turning the other end. Then, after a finishing tool has brought the shaft and the collar to their correct diameters, the collar is faced to the required width, again leaving only the fillet allowance. Afterwards the end of the shaft is faced with a finishing cut to the exact length specified in the drawing, the steel rule being used to measure from the finished face of the collar.



Finally the fillets, which add strength to the shaft where it joins the collar, are turned with a radius tool, which is set on center and used first on one side of the collar, then on the other. This completes the machining of the piece, and it is then checked against the drawing for possible errors.

When inspection is completed, the blank is ready to go to the milling machine to have the gear teeth cut.

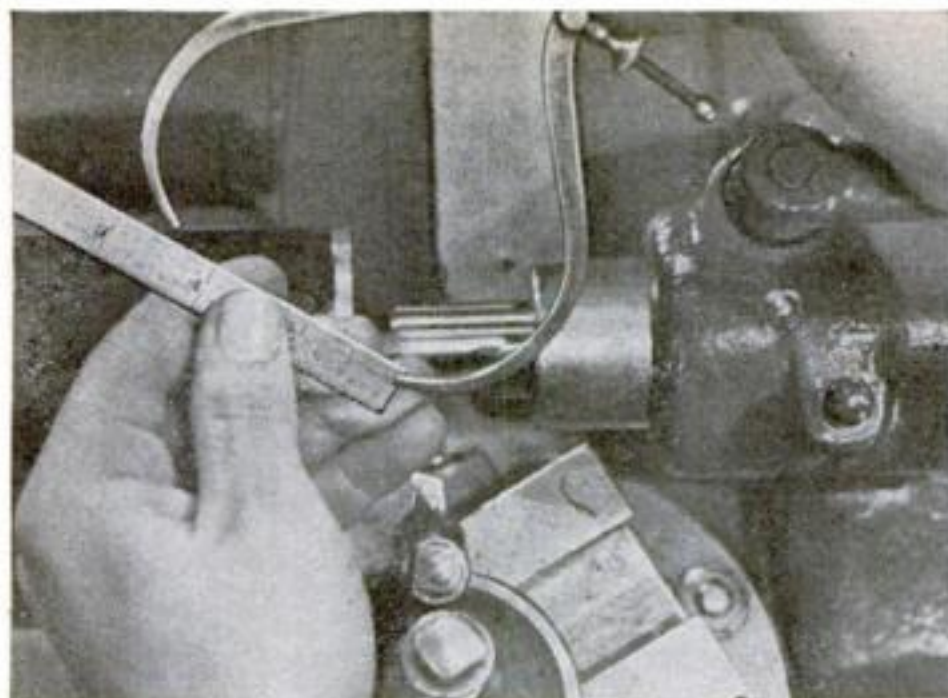

9 The cut is stopped after it has proceeded about $\frac{1}{4}$ ". The diameter is calipered and found to be $2\frac{1}{2}$ ". The finished size is to be $2\frac{1}{4}$ ", but $\frac{1}{16}$ " more ($\frac{1}{32}$ " all around) must be left for the finish cuts

10 Since the tool is set in only one half as much as the amount of stock to be removed, Roy will adjust the feed and speed for a rough cut of $\frac{3}{32}$ ", or .093", which will remove $\frac{3}{16}$ " from the diameter

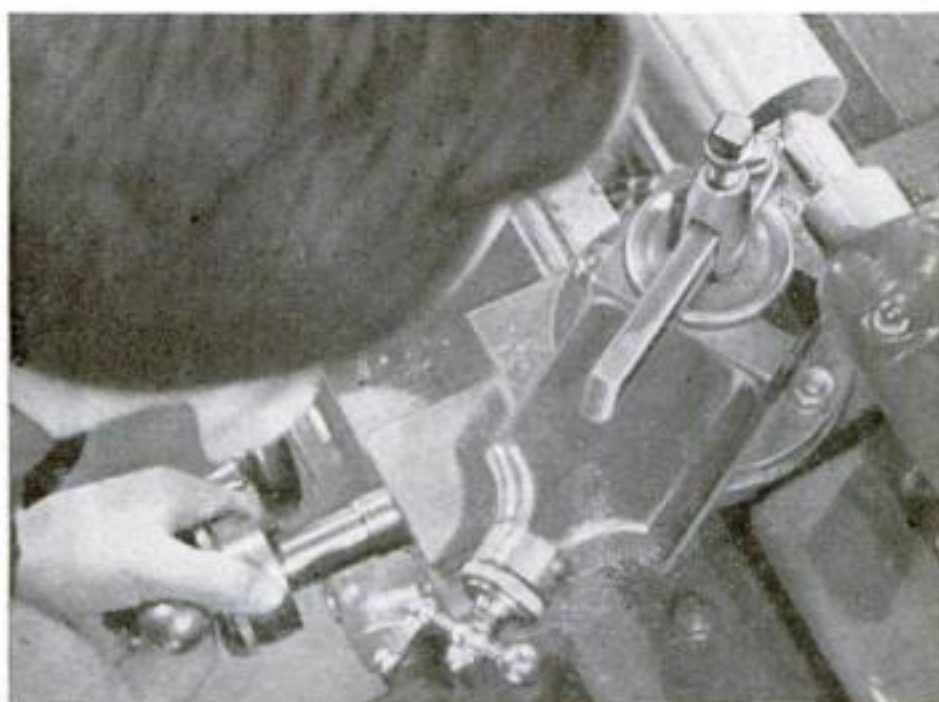
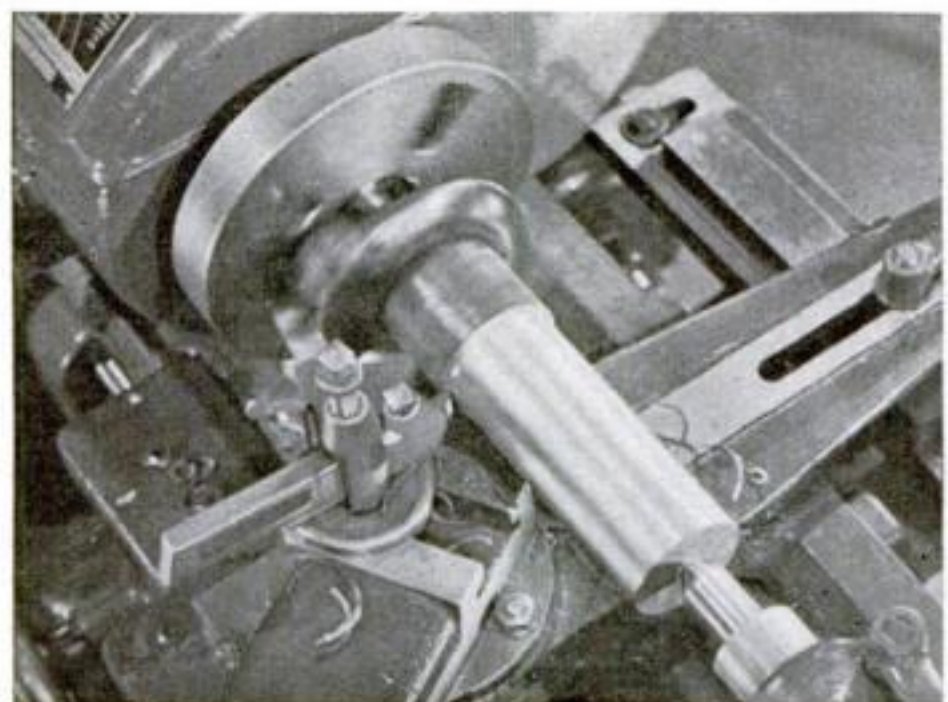



11 The new cut is checked with calipers, and, if correct, is continued up to a safe point from the whirling dog. Care should be taken to keep the tail center oiled, and set neither tight nor loose

12 Before accurate measurements of length can be made, the end must be faced off as a point of reference. For this, a facing tool is used, set so that the cutting edge is turned in toward the work


13 The drawing shows the shaft to be 4" long. Roy measures this from the end just faced and sets the tool exactly at the end of the rule. He starts the machine up to cut a groove at the desired point

14 This groove marks the face of the collar, but some excess will have to be left on this face for finishing, so the rough cuts that are to follow will be made only to the right of the groove's edge

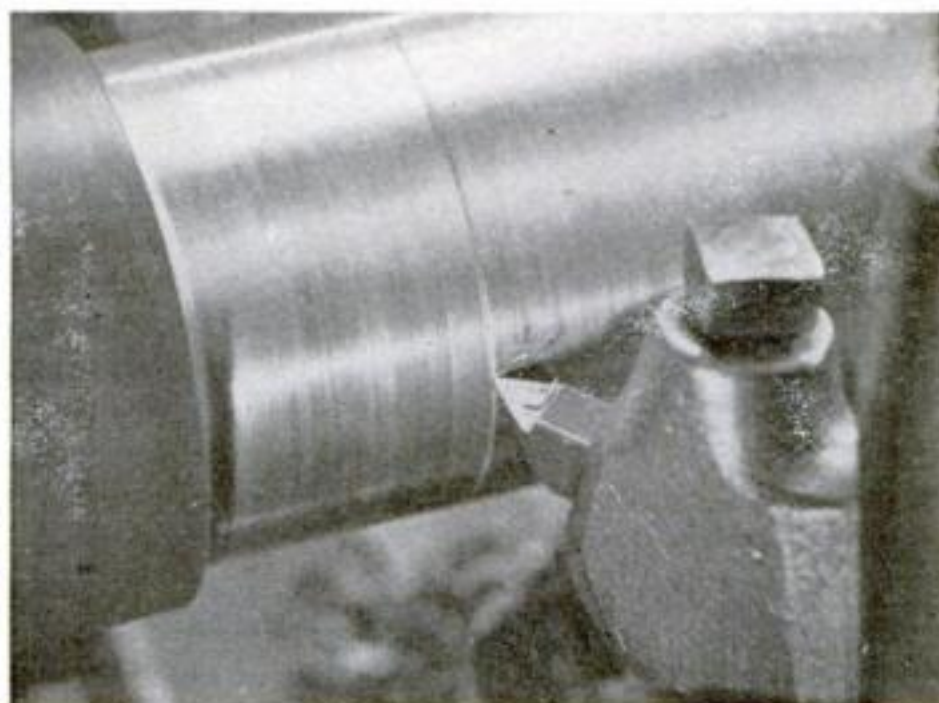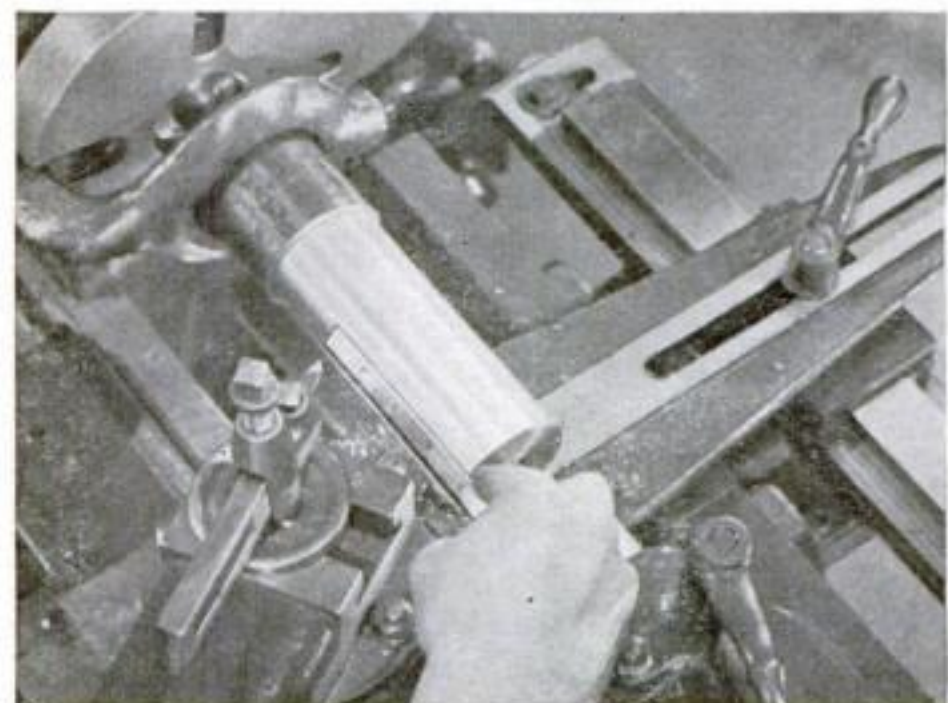


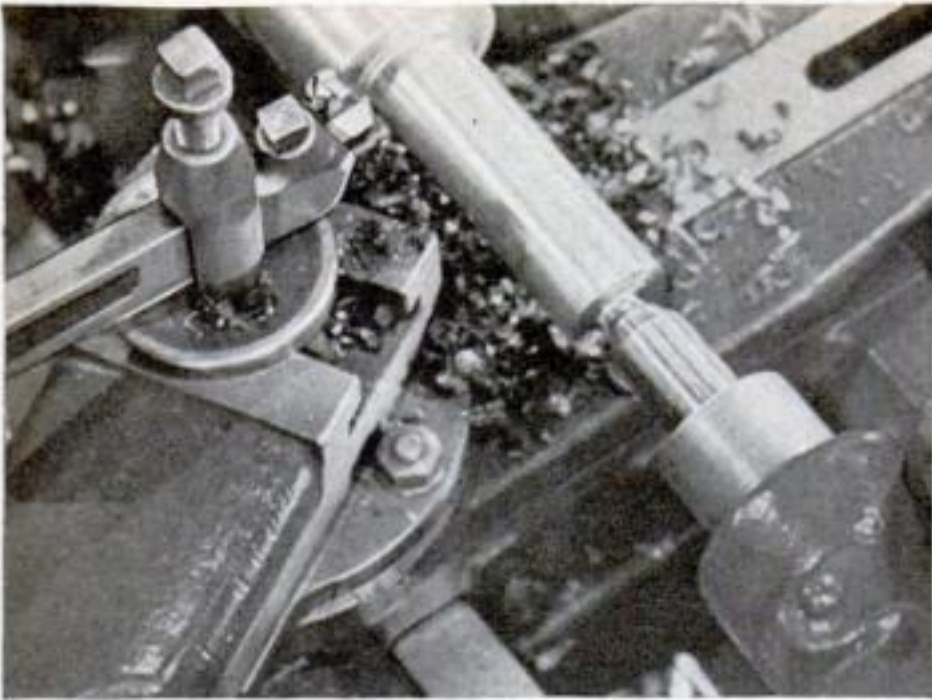


15 The shaft is to be 1" in diameter, plus .002" tolerance. Roy makes rough cuts to begin the process of bringing it down. The last one must leave 1/32" all around for the finishing cut made later on

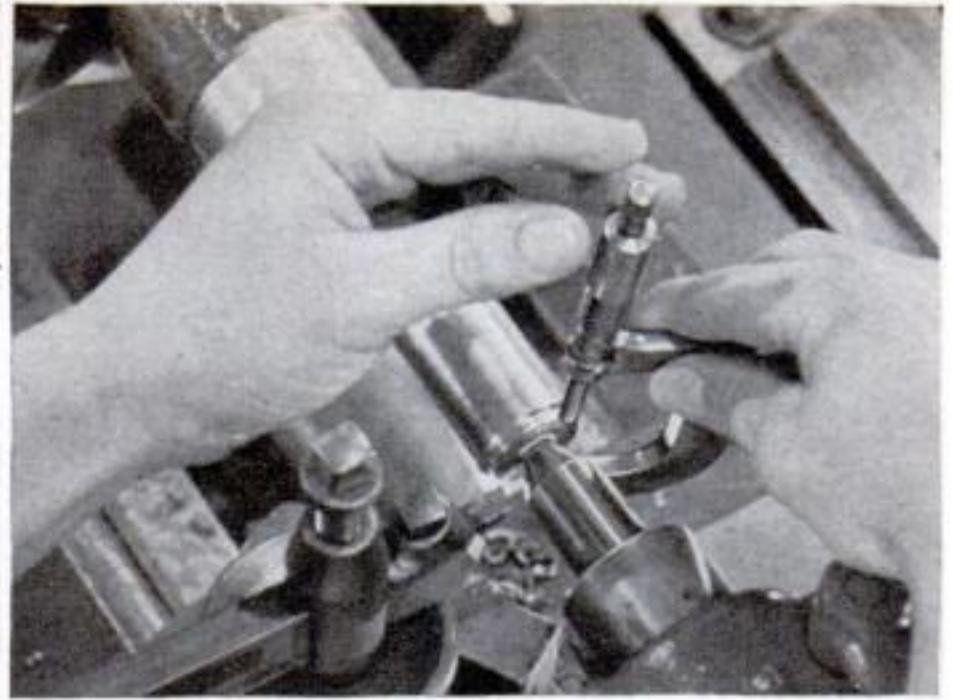

16 After this final roughing cut is started, it is checked with a micrometer to make sure that it is not too deep. If it is satisfactory, this cut is extended all along the shaft to the marking groove

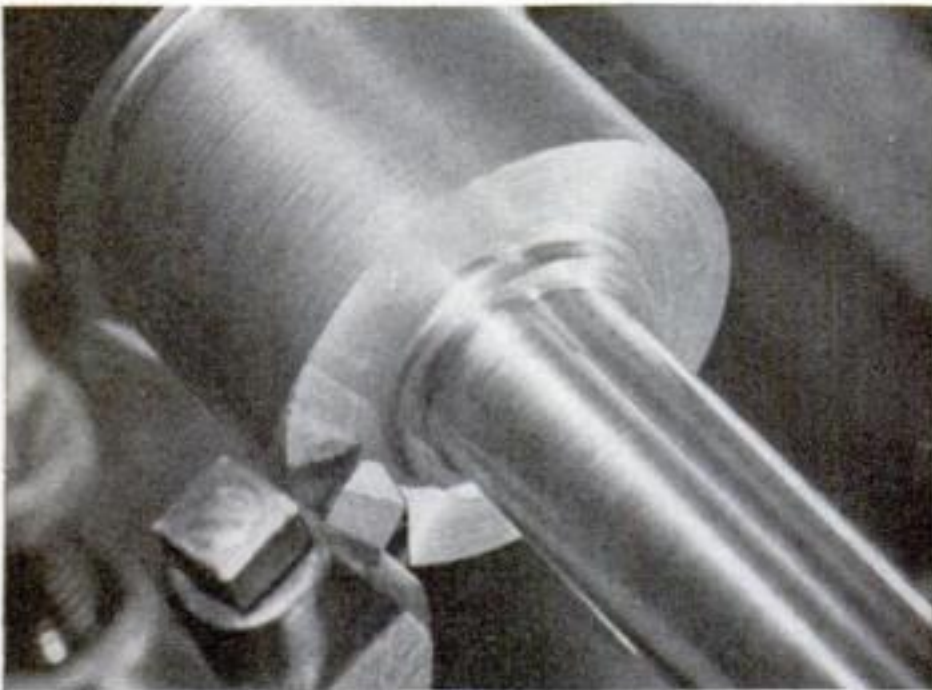



17 The face of the collar is still uneven and has to be machined. The same roughing tool is fed in by hand against the face of the collar. Note the stock left for the 1/16" fillet to be turned later

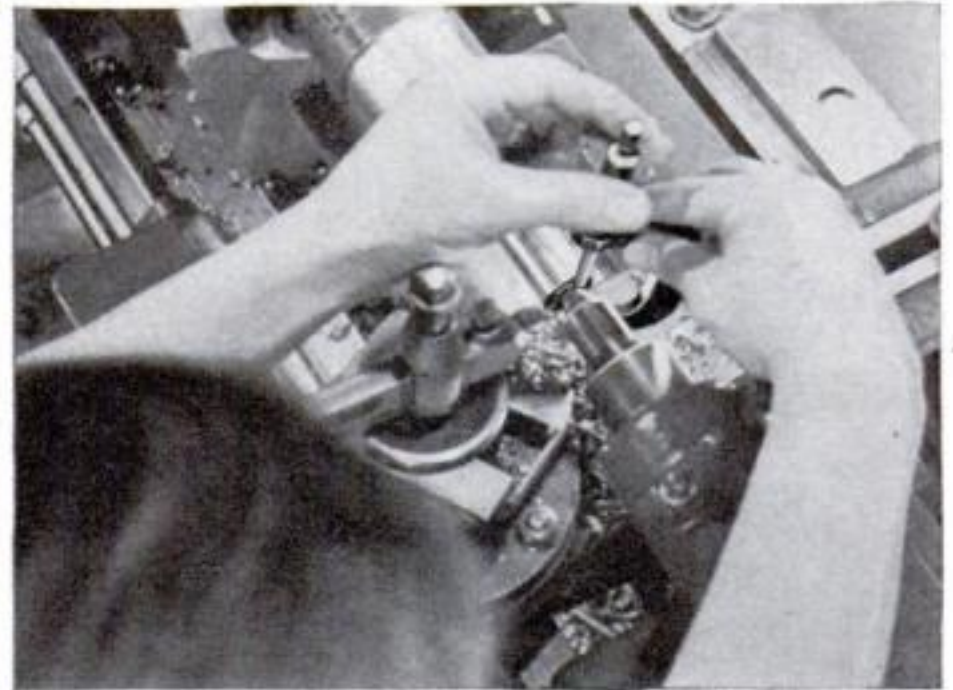


18 Roy is now ready for the finishing cuts. The first one can be made with the roughing tool to within .010" of final size. After starting the cut, he again carefully checks with a micrometer


19 A finishing tool is now needed for the final cuts to the tolerances specified. Here below, from left to right, are bits ground for roughing, finishing, parting, threading, and radius forming

20 On this finishing tool the nose is flat and narrow, while the end relief angle, or heel clearance, is about 10 degrees. Note particularly the lip which gives the tool a fine cutting edge

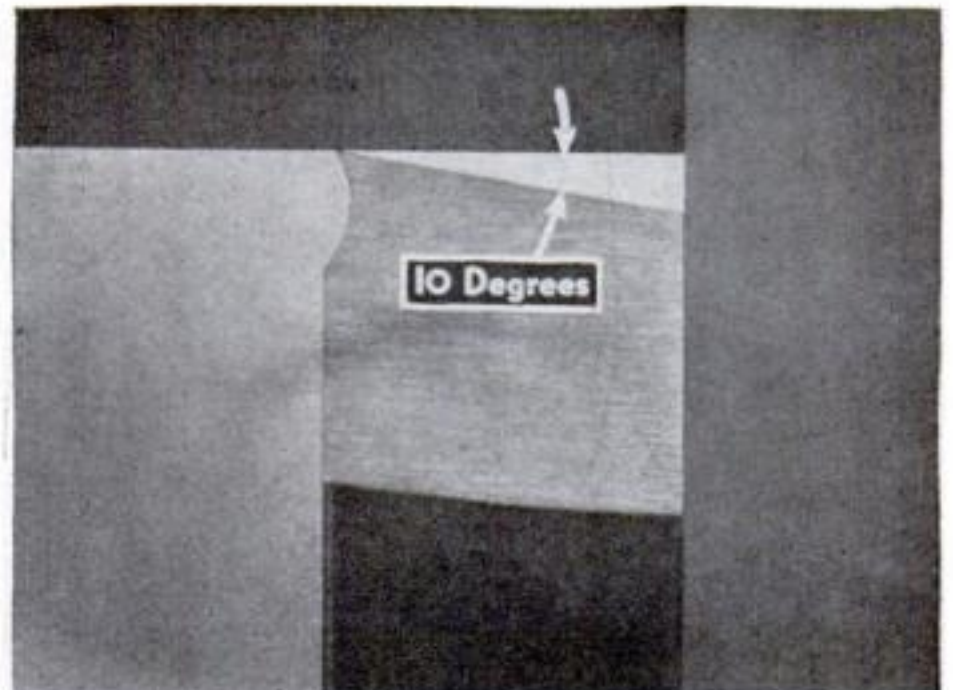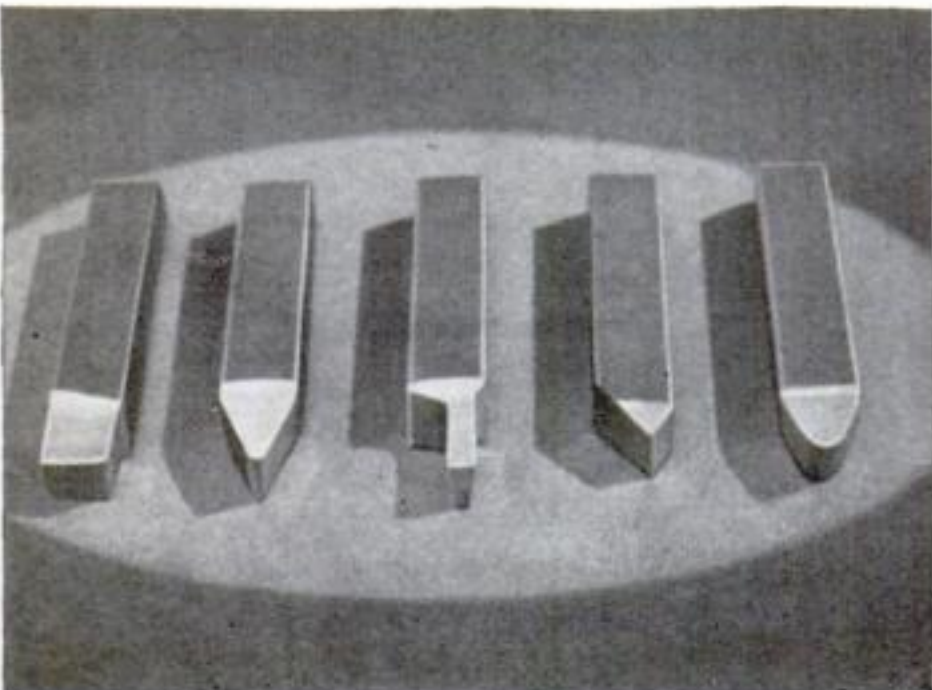

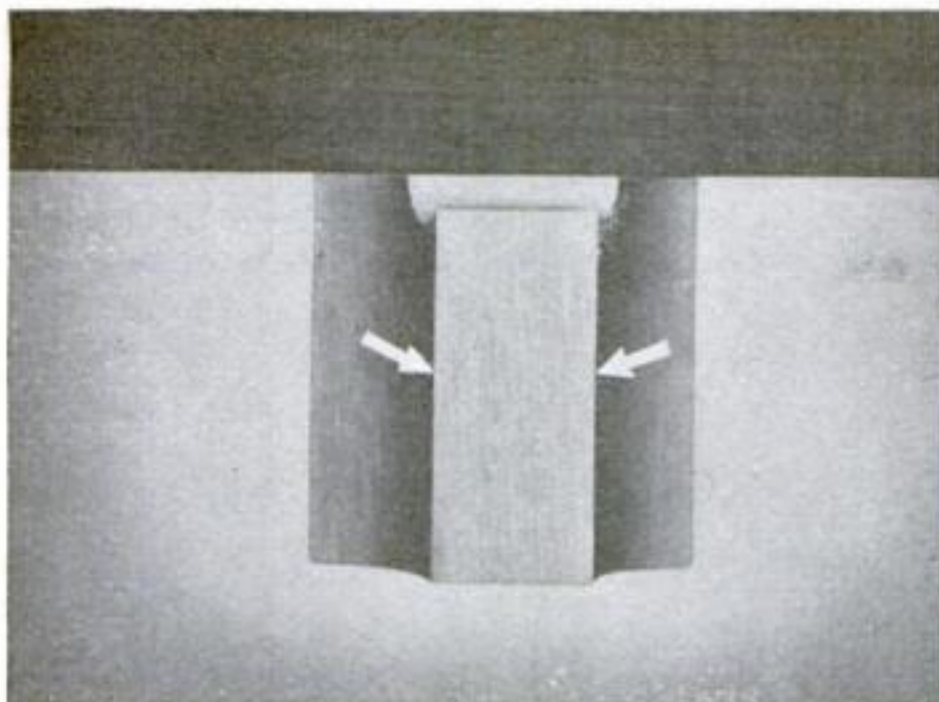


21 As seen from the cutting edge, arrows show the sides of the tool without any side rake or relief angle. The nose must be set parallel to the work and on dead center, while the cut is .005"

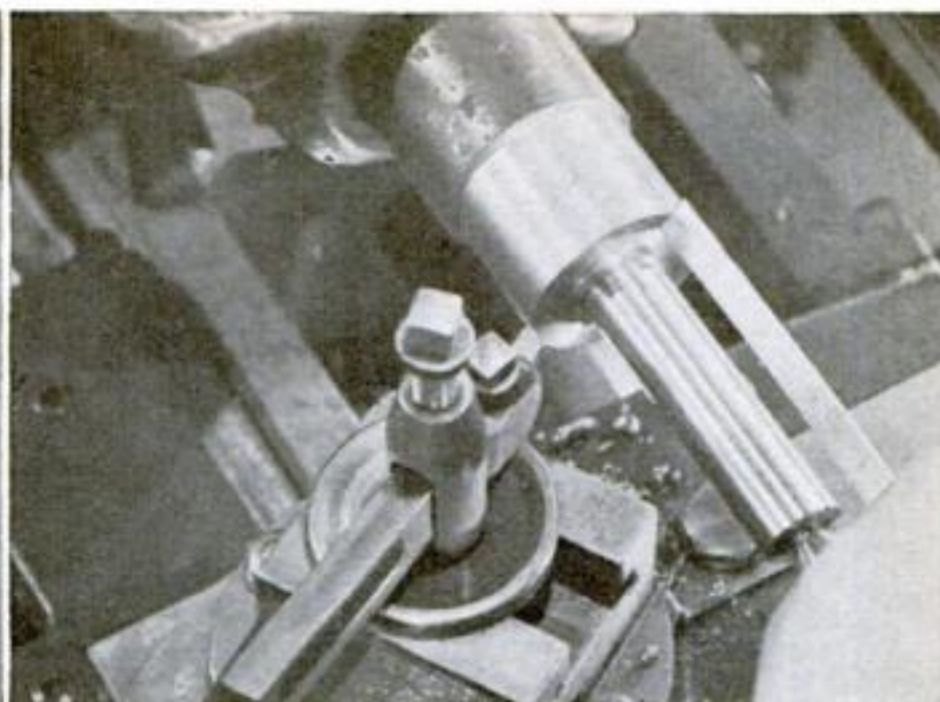

22 A radius tool, set at a convenient angle, is used to face the collar. Measuring the length of the shaft from its trued end with a steel rule, Roy sets the tool against the collar by hand feed





23 The piece is taken out, and a smaller dog is clamped to the finished end with a thin band of soft metal to prevent surface marks. The work is remounted, and the other shaft end rough-turned

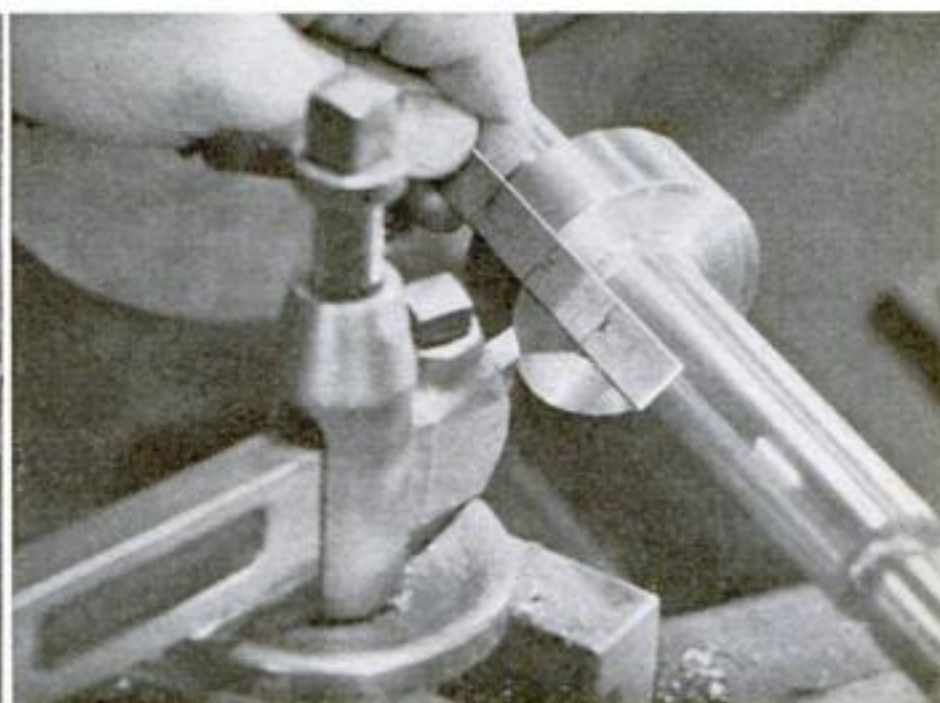


24 Finishing cuts bring the shaft and collar to correct diameter. Roy measures the width of the collar, and with a rough facing cut and a light finish cut brings it to size, plus fillet allowance

25 The other end of the shaft is measured from the finished face of the collar, and is now being machined to its exact length. Arrow shows the facing tool making the cuts at the end of the shaft

26 A radius tool is used to turn the fillets. The carriage feed is operated with the left hand, the cross-slide feed with the right. Finally, the work is once more checked against the drawing

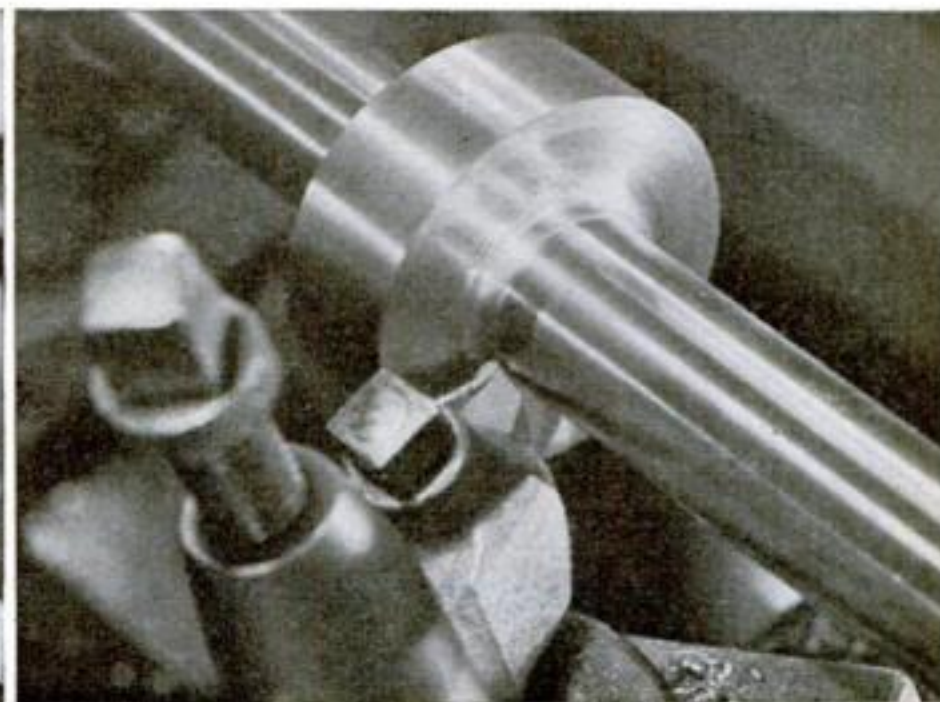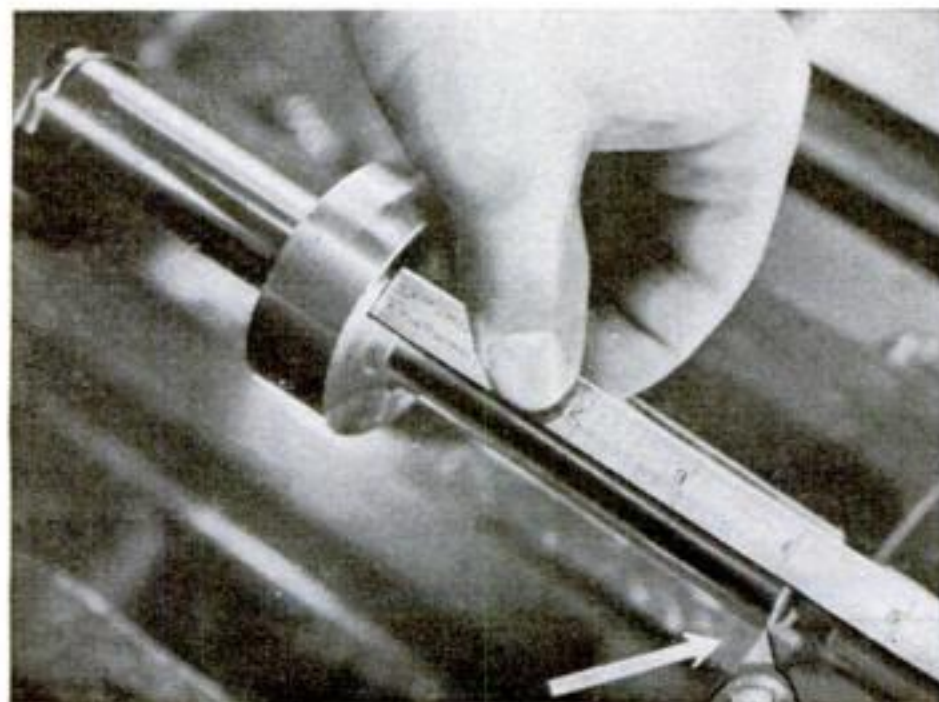


WORKING TIME: TWO EVENINGS

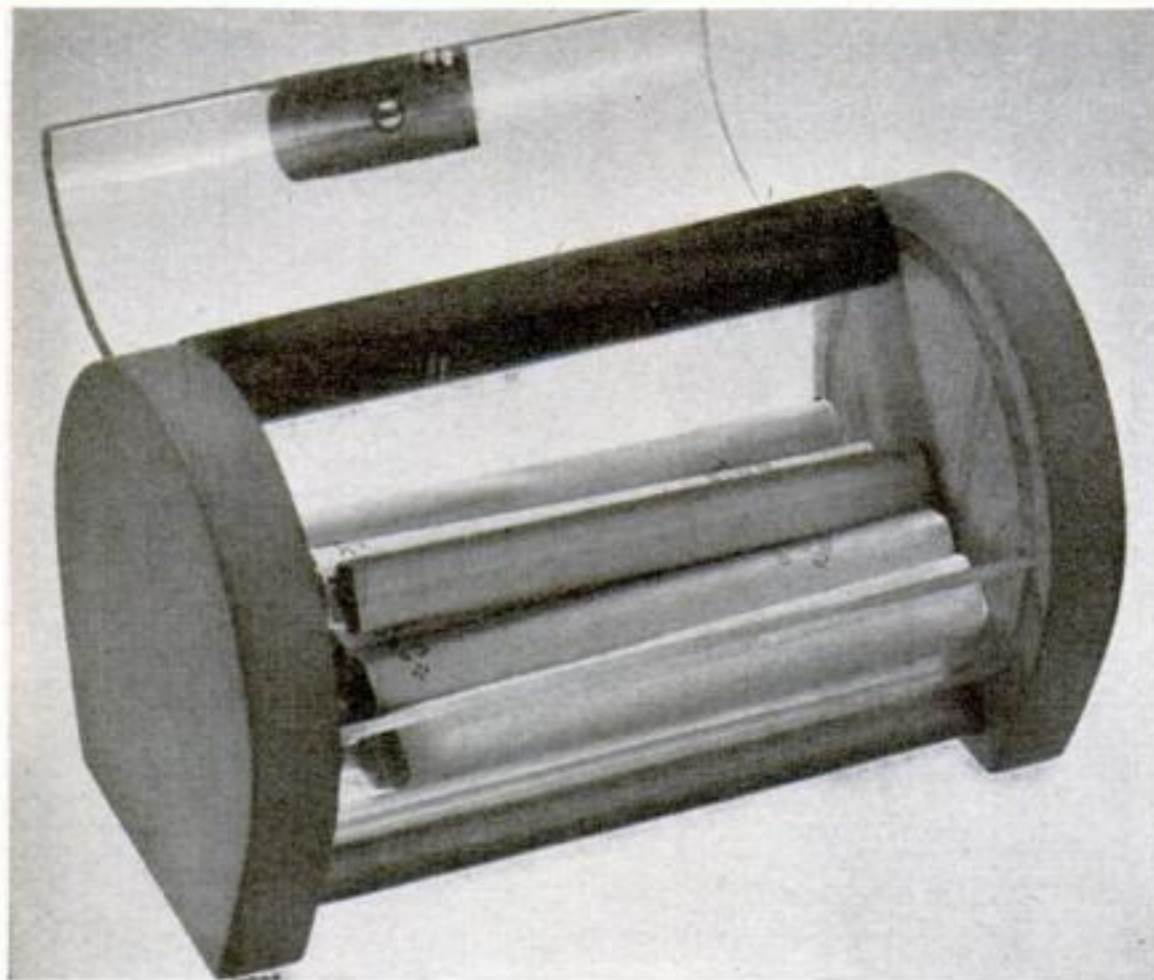

Made from clear plastic, maple, and walnut, this cigarette box is a handsome project involving several interesting operations


Many craftsmen have scraps of plastic left over from completed work. Here are three projects that can be made from such odds and ends. None calls for a piece longer than 4", yet all show off the beauty of this material to the full.

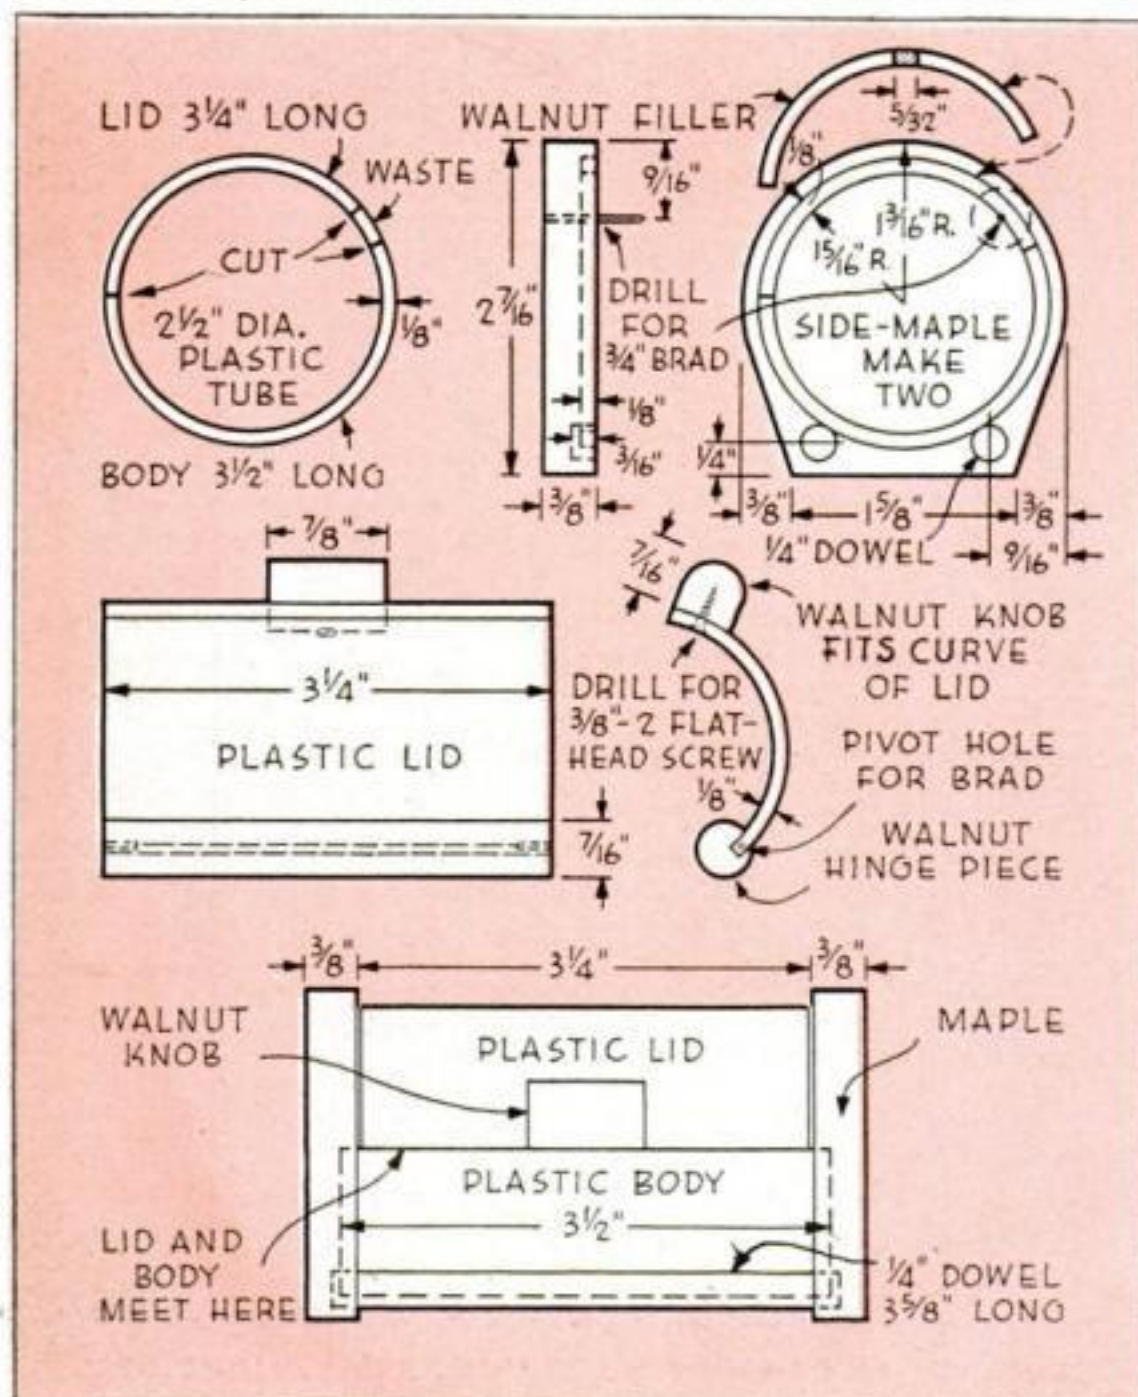

CIGARETTE BOX. Clear plastic, maple, and walnut are combined in this unique occasional piece, displaying both the plastic and the woods to good advantage. A clear-plastic tube 2 1/8" in diameter and 3 1/2" long is sawed apart as shown in the drawings at the left to form both the body and the lid. Lay out two maple endpieces, as shown, on 3/8" stock. Drill two 1/4" holes 3/16" deep in each for the dowel rails, which are also of maple; then cut out the 1/8" by 1/8" circular groove with a circle cutter, and finally cut and sand the outside to shape. Use the circle cutter also to cut a 1/8" by 1/8" walnut ring, from which filler pieces can be made to close those portions of the grooves alongside the lid.

Cut the lid to 3 1/4" in length, saw off a strip 3/8" wide along

A black and white photograph of a modern glass vase holding three roses. The vase has a spherical base with a horizontal band and three vertical stems. The roses are light-colored and have long, dark stems. The vase sits on a dark, rectangular base.


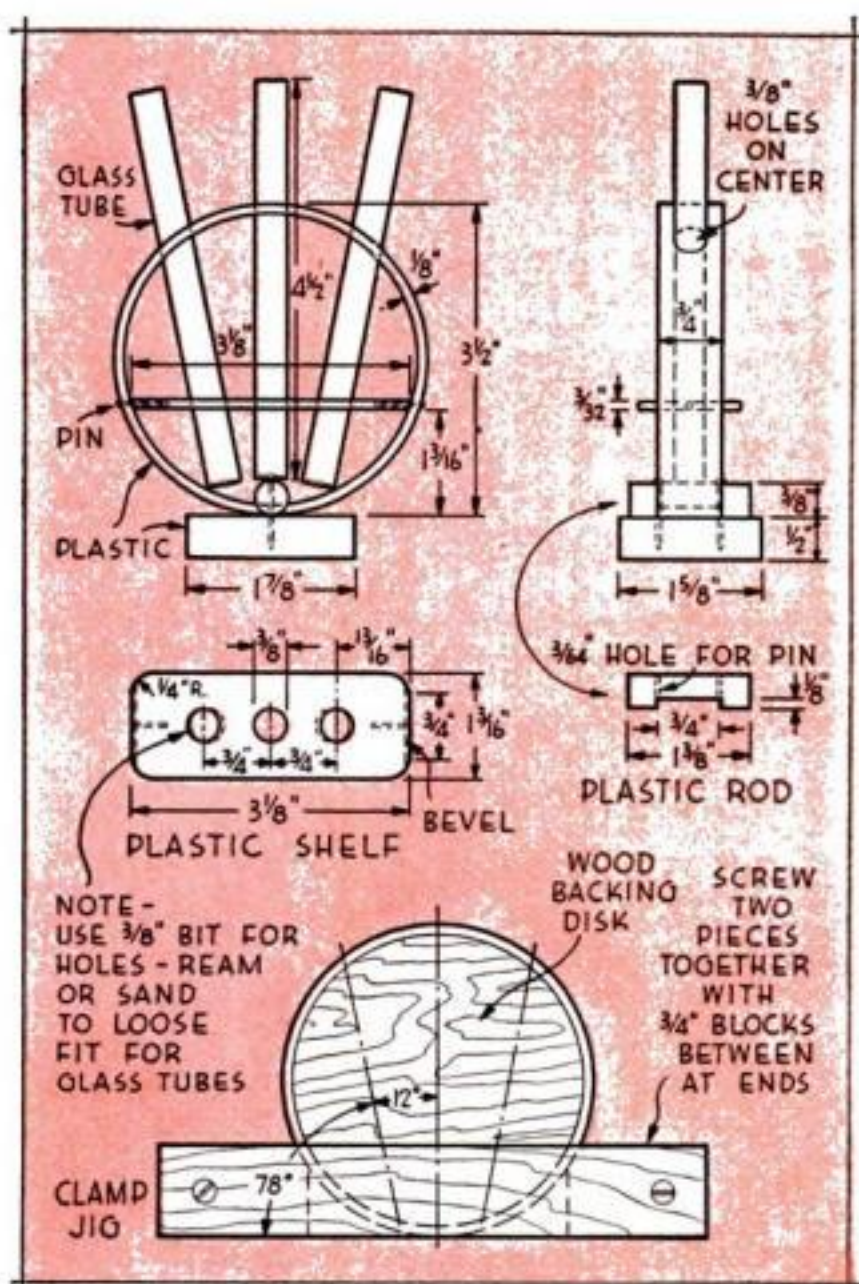


Assemble the ends, body, and dowel rails with cellulose or model-airplane cement. Fit the lid in place, and drill through the maple ends into the plastic—not the hinge piece—for pivot pins. Insert these, and fill the holes over them. Finish with three coats of wax applied to the wooden parts, rubbing well after each of the coats. Working time: 4½ hours.

A simple drilling jig will prevent break-

Note that the shelf length is less than the ring diameter. Round the corners, and bevel the short edges to fit inside the ring. Ream or sandpaper the holes to a free fit for the vases. Line up the holes by a trial fit; then drill a slightly undersized hole through each side of the ring into the shelf and press in a $\frac{1}{2}$ " escutcheon pin.

Sand all edges very smooth, and buff any scratches off the polished surfaces. The

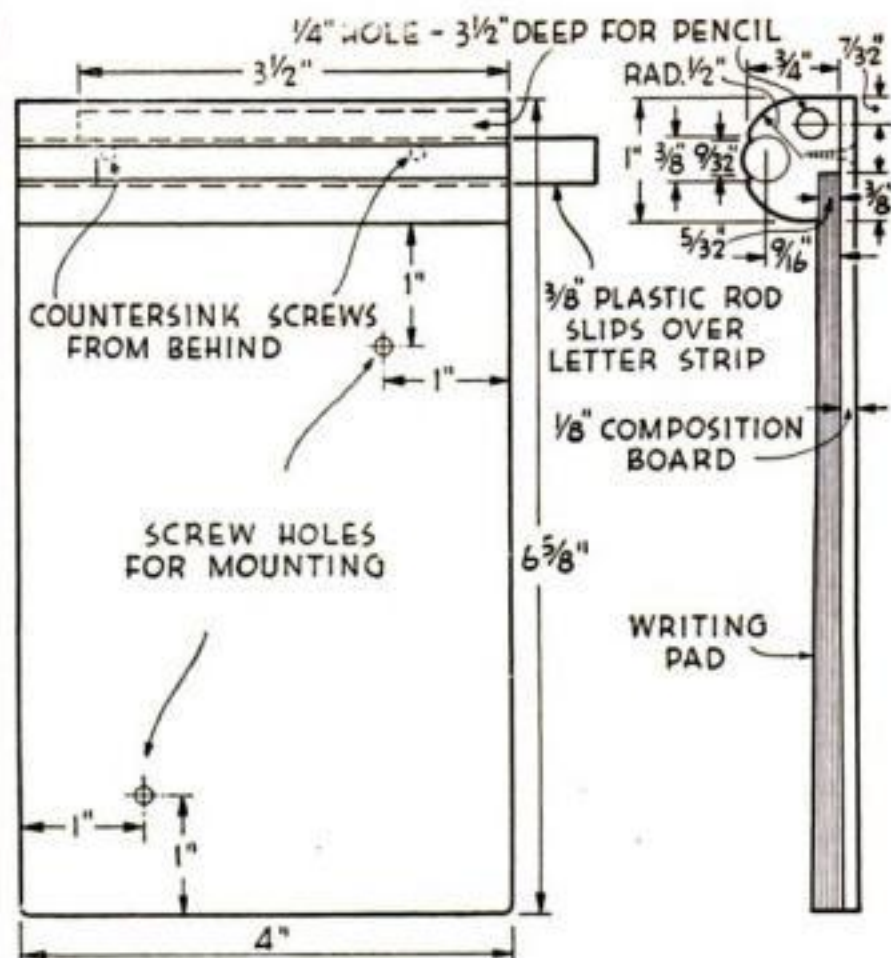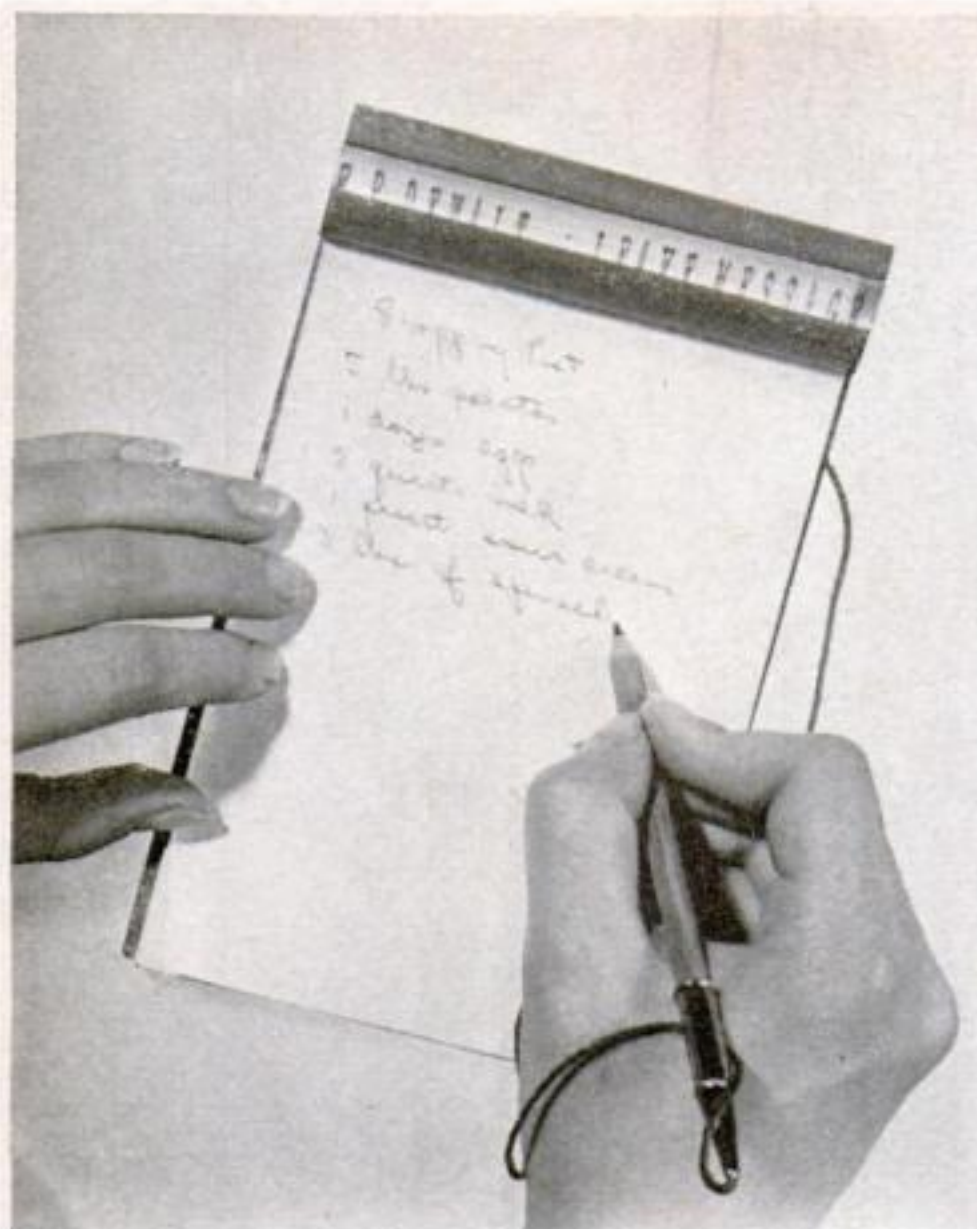

edges may be left unbuffed for textural contrast. Working time: 4 1/2 hours.

MEMO PAD. This is handy for kitchen reminders, an office desk, or messages from callers. The over-all size, 4" by 6 5/8", fits a 4" by 6" stock pad slipped into a 5/32" by 3/8" rabbet in the molded hardwood strip. Use a 1" by 1" by 4" piece of walnut, mahogany, or maple. Drill the 3/8" hole through

with a keen spur bit. Use fine sandpaper on a dowel to sand the hole so that a 1/4" wide strip of paper and a 3/8" clear plastic rod may be inserted together. Open out the hole with two saw cuts 9/32" apart, and then round off the outside to 1/2" radius. Drill a 1/4" blind hole in from one end to a depth of 3 1/2" for a pencil, which may be secured with string or fine chain. Screw the strip fast to a 1/8" composition-board back. Finish with two coats of clear lacquer, but apply none to the channel. Insert a typewritten strip and the plastic rod, which will magnify the lettering. Working time: 3 1/2 hours.

PLATING NONMETALLIC WORK

[ELECTRICAL]


THE plating of nonmetallic articles is generally thought of in connection with baby shoes, but other objects that can be encased in electroplated metal include flowers and insects, leaves and fruit, plaster casts, pottery, textiles, wooden handles, buttons, drinking cups, and so forth. A small wooden box or drawer pull can be more uniformly covered with metal by electroplating than by working metal in sheet form.

It is necessary first to treat the surface of the work so that it will conduct electricity. A rough method consists in coating the surface with spar varnish, then, when this is tacky, laying pieces of thin metal foil on it much as sign painters apply gold leaf. It must be patted into close contact if detail of the work is to be reproduced.

A better way of forming the conducting surface is to give the work a thin coat of wax (paraffin) or electrotypers' varnish. These must not be applied so heavily as to obliterate detail. The conductive powder generally consists of finely powdered graphite (known as plumbago or black lead) as used by electrotypers. Copper bronzing powder is also used; carefully applied, it allows faster plating. All grease must be removed from the powder by shaking it in a bottle with acetone.

The conductive powder is applied with a soft brush. Particular pains must be taken to see that all crevices are coated. Brush off the surplus after the work has taken on a shiny, thoroughly coated appearance. The cathode connection is best made by slinging the work in fine copper wires. Rinse it well in water before transferring it to an acid copper-plating bath. After the article has been plated with copper, it may be plated with some other metal if desired.

POPULAR SCIENCE MONTHLY SHOP DATA

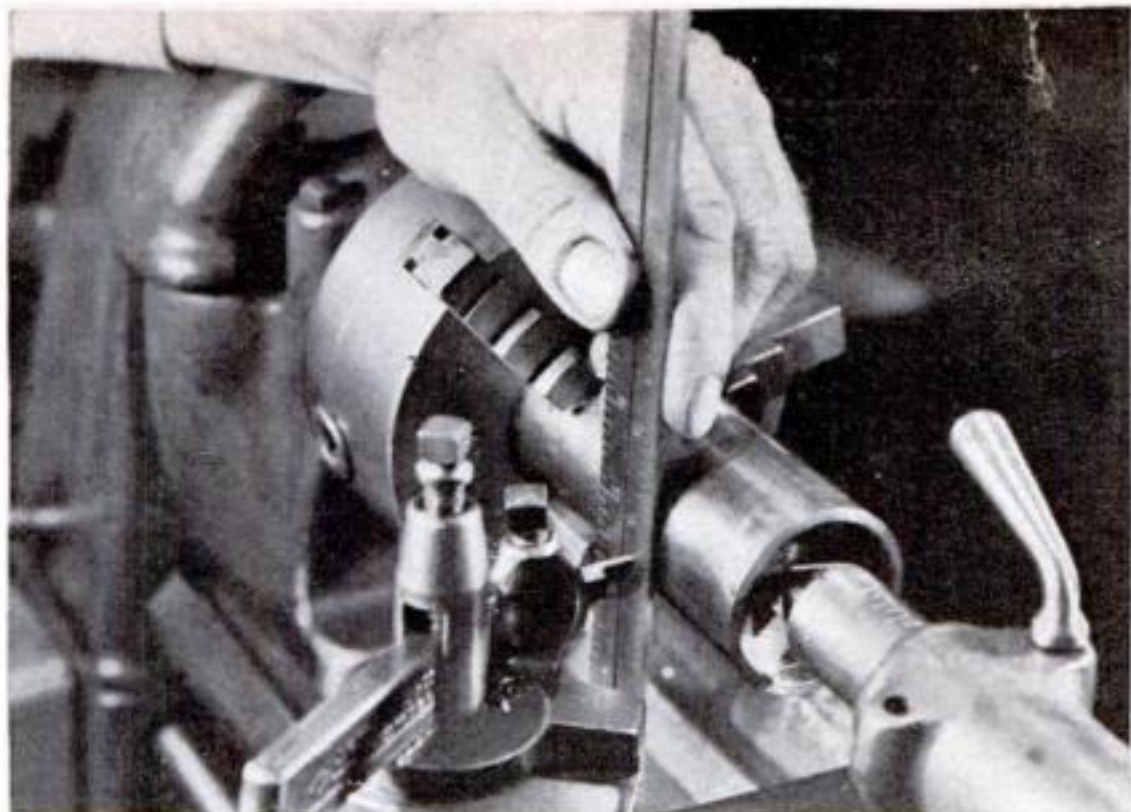

ADJUSTING THE CUT-OFF TOOL is generally considered one of the most difficult of lathe operations. The tool must be ground properly and adjusted to exact lathe center height. At the left is shown a quick and accurate way of doing this. A machinist's rule is used to measure up from the ways to exactly the height of either center, and the tool is set at precisely that height.—C. W. W.

NEW CUTTING OILS adapted to specific machine operations now eliminate in large part older trial-and-error methods of prescribing proper grades. They permit faster speeds and new methods of tooling, closer tolerances, and increased use of alloy steels with lower machinability ratings than metals normally used. The oils are higher in active sulphur than ordinary types and reduce the tendency of ferrous metal surfaces to fuse or weld, thus eliminating any bonding of the tool and the surface being cut.



Another step toward production efficiency is a newly perfected graphite lubricant for the dead centers of lathes. This is a compound of flake lubricating graphite and specially formulated ingredients which effectively controls overheating and protects dead centers against scoring and softening.



GROTESQUE WELDING MASKS. Fighting planes painted to resemble sharks may have inspired these welders at North American Aviation to apply war paint to their helmets—or perhaps it's an old Indian custom they've adopted to scare the Axis. Other workers have followed suit, and many weirdly decorated masks glower from the walls of the plant's locker rooms.



EDWIN

M.

LOVE

The hollow-ground planer blade cuts smoothly and is especially adapted to ripping and mitering. With dado sets, it is possible to do grooving, tenoning, and rabbeting




Special accessories enable one to get the fullest service from that most versatile power tool, the circular saw. Here Mr. Love discusses the use of planer saws and dado heads

Using Special Blades on the Circular Saw

SPECIAL accessories and jigs greatly increase the usefulness of the circular saw. Often they enable it to double for machines that may be lacking in the home workshop. Many useful attachments can be made of wood in the shop. Others must be purchased, and among the most important of these are planer saws and dado heads.

What is a planer saw? This is a stiff combination blade having groups of cross-cut teeth alternating with single ripping teeth called rakers. It has no set; clearance is obtained by hollow grinding, which decreases the thickness of the blade from the teeth to the arbor washer. It is designed only for fine work. If kept sharp and

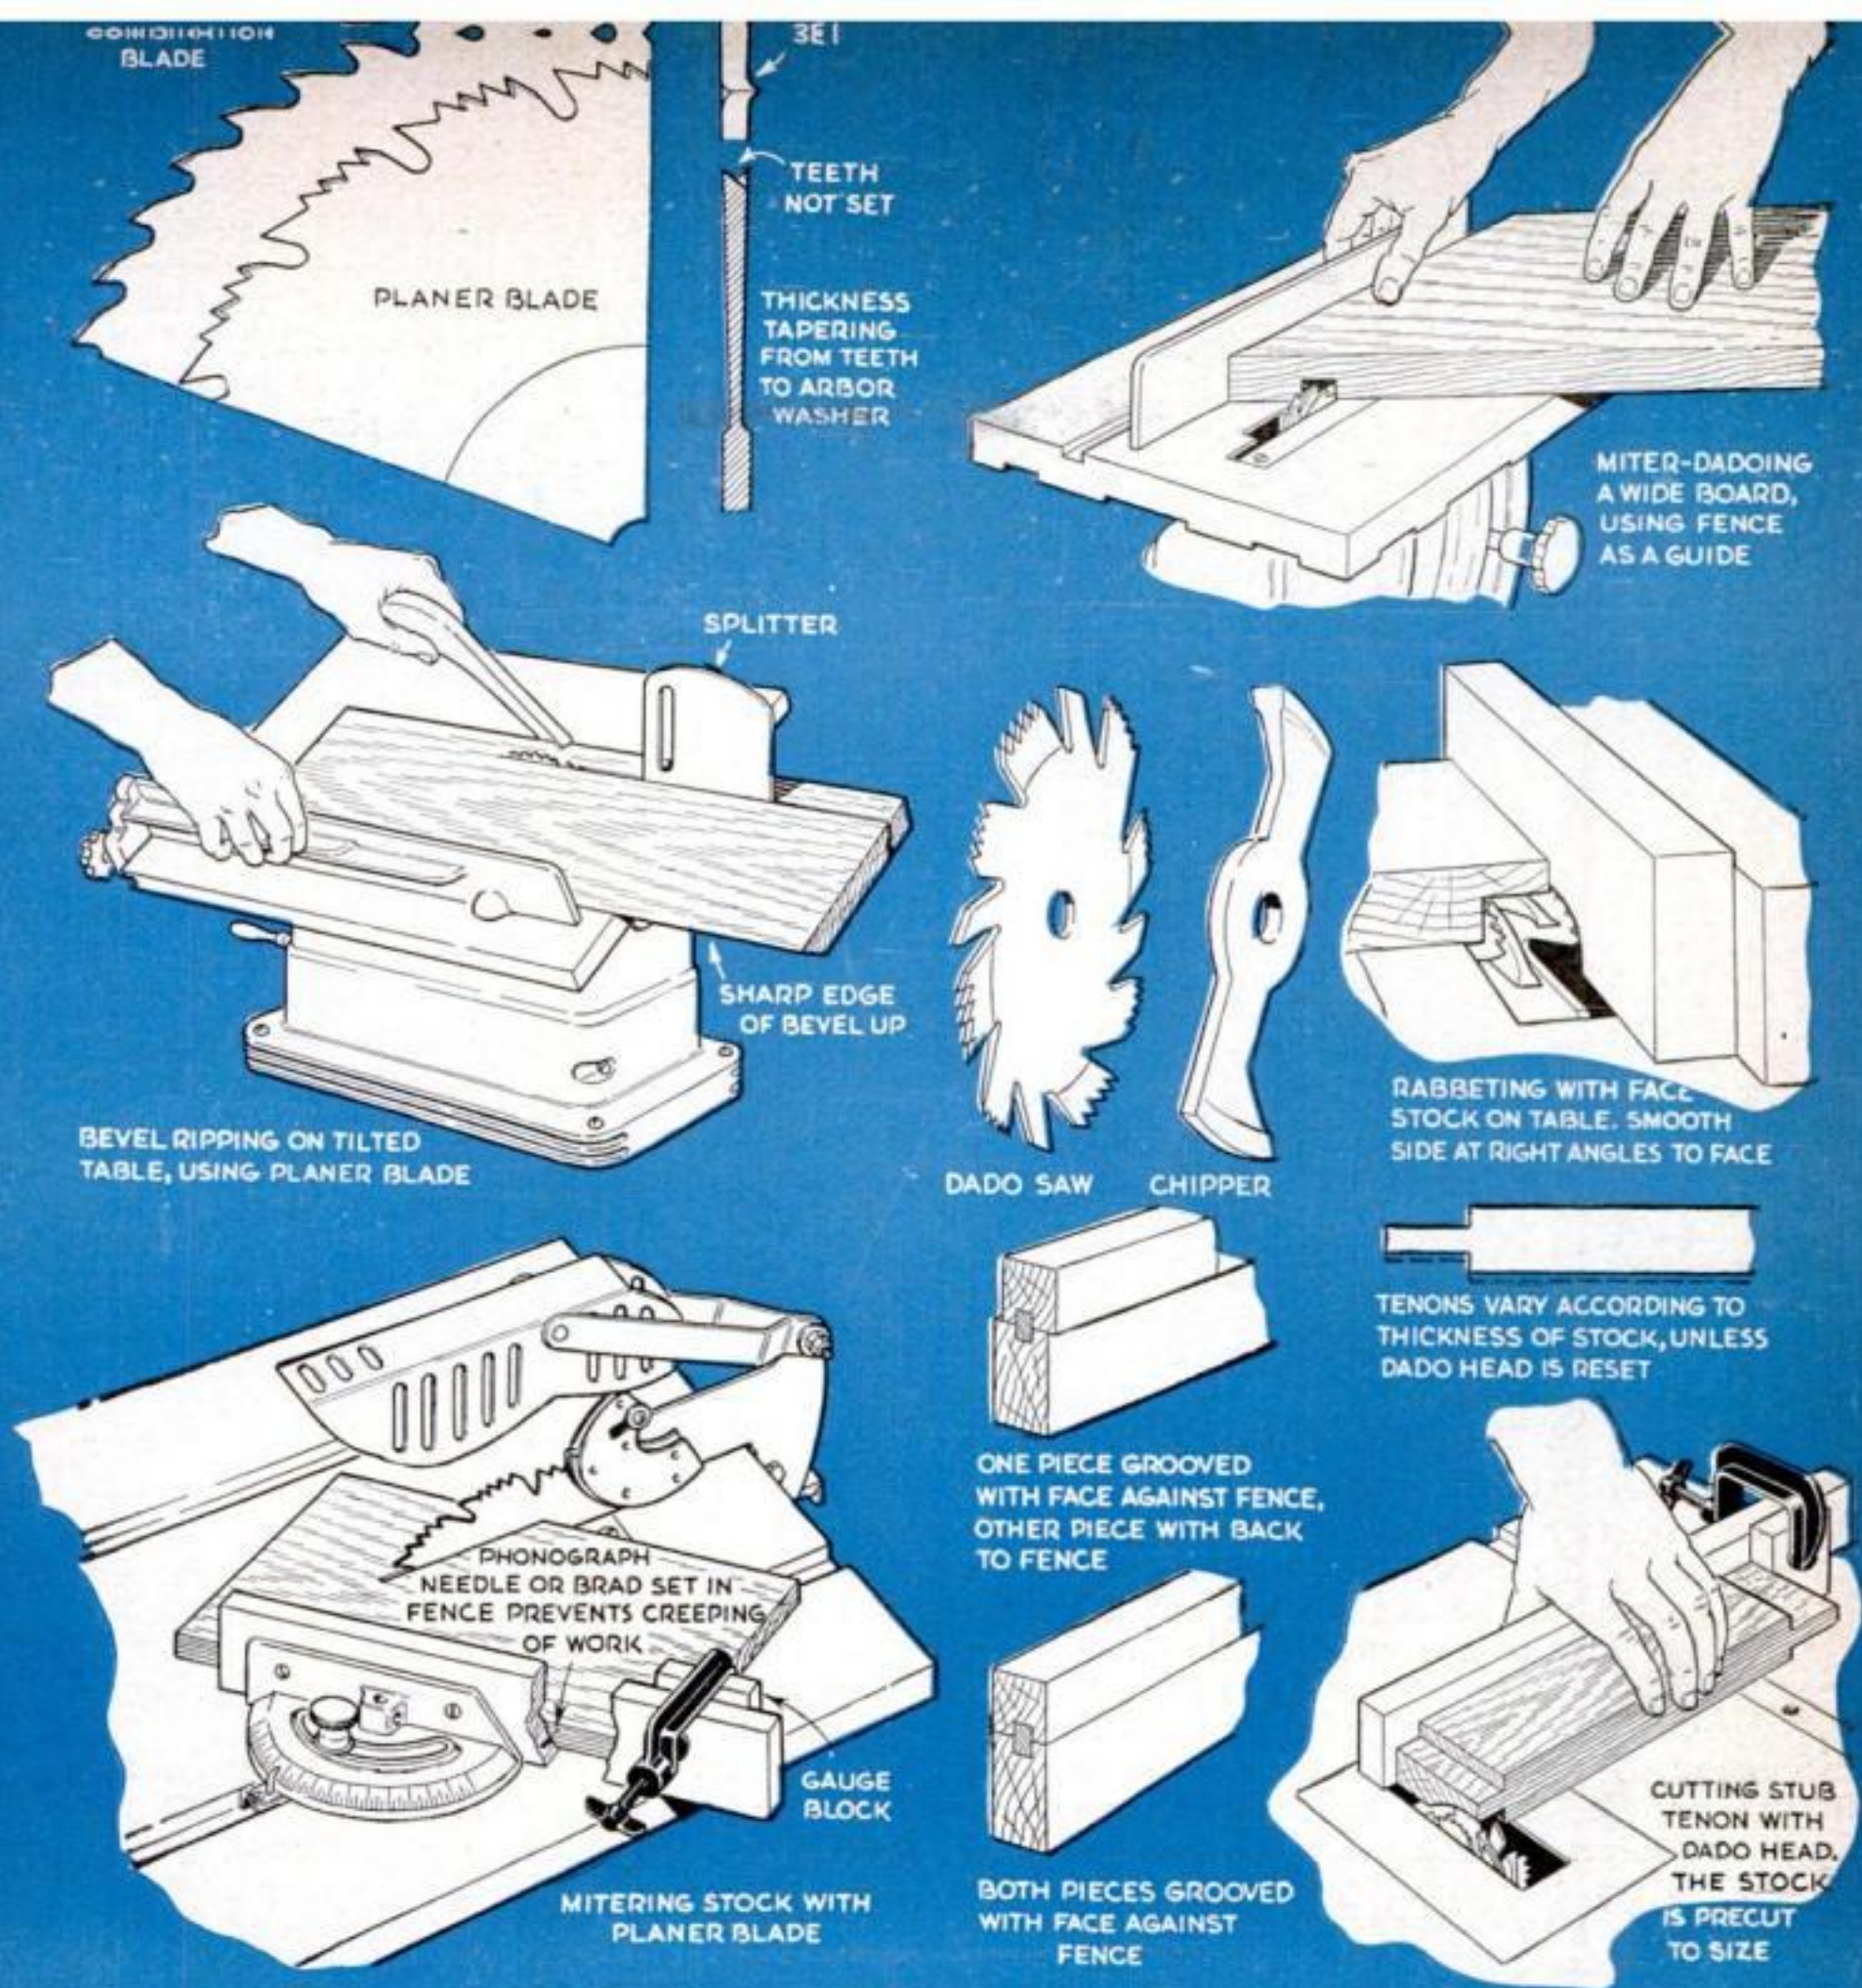


properly jointed, so that it is at all times perfectly round, it cuts with almost glossy smoothness, but when dull it can hardly be made to rip, and will usually wander off along the grain of the wood.

For what is a planer blade used? Its smooth cut makes it especially useful for ripping glue joints. Use only material that is reasonably straight, for wind (twist) will bind the blade, and the cut will not fit the joining member. The edge bearing against the fence must not be irregular, or the cut will be unsatisfactory. When the edge is to be beveled, as in ripping a side for a column, tilt the table to the correct angle and adjust the fence so that the far edge of the board

slides against it. This enables the fence to carry the sliding thrust of the piece, and prevents pinching of the saw. If the piece is too wide for this, place the fence above the saw, so that the weight of the work below the blade will tend to open the kerf. On saws having tilting arbors, the tendency to slide is not present.

When several pieces are to be ripped to the same width, bevel one edge of each; then bevel the other edges after adjusting the fence to the desired width. Always slide the board along with the sharp edge up, for if this edge lies on the table it will wedge under the fence.

For a three-sided column, the bevel must

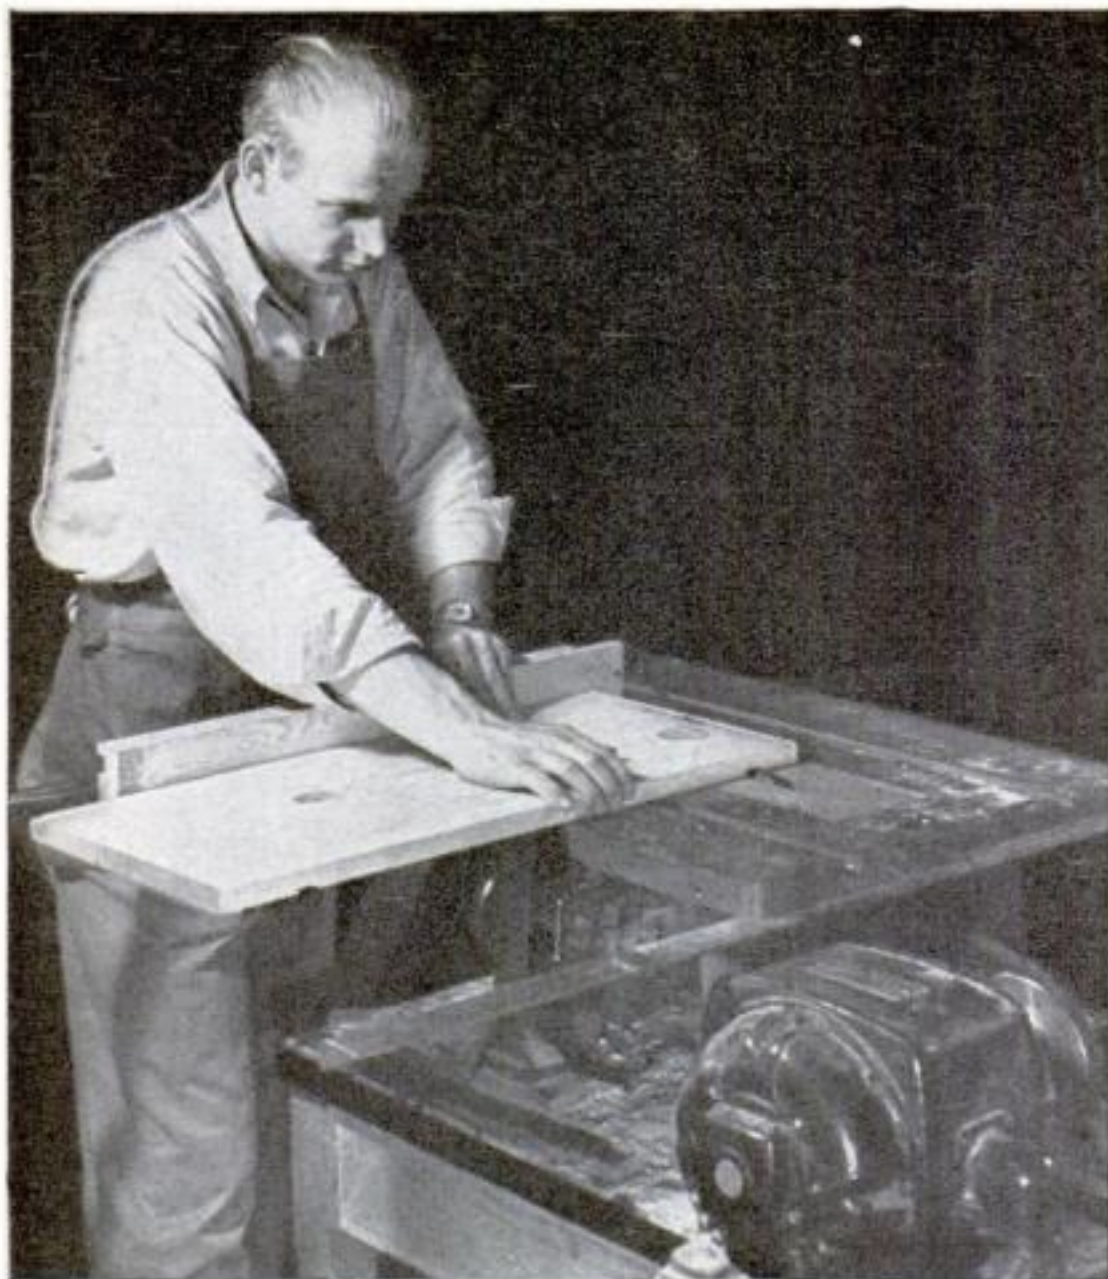

Dadoing a wide board to receive a shelf, with an auxiliary fence on the miter gauge. The ripping fence could also be used

be ripped with the stock edgewise on the table. After the cut has proceeded a little distance, the board tends to settle, which may damage the sharp edge and spoil the straightness of the work. This can be prevented by clamping or tacking a strip of wood to the back so that this strip rides on top of the fence, as shown in the photograph on page HW 32. If bolts or other projections interfere, attach an auxiliary wooden

Have the face side of each piece bear against the fence when grooving stiles and rails for a panel. All grooves will then meet in perfect alignment

face to the fence, with the upper edge high enough to clear such obstructions. It is necessary to rip the piece to width before beveling the second edge.



How is the planer saw used for crosscutting and mitering? Just like an ordinary blade, except that the feed must be slower. If there is objectionable splintering of the underside, make a wooden insert to replace the soft-metal one furnished with the saw, and slit it to fit the blade by lowering the table (or raising the arbor) as the machine runs. This insert will support the work up to the very edge of the cut.

Can the parts of a dado head be used separately? Yes. To cut a groove $\frac{1}{8}$ " wide, use one saw of the combination; for a width of $\frac{1}{4}$ ", use both. Wider grooves are cut with chippers between the saws, arranged with the swaged edges opposite the openings between the teeth, and fanned out so as not to interfere with each other.

How is a dado head used?

It must be accurately set for depth, and then used as if it were a thick blade. When grooving lengthwise of stock, set the fence as for ripping, measuring from the side teeth and making test cuts in scrap wood. Any ordinary groove is made in one pass, but dados wider than the head are cut in two or more passes with the fence reset or a strip of wood laid between it and the work to locate the second side.

Use of a clamping device when mitering prevents creeping. The reversed gauge allows full contact between the edge of the stock and the gauge head

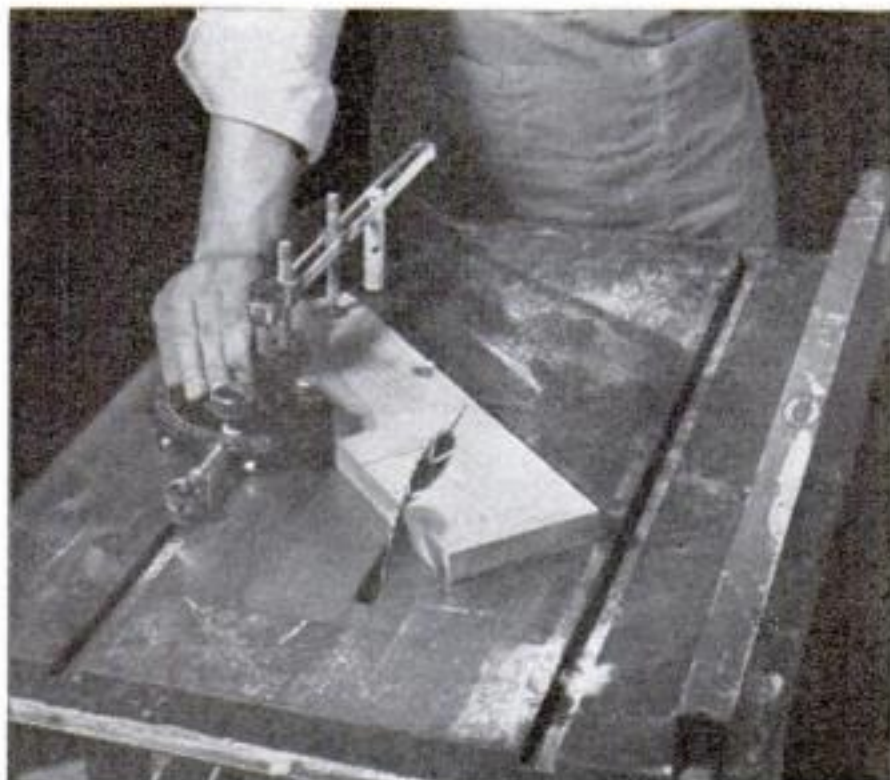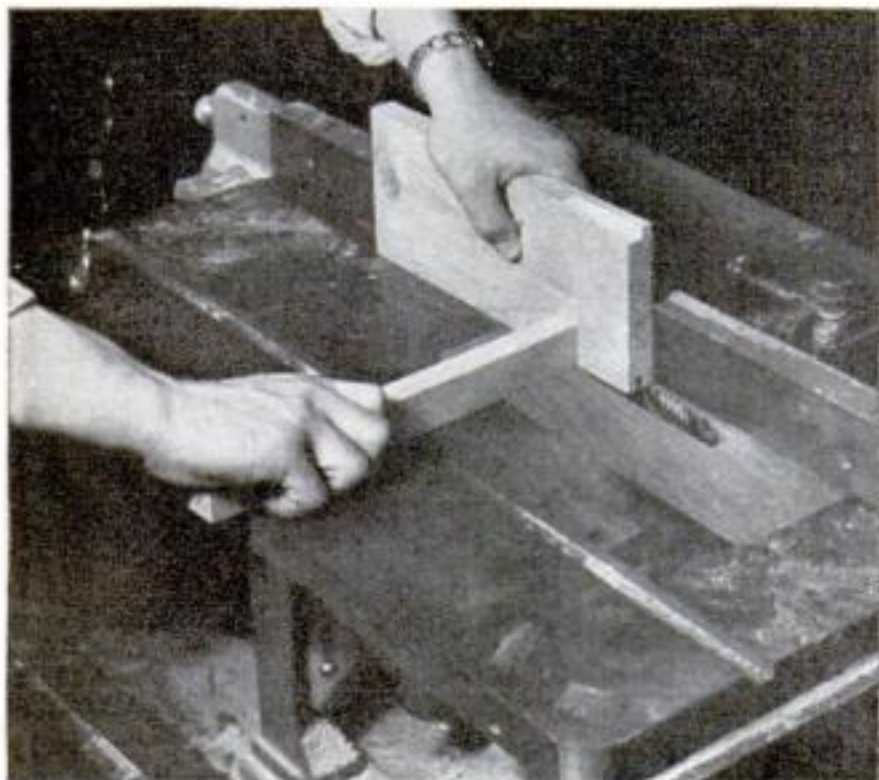

When grooving edges for a panel, as in stiles or rails, slide the face side of each against the fence so that the grooves in all pieces will be the same distance from the face. The same applies to cutting spline grooves, as shown in the drawings. If the material is bent, try to spring it flat against the fence.

Grooves across the grain on wide boards can be made with the end of the stock sliding against the fence. On narrower work, however, the miter gauge is used.

In making tenons, use the miter gauge and cut a dado along what is to be the shoulder. Shift the piece and make a second cut beside it, and so on to the end. Then turn the miter gauge end for end to cut the other cheek. This keeps the face edge against the gauge head in cutting both tenons. The stock should be precut to exact length, and the tenon length located with a block clamped to the saw table. This method permits tenons of any length to be made. A disadvantage is that the tenon thickness varies according to the thickness of the stock, unless the depth of cut is changed.

How are rabbets cut with a dado head? Rabbeting is done much like grooving, but




When beveling a second side, as with the tilting-arbor saw above, keep the sharp edge of the finished bevel up, or it may wedge under the fence

with one side of the dado head exposed. When the fence is used on long cuts, set it away from the saw a distance equal to the thickness of the flange to be left on the edge, set the head for depth of cut, and pass the work over edgewise. This results in a smooth side parallel to the face. For a smooth side at right angles to the face, lay the stock flat on the table, with the edge against the fence. If the fence is arched, or an arched auxiliary wooden fence is used, the lumber can be rabbeted edgewise with the flange outside, the unused portion of the dado head running without obstruction under the arch of the fence.


Tenoning Jig on Miter Gauge Provides Parallel Heads

THIS jig permits the miter gauge to be kept in one groove for tenoning, as the working edge of the stock bears against a second parallel guide for cutting the opposite cheek. Not only does this prevent any misalignment of shoulders due to the stock being not quite parallel, but it also allows tapering stiles to be tenoned. Screw one auxiliary head fast to the miter gauge, the other to a plywood base, which is attached to the gauge bar with machine screws fitting the tapped holes. Both heads must be squared with the bar.


The stepped stop block is attached to a saddle having plywood sides, and the latter clamped to the fence with a setscrew inserted through a small reinforcing block. Bore the hole slightly undersize and let the screw cut its own threads. This block is more readily adjustable than one clamped to the table, and can be raised if a pattern is used.

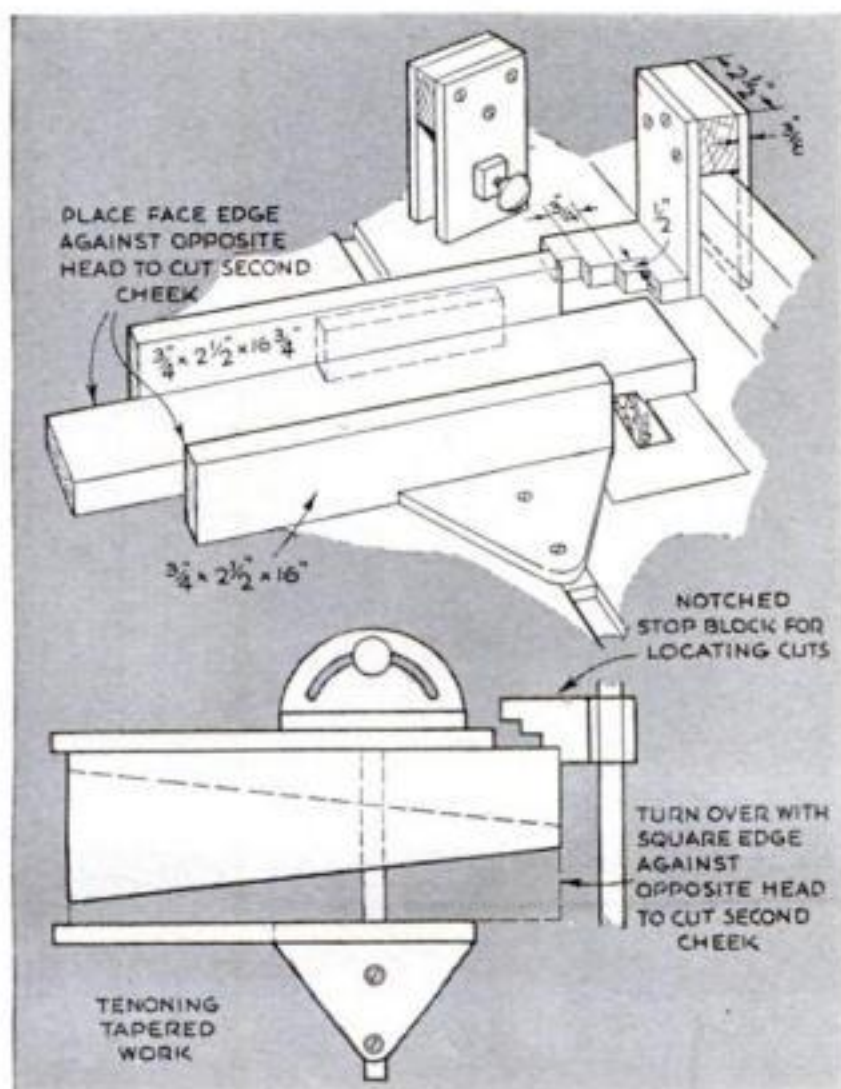

KEEPING

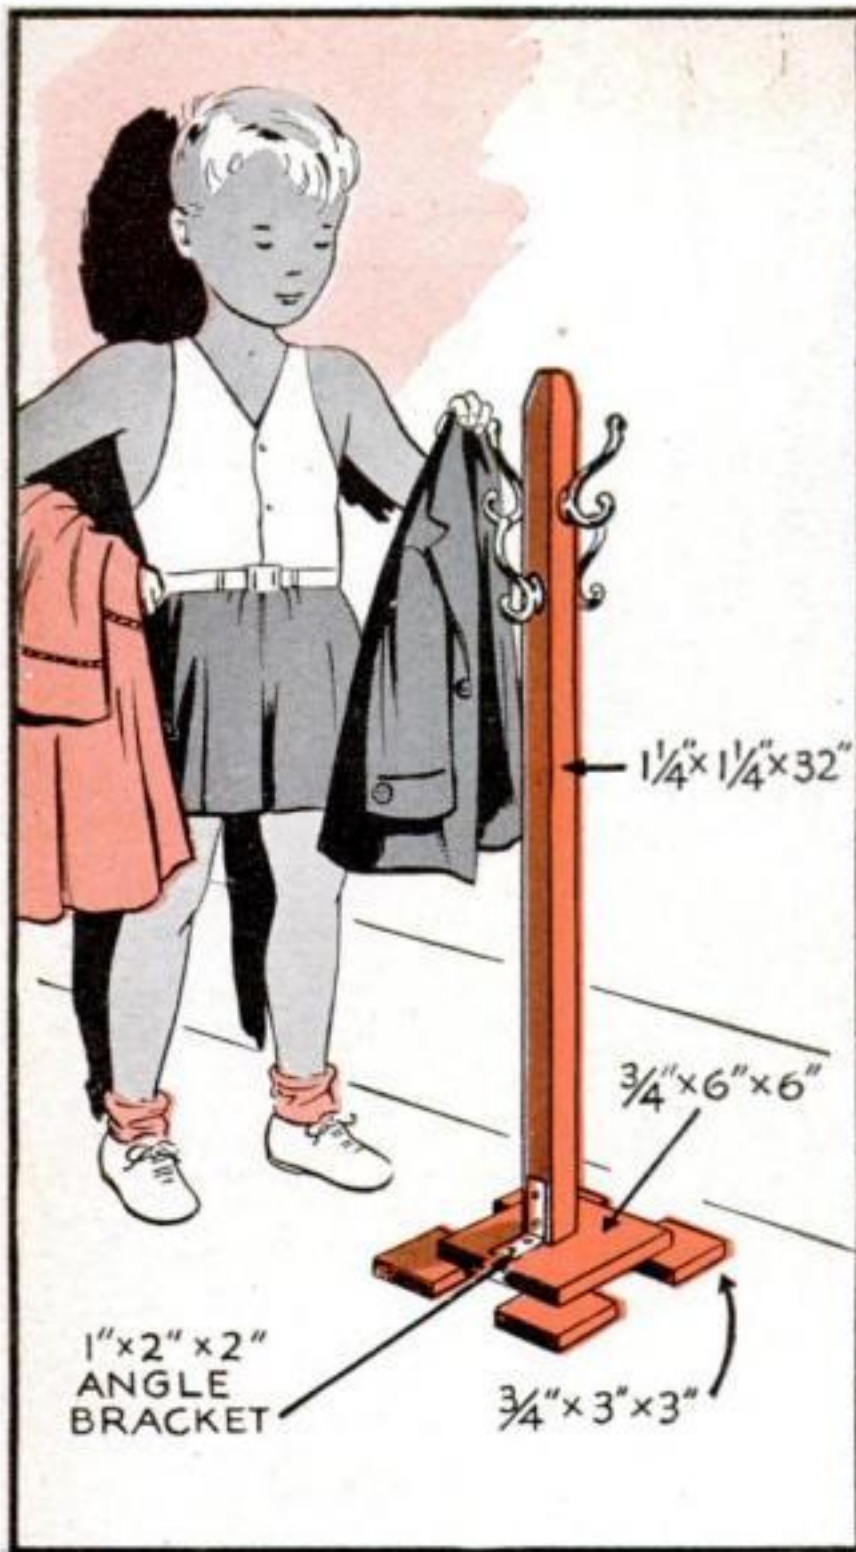

Orderly habits in hanging clothes where they can be found the next day may be taught a child with a clothes tree built to his size. Use pine or scraps, apply a maple oil stain and wipe it off until the desired color is obtained, then finish with shellac. The height may be changed to suit

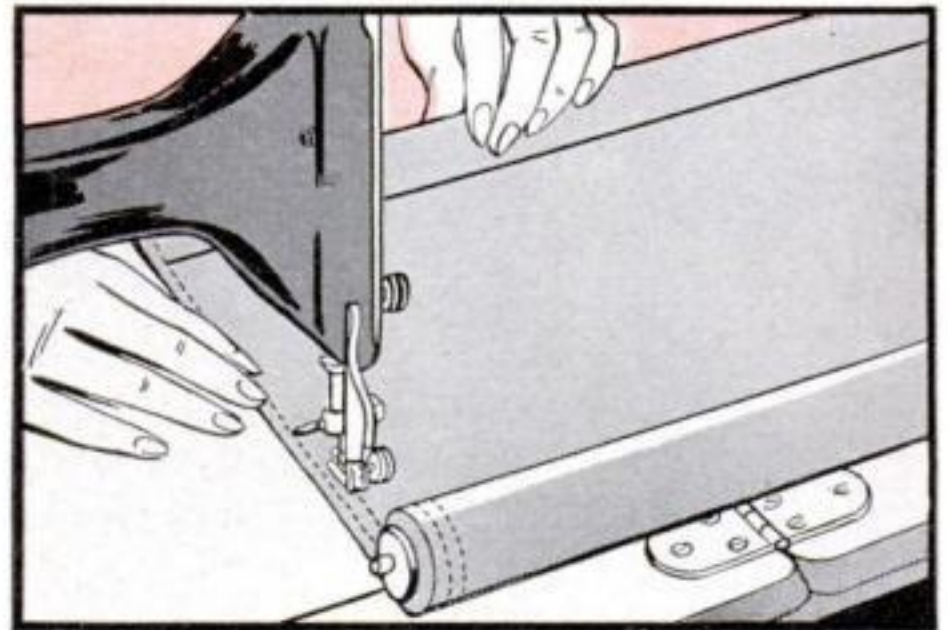

Two rows of machine stitching along each side of a paper window shade reinforce the edges and prevent tearing and fraying. Stitching may be done with the shade still attached to the roller by beginning at the top and rolling the shade as the work proceeds



Ice trays can be kept from sticking in the freezing unit of a refrigerator by coating them on the bottom and sides with a thin film of cooking or salad oil. The oil film does not retard freezing, but prevents the ice from sticking fast to the metal tray surface



In order to use garlic sparingly, put it in a tea ball that can be fastened over the edge of the kettle for removal at any time




Food may be scraped off pots without danger of scratching by using a wedge-shaped piece of wood sanded well on all edges



Washing will not stretch pockets and buttonholes in a sweater if they are basted together before the sweater is put in the water


THE HOME SHIPSHAPE

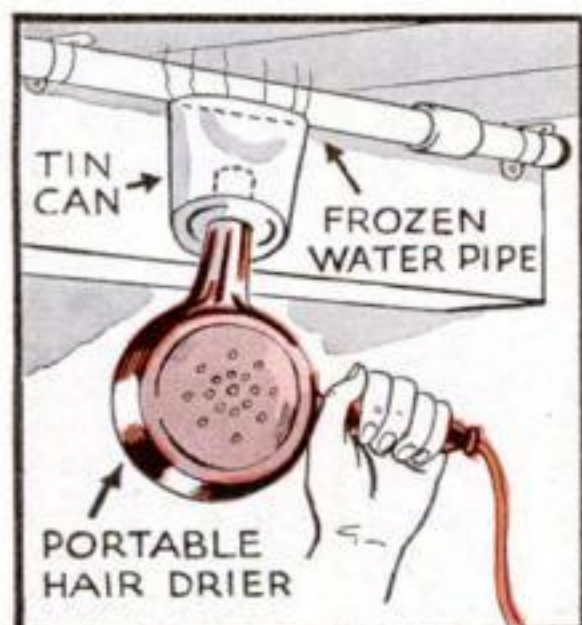

Frozen pipes can be thawed out by using a portable hair drier with a tin can cut to fit the nozzle. Flatten the open end of the can to concentrate the heat




Paraffin rubbed into rough spots in the lining or seams of shoes lessens friction and prevents blisters. Repeat for several days, and sprinkle with talcum

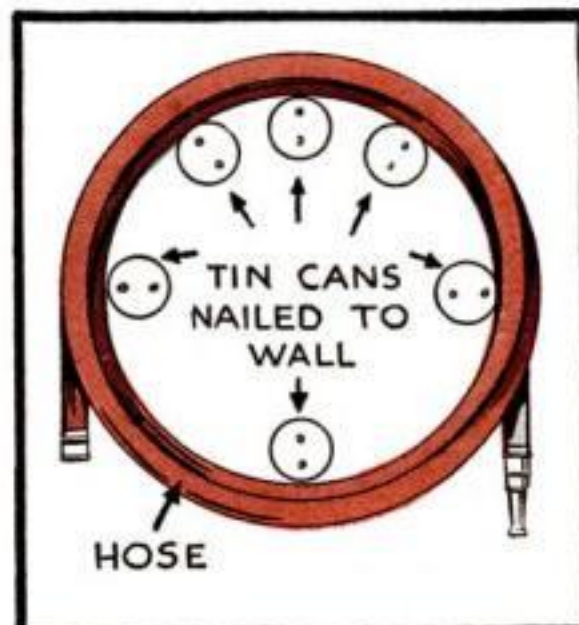

Six cans on a wall in the form of a 2' circle, as above, make a garden-hose rack. Punch screw or nail holes. A solid rod will be of help in driving in nails



When the threads holding the cap on a fountain pen are so worn that the cap keeps coming off, stick a piece of transparent cellulose tape over the threads on the barrel to increase the strength of the grip

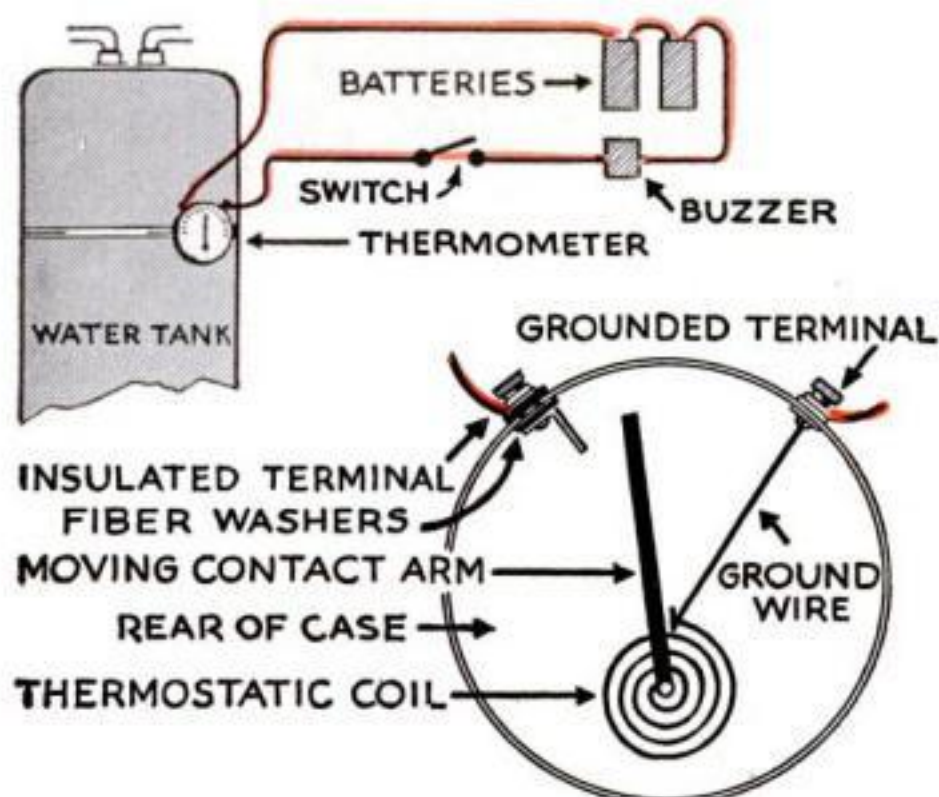

The hot-water level in a boiler with no thermostatic control can be signaled automatically by adapting a dial-type thermometer and connecting it to a buzzer. Pry the back off the thermometer, attach terminals as shown, solder a metal contact arm to the back of the thermostatic coil, and solder on a ground wire. Strap the unit onto the tank about 3' from the top



Discard the wire from a package handle, cover the wood with felt, and then shape a coat hanger for a handle to make a roller for painting screens

Two-Rail Operation

AUTOMATIC SIGNALING

By
David Marshall

CAN we have two-rail operation and automatic signaling, too? Only a few years back the answer would have been a flat "no." It was pretty well known, of course, that the trick was not altogether impossible—two-rail pikes, completely signaled, were already in operation. But the apparatus required was so expensive that the average model railroader could not even dream of it.

In the past two or three years, however, new methods have been evolved—simple, reliable, and quite inexpensive. Circuit for circuit, signal for signal, the cost today will not exceed what you would ordinarily spend for signaling a three-rail road; or at least the difference will not be great enough to matter one way or the other.

Although these new methods represent a distinct improvement over the tried and true systems of the past, they have, unfortunately, one drawback. For reasons that will presently become apparent, signaling a two-rail system imposes a burden upon the operating efficiency of your trains. This is true, however, only within limits, and the limits can be wide enough. Stated broadly, the situation is that a resistor in every car must limit the length of trains or rob the locomotive of necessary power. But if you keep this point in mind, and stick to a certain balance, you will find the following method not only simple, reliable, and cheap, but also quite satisfactory.

NORMAL TRACK CIRCUITS. To approach our problem the easy way around, let us begin by recalling all we know about track circuits and automatic signaling in general. Let us build a normal three-rail pike and signal it the normal way, and having done this, let us convert the whole job to a two-rail pike.

In Fig. 1 we have the orthodox three-rail main line, broken up into blocks according to standard model-railroad practice. Of the two running rails, the upper one is con-

tinuous, serving as a ground for both power and track circuits. The lower one is broken up into insulated sections, each one extending the length of a block, which can be anywhere from 2,500 scale feet to three or four scale miles. The third rail is also sectionalized, to enable us to control trains in separate blocks separately. We have here three electric circuits, each one forever separate and distinct from the others, though all three may flow—never mixing—through common channels.

The power circuit is from the generator to the various controllers to the various third-rail sections, thence through the locomotive windings to the common running rail and so on back to the generator. The track circuit, on the other hand, is from the track battery to the common rail, where normally it is broken. Then, from every section of the control rail—the broken running rail—the track circuit is to a relay corresponding to that particular block, and from the relay back to the battery.

Thus the track circuit is normally open. But when a train—or a runaway box car, for that matter—enters a given block, it closes the gap between the common rail and the control rail; its own wheels and axles form a channel through which the electricity flows, and thus the circuit is completed. The track relay, normally inactive, is now energized, its armature drawn hard against the magnetic poles. That is the function of the track circuit—simply, under a given track condition, to energize a magnet. And, of course, when the track condition changes, when the train passes out of the block, the track circuit is broken, the relay becomes once more inactive, the armature returns to its normal position—drawn back by gravity or, on model railroads, by the pull of a spring.

The power circuit is under your control. From your perch before the operating panel you stop and start your trains at will. But over the track circuit you have no direct control. This is closed by the physical presence of a train in any given block; it is broken with the departure of the train. Likewise you have no direct control over the signal circuit, which in any case is not subject to interruption, but flows continuously through one light or the other depending upon whether the track relay is energized or inactive. All of which is made clear in Fig. 1.

COMBINING RAILS. Now let us take this whole setup, precisely as it stands in Fig. 1, and see what happens if we combine the third rail with the control rail which it so closely resembles. So far as the signal circuit is concerned, nothing at all will happen, for



this is independent of all the rails, and it stands to reason that the signals will continue to flash red and green in response to the movement back and forth of the track armatures. So we can forget the signal circuit entirely, and concern ourselves from now on simply with the track and power circuits, confident that, if we can get the relays to behave properly, the signals can be depended on to do likewise. To keep things simple, therefore, the signal circuit is omitted from Fig. 2, though the tie-in is sufficiently indicated.


In changing over from three-rail to two-rail, we retain the common rail precisely as it is. And we transfer to the control rail all the functions of the third rail, as indicated. Then we cross out all the duplicating wires, and find the track relays neatly tucked away between the power controls and control rail (Fig. 2). The relay is thus in series with the locomotive—and here we have two distinct situations. The locomotive draws power through the relay, so the relay must be energized when the locomotive is under way. But the locomotive, as a result of the hookup shown in Fig. 2, also pulls a certain minimum of electricity even when standing still, and this, though it is not enough to move the locomotive, is sufficient to keep the relay energized. And so the signal shows red as long as the block is occupied and whether the locomotive is in motion or halted. In short, the power is never shut off completely, and the rheostats at your control board must be adjusted accordingly. To stop a train, you simply reduce the power to a point below the minimum required to keep the locomotive going.

HALF-AND-HALF WHEELS. So far, then, as the locomotive goes—and with certain reservations—we have an adequate setup for automatic signaling. If we next equip all the cars with half-and-half wheels (steel on one side of the trucks and plastic on the other), and place a light or other resistor on each car, we have whole trains

equipped for working the signals. The scheme is, of course, that the steel wheels of the forward truck shall ride on one rail, and the steel wheels of the after truck on the rail opposite, so that, even in the case of a box car, a current will forever flow from one rail through a resistor to the other rail. But since that can cause too great a drain on your power, it becomes expedient, at times, to cut out resistors by reversing one truck on each of several cars by having all the steel wheels ride on a single rail.

And so we have the beginning of an automatic system for a two-rail pike. As it stands, however, it is not perfect, though it may do for an HO pike. The trouble is, when we apply the scheme to an O-gauge road, that a relay sensitive enough to pick up on the minimum flow of current would burn out if sufficient power were shot through it to get the train really working. How this defect is remedied we shall explain later on.

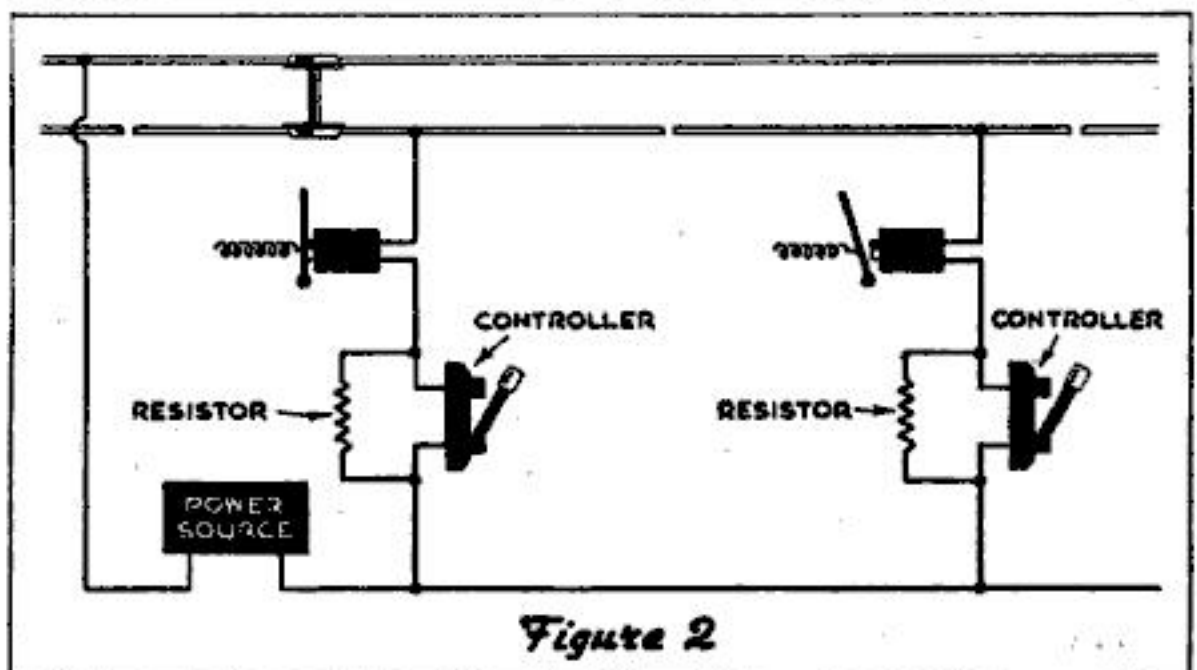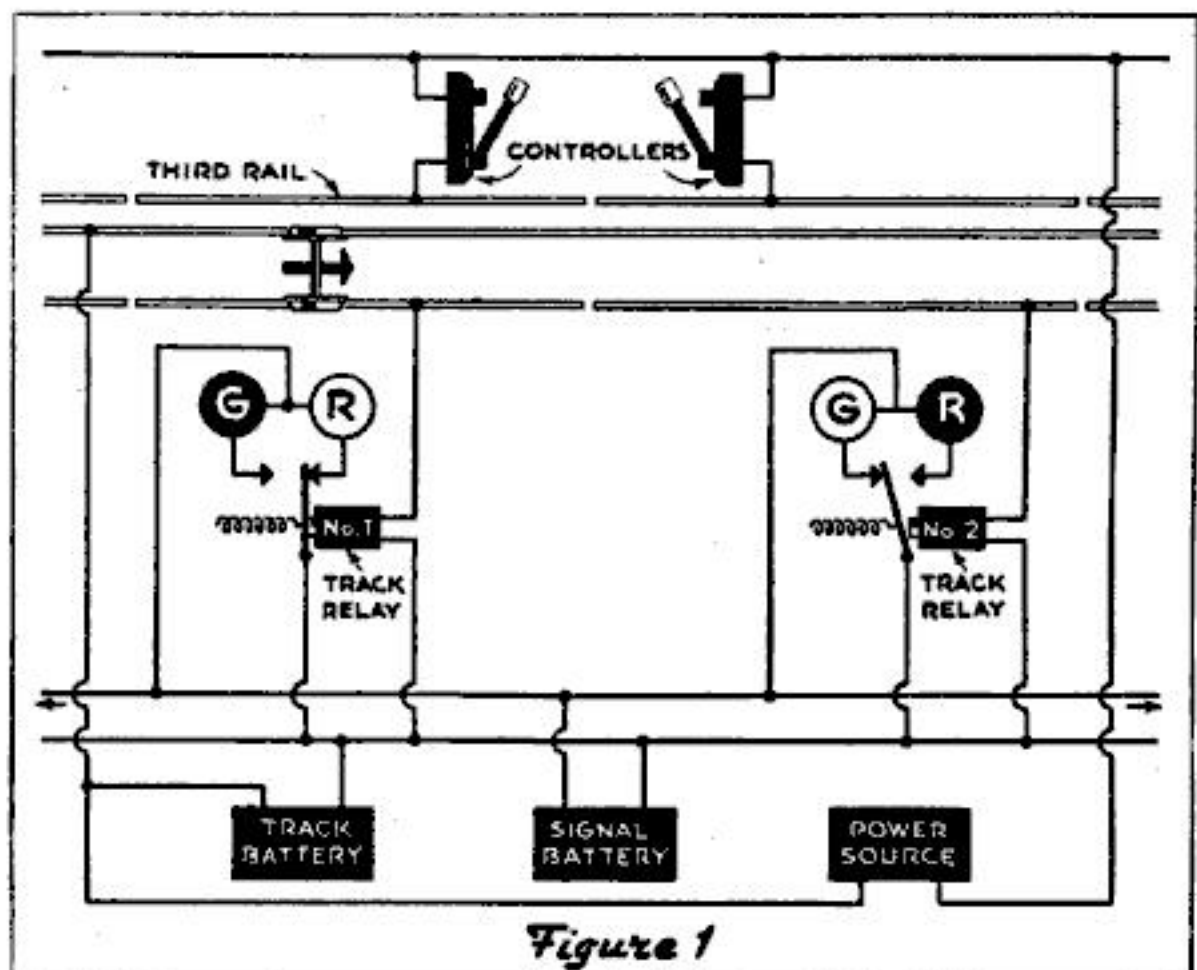

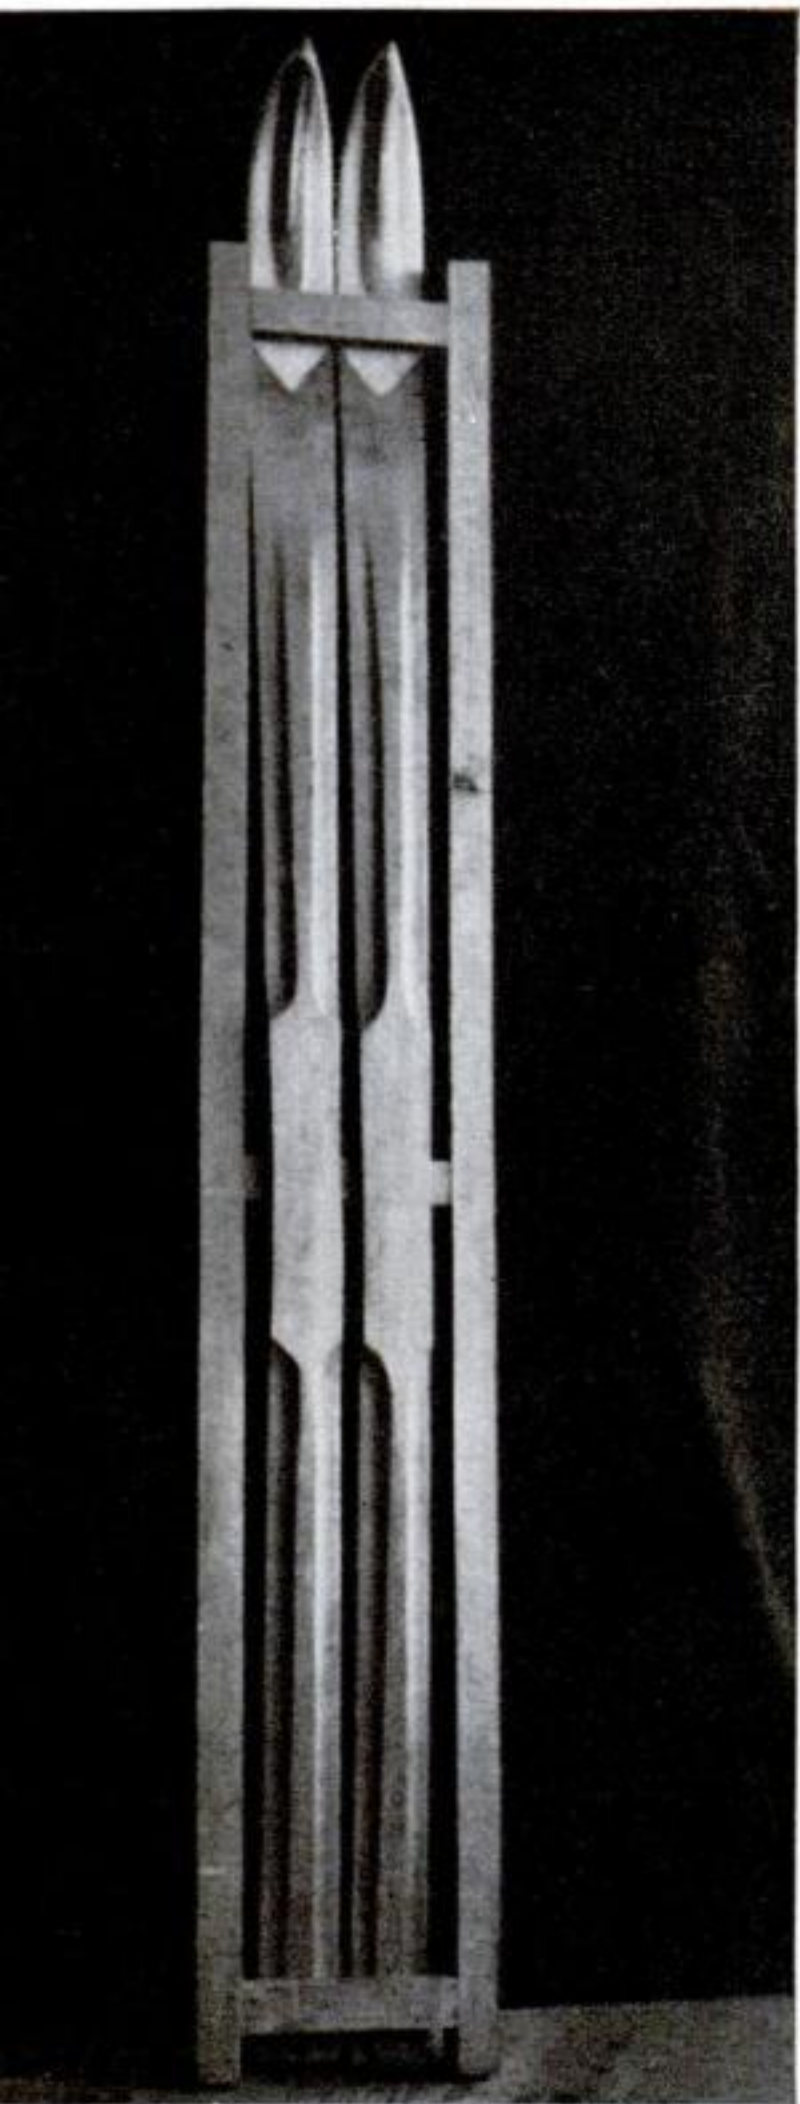

SIMPLE STORAGE RACK

for SKIS





Sturdy Frame Prevents Warping

SKIS often present a difficult storage problem because of their length and shape. Although some experts prefer simply to tie them together and stand them in a corner, other skiers favor the use of a frame in which the skis can be clamped. Such a frame prevents them from becoming warped in the wrong direction, and so preserves their camber. If desired, extra clamps can be affixed to the tips of the skis to preserve the curvature of these parts.

The frame shown at the left can be built from any available stock such as 2" by 2" or 1½" by 2" lumber. Make the middle crosspieces just high enough to give the proper camber to the skis when they are placed over these and under the end pieces. Assemble the parts with mortise-and-tenon joints. One crosspiece at the toe end of the frame is removable and held in with wooden pins so that the skis can be put in the rack easily. The dimensions given are for a pair of 7' skis. For other sizes, simply build the rack in proportion.—R. H. JENKINS.

Left, the completed storage rack, showing skis in place. The strong frame protects them against being warped, scratched or otherwise damaged, and keeps them bent to the proper camber

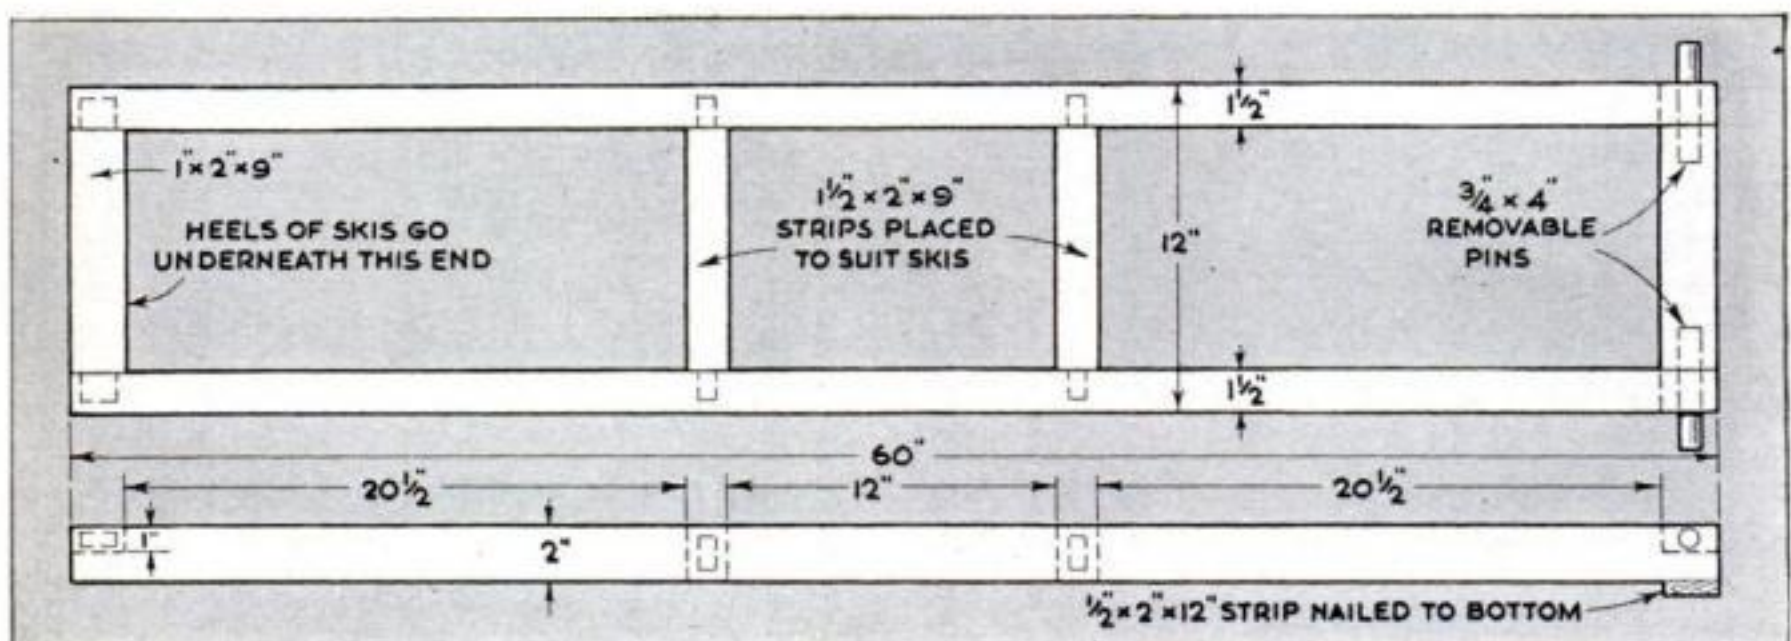

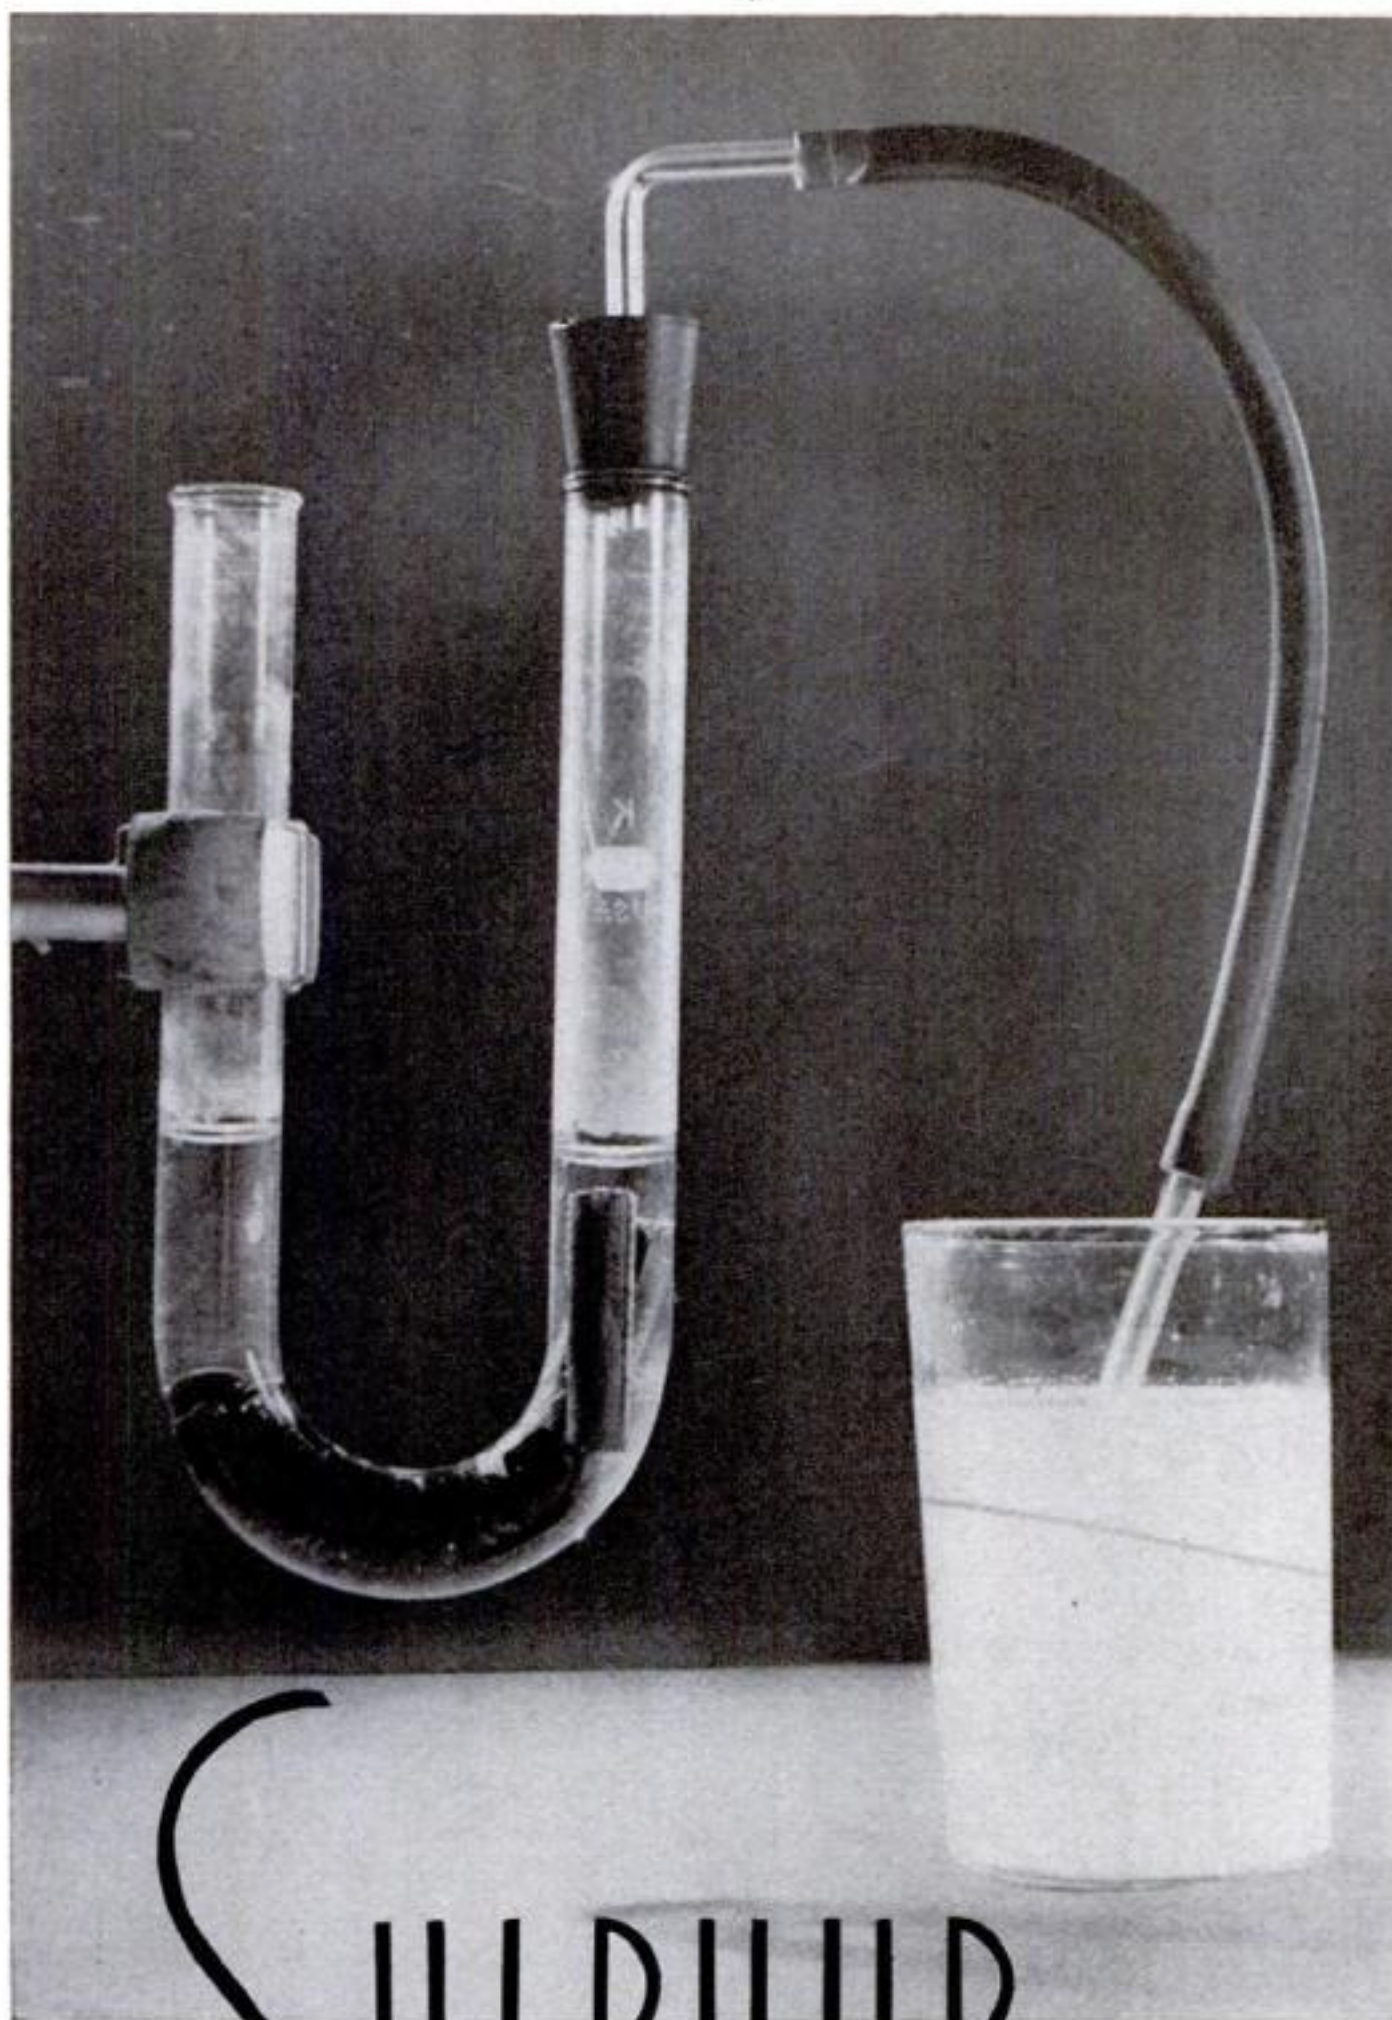

Commercial sulphur, produced first in Sicily, comes today from deposits under the earth of Texas and Louisiana. It is raised by melting it with hot water under pressure and forcing it to the surface by means of compressed air. Left, how a salt solution is analyzed by passing hydrogen sulphide through it. The white precipitate shows zinc is present

S

SULPHUR

CORNERSTONE OF MODERN INDUSTRY

TAKE sulphur from the chemist's kit of magic, and almost every manufactured article of daily life would either be altered or cease to exist. Sulphuric acid, which enters into more commercial processes than probably any other chemical, as well as other sulphur compounds, play important roles in many basic industries.

Called brimstone ("burning stone") by the ancients, sulphur was first found near volcanoes. Chemical theory has it that it

forms in these regions due to the interaction of the gases hydrogen sulphide and sulphur dioxide. You can learn to generate these important compounds of sulphur, and to produce sulphur as a volcano does, with the simple chemicals and apparatus of your home laboratory.

Sulphur dioxide may be prepared by heating sodium sulphite and dilute sulphuric acid in a flask provided with a thistle tube and a delivery tube. You probably know its



How free sulphur is formed in the vicinity of volcanoes can be demonstrated in your home lab, as seen in photo at left. Sulphur dioxide is prepared by heating sodium sulphite with dilute sulphuric acid in the apparatus at the extreme left. Hydrogen sulphide is generated by the action of dilute hydrochloric acid on iron sulphide shown in the U-tube to the right. The two gases are led by tubes to the center jar, where their interaction produces sulphur

smell as the odor of burning sulphur. Hydrogen sulphide, recognizable by its "rotten-egg" smell, may be generated by an apparatus which stops production as soon as enough gas is obtained. This is made by filling the bottom of a U-tube with glass beads. In the outlet leg of this tube drop several pieces of iron sulphide, and pour in enough dilute hydrochloric acid to cover the sulphide.

As long as the acid is in contact with the sulphide, hydrogen sulphide is produced. If a pinchcock is applied to the delivery tube, gas pressure forces the acid away from the iron sulphide, and gas production automatically stops. Releasing the pinchcock starts generation again.

Set up these two generators together and lead a rubber tube from each to the bottom of a glass jar. Loosely add a little of both gases at once. As they mix, a cloud forms, and finely divided sulphur deposits on the sides and bottom of the jar. Keep your lab well ventilated during this experiment, and don't prolong it unnecessarily. These gases are evil-smelling, and may even be poisonous when breathed in large amounts.

An interesting characteristic of sulphur is that it can exist in three widely different physical forms. Dissolve some in carbon disulphide (keep this liquid far from any flame, as it is volatile and inflammable) and pour the solution in a dish to evaporate. The sulphur crystals that form are rhombic or octahedral in shape. This is the most common and stable form of sulphur.

Melt some sulphur, with the least heat possible, and pour it into a dish to cool. Now the crystals are thin, prismatic, and needle

shaped. After standing, the crystals will change back to the rhombic form.

Melt sulphur and continue heating until it boils, however, and you temporarily change its basic characteristics. Pour some into water and it forms a tough, elastic mass resembling rubber. Gradually this too will change to the first crystalline form.

Powdered sulphur may be made by holding a cold plate in the vapors of boiling sulphur, which condense as the familiar fine powder.

An extremely active element, sulphur combines directly with all metals, except gold and platinum, on the application of heat. The result of the reaction is a sulphide. By dropping iron filings or a bit of steel wool on some burning sulphur, you may witness a vivid demonstration of one form of combination, the end product in this case being iron sulphide. So much heat is liberated that the iron sparkles and glows as it unites with the sulphur.

Advantage may be taken of the fact that sulphur and iron combine to form black iron sulphide to create a durable black finish on small iron parts. Immerse the parts to be blackened in a solution of sulphur in warm turpentine (heat the turpentine over a water bath, and keep it away from all open flame); then heat them in the flame of a Bunsen burner. By repeating the immersion and heating, the coating may be built to the desired thickness.

Raw rubber is a gummy mass, sticky and shapeless—completely useless for most of the products with which we are familiar. Sulphur is the chemical that gives this mass strength and life; the process is known as



Left above, if sulphur is heated in an open tin until it blazes, and steel wool or filings are dropped into it, the resulting combination is iron sulphide. Right above, lead paint, darkened by the presence of sulphur in the air, may be whitened again by oxidizing the surface with a solution of hydrogen peroxide

vulcanization. By regulating the amount of sulphur and the temperature and length of time of vulcanization, the elasticity, toughness, and hardness of rubber may be accurately controlled.


The process of vulcanization originated in 1839, when Charles Goodyear accidentally spilled a mixture of rubber and sulphur on the top of a hot stove. The product formed was the forerunner of the entire rubber industry.

You can repeat this experiment with the aid of a little rubber cement and powdered sulphur. Heat a few drops of rubber cement over a small flame, and add a few grains of sulphur. When the mixture has been heated sufficiently to melt the sulphur and evaporate the solvent of the cement, the patch may be peeled from the tin. This new product displays the stretch and tensile strength of rubber.


Hydrogen sulphide gas is a great help in the laboratory in the detection of metals. When it is passed through salt solutions of various metals, colored sulphides may be precipitated. From the color and solubility of these sulphides it is possible to identify certain metals.

Pass some of the gas from your hydrogen sulphide generator into a solution containing some unknown salt. If the precipitate is white and will dissolve in hydrochloric acid, the metal is zinc. If it is brown-black and soluble, it is copper. If black and insoluble, it is mercury. If black and soluble, it is lead.

Minute amounts of hydrogen sulphide in the air turn silverware black, and often cause white-lead paints to darken due to the formation of lead sulphide. Paint so discolored may often be whitened by oxidizing the surface with hydrogen peroxide, changing the sulphide to *sulphate*, which is pure white.—KENNETH SWEZEY.

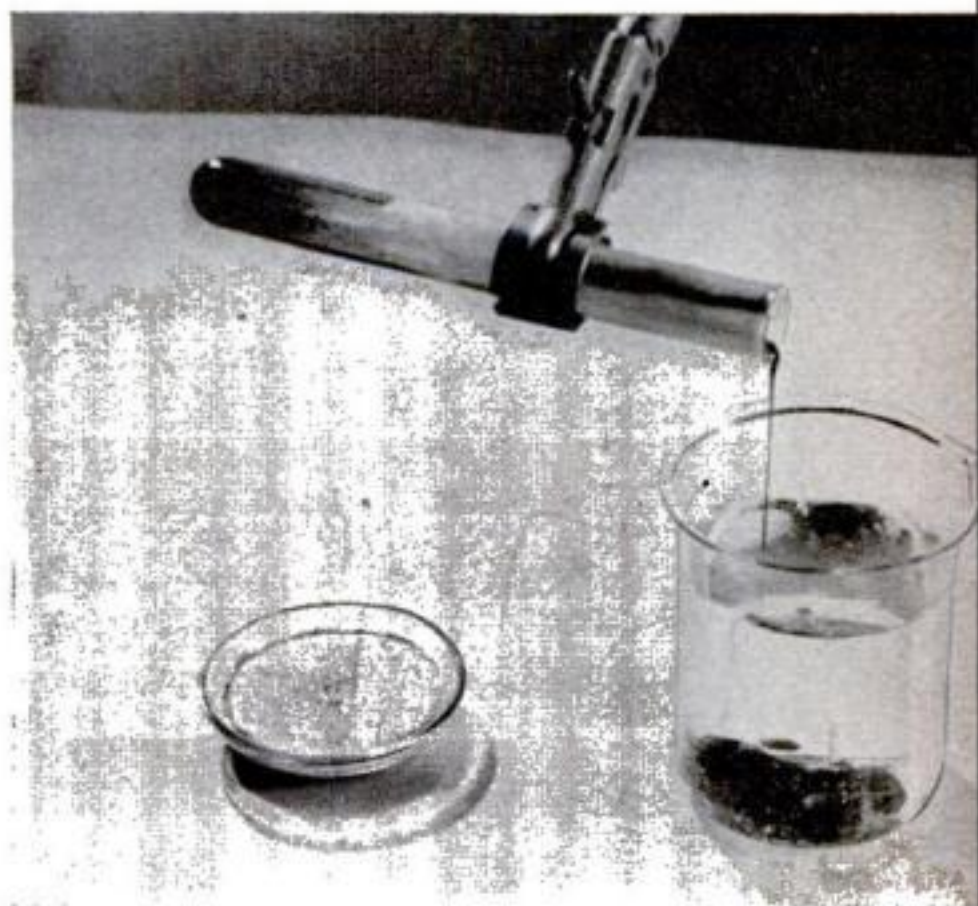

Two forms of sulphur are seen in the above photo. One assumes the shape of crystals; the other is a plastic, rubbery mass. Learn how sulphur acts on rubber by mixing powdered sulphur with rubber cement and heating the mixture over a small flame, as shown below

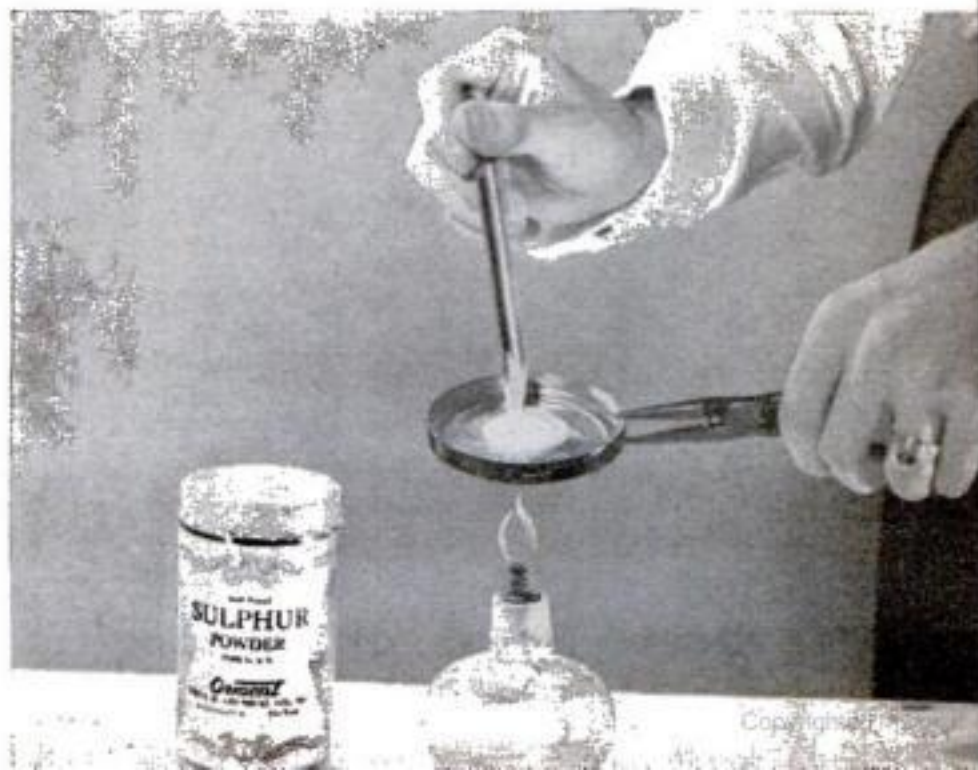

home EXPERIMENTS



SHORT CIRCUITS and their effects can be demonstrated with two dry cells, a small battery bulb, and a battery-testing meter. First, connect the bulb in series with the dry cells and the meter. Now scrape a bare spot on the wires leading to the bulb and away from it. Short-circuit the bulb by connecting these bare spots with a metal object. The resistance of the bulb gone, the hand of the meter jumps ahead. What had been a harmless, controlled current, now becomes an excessive one that will soon exhaust the cells. In the case of house current, it might cause a fire.

RADIO STATIC is caused by atmospheric electricity and by radiations and fluctuating magnetic fields from doorbells, telephone equipment, street-car lines, X-ray apparatus, and so forth. How static can affect your receiving set can be demonstrated with the simple setup shown at the right. Make a loop of several turns of bell wire, to represent your radio aerial, and connect the ends to a pair of headphones. Set up a similar coil a few inches away, and parallel to it. Connect one end of the second coil to one terminal of a dry cell, scrape the other end over the second terminal, and distinct clicks and raspings will be heard in the headphones. Connect a bell or buzzer in series with the second coil, and you will hear a buzzing in the phones. In both cases the noise in the headphones is caused by electrical currents induced in the "aerial." Similarly, electric wires running parallel to your radio aerial cause induced currents every time a switch is opened or closed or a bell is rung, even though the wires and aerial are insulated from one another.



WHY BATTERIES "PICK UP" after a rest is illustrated at the right, with a transparent experimental cell. Arrange a rod of carbon, and another of zinc, in a glass containing a strong solution of sal ammoniac. If you connect a small $1\frac{1}{2}$ -volt bulb to the two terminals the bulb will light brightly at first, but will gradually lose its brightness until it goes out completely. Observe the carbon rod carefully, and you will see just what causes the diminution in current. As soon as the bulb is connected in the circuit, bubbles of gas begin to collect on the carbon, clinging to the rod until it is almost completely covered. These bubbles are filled with hydrogen, and their effect is the dual one of partly insulating the carbon from the solution and of creating a contrary potential in the cell. Together, they reduce the voltage of the cell and, consequently, the current. To prove that this is correct, merely scrape off the hydrogen bubbles, and the lamp will light brightly again. In dry cells, "scraping" of the gas bubbles is accomplished by chemical, rather than by mechanical action. It is brought about by a depolarizer, such as manganese dioxide.




MAGNETIC LINES OF FORCE around conductors carrying an electric current can be demonstrated with a coil of bell wire, two dry cells, and a small magnetic compass. It is a good idea to wind the coil as large as you can conveniently make it, since the magnetic fields are likely to interfere with each other if the coil is too small. By moving the compass about on the cardboard platform, placed as in the photograph below, the needle can be made to indicate both the direction and the arrangement of the lines of magnetic force, which can be drawn easily with a pencil. Reversing the battery connections will also reverse the direction in which the current enters and leaves the coil. The lines of force, and therefore the compass needle, will change accordingly.

IS MORE ELECTRICITY obtainable from dry cells in series, or from cells in parallel? An analogy answers this question. Fill two containers, both having a hole punched in the bottom, with water. Arrange them as below. The greater height of the upright one results in greater pressure, and the water flows out more quickly. The lower pressure of the horizontal one results in a slower flow, which continues longer. Similarly, two dry cells in series produce greater electrical pressure, causing more current to flow in a given time. Connect them in parallel, and only half the current flows, but for a longer time. In both cases the total amount of electricity is the same.



WARTIME

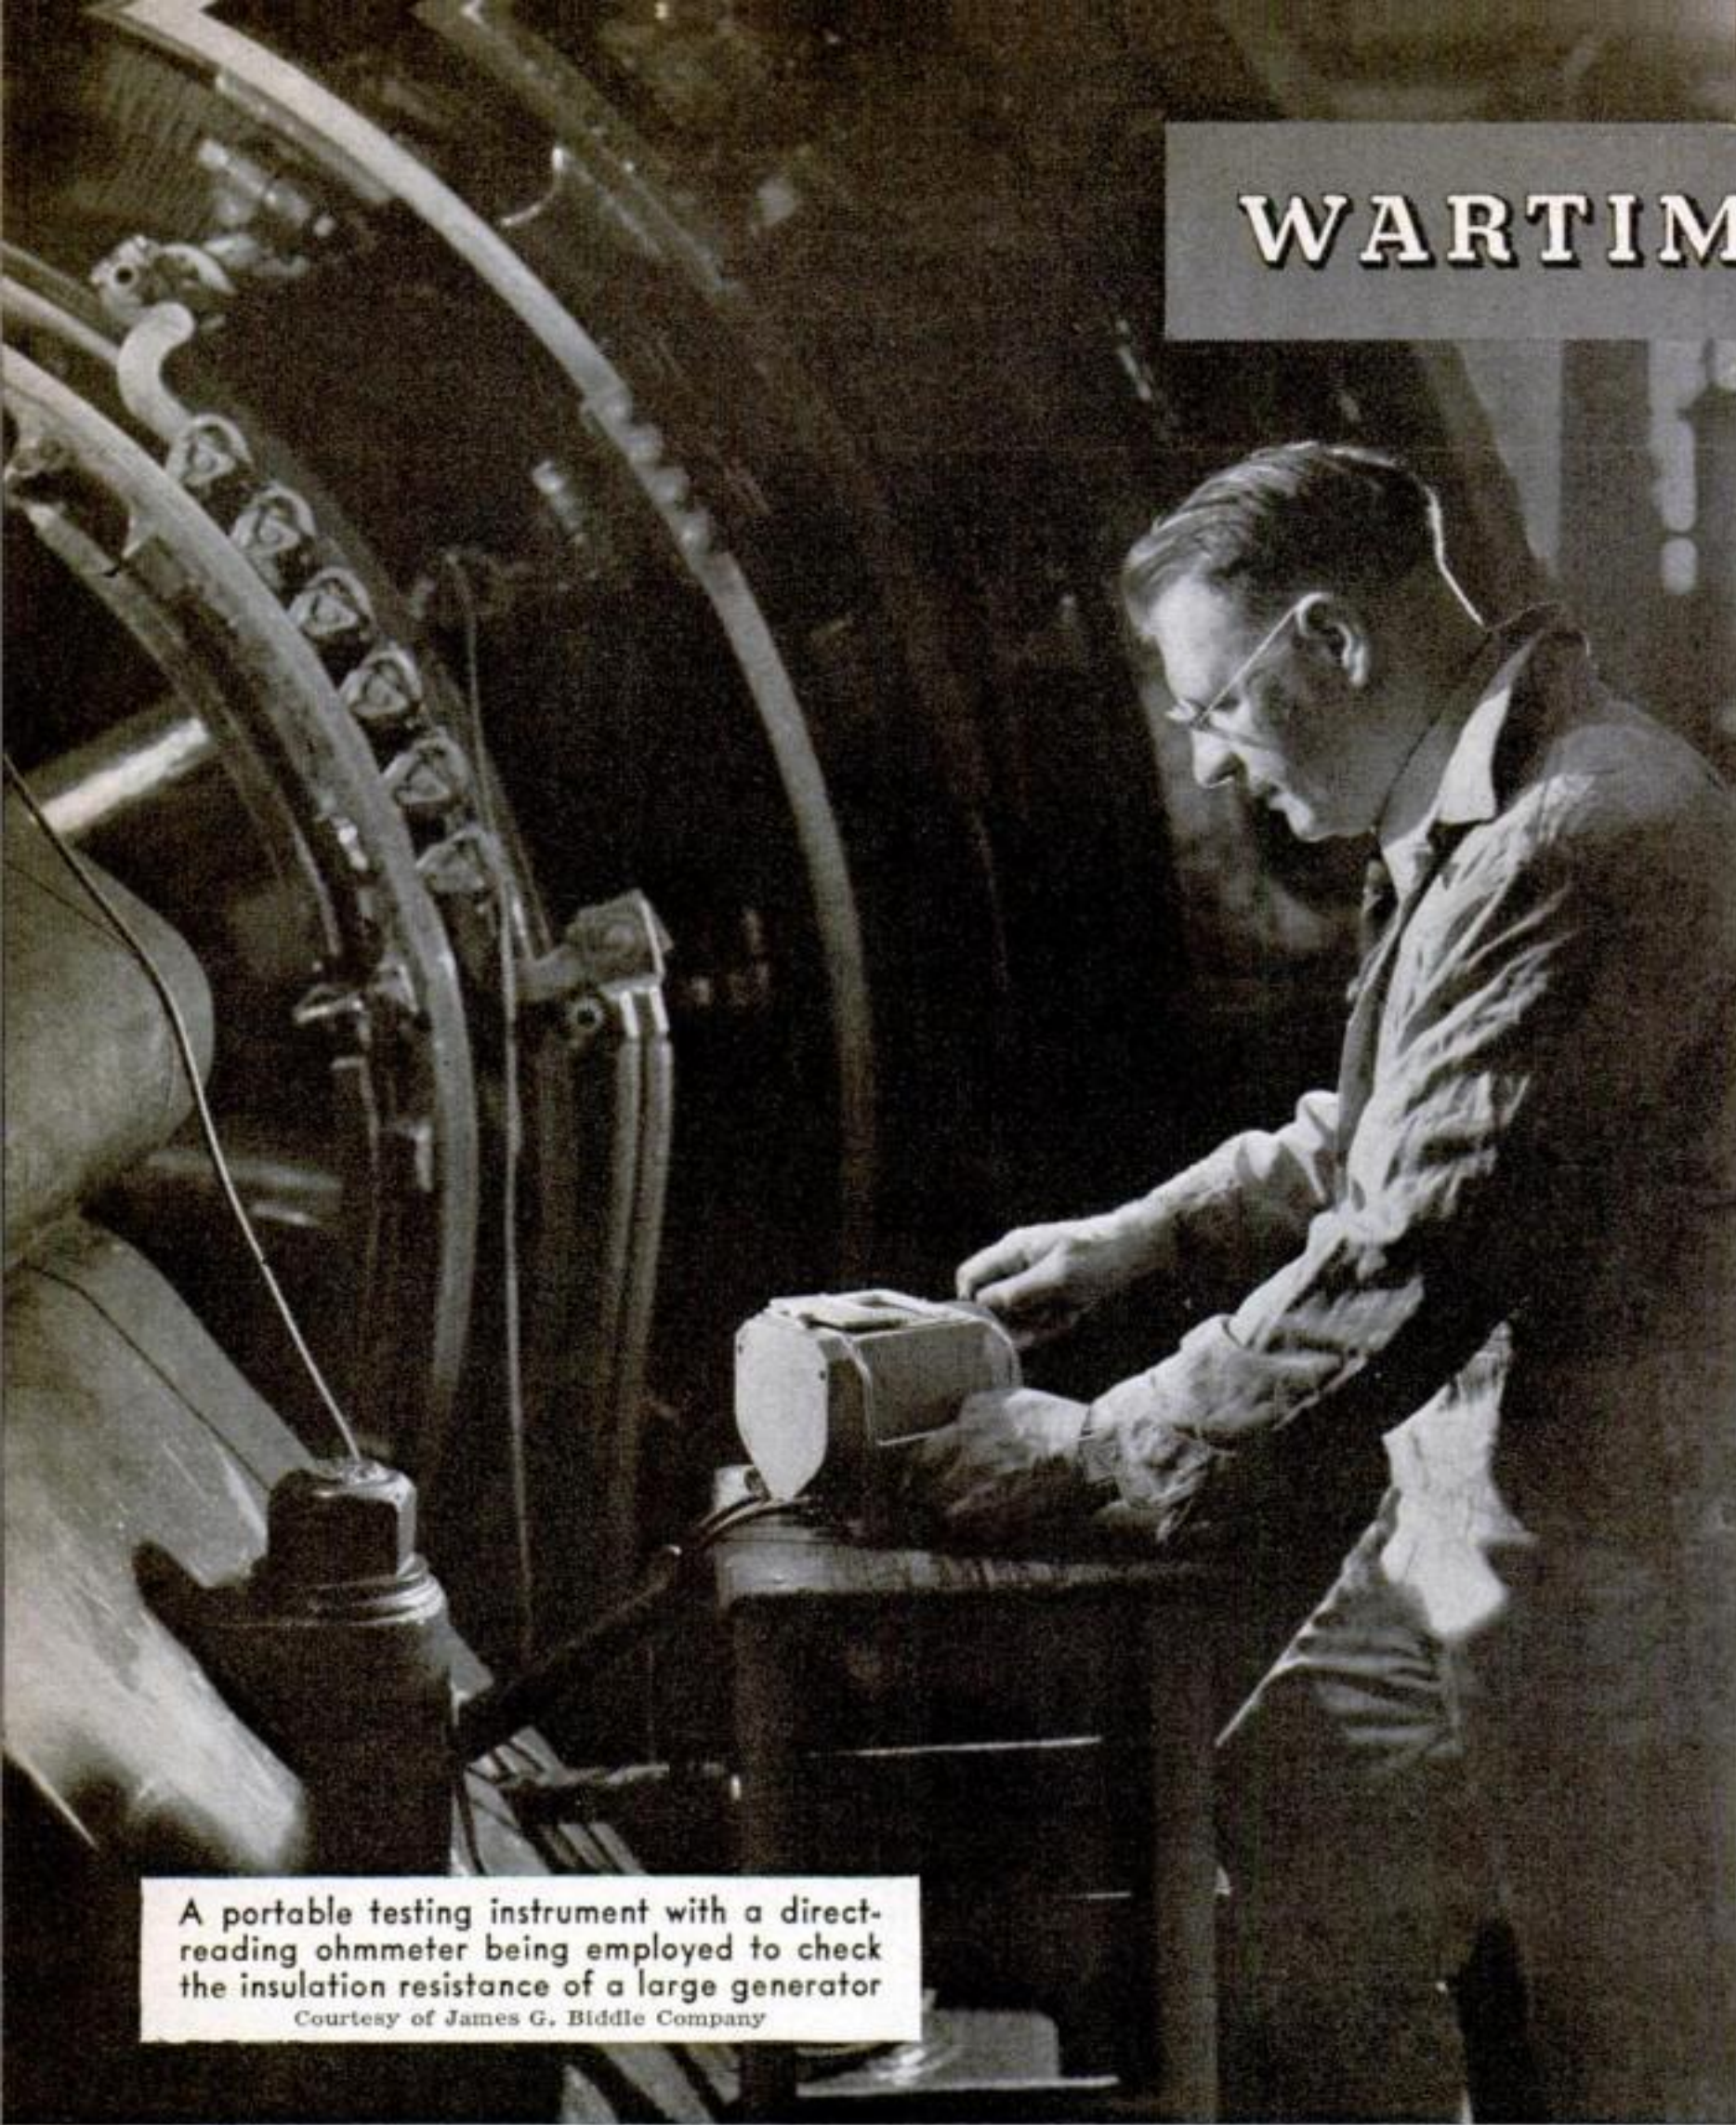

A portable testing instrument with a direct-reading ohmmeter being employed to check the insulation resistance of a large generator

Courtesy of James G. Biddle Company

PROPER MAINTENANCE METHODS INSURE TOP PERFORMANCE

By HAROLD P. STRAND

WITH most factories engaged in war production on a 24-hour schedule, it is more imperative than ever that the electric motors which drive their machinery should be given every care. A motor breakdown may slow up production or even close an entire department for a time.

Under present conditions, many motors must be run the clock around with no relief

periods. This skyrockets their average working time from the normal figure of about 1,800 hours a year to over 8,700 hours. No wonder inspection, lubrication, cleaning, and adjustment must be quadrupled if motors are to last for the duration!

In the home workshop, motors are not likely to be overworked, but since new ones cannot be bought readily, the shop owner had better take good care of those he has. Dampness, acid fumes, dirt and dust,

CARE OF ELECTRIC MOTORS

abrasive particles, and vibration are natural enemies of motors, as are overloading, misalignment, lack of lubrication, friction, and stray oil. Operating a motor with badly worn bearings is another form of abuse. In the box below are given some hints of value.

As most motor failures are electrical rather than mechanical, one of the most important pieces of equipment for the maintenance man is an insulation-resistance tester. This device consists of a hand-operated, direct-current generator capable of supplying a potential of 500 volts, mounted in a carrying case with a direct-reading meter calibrated in ohms and megohms. For testing apparatus rated above 750 volts, a 2,500-volt generator is available.

With such a tester, it is easy to keep a constant check on the insulation resistance of motors, generators, starters, and wiring so that breakdowns can be avoided. One test lead is connected to "ground" and the other, in the case of motors and generators, is clipped to a brush holder. By lifting or removing the brushes, the field can be tested separately from the armature.

All forms of both D.C. and A.C. apparatus and all wiring circuits should be tested periodically and charts kept of the meter readings. Motors that have been rewound should be given an insulation test before

the usual dielectric-strength test with high voltage. If the reading is low on the insulation test, it is not good practice to use the high voltage until the windings have been dried or other measures have been taken to raise the reading, so as to avoid permanent damage. Following the application of high voltage, the insulation tester should be used again to make sure the insulation has not been strained to the point of puncture or breakdown.

The scale of a typical resistance tester reads from 10,000 ohms to 100 megohms, and is suitable for most maintenance work under 750 volts. It can be seen that this instrument starts where most bell-ringing magnetos leave off (10,000 ohms) and as one megohm equals 1,000,000 ohms, the condition of insulation can be quite definitely determined with a top limit of 100 megohms. The readings to be expected will vary with the type of apparatus, temperature of the machine, humidity and operating conditions. Motors, for example, when tested after a long run and consequently warm, will show a lower reading than when cold. Cleanliness of the parts also has a bearing on the case, and when readings are low and there are no serious defects otherwise, washing with a solvent and drying out may raise the reading considerably. Motors in


SERVICING HOME WORKSHOP MOTORS

- Keep commutators of both A. C. and D. C. commutator-type motors clean with fine sandpaper.
- If deep pitting or ridges are evident, turn commutator down in the lathe.
- Replace brushes worn too short to make good contact. Set tension springs to provide only enough pressure for nonsparking operation.
- Keep brush guides clean and free from oil.
- Should sparking persist after brushes are correctly adjusted, try undercutting the mica. If this does not end sparking, test the armature on a growler.
- Use the oil specified by the motor manufacturer. Avoid spilling it into or on the motor.
- Blow out dirt, dust, shavings, chips, or sawdust frequently.
- Cover idle motors to keep out dust.
- Keep mounting bolts tight to prevent vibration.
- Do not allow belt tension to be greater than necessary.

IF A MOTOR seems to run hotter than usual, check with a suitable thermometer and compare the temperature with that specified on the name plate as normal. If a commutator-type motor has run hot, examine the soldered commutator leads. Should solder "whiskers" be evident or solder be spattered inside the housing, resoldering would be advisable. Overheating of the commutator may be caused by using brushes of the wrong grade or poorly fitted brushes.



This motor on a wood shaper is covered with sawdust after a day's run, despite its shield. Damage is likely if such clogging dust is not blown out

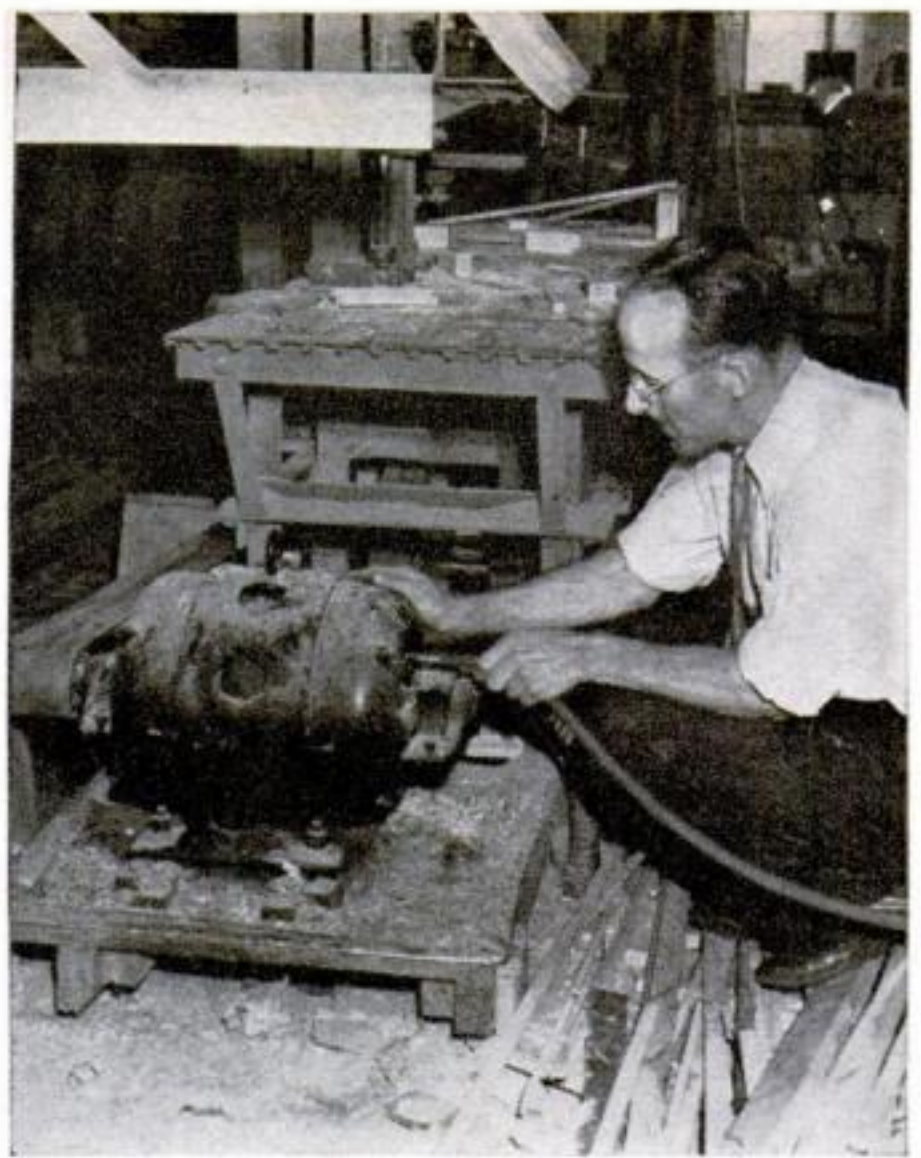

Air cleaning of such shop motors as this should be a daily chore. A compressor or electric blower is ideal, but even a hand bellows can be employed

damp places are hard to keep dry enough to give a satisfactory reading unless given special care as described below.

The actual value on the scale in megohms is not so important as are comparative readings over a period of time, as noted from the charts. However, many engineers and practical electricians take the value of one megohm per 1,000 volts as a standard for a low limit. Some types of apparatus will show considerably higher tests and others operating under adverse conditions may be safely run at lower values, but any sudden or even gradual lowering in resistance is an indication that something is wrong. Unlike a bell-ringing magneto, which delivers alternating current, a D.C. tester of this type is not short-circuited by the capacitance of a large machine or a long cable, nor choked by inductance, as is often the case with an A.C. tester, resulting in a false diagnosis of the trouble. In using either machine, make sure the current is off on the line or apparatus under test.


Water, or dampness, is the cause of many electrical failures. Avoid spraying water on a motor or splashing water close to it. Keep a motor subject to spray or splashing covered with a protecting box or hood at all times or, better still, use a totally enclosed or splashproof motor. Make frequent tests with the resistance meter, and when the reading shows a decline, take steps to dry

out the motor before damage is done. This can be done in an oven under controlled temperature or by locking the rotor and sending a low-voltage current through the windings. Another method is to cover the motor with a tarpaulin having ventilation holes at top and bottom, and blow hot air through the motor. Make frequent resistance tests to avoid unnecessary loss of time and possible overbaking, which may cause insulation to become brittle and crumble.

Where shop motors are choked with sawdust, air pressure from either a compressor or a hand bellows should be applied to blow this waste matter out after each day's run. If allowed to remain, it will cause overheating of the motor and possibly a burn-out. Totally enclosed, fan-cooled motors should be used for this class of service.

Overloading a motor willfully should be a punishable offense. The first indication of it is usually a decided increase in temperature and a blowing of fuses or overload relays. To determine whether or not overload is present, connect an ammeter in series with one lead while the motor is carrying full load, and note the reading in amperes. If this is not more than the normal current stated on the name plate, it can be assumed that the motor is not overloaded.

Several things other than the external load given a motor can result in overloading. Lack of lubrication can cause friction

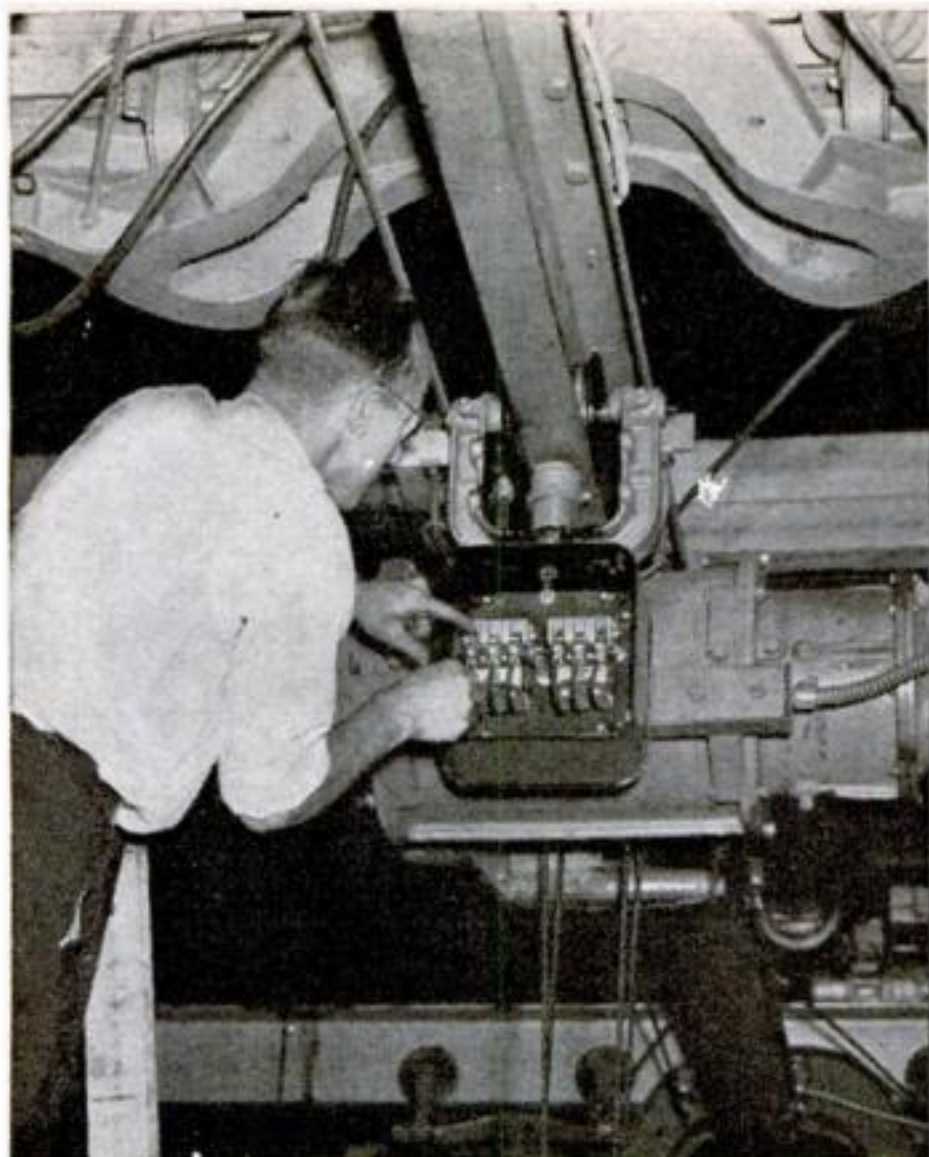


The contact fingers of magnetic controllers need inspection and cleaning at regular intervals for protection against burn-outs due to bad contacts

at the bearings. Worn bearings may allow the rotor to rub on the field poles. An overly tight belt can make a motor labor. Dirt and other waste matter inside the housing may have the same effect. Misalignment of pulleys, chain sprockets, or gears will cause friction, vibration, and inefficient operation. If after all these points have been checked, overload is still present, there is nothing else to do but substitute a larger motor for the work. Don't continue using an undersized motor by overloading it.

Lubrication is one of the most important factors in keeping motors on the job. In bearings that have oil rings, always use oil—never grease. Check the rings occasionally to make sure they turn freely. Drain the wells at intervals and refill with clean, fresh lubricant. Keep the level at all times just below the top of the overflow cup at the side, which level should be determined when the motor is at rest. Use an oil of the correct grade for the size of the motor. Too light an oil will be squeezed out from between the shaft and the bearing surface and allow metal-to-metal contact with resulting damage.

Waste-packed bearings also use oil, and this should be renewed occasionally. Anti-friction bearings such as ball bearings require grease. This should be injected as required, for damage to the polished surfaces is sure to result if such bearings run dry.

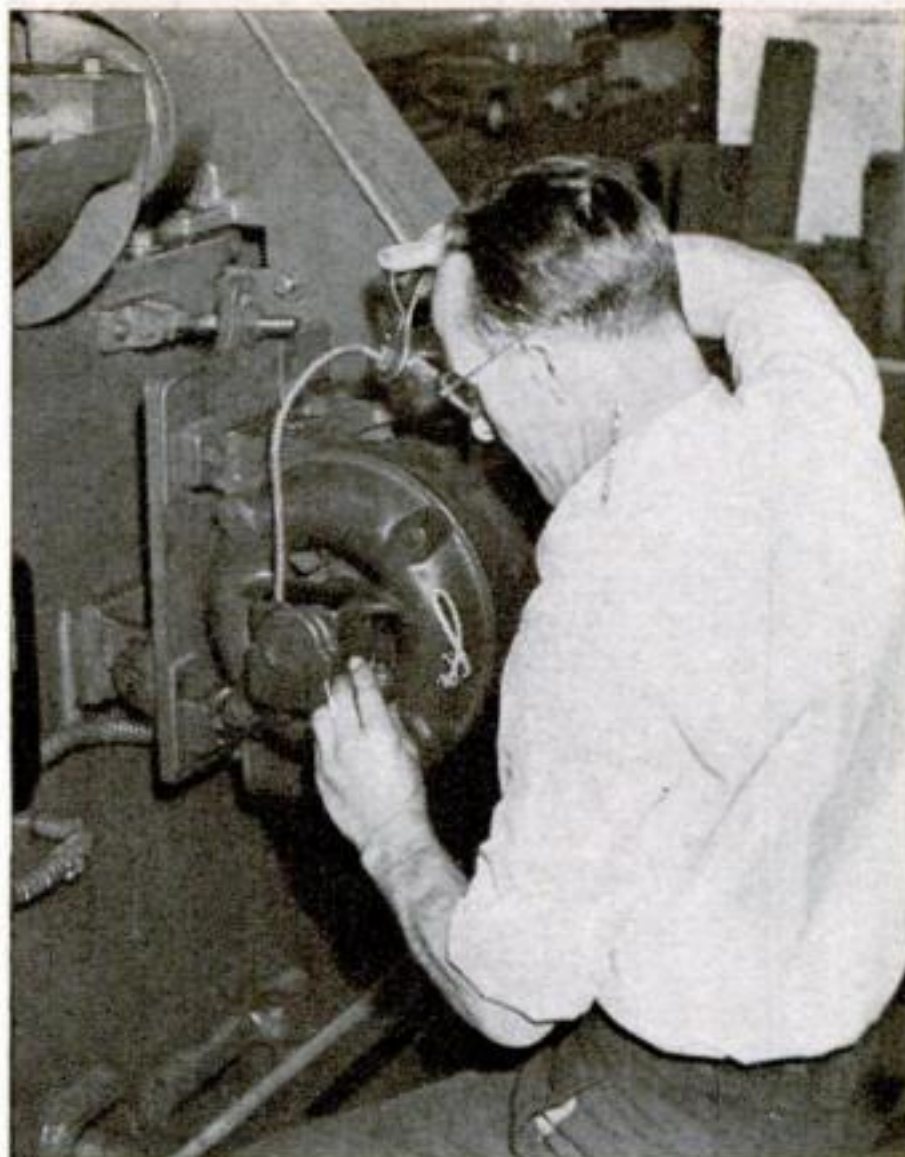

The lubrication of a 5-h. p. motor on a big power saw is being checked here. Oil is added to keep the cup at the side of the bearing nearly full

When ball bearings wear to a point where play or shake is noticeable, new ones should be installed without delay. If any dirt or abrasive particles ever get into the bearings of a motor, stop the machine at once and thoroughly wash out the parts with carbon tetrachloride; then refill with new lubricant.

A point often overlooked in the maintenance of motors is the possibility of three-phase motors running "single phase" due to a blown fuse or dirty contacts in the control switch or breaker. When this happens, the motor will continue to operate, but with a gradual increase in temperature until fuses blow, relays open, or perhaps the motor burns out. To guard against this hazard, check fuses frequently and clean all contacts in both fuse panel and control switches regularly. Often it will be found that fuse clips are loose, making poor contact. Control contacts may be pitted and burned. They should be cleaned or new contacts obtained and installed.

Another source of trouble in motors is vibration. Many times the rotor is out of balance, especially following an armature repair. This can be checked by testing the rotor on parallel knife edges or bars. It should not come to rest at any particular point repeatedly. If it does, it has a heavy side. The usual remedy is to drill a few shallow holes in the armature core at this point until it balances.

FIRST STEPS IN ELECTRONICS

PART I — THE ELECTRON

By CHARLES I. HELLMAN

Physics Instructor, Bronx High School
of Science, New York

ELECTRONS, although the smallest particles in existence, are doing a big job in helping Uncle Sam win this war. The problem of producing them and putting them through their paces is a comparatively new branch of science called *electronics*.

Through this and subsequent articles, those readers with a general interest in science may gain an understanding of how *electronics* is helping in our war effort. Experimenters will discover in this most fascinating of modern sciences a ready field for new activities. And men and women who wish to expand their knowledge of electronic applications in war industry will find it essential to study and master the fundamentals.

Electrons are literally everywhere, for they are constituents of matter. Free electrons abound even in "empty" interplanetary space. Surcharges of electrons create the beauty of the northern lights and the flash of lightning. Electrons are also given off by radium and other radioactive substances.

We ourselves are constantly freeing electrons from ordinary matter, and putting them in motion. Comb your hair briskly with a hard-rubber comb on a dry winter day, and the friction strikes electrons loose from the atoms comprising your hair. These cling to the comb, which we then say is "electrified."

An electric current consists of electrons in motion. Snap an electric-light switch, and billions of electrons flow through the filament. Millions crowd upon the negative terminal of the dry cell you buy for a dime, and are ready to flow forth, through the bulb of your flashlight, and back to the positive terminal, at the touch of your finger on the button.


Early in the science of electricity it was rather arbitrarily decided that the flow of current was from

the positive to the negative. Today it is known that the electron flow constituting the current is exactly opposite to this—from the negative to the positive. It is an excess of electrons that constitutes a negative charge. Matter that has been stripped of some of its electrons is said to have a positive charge, and will attract electrons from whatever source it can. The electron flow is thus always from the negative to the positive.

A source of electrons most of us are familiar with is the cathode or filament of a vacuum tube. As *electronics* has made perhaps its greatest contributions in the field of radio communication, it is interesting to note that our modern knowledge of the electron began with an accidental discovery made during the first demonstration of wireless waves.

In 1864 James Clerk-Maxwell, in attempting to explain how a magnet would pick up a piece of iron at a distance, or how an electrified rubber rod could attract pieces of paper at a distance, propounded a startling theory. By mathematical calculations he found that the speed with which a magnetic disturbance traveled was nearly that of light, and he therefore concluded that light itself was an electromagnetic disturbance.

Since light can be reflected, focused, and transmitted through space, and since electromagnetic disturbances seemed to be of the same nature as light, Clerk-Maxwell's discovery indicated that it might be possible

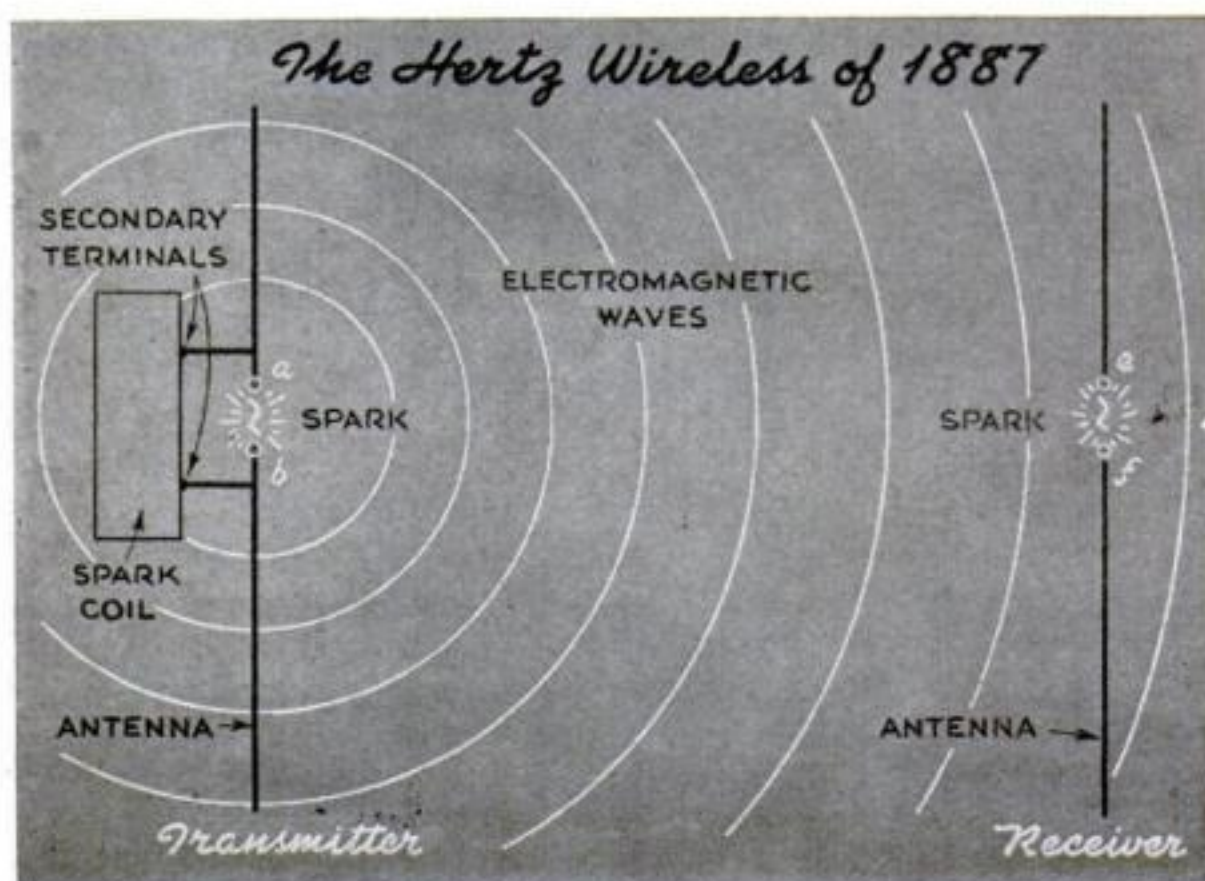


to produce an electromagnetic wave having somewhat the same properties as light. As a consequence of this work, many physicists were stimulated to experiment along these lines, and in 1887 Heinrich Rudolph Hertz, after painstaking work, succeeded in producing waves that completely confirmed Clerk-Maxwell's theories. The apparatus he used for some of his experiments is shown on the facing page. Using this equipment, he was able to duplicate with electromagnetic waves almost all the effects possible with light waves.

Let us examine Hertz's equipment in order to understand how, as early as 1887, he was able to produce radio waves. A spark coil like that in an automobile was connected to the two brass rods, as shown in the diagram. This apparatus was the transmitter of energy. The receiver was used to pick up the electromagnetic waves. When the receiver was tuned to the transmitter by using the correct length of antenna wires, Hertz found that whenever a spark was set up in the gap *ab* by the spark coil, a spark was received at gap *ef*. With this apparatus, simpler than the ignition system of an automobile, Hertz was able to establish the experimental foundations of radio communication.

An elementary explanation of the above experiment may be given in terms of electron movement. Whenever an electron is speeded up or changes its direction suddenly, it tends to radiate energy in the form of electromagnetic waves. If the oscillating motion of the electrons occurs at a frequency of 730 trillion times a second, then the electromagnetic disturbance will affect our eyes and be called light. If the frequency is in the range of 100,000 to 1,000,000,000 times per second, the energy radiated will be picked up by a properly tuned set as a radio wave. The chart at right shows how the nature of electromagnetic waves depends on the frequency of electronic oscillation. Since the frequencies are extremely high, mathematical shorthand is used in writing large numbers. Thus 10^{13} is 1 with 13 zeros following or 10,000,000,000,000. For convenience, this may readily be reduced




Modern version of the apparatus used by Hertz—a walkie-talkie radio that keeps Army patrols in close touch with their officers

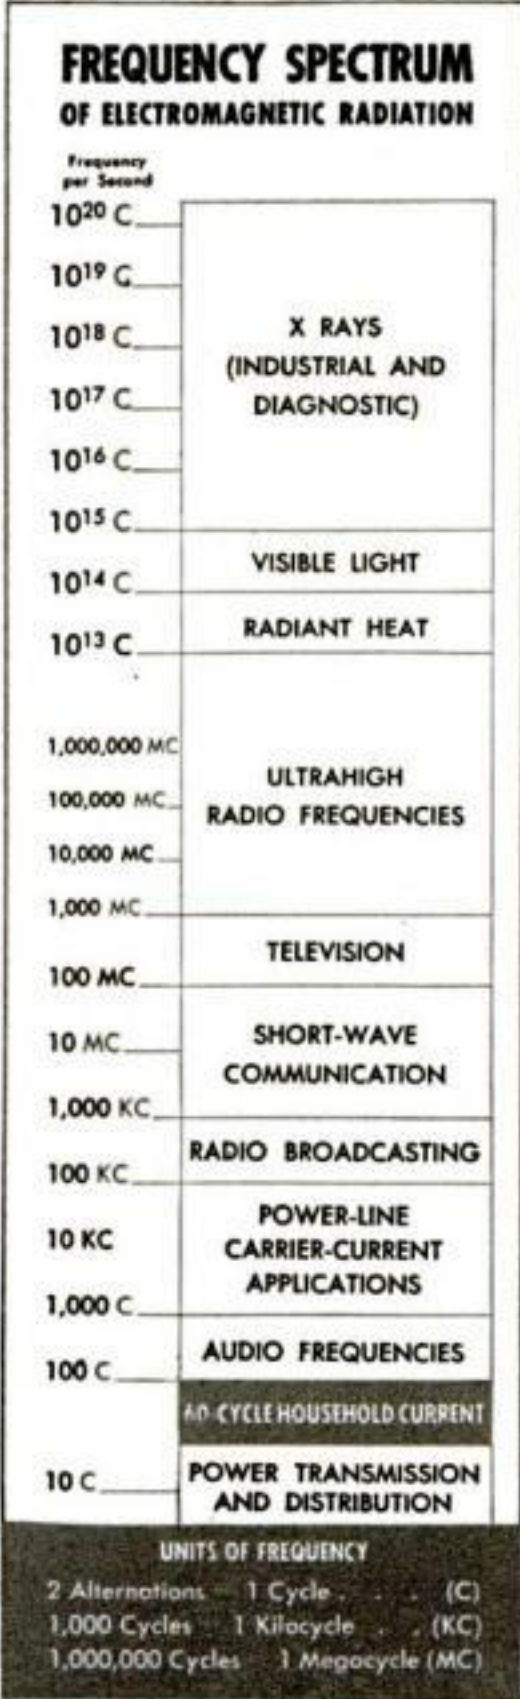

to ten million megacycles. Directly above is a modern version of Hertz's apparatus. This walkie-talkie radio outfit used by soldiers keeps fast-moving patrols in constant touch with directing officers. A drawing on page HW52 shows graphically the mechanism of radiation.

An important phase in the development of electronics is the discovery of the photoelectric effect. In 1887, Hertz discovered that when ultraviolet light fell on the metallic knobs of the spark gap in his receiver, he could obtain a spark more easily.

A year later, Wilhelm Hallwachs, another physicist, studied the effect of light in producing a discharge from metal surfaces. As a result of

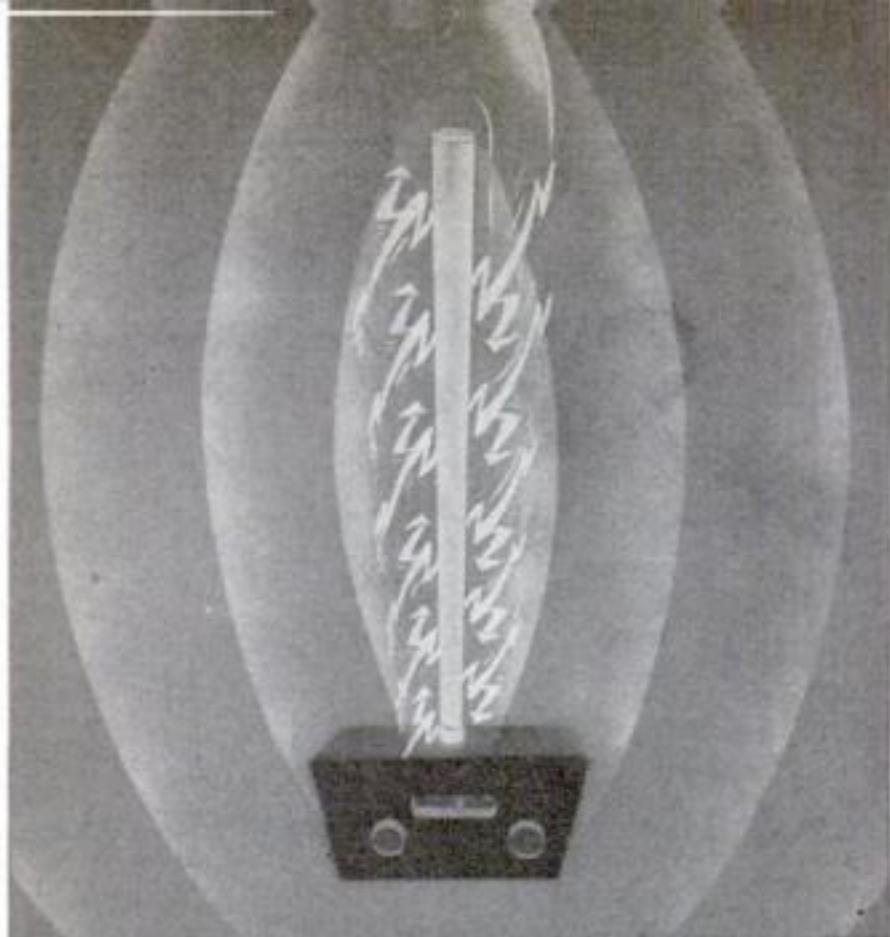

Electrons tend to radiate energy in the form of electromagnetic waves when speeded up or suddenly changed in direction. At right, transmission of pictures by radio—a new photo-cell application



his work, he is credited with the discovery of the photoelectric effect. His apparatus is shown just below. Ultraviolet light falling on the zinc knob caused the leaves of the negatively charged electroscope to lose their charge of electrons and collapse.

Photo cells are today used to transmit television images, to help guard defense plants, to convert sound-track densities into talking movies, in plane de-icers, and in a vast array of other applications. One new use is the sending of photographs by radio.

A diagram of the action of a photo cell is also shown below. The electrons emitted from the light-sensitive surface are picked up by the collecting rod and are conducted to an outside circuit. This stream of electrons constitutes an electric current.

The best way to learn electronics is to handle electronic equipment. However, due to the fact that almost all electrical equipment is being diverted to military channels, such apparatus will no longer be available to the experimenter. Fortunately, there is a source of equipment that most of us can tap at little or no cost. Every old or obsolete radio set is a veritable gold mine of parts. If you can get your hands on one that has outlived its usefulness, you can still make use of its components.


A few of the electronic devices that can be made from them are a radio-frequency oscillator, an audio-frequency oscillator, a wave-trap, and a phonograph amplifier. How to build these and other useful devices will be told in a later article.



Hallwachs discovered the photoelectric effect in 1888 with a negatively charged electroscope (left). When light fell on the zinc knob, it lost its charge of electrons, as shown by the falling of the telltale leaves

In a photoelectric cell, the electrons that leap forth from the plate strike a collecting rod or conductor, down which they travel to the amplifier or other outside circuit, as shown in the drawing at right

What's Wrong?

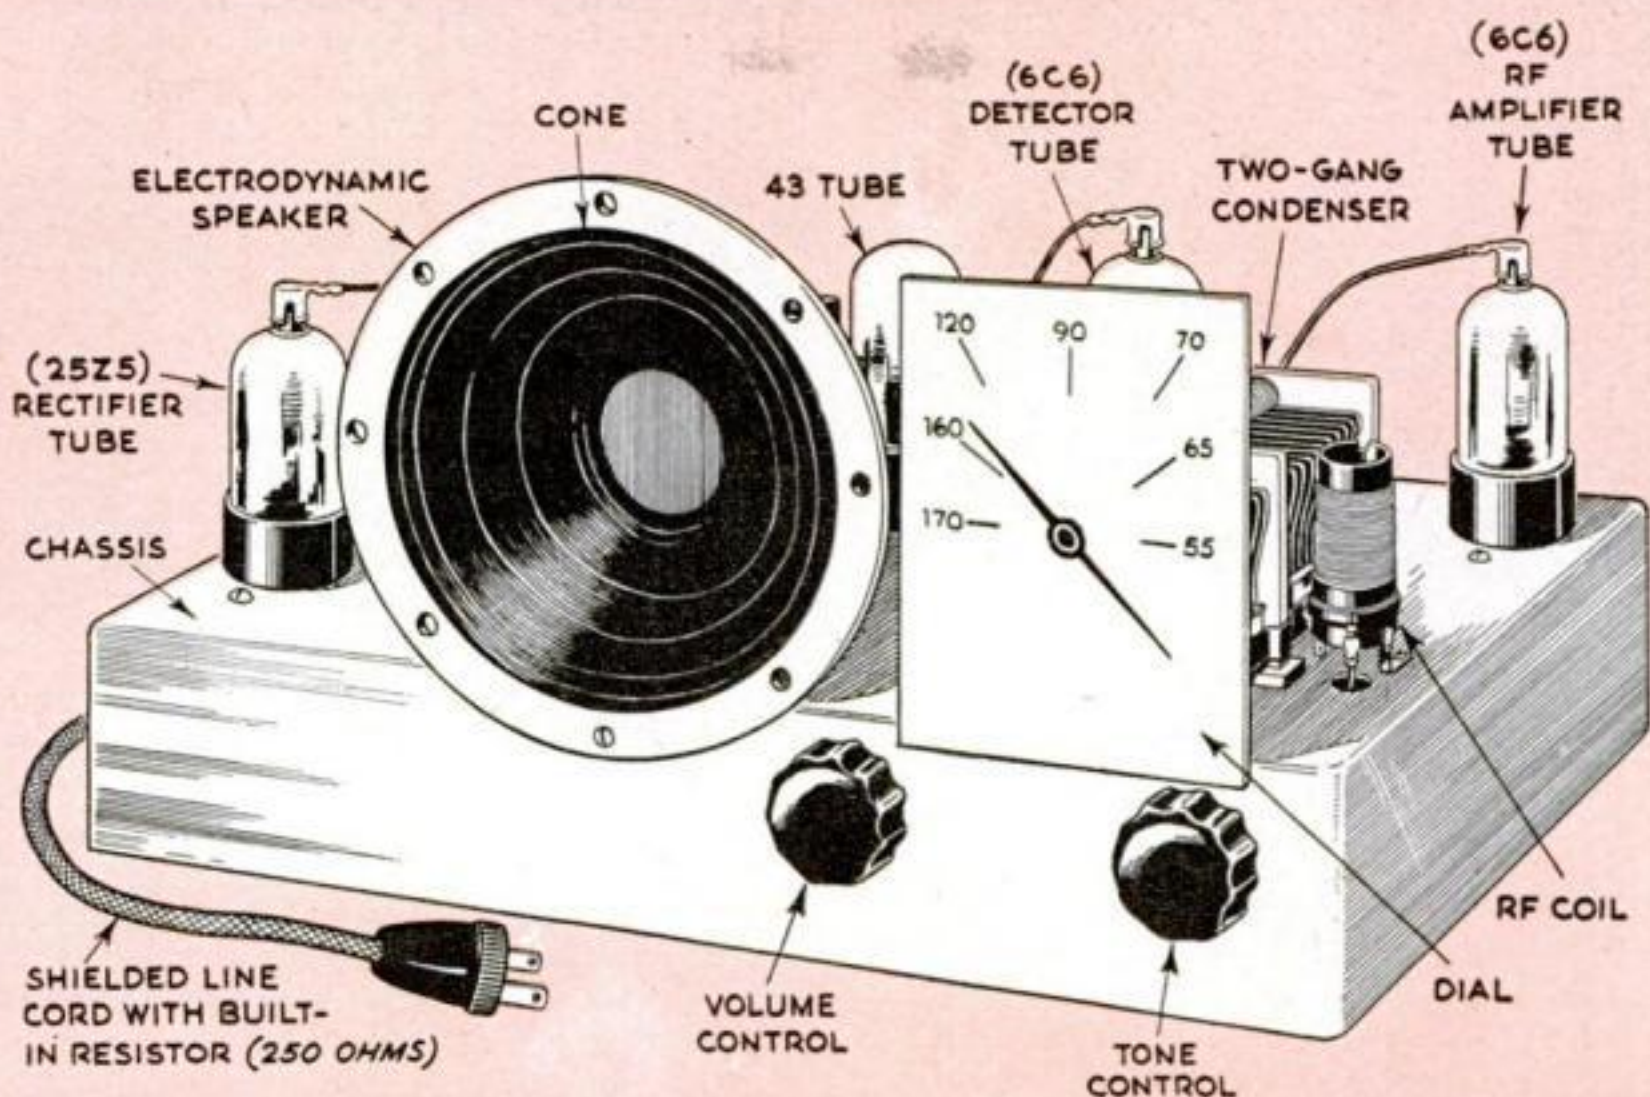

CAN YOU FIND EIGHT ERRORS?


How much do you know about radio? In the sketch of a four-tube A.C.-D.C. TRF receiver above, the artist has made eight intentional errors. Can you find them? As a clue, look for omissions and unnecessary inclusions, and study the parts themselves and their position on the chassis. Take as much time as you require; then turn this page upside down to check your answers.

of selecting stations. 7. All the tubes have the wrong shape, since the 6D6, 6C6, 43, and 25Z5 types all have dome tops. The shapes in the sketch are those for the new GT/G-type tubes. 8. The speaker is too close to the dial for practical use in a cabinet.

ANSWERS: 1. A 6C6 is never used as an RF amplifier tube. In a four-tube TRF receiver, the first tube is always a 6D6 super-control RF amplifier tube. The 6C6 is a detector tube. 2. The RF coil is never mounted on top of the chassis; it is the antenna coil that is mounted in this position. The RF coil is mounted underneath the chassis for shielding purposes. 3. The 25Z5 rectifier tube should not have a grid cap on top of the bulb. 4. The resistance in the line cord is too high for the tubes used. It should be between 165 and 180 ohms. 5. Line cords on A.C.-D.C. sets are never shielded. 6. There is no dial-control knob shown. With only volume-control and tone-control knobs, there would be no way

Pocket-Size Kit Contains Dial and Knob Parts


A COMPLETE assortment of knob springs, setscrews, dial pulleys, idler pulleys, and drive rubbers is contained in a radio kit, at left, equipped for repairing dials and knobs. The kit is convenient to take on jobs, since it measures only $\frac{7}{8}$ " by $2\frac{3}{4}$ " by $4\frac{3}{4}$ ". Two models are available, one containing 70 pieces, the other 150, and replacements may be obtained. Either kit will service any type knob or dial.

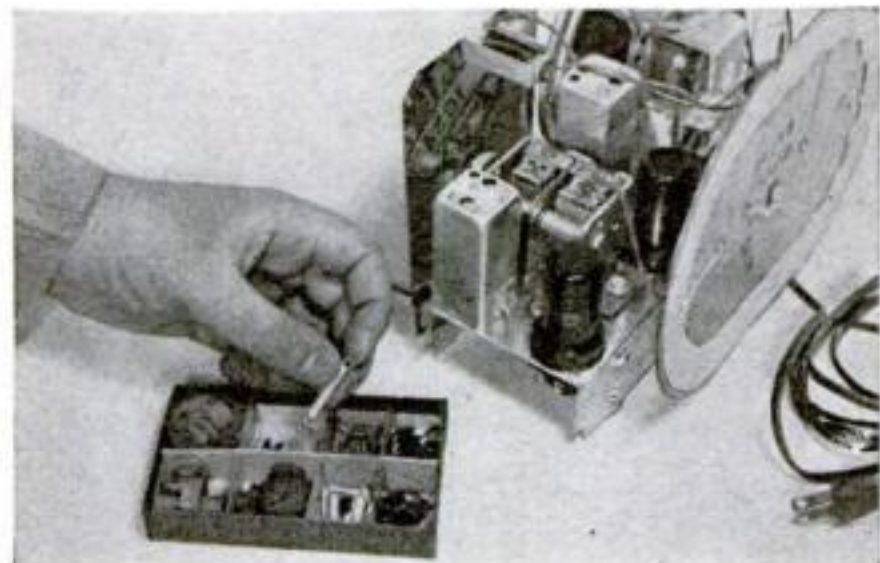


Servicing Your Radio



CHANGING PILOT LIGHTS is a simple operation in servicing a small A.C.-D.C. receiver, but be sure that you disconnect the radio at the wall socket—don't just turn off the switch. A serious short can occur if the pilot-light bracket and holder drop on the tuning condenser or chassis.


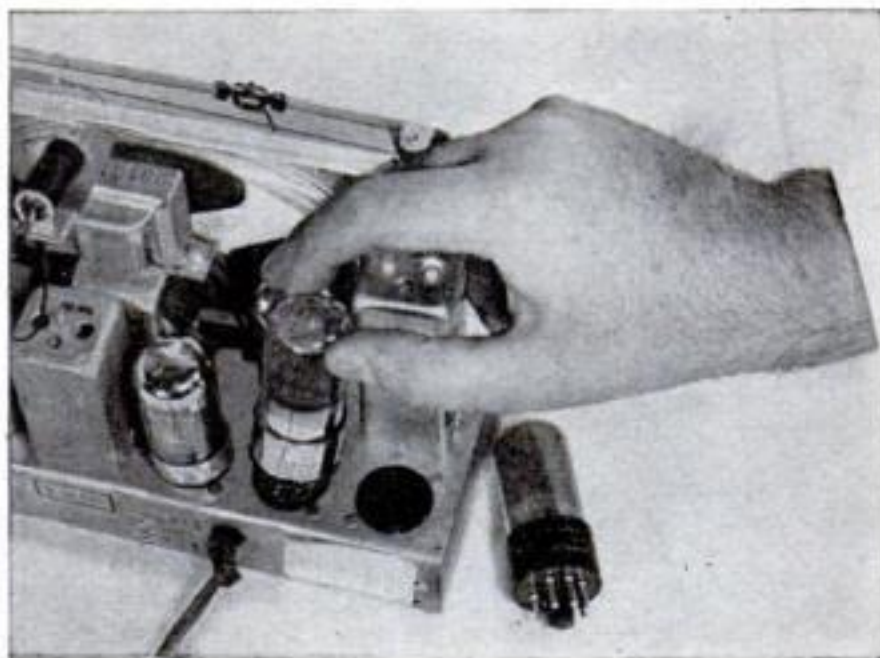


INCREASED HEATER VOLTAGE may be necessary if the rectifier tube burns out quickly on an A.C.-D.C. radio having a new high-voltage heater tube and no line-cord resistor. Try replacing the 3525-GT/G rectifier tube with a 45-volt rectifier, such as a 42Z5-GT/G, to increase the heater voltage to 120 volts.

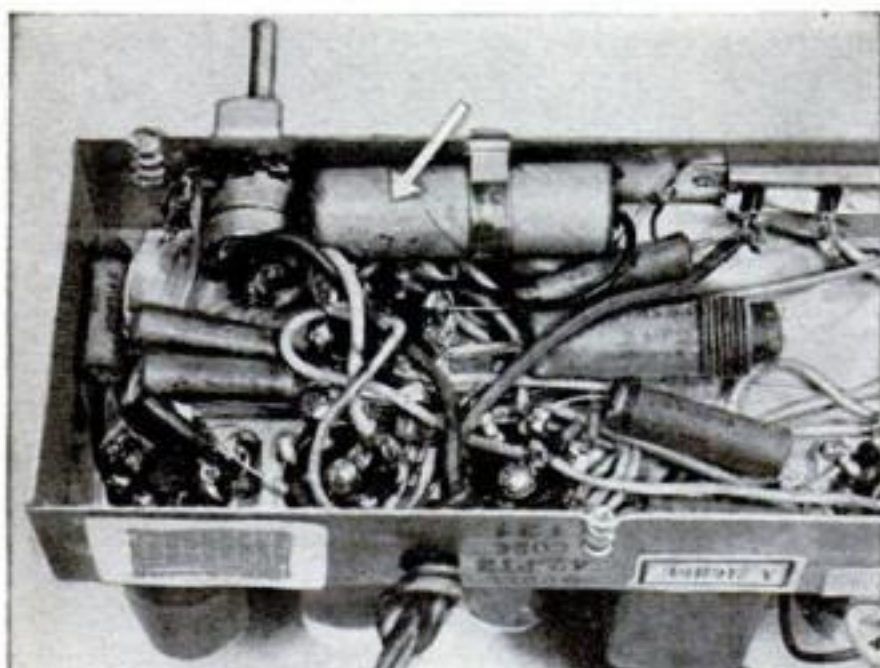

THE PAPER TUBULAR CONDENSER connected between the power pentode tube and chassis, as shown in the diagram below, may be shorted if an A.C.-D.C. radio has gone dead except for the heater glow inside its tubes. This is especially true if, upon testing, the D.C. voltage to the tubes shows only about 20 volts. Remove the power pentode tube (a 43, 25L6, 50L6, or similar tube) from its socket, and test the condenser by placing an ohmmeter across it. If the needle on the meter swings over, the condenser is shorted and a new one must be installed.

SQUEALING AND WHISTLING that make it impossible to tune in a station clearly on a small A.C.-D.C. receiver may mean failure of one or both of the filter condensers shown in the photograph above and the diagram below. The noise is usually accompanied by a noticeable loss in volume. If defective, the condensers must be replaced.

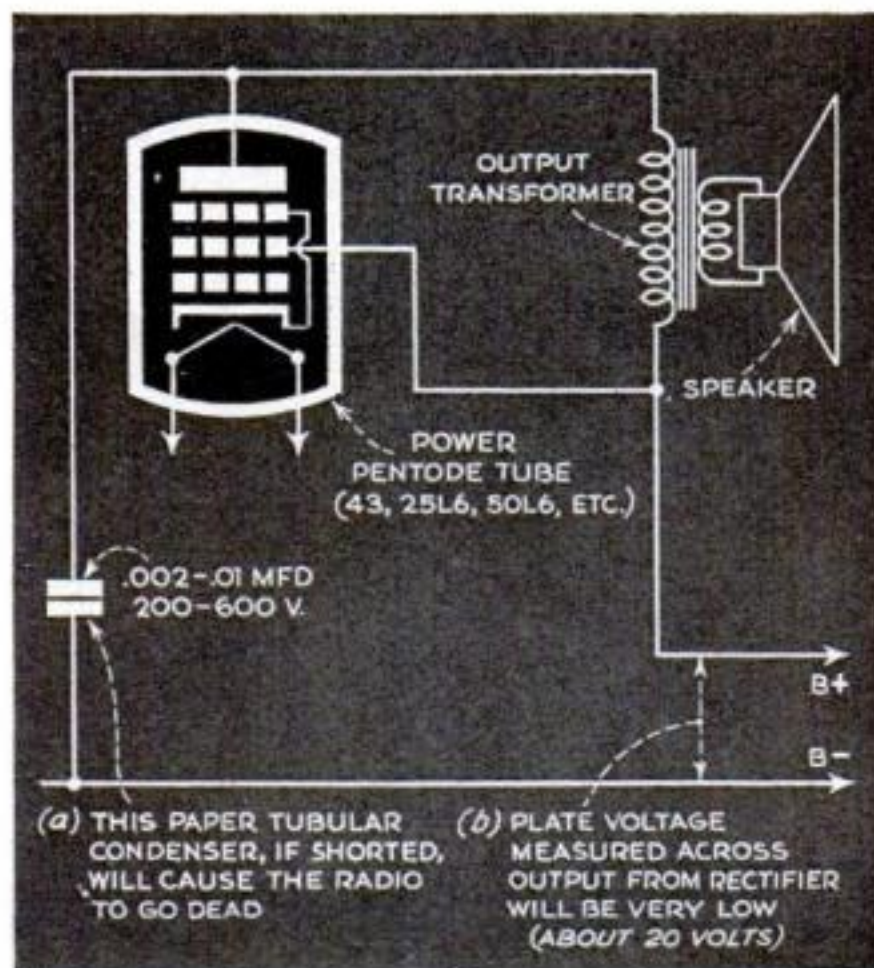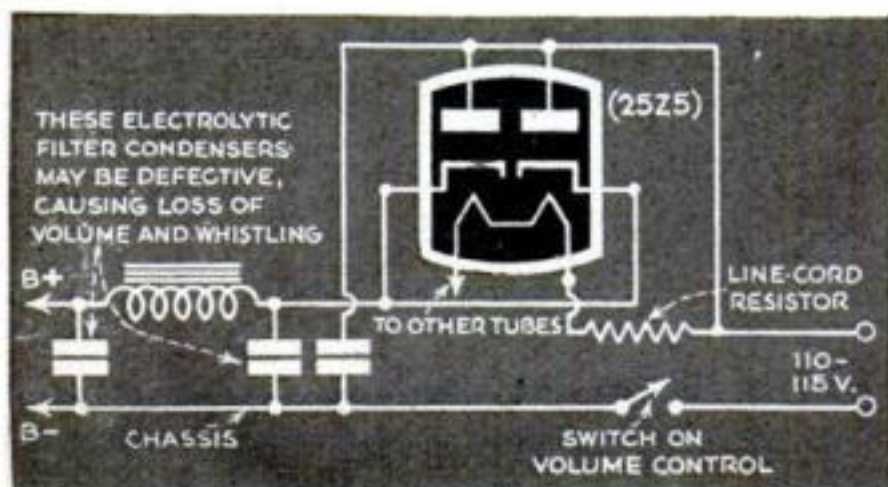




1



2



3

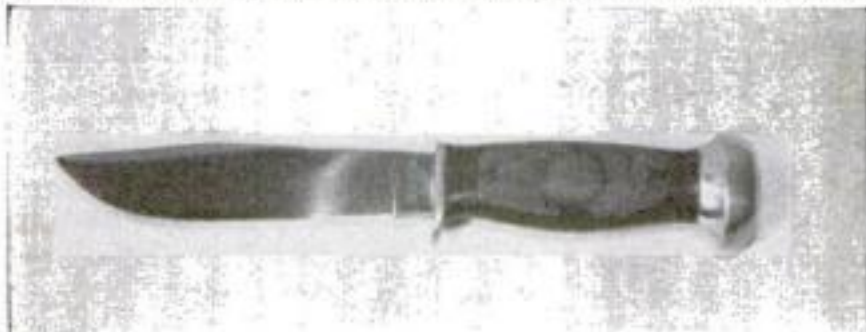

4



5



6



7

Question Bee

A SHARP shell or bit of flint was probably the first knife, so the origin of this tool undoubtedly dates from the dawn of human history. There is no tribe today, even among the most primitive peoples, that does not use knives of some kind. War, hunting, fishing, manufacturing, and the arts have all developed their special types, and at least seven different kinds of steel are used in the manufacture of modern knives. Can you name the ten common knives shown here? After writing your answers on the dotted lines, turn the page upside down to find your score.

ANSWERS

1. Grapefruit knife
2. Spatula knife
3. Sloyd manual-knife
4. Sheath knife
5. Shoe knife
6. Clam knife
7. Jackknife
8. Fisherman's knife
9. Slitting knife
10. Linoleum knife



8




9



10

Dear Workshop Editor:

Most home craftsmen need some kind of lumber rack badly. I know I do. Stock left on a damp floor is likely to warp or split, and if it's stacked up in a corner you may fall over it and you always have a hard time finding the piece you want. How about a plan for a simple rack that can be placed against one wall, with some way of keeping different kinds or thicknesses of stock separate? *C.E.V.*

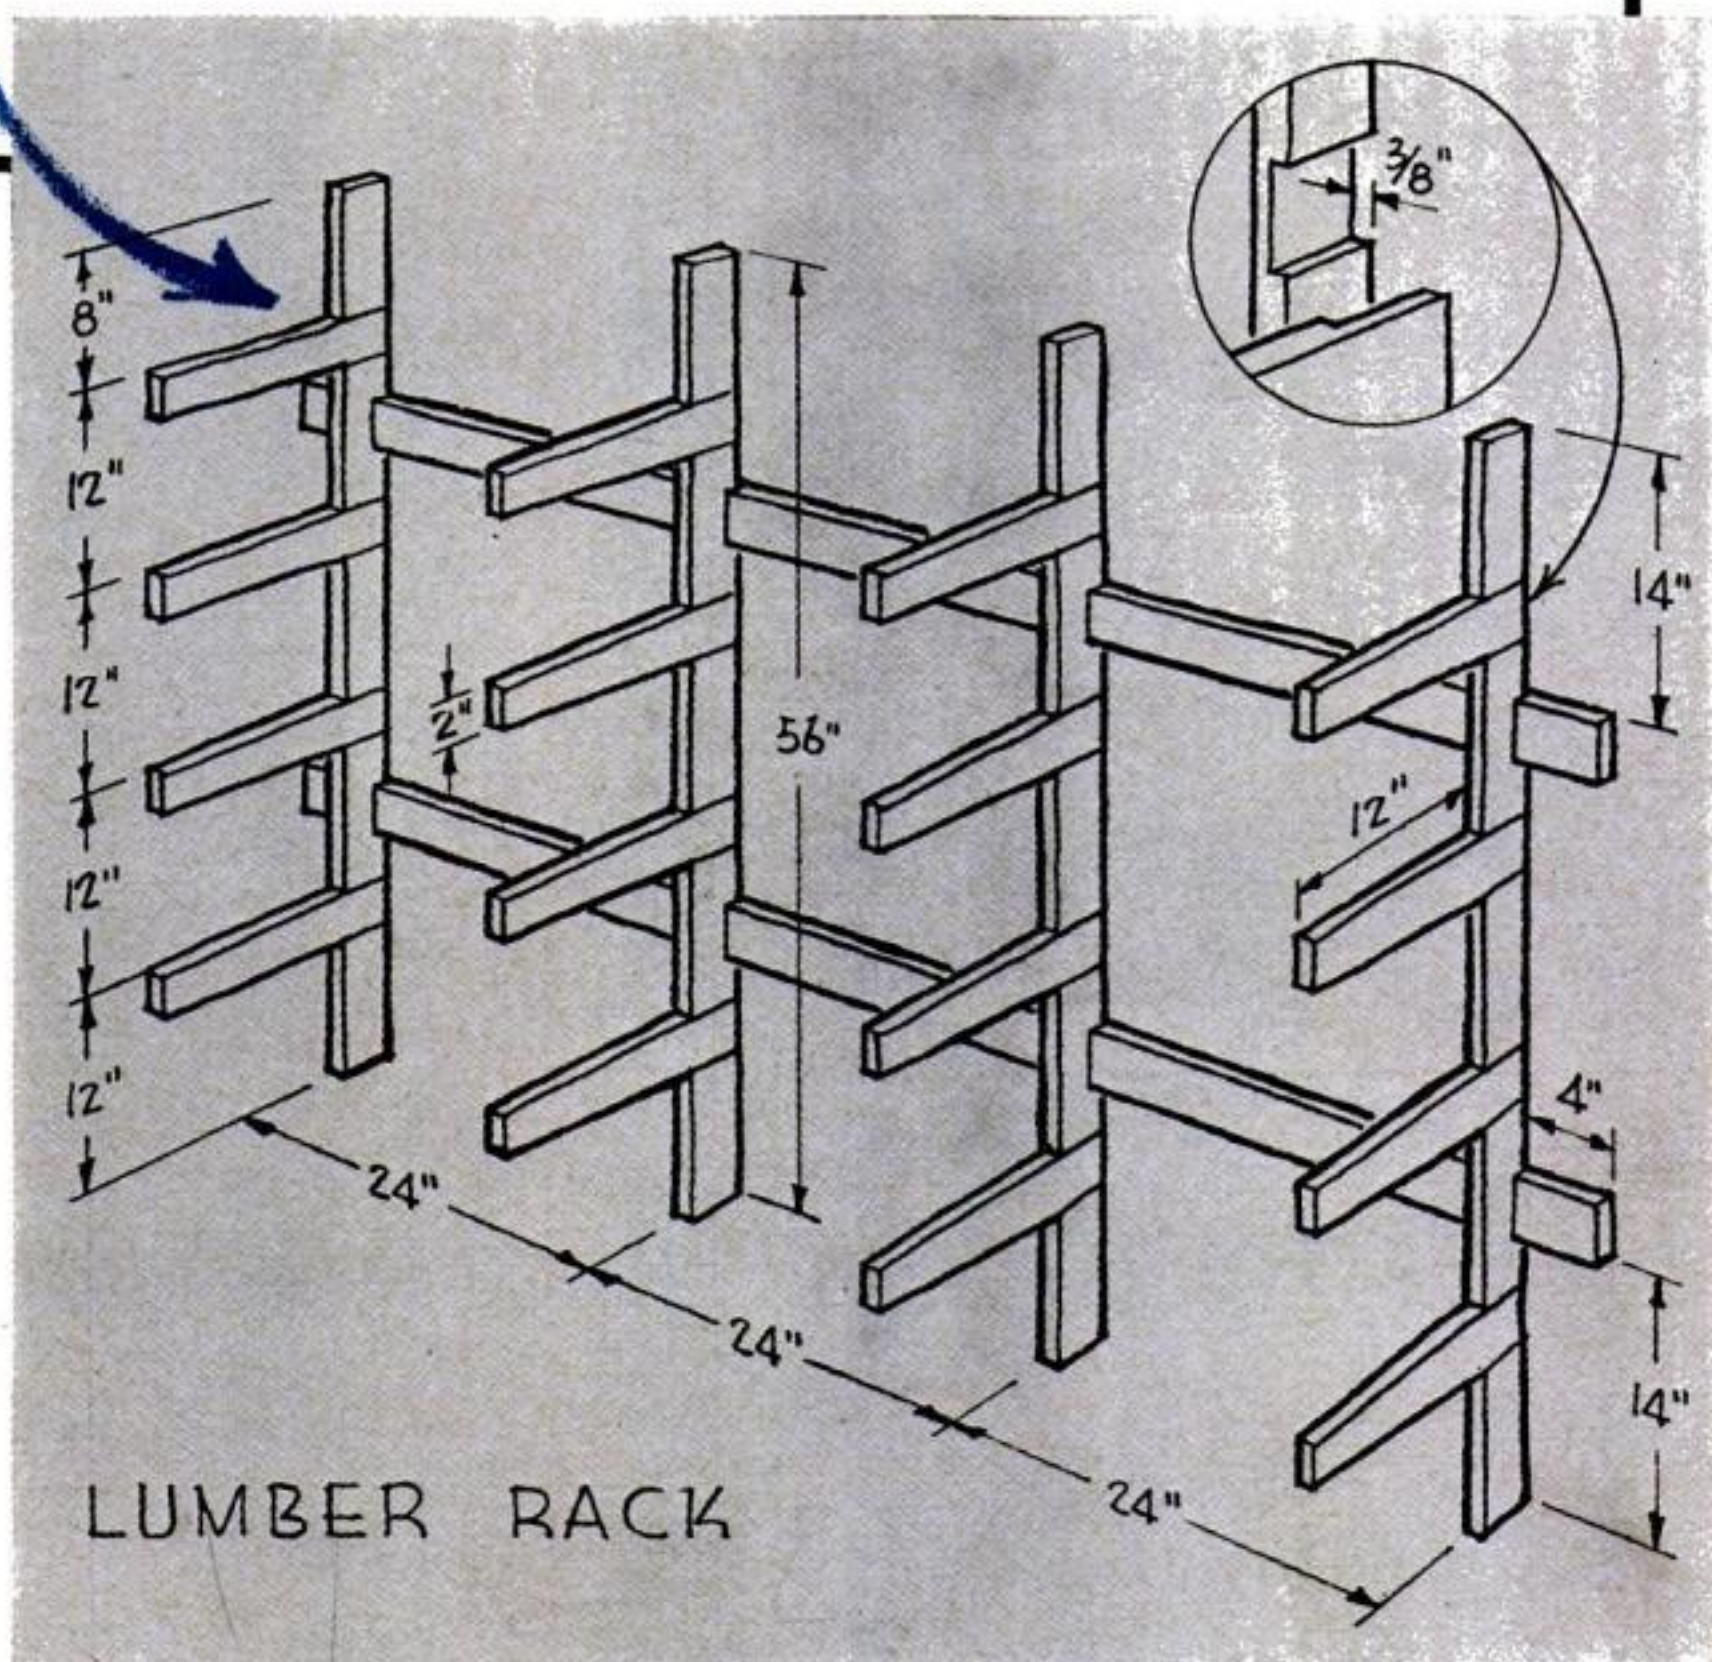

Clear white pine $\frac{3}{4}$ " by 3" is used for this rack designed by James N. Larson, but 4" stock would add strength, if desired. The four uprights are notched for lap joints with two cross supports and 16 lumber holders. These holders are alike,

and can be made quickly on the bench saw by using a jig for cutting the bottom tapers. Assemble with nails, screws, or bolts, and mount on a wooden wall or, if the wall is concrete, make the uprights long enough to nail to overhead joists


Clock Spring Replaces Shop-Apron Strings

AN OLD clock or phonograph spring sewn around the waist of your shop apron will eliminate bothersome strings and hold the apron firmly in place.

Cut the spring to a length equal to the width of the apron. It is wise to use the innermost part of the spring, since it has more tension, and will cling more closely to the body. Sew a strip of ordinary carpet binding across the apron with strong thread and insert the spring in the opening between the two rows of stitches.



If you do not have a spring suitable for this purpose, you can purchase one for a small sum from almost any jewelry or clock-repair shop in your neighborhood.

When the apron is to be laundered, it is a simple matter to pull the spring out, and to replace it afterwards.—FRANK LAMBERT.

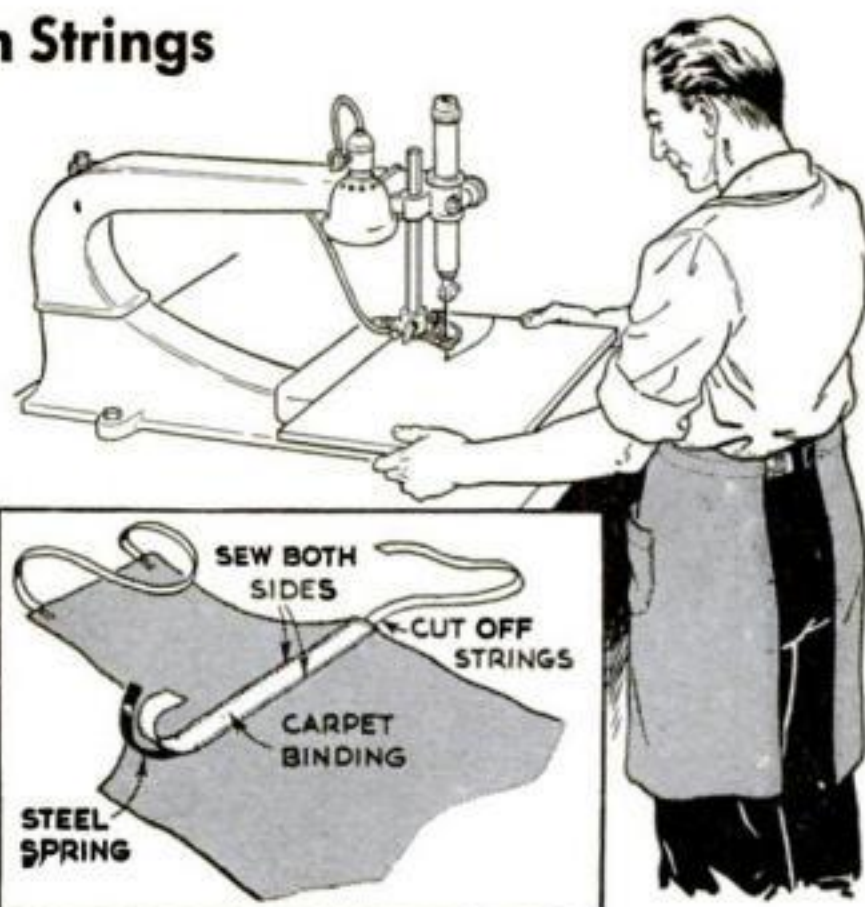

Detachable Bag Catches Litter from Workbench

A bag attached at the end of a workbench as shown below is useful for catching sawdust or shavings. A straight piece of wood as wide as the bench, with a curved piece of stock bent around it and screwed fast at each end, forms the bag frame. A burlap bag is fitted into this curve. Keyhole slots hook over screws so that the bag may be detached for emptying.—J. H. WILSON.

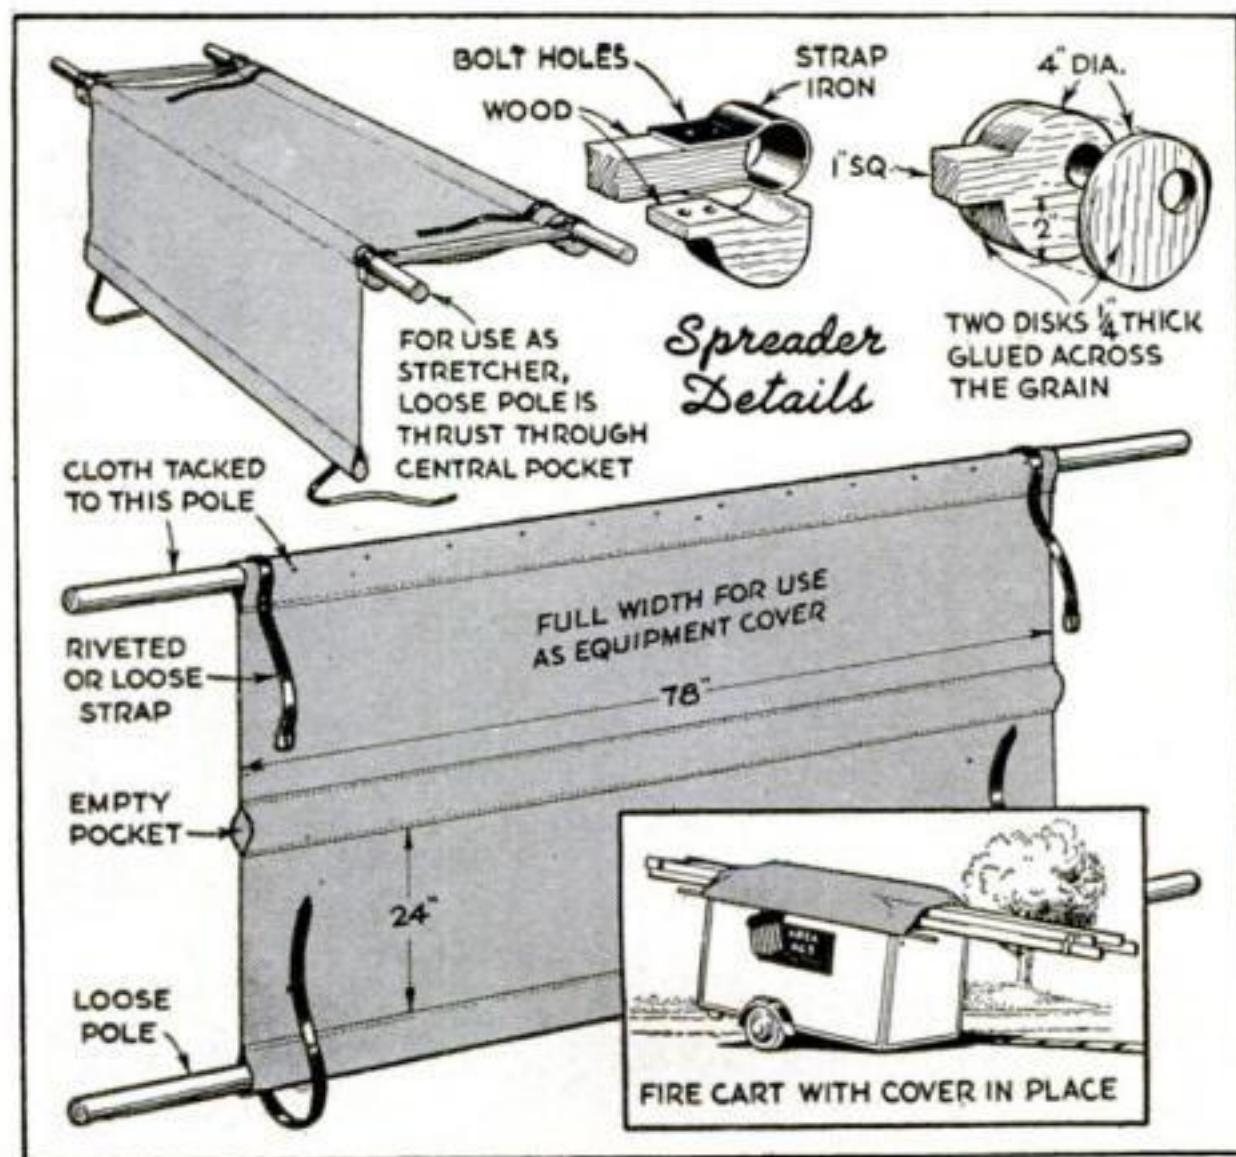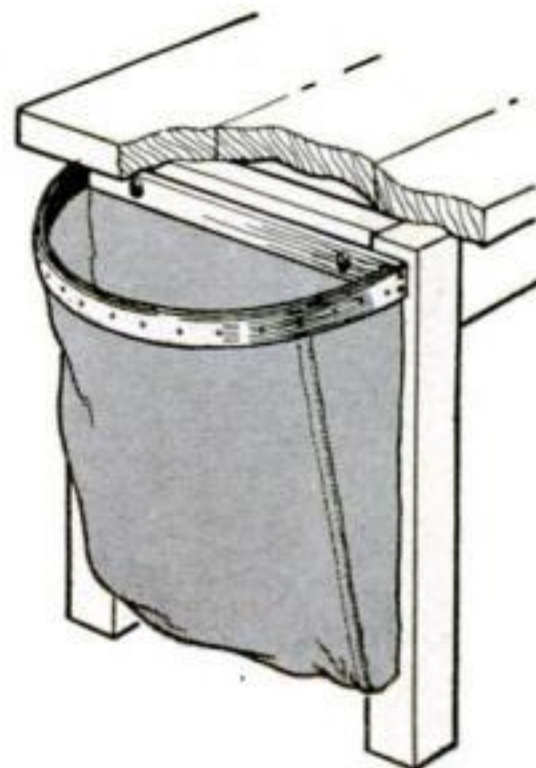

Stretcher Doubles as Cover for Fire Cart

HEAVY, unbleached muslin—waterproofed and cut out to cover civilian-defense equipment, such as a mobile fire cart—can also serve as an emergency stretcher.

If the cover is wider than a standard 27" stretcher, a third pole pocket should be stitched in. The length of the stretcher fabric should be approximately 78", and the poles should protrude far enough at both ends for an easy carrying grip.

Two alternative spreaders are shown in the drawing, one built entirely of wood. Straps will be needed for fastenings when the unit is used as a tarpaulin.—BLAINE KLUM.

AIDS TO WARTIME

Housekeeping



PROLONGING THE LIFE OF YOUR IRON

IF YOUR iron sticks to the clothes, starch or other foreign material has probably collected on the sole plate. Remove this by rubbing the hot iron on a piece of paper sprinkled with salt, as shown above. The metal surface should then be waxed by rubbing it with beeswax or paraffin.

The sole plate must be smooth for easy ironing. Don't scratch it by ironing over buttons, snaps, zippers, and the like.

Never kink the cord. Avoid coiling it around the iron while the latter is hot. Detachable cords should be removed and hung up separately.



ALL-GLASS PRESERVING JAR. This has a reclaimed-rubber gasket that can be used again and again. The jar is opened by indenting the gasket with a sharp instrument through a special slot in the side.



TESTED RECIPES are contained in this file, which has index dials for locating the cards quickly. Each of the 22 sections, from appetizers to desserts, is tabbed. Touch one of the tabs and a dial pops up to tell you all the recipes in that section.


A FURNITURE POLISH for general use on varnish, shellac, or lacquer finishes removes spots and covers minor scratches. A cloth is moistened with the polish, applied to the spot, and rubbed with the grain. Removes liquor, water, and even heat marks.





PREPARING CORN DISHES, such as corn fritters, succotash, creamed corn, and the like, is made easy by this stainless-steel scraper with specially designed teeth that split the kernels and cut them off the cob in one motion, leaving only the hulls. The wooden handle is enameled green or red to match other utensils

COOKING ODORS are dispelled with an air purifier that can be attached to any fan. The unit clamps upon the guard of the fan, and a wick arrangement dispenses the liquid inside the bottle onto a fibrous pad from which it is volatilized into the room. Feed can be altered by varying the number of wicks in the bottle

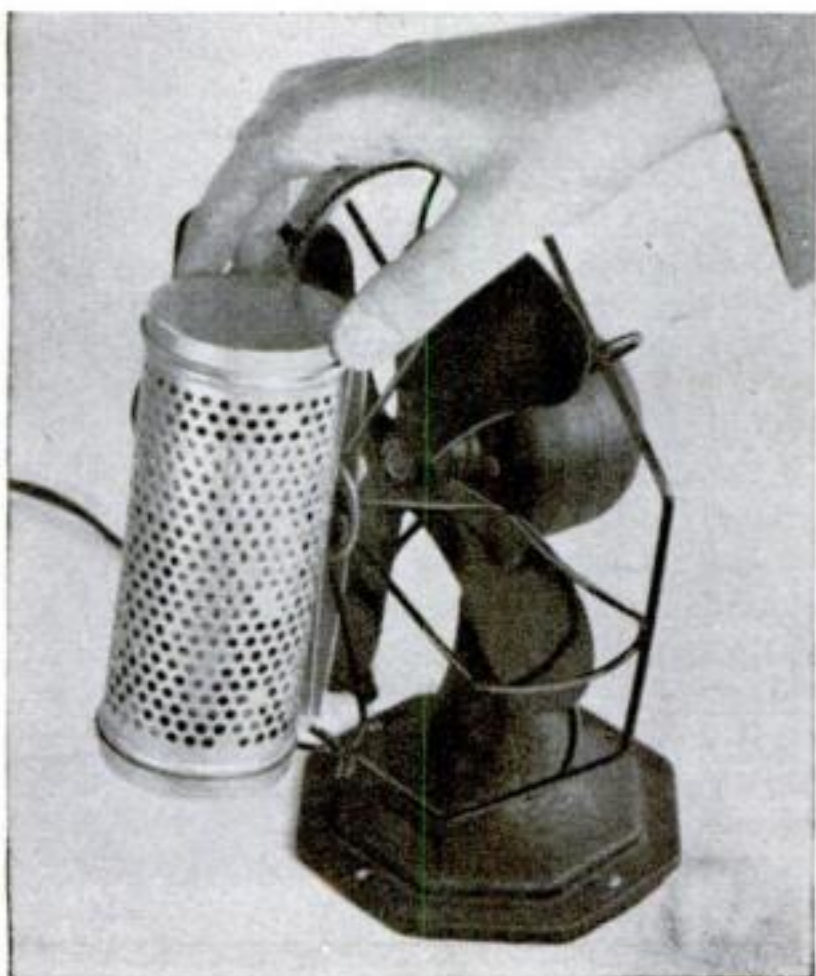

OFFICERS' BUNK BAGS provide ample space for two uniforms (or uniform and overcoat), plus all other essential clothing and military accessories. The garments travel on hangers, shown above, inside cellulose-film envelopes. The bags are covered with water-repellent sailcloth in olive drab or navy blue




EXTRUDED PLASTIC takes the place of rubber in this kink-preventing jacket, which is easily placed on any ordinary telephone cord. Translucent and lighter than rubber, the spiral jacket is already coiled and will retain its shape for an indefinite time



GENUINE SPONGE is sewn inside the soft tufted sack shown above, creating a very absorbent cleaning sponge for all household purposes. It will not scratch or shrink, and dries to a thick, fluffy pile. The sponges are available in three useful sizes

Frame Is Bowed at Center to Pull Wire Screening Taut


WIRE screening can be made taut by bowing the frame $\frac{1}{2}$ " or so at the center while the ends of the screening are being tacked on. Place the ends of the frame on saw-

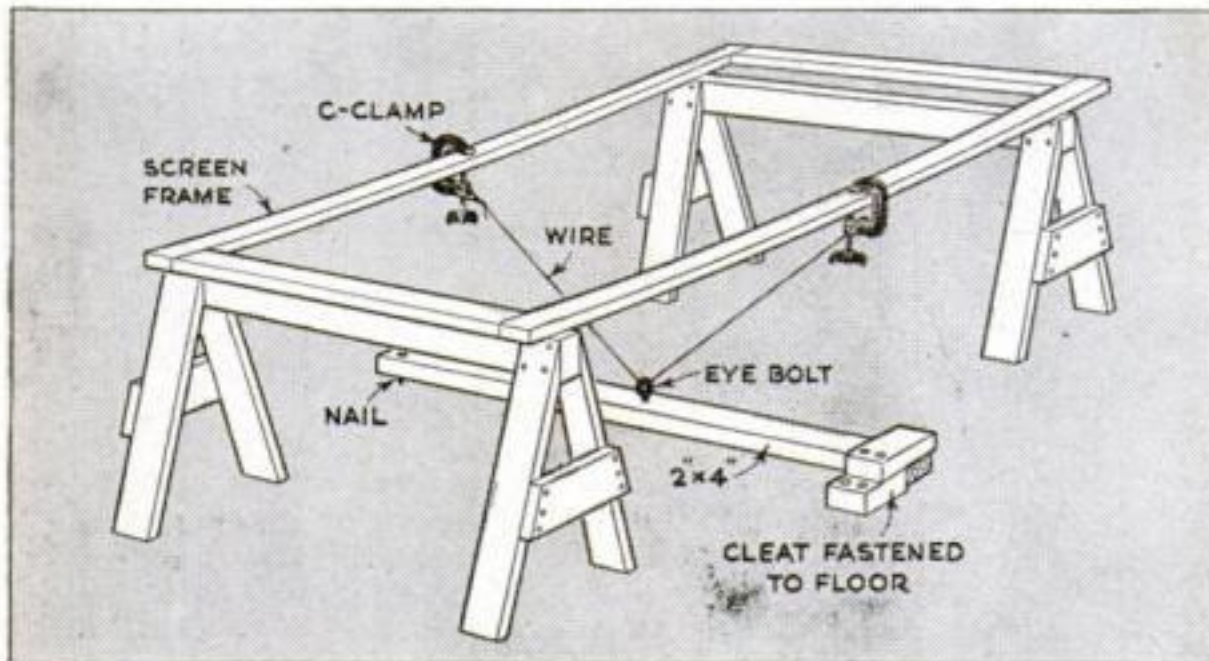

horses, and fasten a C-clamp at the center of each side. Lay a sturdy board under the clamps, nail one end to the floor, and attach an eyebolt to the board midway between the two clamps. Through this eyebolt and the clamps stretch a wire or cord, fastening it so that the free end of the board is about 2" off the floor. Then press the board down, working it under a cleat, as indicated in the drawing. This will bow the frame sufficiently for the screening to be attached to the ends. Release the tension on the frame when you wish to tack the sides down.—E. M. WOODEN.


Angle-Painting Problems Solved with Adjustable Brush

HERE'S an adjustable-angle brush for painting inaccessible corners on cameras, recording instruments, and similar equipment. Saw off an ordinary brush about two thirds of the way up the ferrule. Drill corresponding holes in the metal ends, and join the two parts with a machine screw and nut, as shown. Set at the most convenient angle, and tighten the nut.—CHARLES HOMEWOOD.

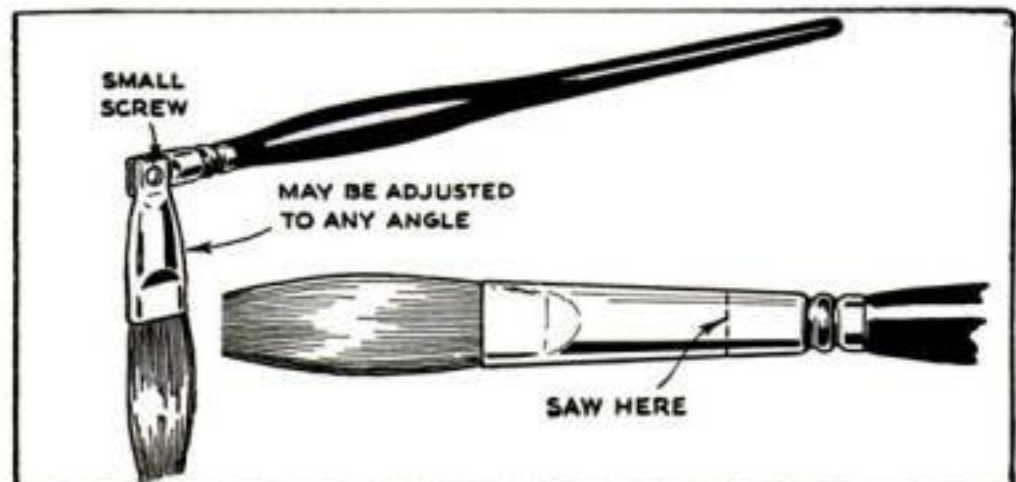

REMOVING UPPER WINDOW SASH

[SHIPSHAPE HOME]

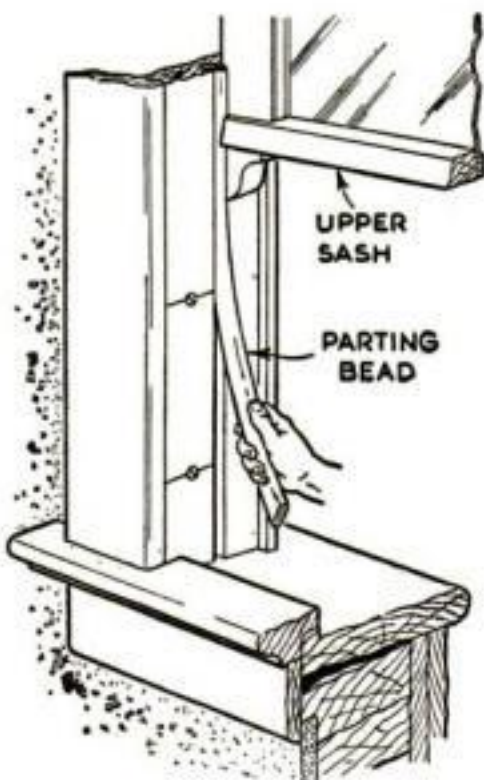


Upper sash cords do not often need replacement, but when they do, a stop must first be removed and the lower sash taken out and laid aside. Then pry out the parting bead from the same pulley stile. This member, sunk in a groove, is often held by a nail near the center, and if the runs are painted, may be stuck tight. Drive the edge of a wide chisel into the bead at various points from behind, raising or lowering the sash as required, and pry against the bevel until the parting bead is loose. A knife point passed along each side may help.

Raise the sash to the top and pull the strip out of the groove, twisting it forward to clear the notch in the end of the check rail. It may be easier to lower the sash and pull out the bead from above. Replace the sash cord, swing the sash into place, and put back the parting bead. Rehang the lower sash and install the stop.

POPULAR SCIENCE MONTHLY SHOP DATA

Sabotage under Your Roof

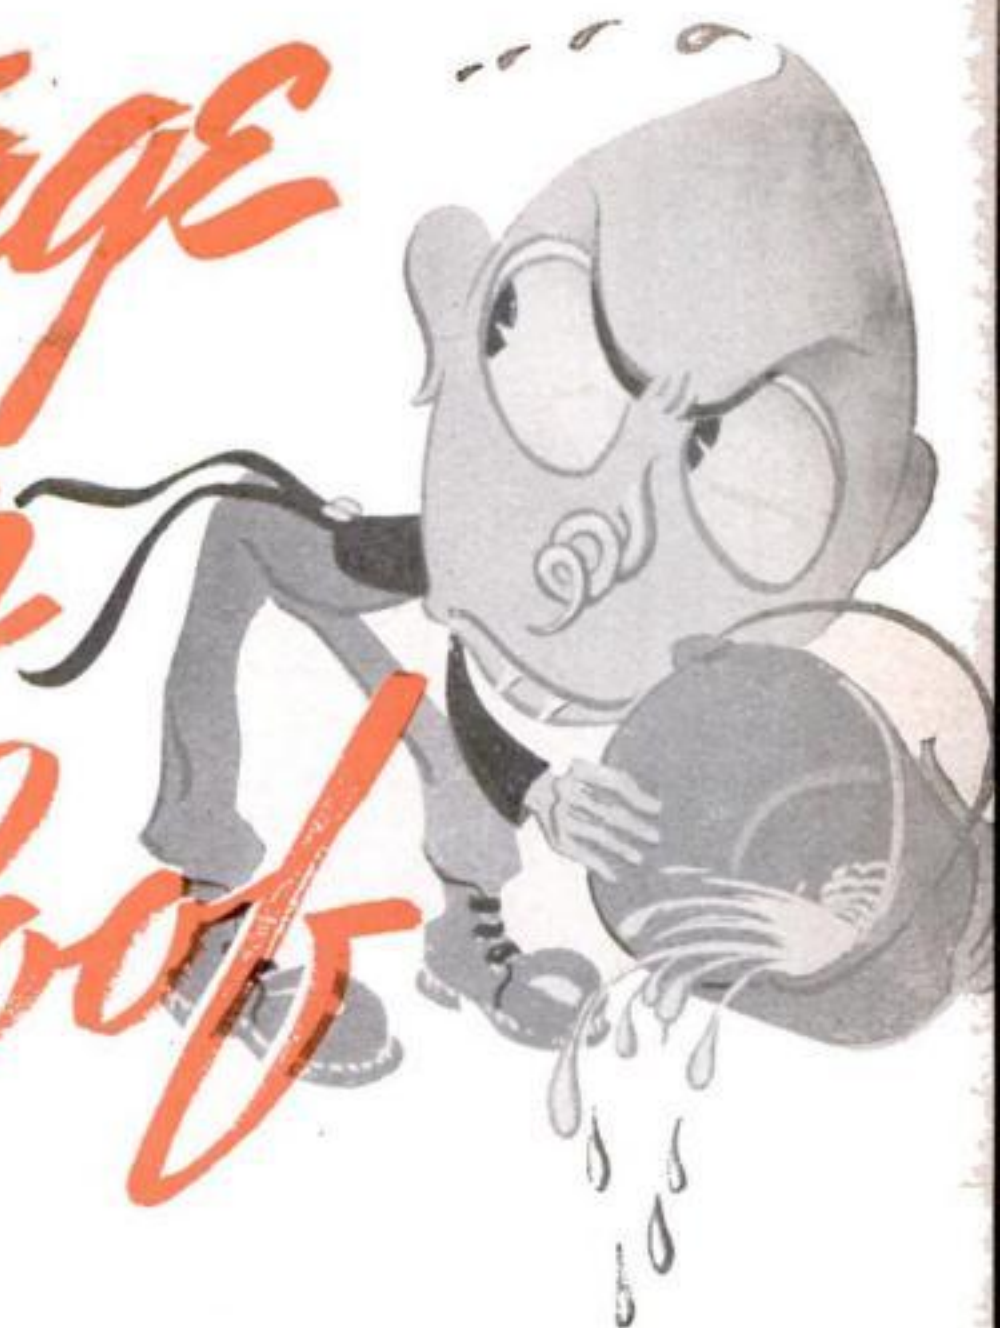

HOW CONDENSATION CAUSES A HOUSE TO DETERIORATE ... AND WHAT YOU CAN DO TO CORRECT IT

IN THOUSANDS of loyal American homes, sabotage is going on. This sabotage is unintentional, but scarcely less severe than if it were enemy inspired. When paint blisters and peels or brown stain appears on the outside walls of a new home—look for sabotage.

People who pride themselves on maintaining healthful living conditions are most apt to be unwitting partners to the crime. For the offender—the saboteur—is condensation or uncontrolled moisture in the home. Like a stealthy enemy agent, it performs its destructive work unsuspected and unseen.

Ironically enough, condensation rarely gets the blame. If the paint has failed, we sue the painter. If the woodwork is stained, we blame the carpenter. The surface evidence is against them, and they have to make good the damage. Yet underneath, the true culprit, condensation, goes unrecog-

nized and is left free to raise havoc again.

Condensation is a national problem. So prevalent has it become in recent years that many scientific building authorities have delved into the subject, among them the National Bureau of Standards, Forest Products Laboratories, the University of Minnesota, Iowa State College, and the Canadian National Research Laboratories. They all agree on a common cause and a common cure.

Back in grandfather's day, homes were drafty. In winter you could feel the chill wind blowing in around the doors and windows, and the walls were cold to the touch. Escaping heat melted snow on the roof almost as soon as it fell. Just as the cold air crept in and the heat escaped, moist indoor air easily found its way outdoors. Grandfather had a serious fuel problem, but no paint troubles worth mentioning.

His grandsons live in much more comfortable homes. Heat loss and wind infiltration have been reduced by insulation, weatherstripping, storm sash, and tighter construction. Cracks and crannies through which moist indoor air might escape have been largely eliminated. For health and comfort, modern homes are often provided with furnace humidifiers or some other means of increasing indoor humidity. It is



Introducing:

The little man who WAS there—if things happened when they shouldn't. He's the Household Gremlin, grounded cousin of the sky pixy who's the bane of air pilots. How he loves mischief!

in these homes where high humidities are maintained that most condensation difficulties occur. And the grandsons have paint trouble aplenty.


What is condensation? When water is evaporated, it changes into an invisible gas or vapor which mixes readily with air. This water vapor in the atmosphere we call humidity. As a gas, water vapor exerts a definite pressure that is part of the total pressure exerted by the atmosphere. Vapor, therefore, tends to expand to areas where the pressure is less, much as gas leaking from

a kitchen stove will quickly spread throughout the house and force its way outdoors.

The amount of vapor that the air can carry increases as the temperature rises, and decreases as the temperature drops. When vapor-laden air is for any reason cooled—by striking a cold surface, for example—it can no longer retain the moisture it has taken up, and what we call condensation sets in.

In our homes we are seldom aware of water vapor until condensation has set in. A vast quantity of it is drawn into the air

VITAL SPOTS IN YOUR HOME WHERE CONDENSATION CAN CAUSE

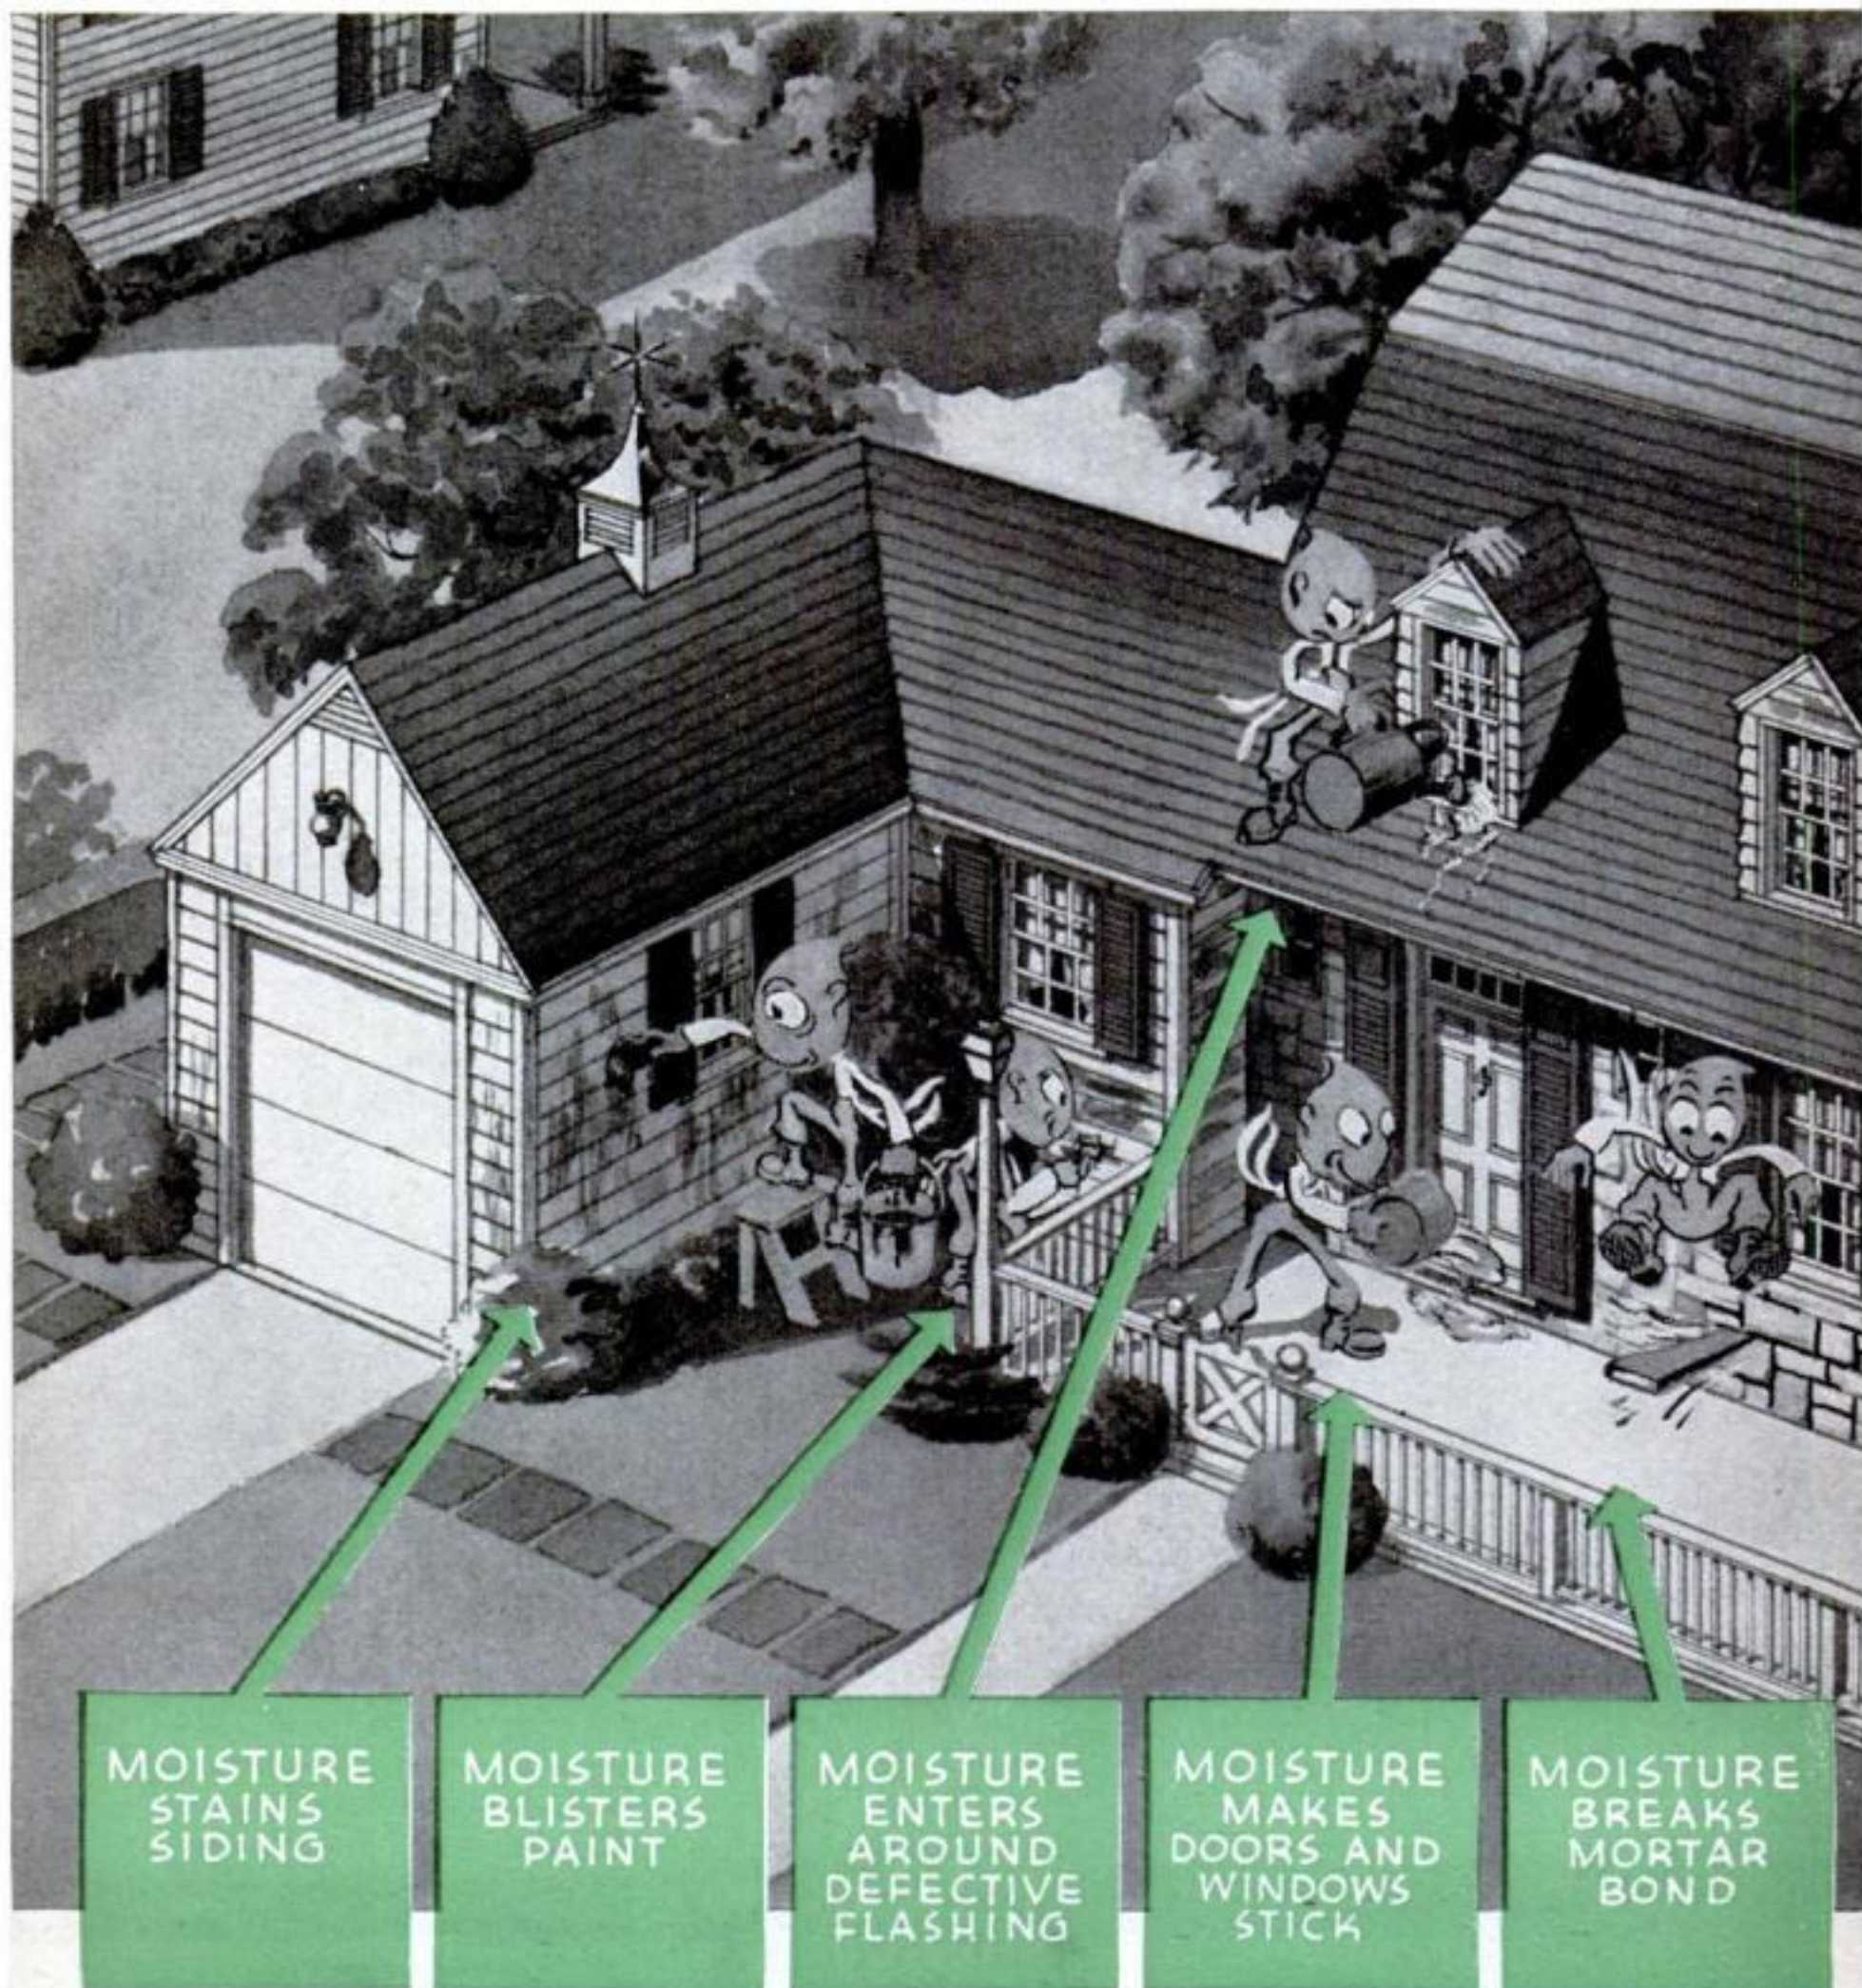

from new plaster, furnace humidifiers, air-conditioning equipment, and rooms where heated water is in use—the bathroom, laundry, and kitchen. The air exhaled from our lungs and moisture evaporated from our skin surfaces contribute more air-borne moisture.

Acting under pressure, this vapor moves as a rule from warm to cooler areas entirely independent of air currents. It passes readily through plaster and other unprotected wall coverings on its way to the outside air. Gathering in the stud spaces

within the wall and cooling there, the vapor condenses into water, and destructive action begins. The moisture works through the sheathing and siding to the paint film, where it forms blisters and causes the paint to peel.

Certain woods commonly used for siding contain large percentages of water-soluble coloring matter. Moisture passing through the siding from within leaches out this coloring matter and deposits it on the painted exterior in dirty brown streaks resembling tobacco juice. If used promptly, a solution of one half painters' alcohol and one half water will remove the ugly stain, but if the stain has become oxidized the surface must be scraped and repainted.

Lumber used in homes normally contains from 12 to 20 percent moisture. When condensation water soaks into the wood and forces the moisture content above that range, there is bound to be trouble. The wood will swell and warp or even split. Doors and windows will stick. Excessive moisture working through the siding may encourage dormant fungus spores to develop in the wood and discolor the paint film with a dirty blue stain.


In homes of brick or stone, moisture from within, after freezing a few times, may break the mortar bond, leaving little but gravity to hold the masonry together. As moisture passes through the wall, it leaches out alkali salts, which on evaporation are left on the surface as a disfiguring white deposit known as efflorescence.

Moisture condensed in the walls may also do considerable damage to home interiors by soaking through the plaster and discoloring the wallpaper. High humidity invites decay in wood, permits corrosion of metals. In warm weather moisture condensing on cold-water pipes may drip on the woodwork and cause serious localized decay. In winter there may be so much condensation on window panes that water will run down over the sash or sills and soak into the wood.

Now, what can be done? Authorities agree that the relative humidity in homes should be controlled according to the outside temperature. In below-zero weather the indoor relative humidity should not be more than 20 percent; between zero and 20 deg. F., not more than 30 percent, and in temperatures over 20 deg., not more than 40 percent.


Lowering the relative humidity indoors as the outside temperature drops may be accomplished with exhaust

COSTLY DAMAGE

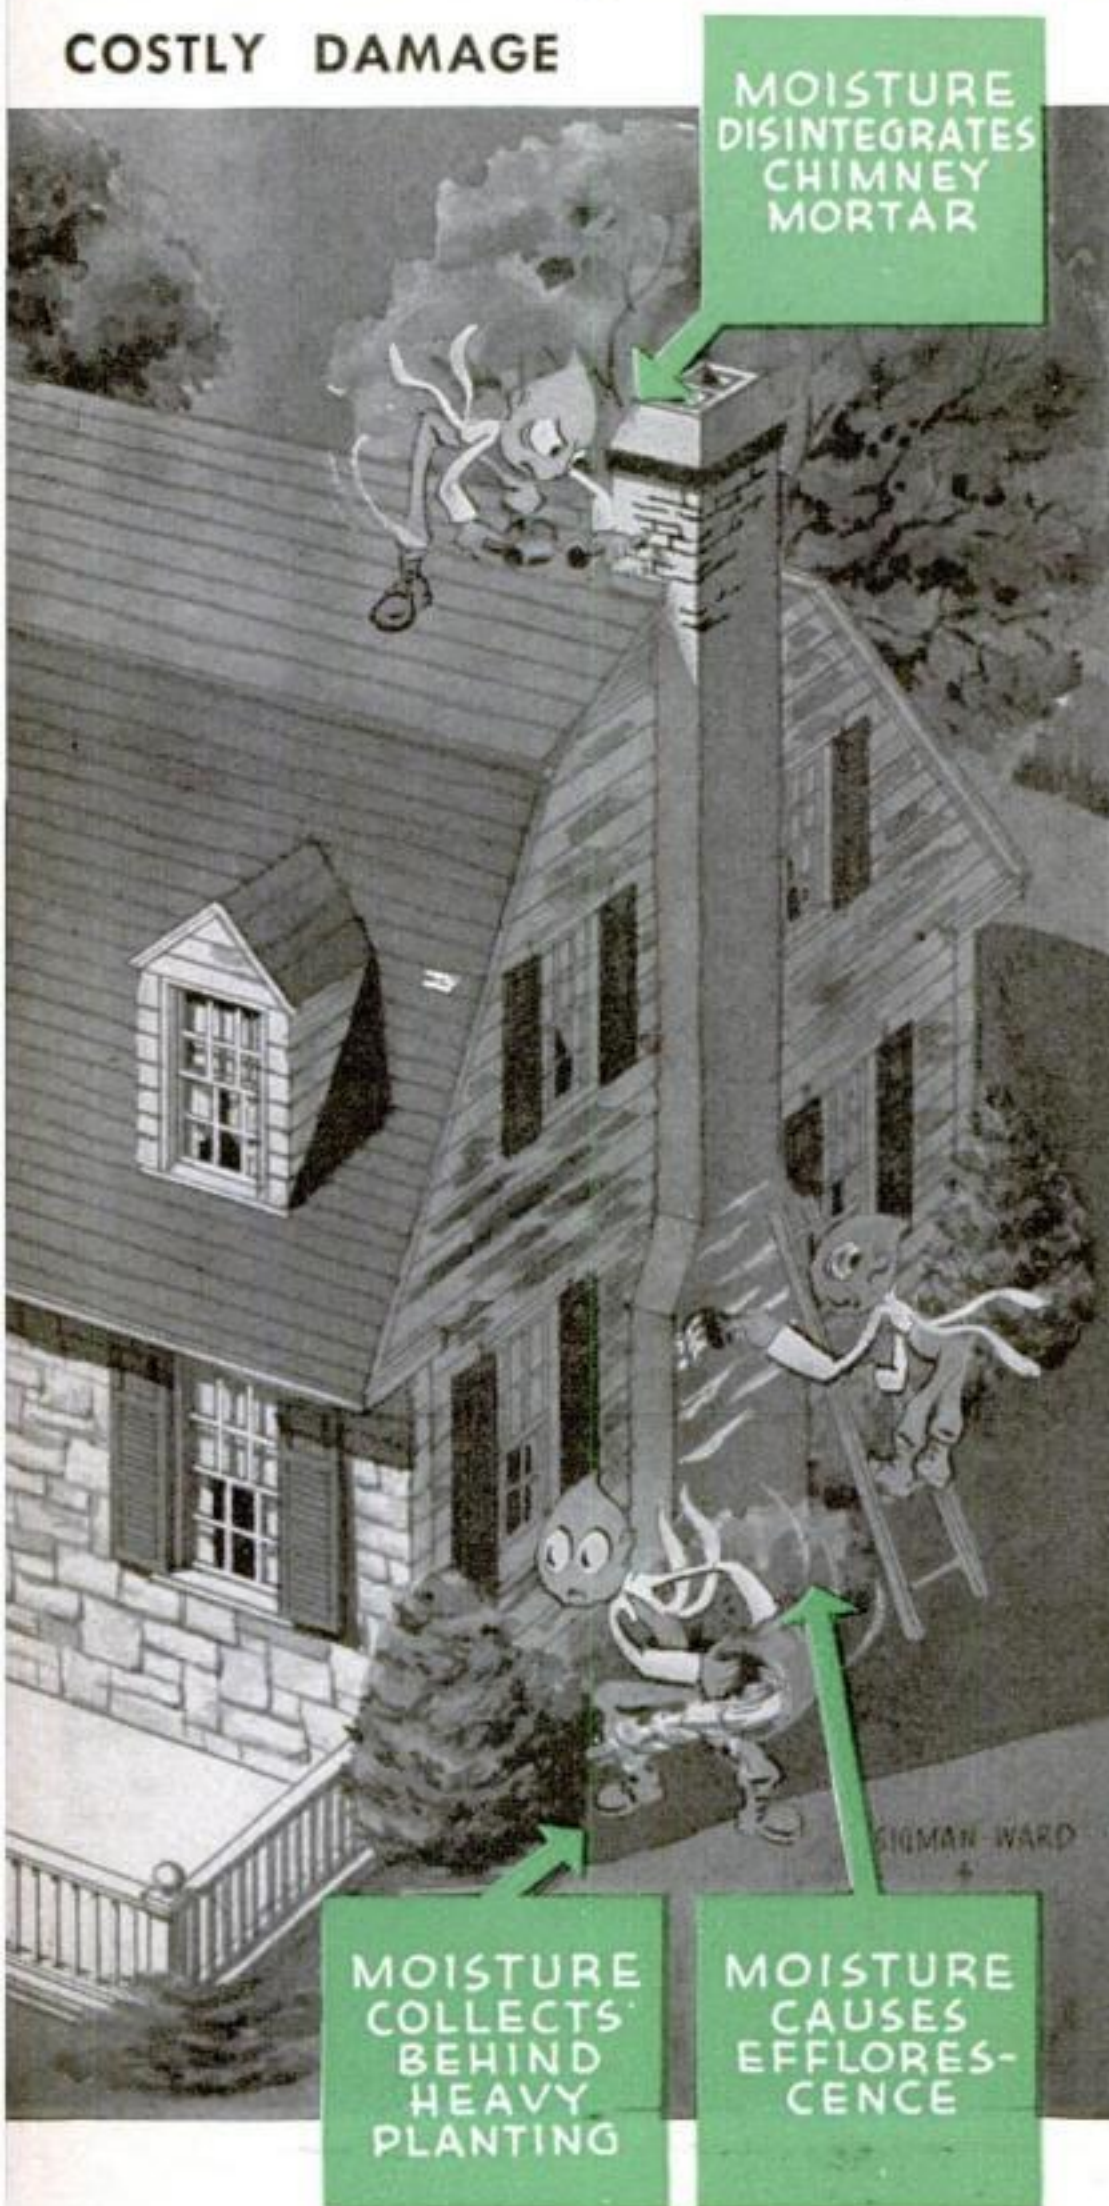



The owner of this new home bragged about the high humidity he maintained—and look what happened. Condensation is the cause of many paint failures

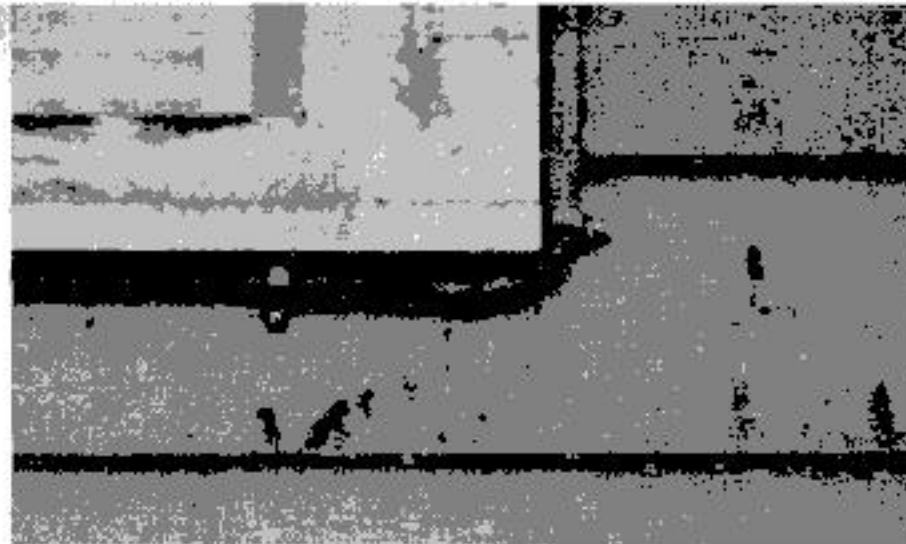

Four types of paint deterioration near a bathroom window—peeling on the casing, blue stain on the sash, and brown stain and blisters on the siding

fans, and ventilating louvers may be installed to assure frequent changes of air. When moisture gathers on walls, windows, or mirrors in the kitchen, laundry, or bathroom, open the windows and let the saturated air escape. Regulate the furnace humidifier or shut it off entirely in below-zero weather.

These precautions, although helpful, are not sufficient. The outside walls and top-floor ceilings are still permeable to vapor. The problem is, therefore, (1) to stop the vapor from entering the outside wall and top-floor ceiling spaces, and (2) to allow any vapor within these spaces to escape outdoors. In other words, a "vapor dam" is needed on the warm side of the outside walls or top-floor ceiling to retard vapor travel, and a "vapor gate" on the cold side to carry off any overflow from the "dam."

In new construction this is easily accomplished by installing an asphalt vapor barrier underneath the plaster, and by avoiding the use of any materials in the outside part of the wall which too greatly retard the escape of vapor. For homes already completed, two coats of a good oil or varnish-vehicle paint on the interior of all outside walls and top-floor ceilings will provide an effective vapor barrier. There must be no gaps. Protect the backs of cupboards and bins in the kitchen, bookcases and window seats in the living room, cabinets and buffets in the dining room, and all other built-in features, and don't forget the closets or the area underneath and behind the bathtub where it adjoins an outside wall. Above all, make sure that no vapor can escape from the basement into the stud spaces. Here a reinforced duplex building paper will provide an excellent vapor seal. Remember that any appreciable gap in the vapor barrier may result in condensation trouble.

Moisture difficulties may arise from other sources. Moisture may enter the wall through improper flashing at interior angles,

eaves, or over doors and windows, and it may also seep in through cracks or gaps in the siding. Look for loose joints at the corners of the house, around door and window openings, and between the boards themselves. Any good caulking will correct this.

Excessive moisture in the basement may be due to ground water or unusually damp surrounding areas, such as those caused by heavy shrubbery planted close to the house. Slope the soil up to the foundation so that water will drain away from the house, and make sure there are no low spots near the wall where water can gather.

If trouble persists, it may be necessary to dig a trench around the house and lay drain tile next to the foundation and just below the basement floor level. Before filling in, give the foundation wall a good coating of asphalt. Check downspouts and leaders for breaks below the ground level.

For slow leaks in foundation walls, any good concrete waterproofing compound applied on the inside should prove a corrective.

Natural gas, when burned in open heaters, produces a vast amount of water vapor. During a single heating season a five- or six-room home—for example, one in Oklahoma City, Okla., where much natural gas is used—may burn 80,000 cubic feet of gas, and in the process some 800 gallons of vapor

will be released, with possibilities of condensation damage. To prevent condensation, gas heaters should be vented directly to the outside so that the water vapor produced in combustion will not be added to the air in the house.

Chimney failures from disintegrating mortar may be due

to moisture caused by poor capping or originating within the flue. In converting a heating plant from coal to gas, reduce the diameter of the flue to 5" or 6", or the extra moisture from gas combustion will be chilled to the dew point before escaping. An acid- and corrosion-resisting slip-in liner should also be inserted in the flue.






CHAMPION SPARK PLUGS

are the


dependable source of full, flowing engine performance, so vital to a Navy pilot at that crucial moment when an enemy ship—the never-to-be-forgotten prize—looms large in his sights. Champions are on active duty on every front.

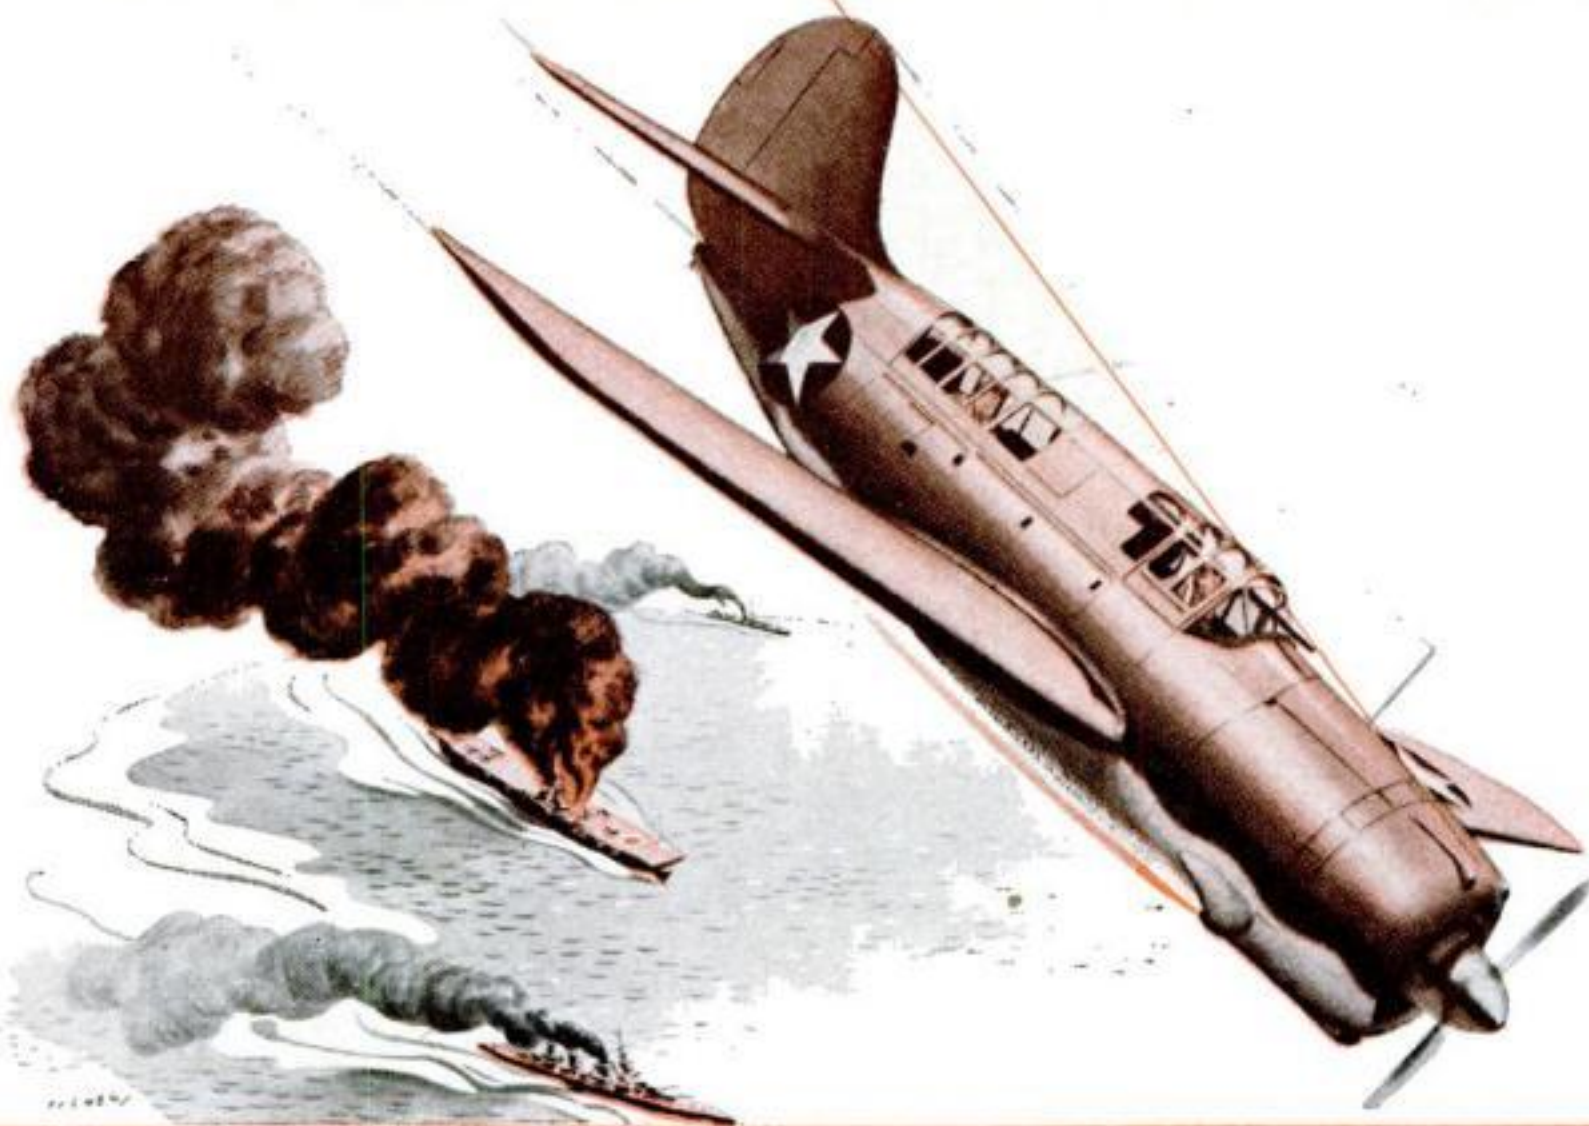

The furious assault on an enemy ship by a formation of Navy dive bombers is a magnificently awe-inspiring and intense moment. Already the record books are replete with glorious achievements on the part of the men who man these avengers of Pearl Harbor. The records likewise show that many of these Navy planes, as well as all other types of planes in use by our air forces, are powered by

engines equipped with Champion Spark Plugs. In performing their vital tasks, instantaneous response to the throttle is paramount and depends on the proper functioning of the all-important spark plugs. The characteristic dependability of all Champions, including those for your car, is directly due to research, engineering and precision manufacturing unequalled in the spark plug industry.

**"IT'S GOT THINGS
I NEVER KNEW BEFORE!"**

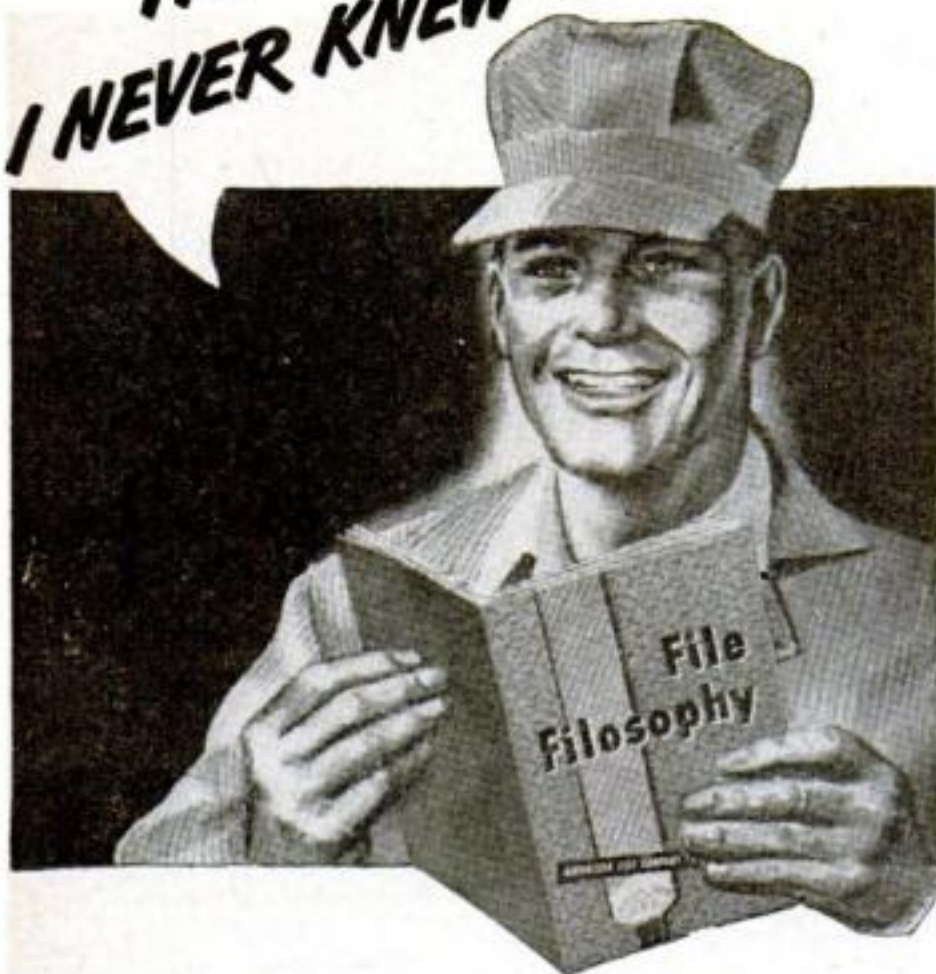

"DON'T anybody ever tell me a file is just a flat, round, half-round or triangular length of hard steel with a roughened surface!

"This book says there are *more than 3000* file kinds, cuts and sizes. . . . Files in a great variety of designs. . . . Files with teeth of distinctive shapes, angles and degrees of coarseness. . . . Files for today's many types of metal and other materials; for sharpening all kinds of cutting implements; for the many different filing results specialized production demands."

Right! Each Nicholson or Black Diamond File is made, not only in highest quality and with utmost uniformity, but for a particular kind of job. Yet all have one common purpose: to do faster, better work on the millions of filing operations which take place daily in America's industries. *Twelve perfect files in every dozen — guaranteed.* At mill-supply and hardware houses.

"FILE PHILOSOPHY"—Every production head, superintendent, shop foreman and master mechanic will find invaluable information in this new, profusely illustrated 48-page book on files—their kinds, use and care, and how to select *The right file for the job.* It's **FREE**.

**NICHOLSON FILE CO., 19 Acorn St.
PROVIDENCE, R. I., U. S. A.**

(Also Canadian Plant, Port Hope, Ont.)



**NICHOLSON
FILES FOR EVERY
PURPOSE**

**NICHOLSON
U.S.A.
MADE IN U.S.A.**

Polarized Light

(Continued from page 61)

tion for 30 seconds to two minutes, the relief images absorb it like sponges.

Watch closely—you are about to see some chemical sleight of hand. Between the two leaves of the book, the operator has slipped a blank sheet of transparent plastic. Hinge first, the sandwich zips through a pair of wringer rolls. A minute later, the relief prints are stripped off; they can be used again many times. There remains the transparent sheet, now bearing a faint image on each face. Look at it through a pair of polarizing spectacles—and a brilliant stereoscopic view fairly leaps out of the film.

What has happened? Like tricks of stage magic, it will take a bit of explaining. In the first place, that sheet of transparent plastic wasn't as simple as it looked. To make it the opposite faces had been so treated that their molecules were aligned like the letter "X"—diagonally and at right angles to each other. At this point both faces possessed a curious property. The molecular surfaces did not yet have any polarizing power for light. But each surface could be made polarizing, in the direction of its molecules' alignment, by a suitable chemical reagent. And the degree of polarization would depend upon the quantity of the reagent absorbed.

Now the mystery is clearing up. The brown liquid soaked up by the relief prints was the reagent that made the sheet polarizing. And the effect was proportional to the amount of liquid transferred to the plastic film. The degree of polarization was strong, medium, or weak, depending on the relative height of different parts of the relief prints, which in turn determined the amount of reagent soaked up and transferred. Lenses of the viewing spectacles, also set with their angles of polarization diagonal and apposite, acted as optical valves—letting through the light portions, partially shutting off the halftones, and "blacking out" the dark portions of the image intended for each eye.

For color stills or movies, the problem was a stiffer one. It called for reagents that not only made the film polarizing, but also imparted the proper colors—blue-green, magenta, and yellow. Since left- and right-eye images are required in each color, a full-color film consists of six images.

For an opaque "reflection print," the back of a Vectograph is brushed with a mirrorlike aluminum pigment. Transparencies get lacquer on both sides. For a lantern slide, the Vectograph is simply bound between cover glasses.

You may worry
about getting
to work on time



but here is one worry you can avoid

UNCLE SAM needs YOU in your war-job . . . whatever it may be. Equally important, he needs you on the job *all day, every day*.

That means you've got to keep your *car* on the job too . . . ready to get you to work on schedule! So stop car troubles *before* they start. Avoid excess chassis wear with Marfak lubrication.

Marfak helps add miles to your car's life by *cushioning* king pins, tie rods, drag links and other vital friction points. Marfak especially resists the washing-out effect of snow, slush and rain. It's super-tough. It "stays put."

To insure *worry-free* protection, Marfak is applied by chart, not by chance!

Never say "grease-job." Insist on genuine Marfak 40-point Lubrication Service. At Texaco and other good dealers everywhere.

For Your Enjoyment . . . 2 Great Radio Programs



FRED ALLEN:
On the air
every Sunday night,
Columbia Network.



METROPOLITAN OPERA: Complete
broadcasts of
great operas every Saturday
afternoon. Blue Network.



You're Welcome at **TEXACO DEALERS**


LIGHTER MOMENTS

with **fresh**
Eveready Batteries



"Loan me your flashlight willya? The Major's got a little something in his eye"

FRESH BATTERIES LAST LONGER... Look for the date line →

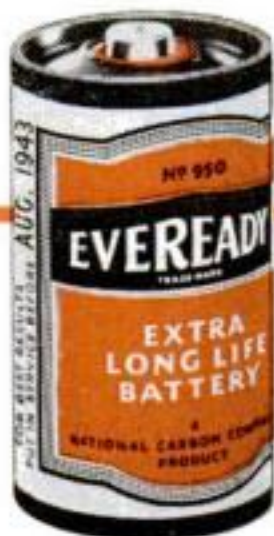

REMEMBER—our fighting forces need "Eveready" flashlights and batteries and the materials they are made from. You can serve by conserving yours!



The word "Eveready" is a registered trade-mark of National Carbon Company, Inc.

Cheating Axis Torpedoes

(Continued from page 89)

from the ship. Then the lifeboatman in charge makes a thorough inspection of the boat. Once he has ascertained that it is seaworthy—in an actual sinking he would have to supervise the plugging of all holes caused by machine-gun strafing or any other mishap of battle—he checks all provisions, distributes his men to the various watches, and assigns duties to the whole crew. He then appoints his next in command and confers with them, studying the pilot chart to determine the most suitable point of land to head for.

When all these preparations have been made and a course charted, the log must be written up and orders given. Now the routine life begins, and a tough life it is, as taught by the Academy instructors. Cadets learn that they must at all times maintain the strictest discipline to bolster flagging spirits—every man must be constantly occupied, for idle minds are prey to fear and despair. No smoking is allowed on lookout, and talk is cut down to a reasonable minimum; a man with his eyes peeled for a passing ship or plane, or for land, must not be distracted from his job. Most ticklish task of all, and the most exacting, is to figure out the rationing of provisions. This depends partly on climatic conditions: more water is needed in the tropics; less water and more hard provisions to provide body warmth in northern latitudes. For the rest, the time period over which supplies must last is cautiously estimated by doubling the number of days it will take to reach the nearest point of land under favorable prevailing winds.

One of the commander's first duties is to call in all personal supplies before the rationing system is laid down. This rule is nowhere so essential as in the control of cigarettes. Smoking not only keeps a man's spirits on even keel in the grimmest of circumstances—it also cuts down his appetite appreciably, and thus makes emergency rations go that much farther. Archie Gibbs, twice-torpedoed deck hand who spent four days as a prisoner aboard a German sub, says "guys have been lost when they stood up in the boat, said they were going to mosey across the street for a smoke, and stepped over the side."

By the time the war comes to an end, ours will be a merchant marine of seasoned men, for the Government is doing everything possible to make sure that men now going to sea in American ships will be back to finish the job.

\$1,000 FOR YOUR IDEAS

In the Big Marlin Gun Contest!

Now here's a chance for you hunters and target shooting fans, to *cash in* on your knowledge of guns! Marlin—always on the lookout for new ideas to improve sporting firearms—wants to hear from you. Sportsmen and gun dealers are cordially invited to join Marlin's big Gun Contest—with \$1,000 in cash prizes to shoot at. And remember, many a good idea is simple and easy to describe. Your chance is as good as the next fellow's to win a prize. It's easy to get in the contest—read the details below and send your entry in today! Contest ends July 1, 1943.

Jot down your ideas for improving any current model Marlin Gun. Follow the simple contest rules and send your entry in. If you wish, you may suggest new features, not at present in the line. A free catalog is yours for the asking, to review the features of Marlin Guns.

PRIZES IN THE BIG MARLIN CONTEST

The first prize is \$500.00 in cash; second prize \$100; third prize \$50.00; fourteen additional prizes of \$25.00 cash each. Seventeen prizes in all! (Marlin suggests the purchase of U.S. Savings Bonds with the prize money.)

JUDGING

Three famous gun editors—Bob Nichols of Field & Stream, Jack O'Connor of Outdoor Life, Maj. Chas. Askins of Sports Afield—will select the winning entries. All ideas for which prizes are given become the property of The Marlin Firearms Company and none will be returned. Prizes awarded for the seventeen ideas which are most valuable and practical, in the opinion of the judges. Duplicate prizes awarded in the event of a tie. WINNERS will be determined and prizes announced as soon as possible.

CONTEST RULES

The Marlin Gun Contest is open to all sportsmen and dealers in guns, with the exception of Marlin employees. Written suggestions must not exceed 300 words, the shorter the better. No limit to number of entries which may be submitted. Write name and address clearly on each suggestion. Mail entries to Dept. K, The Marlin Firearms Co., 17 E. 42nd St., New York City.

Entries must be received on or before July 1, 1943.

Win cash with your ideas! Enter the Marlin Contest today.

The Marlin Firearms plant is now 100% on war production.



Marlin's Over & Under Shotgun, in 12, 16 and 20 gauges and .410 bore, is hammerless, cocks on opening, has sturdy one-piece frame.



All Marlin rifles—lever action, clip and tubular magazine and .22 automatic, feature deep-cut, accurate, "Ballard" rifling.



Marlin lever action rifles, in calibers .22, .30-.30 and .32 spec., have the solid-top, case-hardened receiver, with safe side ejection.



EVERY MAJOR AIRLINE Endorses Snap-on Tools

What is the secret of the amazing safety records established by America's great airlines? One answer is... *high standards of maintenance!* That calls for an army of skilled mechanics equipped with fine tools. And in every major airline executives responsible for maintenance *recommend Snap-on tools.*



Carl J. Brock

tools since 1929 . . . in our exacting work of over-hauling air-craft engines quickly and efficiently, there can be no excuses. We use highly skilled mechanics, the best materials, and, of course, Snap-on tools."

Not only in every branch of America's gigantic aviation industry, but in every industry where fine tools contribute to Production-for-Victory, Snap-on tools are *helping beat the promise!*

Says Carl J. Brock, Superintendent of Maintenance for famed Delta Airlines "I have been using Snap-on tools personally for over 20 years, and that alone indicates my high regard for these products." Adds Charles E. Bradley, Superintendent of Delta's engine overhaul department, "I have been using Snap-on



C. E. Bradley

SNAP-ON TOOLS CORPORATION
8060-B 28th Avenue, Kenosha, Wisconsin



Studios on the Battlefield

(Continued from page 113)

officers' uniforms, minus all insignia except an identifying brassard. But in action they share the dangers of both officers and enlisted men. It is remarkable that only a few have been on the casualty lists.

Five newsreel companies—Fox Movietone, Pathe, Paramount, Hearst's "News of the Day," and Universal—comprise the Newsreel War Pool. Each has two cameramen on the fronts of the world, with others available if and when Washington opens new pool areas.

All newsreel and still-picture films are subject to stiff censorship regulations, the authorities here and abroad keeping a sharp eye out for anything that might give aid or comfort to the enemy. The usual procedure in the case of stills is for censorship to begin with the military or naval commander in the field, thence to the fleet or zone commander and then to Washington. Newsreels generally are sent directly to Washington for review.

Hitler may have been the first to employ films as a weapon of war, but our own military leaders have made up for lost time. Special training schools have been established to prepare cameramen and photographers for the fighting fronts.

One of the most ambitious Army projects has been the establishment under the Signal Corps of new self-contained, mobile photo assignment units, with cameramen, photographers, laboratory men, and assistants equipped to record front-line action. From their welded platform atop an Army carry-all cameramen, protected by the Tommy gun of their driver, grind out scenes of battle of utmost importance to the military leaders—and of absorbing interest to the public when permitted by the censors to supplement the films in the war pools.

The Navy, too, has realized the benefits derived from newsreels and photographs of actual combat. Some of the most striking pictures to come out of the war zones are the work of Navy lensmen. To expedite the training of naval cameramen, the newsreel companies have opened their doors to Navy men, sharing with them their professional secrets and experience. The classes are held at race tracks and fires, ship launchings and weddings. The idea is to give the Navy men practical experience by having them accompany a professional cameraman on regular news assignments and film the same events that he does. The newsreel producer compares the films and sends a critique to the Navy Department.

Casite Guarantees—

SUMMER STARTING THIS WINTER or Double Your Money Back

● Motorists, here's the good news you've been waiting for—*guaranteed* winter starting.

No more grind, grind, grind to drain your battery and waste gasoline. Casite guarantees you summer starting all winter long or *Double-Your-Money-Back*.

Just add Casite to your winter grade oil and then watch your engine leap to life at the touch of the starter button—in coldest weather.

Most good service stations or garages have Casite. A pint is sufficient for most cars—and costs only 65c.

THE CASITE CORPORATION • HASTINGS, MICH.

We Guarantee*

that any motor capable of being started in a warm room will start in the coldest weather with Casite in the crankcase.


*Subject to these simple conditions:

If the crankcase capacity of your motor is six quarts, or less, you are to put one pint of Casite in the oil and add a pint at the end of each 1000 miles driven. Maximum refund amount for failure to start will be \$1.30, which is twice the nationally advertised price of Casite, 65c per pint.

If the crankcase capacity is more than six quarts, you are to put two pints of Casite in the oil and add a pint at the end of each 1000 miles driven, unless you change oil, in which case add two pints. In this case, maximum refund amount will be \$2.60, which is twice the nationally advertised price of two pints of Casite.

HERE'S PROOF

Pittsburgh Testing Laboratory tested a badly sludged motor at zero without Casite. Motor failed to start seven out of eight times. After adding Casite, same motor started promptly every time.

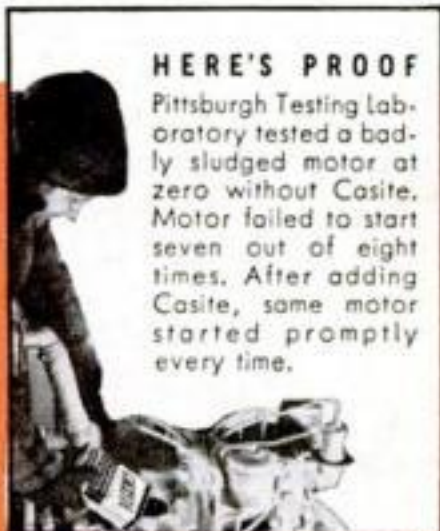

FOR QUICK STARTING HORSEPOWER

Get CASITE

HOW TO CHOOSE A GLUE

Don't think that there is any *one* glue that does all gluing jobs. Here are two simple rules to follow.

RULE 1

USE CASEIN GLUE: For all interior or protected construction—furniture, cabinets, toys, laminated trusses and beams, interior wall panels and all types of "odd jobs".

REASON: Casein Glue (CASCO) is easier, more fool-proof to use than resin. CASCO is "self-bonding," needs only moderate, not extreme pressure. Has "filling action" on poorly fitted joints. Highly water-resistant, withstands any interior conditions except extreme dampness or mold. Used at any temperature (above freezing).

RULE 2

USE RESIN GLUE: Where a water-proof, moldproof or stainfree glue is required—boats, outdoor furniture, screens, in damp basements, on thin veneers, etc.

REASON: Resin Glue (CASCAMITE) is completely water-proof, moldproof, stainfree. (Resin glue requires well-fitted joints, smooth wood surfaces, positive clamp pressure and workroom temperature of at least 70°F.)



CASCO Powdered Casein Glue

Meets Army, Navy and Federal casein glue specifications. Highly water-resistant. Cold water mix. 10¢ to 65¢ at hardware stores.



CASCAMITE Powdered Resin Glue

Meets Army and Navy specifications for life floats, truck bodies, other field equipment. Mixes instantly in cold water. 10¢ to 85¢ at hardware stores.

FREE GLUING GUIDE AND PROJECT BOOKLETS

CASEIN COMPANY OF AMERICA, Dept. PS-343
350 Madison Avenue, New York, N. Y.

Send me the literature checked.

- ☐ "GLUING GUIDE". Complete directions for both glues. Over 80 home workshop jobs.
- ☐ "CASCO PROJECTS". Describes 24 furniture projects by famous American designers. How to get free plans.
- ☐ "CASCAMITE WATER PROJECTS". Describes 12 new boat and water projects by Wm. F. Crosby. How to get free plans.

NAME

ADDRESS

-----Save 2¢—Stick coupon on penny postcard-----

Why Our Tanks Are Best

(Continued from page 125)

model, called a combat car, weighed a ton less and had a single turret. Both models were armed with .50 caliber and .30 caliber machine guns.

Our Ordnance officers were convinced that the M2A3 was the best light tank in the world. Events soon proved that they were right. In the spring of 1938 the German Army—by then the acknowledged leader in mechanization—invaded Austria without having to do any fighting. Mechanical failures on the road made casualties of seven percent of its tanks. A few weeks later our Mechanized Cavalry Brigade marched 700 miles over hilly and blistering-hot Southern roads in four days. Eighty-six combat cars started the march, and 86 finished it under their own power.

The M2A3, built at the Rock Island Arsenal, was the first modern fighting vehicle issued to the Army. The more heavily armored M2A4, produced in quantity by the American Car and Foundry Company, soon superseded it as the standard tank of its class. The much-improved M-3 light tank, armed with a 37-mm. gun and machine guns—now being built in large numbers—is its direct descendant.

In 1938 Congress authorized the building of 18 medium tanks—enough to equip an entire tank company! The Ordnance Department was ready with plans and specifications for the 18-ton, 32-miles-per-hour Medium M-2, armed with a 37-mm. gun. From it were developed the M2A1's, a number of which were issued to troops in 1940. Reports from American observers at the Battle of France emphasized the need for more heavily armed tanks. When Congress appropriated funds for the building of what then seemed a large number of medium tanks, it was decided to design a new model with a 75-mm. gun in a side turret in addition to the 37-mm. in the upper turret. Because of the experience gained during the long development period, designing the Medium M-3 took only a few months and early in the spring of 1941 production was started by the American Locomotive and Baldwin Locomotive companies and the Chrysler Corporation.

In the African battles before our invasion the M-3 proved itself to be by far the best tank on the desert. But that didn't satisfy our Ordnance tank experts. They wanted to give our Armored Force an even better medium tank, and they did it by designing the Medium M-4.

(Continued on page 220)

KEEP 'EM
SLUGGING


BUY
WAR BONDS

Atlas "FIGHTING TOOLS"



Milling Machines

Under engineering development for two years, this compact Milling Machine was ready for active work when Uncle Sam's industry began tooling up for planes, guns, ships, and tanks. It handles the complete range of milling—from slabbing and facing cuts to end milling, keyways, finishing and layout work. Operates from 1/3 HP 1740 RPM motor. Precision ground table is 4½" x 18".

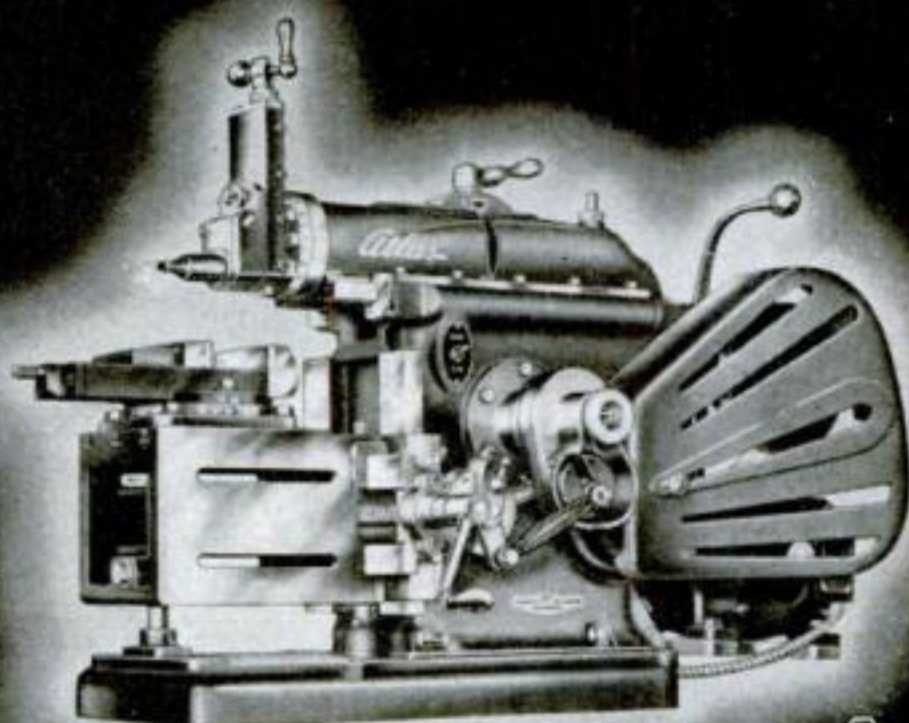

Shapers

These are great time and money savers in the victory program. They relieve larger machines of all work within a 7" stroke. Work set ups are faster, cost is low, motor required is but 1/2 HP. Features include crank-type bull-gear drive, 4 speeds, 5 automatic cross feeds, complete V-belt drive. Atlas Shapers are steady reliable producers in key war plants and serve important military units.



ASK the men of the army and navy maintenance forces . . . ask the men on America's fastest production lines . . . they'll tell you a most familiar trademark today is "ATLAS." They see it on Atlas Lathes, Drill Presses, Milling Machines, and Shapers. They see it everywhere behind the lines because Atlas Tools are in great demand and Atlas production has won the coveted Army-Navy "E" Award. As a potential Atlas buyer you can be glad Atlas is producing "fighting tools." It means the Atlas equipment you want after the war is proving its precision and rugged strength in the toughest test of the ages. Atlas Press Co., 355 N. Pitcher St., Kalamazoo, Mich.



VICTORY FIRST! - THEN Atlas TOOLS FOR YOU



ask the boys from the Aleutians!

THE storm-swept roadsteads of the Aleutians were never made for "happy landings". No placid harbors here, no capacious wharves or rippling beaches! So, crashing through gale-lashed breakers, the dories, skiffs and work boats go . . . landing on craggy coastlines . . . handling ton-by-ton the precious cargoes of men and materials, food and supplies, that must be safely ferried from ships to shore.

It's a "destruction test" for small boats — and for hundreds of rugged Evinrudes that help drive them. At many a tough spot, a few short weeks is long life for battered boats . . . but salvaged motors drive *on and on* . . . peacetime products proving their stamina in grim and relentless wartime service.

Today, new Evinrudes are being built for only one purpose . . . *to help win the war*. When that need is past . . . and you're thinking of buying a new motor again . . . just "ask the boys from the Aleutians" — and from many another front! Ask *them* what they learned about motors, out there where the going really gets tough!



EVINRUDE MOTORS

5010 North 27th Street
Milwaukee, Wisconsin

*Evinrude Motors of Canada,
Peterboro, Canada*

EVINRUDE

OUTBOARD MOTORS

★ Every War Bond you buy helps speed America's Victory. Then, good fishing to you!

Why Our Tanks Are Best

(Continued from page 218)

Captured German, Italian, and Japanese tanks have been subjected to every conceivable practical and engineering test by our Ordnance officers. These tests have confirmed the strong battlefield evidence that they aren't nearly as good as ours.

One of the reasons is that, type for type, ours have thicker and better armor than those of our enemies. The German light tanks, with armor only 7/10 inch thick, give the crews so little protection that they no longer are used for serious combat. The Nazi designers made the same fatal mistake with their Mark IV medium tank. Its original 1½-inch-thick body armor has been strengthened at especially vulnerable spots by bolting one-inch-thick plates over it, but these reinforcements aren't nearly so strong as solid plates would be.

The exceptionally high quality of American tank armor is the result of many years of experimental and development work in Government arsenals. Rolled face-hardened plate, which keeps out the bullets of high-powered machine guns, is used on light vehicles. Rolled homogeneous plate, which absorbs the terrific shock of large-caliber projectiles and also affords sure protection against machine-gun fire, is used on some of our heavier tanks. Tank plates now are welded together instead of being riveted. The use of cast armor is increasing. It can be cast into curved and sloping plates which deflect many projectiles. Our new M-4 medium tank has a cast-armor body.

Another, and very important, reason for our tanks' superiority is that, ton for ton, their light and compact airplane-type radial air-cooled engines are about twice as powerful as the engines of most European-built tanks. The ratio of engine power to vehicle weight of World War I tanks was about six horsepower per ton; in our modern tanks it is about 18 horsepower per ton. This high power-to-weight ratio makes them faster than opposing tanks and enables them to maintain speeds of from 10 to 20 miles per hour in sand or mud and on steep slopes and over obstacles. Speed is almost as good protection as armor—the faster a tank moves the fewer shots hostile tanks and antitank guns can get at it after it comes within their effective range.

Synchro-mesh transmissions now are used on most of our tanks, but several types of electrical and hydraulic variable-speed transmissions are being developed. Future use of one of them would eliminate the clutch. Our controlled-differential steering

system is better than the steering system used on any foreign tank. The articulating-bogie suspension—the development of one of Christie's many tank inventions—is both simple and reliable, and its efficiency in cushioning road shocks is higher than that of other systems. Our rubber-block tracks are beyond argument the world's best. Other armies' tank tracks may last for a few hundred miles; ours last for thousands.

The medium tank has become the most important weapon of mechanized ground warfare—both the spearhead and the shield of armored might. When our Armored Force was organized in the summer of 1940, it had twice as many light as medium tanks; now the proportion is three mediums to two lights.

Our new standard medium tank, the M-4, now rolling off the production lines of a half dozen immense plants, is being built in two models. One has a cast-steel hull and turret; the other an all-welded hull and a cast-steel turret. Its weight is about the same as that of the M-3, but since it is built closer to the ground it is a more difficult target, and its contoured armor is hard to hit squarely enough to penetrate.

Our new 15-ton light tank, heavily armored for its weight, fast, and armed with a 37-millimeter high-velocity gun mounted in a revolving turret, seems definitely superior to Axis tanks of its class.

Heaviest of our tanks is the 57-ton model. It has a welded body and cast-steel armor, and a steel apron to protect its tread mechanism. Its armament consists of a high-velocity gun of immense power and a 37-mm. gun mounted in a heavy revolving turret, and a number of machine guns. It is remarkably fast for its immense weight, and so well designed that it is easily maneuverable.

In building tanks with which to equip their panzer divisions the Nazis concentrated on quantity rather than on quality. They won the early armored battles of the war not because they had better tanks than the British and French, but because they had many more of them at the important spots and because they handled them much better. The tanks they are using today were designed in 1936, and there have been almost no improvements in them since the beginning of the war.

All of our tanks now in production, although their mechanical features are the result of years of steady development, have been designed from the lessons of large-scale mechanized warfare. Our Army Ordnance tank experts are confident that they are the best tanks in the world, but they will keep on trying to make them better until we have won the war.



Raiding with the Rangers, 'cross country scouting, front line dispatch riding... those are some of the motorcycle jobs that call for red-blooded riders with daring and courage, cool heads and resourcefulness.


In flashy, flexible performance on a dozen battle fronts, Indian Motorcycles are backing up these riders with all of Indian's famous power and speed and sturdy dependability. The soldier who rides an Indian knows there's no safer motorcycle built.

And you'll know it, too, when you ride the great new Indians that will be yours for good times and economical transportation after this war. In the meantime, let your Indian dealer help keep your present motorcycle in fighting trim... and ask him about his reconditioned "buys".

INDIAN MOTORCYCLE COMPANY, SPRINGFIELD, MASS.



**BUY WAR BONDS NOW
★ ★ TO BUY AN INDIAN LATER ★ ★**

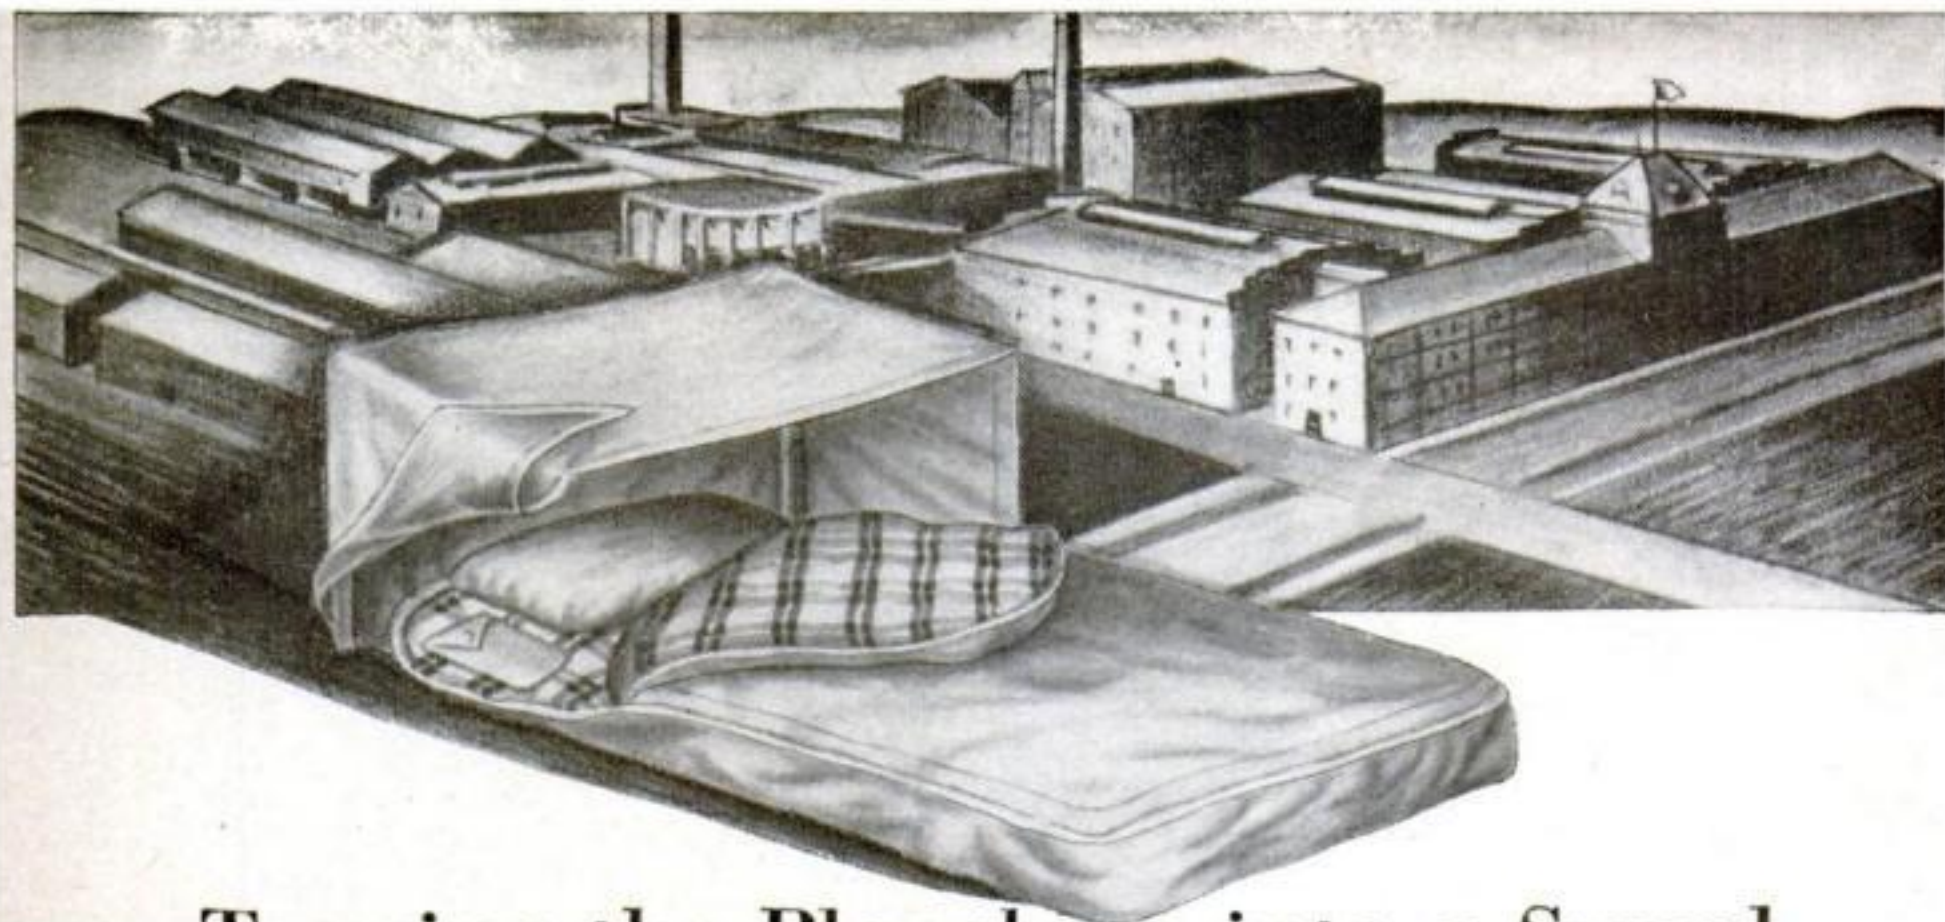

Turning the Plowshare into a Sword

Almost before the echo of cowardly Pearl Harbor bombs had died away, Ta-pat-co factories became an active unit of our nation's war industry.

Ta-pat-co sleeping bags, life preservers and other equipment dedicated to safety and comfort for lovers of outdoor sports in time of peace, now fulfill the same mission for our soldiers in time of war.

Ta-pat-co Sports equipment has become Ta-pat-co FIGHTING equipment—sleeping bags that give soldiers

warm beds in sub-zero temperatures—parkas that defy the cutting blasts of icy winds—life preservers that ride the crest of wave-tossed seas—on land, on sea and in the air—Ta-pat-co is in the war.

After victory is won, and the sword is beaten back into a plowshare, you will find your favorite Ta-pat-co equipment at your sporting goods dealer. Keep in touch with him. He will be the first to know when Ta-pat-co is again available for your outdoor sports enjoyment.

1-S-2

TA-PAT-CO Outdoor Sports Equipment
American Pad and Textile Company **FIGHTING** Greenfield, Ohio



THE OLD TOWN WAY

Paddle the sparkling waters of a sunny lake, rest in the cool pools of a shady cove, lost in a world of peace and contentment. Let your Old Town Canoe be your guide through all the woodland waterways. Light and well balanced. Quick to respond to the softest dip of the paddle. Easy to keep and built to last for many years.

FREE CATALOG illustrates boats for sport, sailboats, and all kinds of canoes, dinghies and outboards. Write today. Address: Old Town Canoe Company, 913 Main Street, Old Town, Maine.

"Old Town Canoes"

Highest Approval for NEW GLUE!

U. S. Adopts it for
Boats and Planes*



Welds wood to wood in Uncle Sam's boats and planes. Holds in salt surf, tropic heat, sub-zero stratosphere. Fast acting WELDWOOD is foolproof. Add tap water to dry powder, stir—and glue is ready for instant use. Cold setting. Perfect for repair jobs. At hardware, chain stores, lumber yards—10¢, 25¢, 50¢. Or send 25¢ with your dealer's name for sample can. Supply limited due to Uncle Sam's war needs.

UNITED STATES PLYWOOD CORPORATION
World's Largest Producer of Plywood

Weldwood Glue Dept.
103 Park Ave., New York
**Compare These
Amazing Qualities**

1. Tremendous Strength
2. Waterproof
3. Rot and bacteria-proof
4. Economical
5. Stain-free
6. Quick and easy to mix

*"Makes the glue line
the SAFETY line"*

*APPROVED for aircraft
by U. S. Army, U. S. Navy
and Civil Aeronautics Auth-
ority when properly applied.



WELDWOOD
PLASTIC RESIN
WATERPROOF GLUE

Typical American Flyer

(Continued from page 101)

ment of a featherweight plastic sun helmet, with a patent suspension that made one size fit almost any man's head. Moreover, he had specialized for the last year in efforts to design a satisfactory oxygen mask from molded plastic. He knew the problem, and would tackle it enthusiastically. He was called on the telephone and told that he was selected to make the heads, and make them quick.

Lieutenant Randall hurried to Chicago with his figures. In 16 working hours, with Randall checking the measurements and supplying anatomical criticism, Head I was completed. In a little more than two weeks, working with fanatical zeal, they had completed not five but seven heads. These weren't art, but they were designers' data of the utmost importance. Cast in plaster by technicians at the Field Museum, they were in immediate demand. Sets were supplied not only to all oxygen-mask designers but also to the Navy, the Armored Force, the Chemical Warfare Service, the R.A.F., and the air forces of Canada, Australia, and South Africa.

These plaster heads will be useful in the designing of all kinds of aviators' headgear—masks, goggles, helmets, or even a one-unit combination of all three. But the crucial point at this time is the fitting of the mask, and in this the most important measurement is what is called the nasion-menton dimension; that is the dimension from the root of the nose to the tip of the chin. The bony structure of these two parts makes it necessary to get a relatively close fit in order to make a leakproof mask. Over the cheeks there is more leeway, taken up by the flexibility of mask and flesh.

In the 1,871 men measured, the nasion-menton varied from a maximum of 145 millimeters to a minimum of 102 millimeters, giving a span of 43 millimeters to be fitted by as few different sizes as possible. But three quarters of the individuals measured—1,453—had nasion-mentons of 122, 123, or 124 millimeters. Head I, the grand mean, has this dimension at 123 millimeters; and the mask which fits him will be a pretty good fit on the great majority of the men concerned.

Heads II and III present an optical illusion. Though they don't look like it, they have the same nasion-menton as Head I. But Head II, the hatchet-faced boy, is a composite of the minimum values (that is, the smallest measurements) found in the

(Continued on page 224)

FREE TO MECHANICS



WILLIAMS' TOOL DATA SHEETS

• Designed primarily to help mechanics and production men engaged in war work, each sheet provides factual information on a specific subject. They are punched to fit a standard 3-ring binder and will be mailed flat. Subjects covered to date are listed below. Merely fill in and mail the coupon after circling or checking the numbers indicating the subjects you desire.

- | | |
|--|---|
| 1. Characteristics of Williams' "Superior" Wrenches. | 5. Data on "Vulcan" Lathe Dogs. |
| 2. Data on Williams' Boring Tools. | 6. Data on "Vulcan" Chain Pipe Vises. |
| 3. Data on "Vulcan" Chain Pipe Tongs. | 7. Data on Williams' Turning Tools. |
| 4. Data on Williams' "Supersocket" Wrenches. | 8. Data on Williams' "Superior" Wrenches. |
| 9. Saving Time with Williams' "Supersockets." | |

MAIL THIS COUPON

J. H. Williams & Co., Dept. S-343, Buffalo, N. Y.

Please send Data Sheets circled below:

1 2 3 4 5 6 7 8 9

Name _____

Address _____

City _____ State _____

WILLIAMS
SUPERIOR DROP-FORGED TOOLS

How to polish metal with cloth!



●Aloxite Brand Aluminum Oxide Cloth is excellent for producing a polished surface on metal objects and for removing small amounts of metal in fitting parts. Small flat work, for instance, is rubbed over the cloth, laid on a flat table, as illustrated. In addition to polishing metal, Aloxite Brand Cloth can be used for the removal of rust or for cleaning prior to soldering.

Polishing a giant crankshaft



●This skilled craftsman is hand polishing the throws of a giant crankshaft with the same high quality Aloxite Brand Cloth that is sold for use in your own shop. Send us 10¢ for helpful 95 page illustrated manual on home craftsmanship, and we'll include a souvenir sharpening stone.

See your hardware dealer

CARBORUNDUM
ABRASIVE PRODUCTS

Dept. S-33

THE CARBORUNDUM COMPANY

REG. U. S. PAT. OFF.

Niagara Falls, N. Y.

(Carborundum and Aloxite are registered trade-marks of and indicate manufacture by The Carborundum Company)

Typical American Flyer

(Continued from page 223)

1,453 individuals in the 122, 123, and 124-millimeter group. Head III, the one which looks like a Roman emperor or a big Slav, is composed of the biggest measurements found in the same group. These two will be important when it comes to fitting helmets, hat size varying from 6 $\frac{3}{8}$ to 7 $\frac{5}{8}$.

From the mask standpoint, Heads IV and V are next in importance to Head I. They represent, respectively, the average values found in the lower 15 millimeter of nasion-menton dimensions and those found in the upper 16 millimeter. They represent only a relatively small number of flyers, but include the longer and shorter thirds of the measurement scale. It is possible that a practical mask may be made in just these three sizes.

Heads VI and VII are the out-sizes. Each is a composite of the 16 faces falling in top and bottom measurements. Roughly, they are the long and short one percent.

These heads are only a beginning in what Randall and Borkland see as the new art of "human engineering." Today they are working in a new frenzy, developing means of properly jointing and reproducing three models they have made of composite body sizes of the same 1,871 flyers. These may have great importance, as warplanes attain still greater refinements of space-saving.


For instance, how large should a turret be in a bomber? Every ounce of weight is precious. If turrets were built with gunners as models, that might lead to great error and disaster. For it seems that gunners are smaller than flying cadets. But if a gunner is put out of action, it may well fall upon the navigator, bombardier, or copilot to take over the gun.

When pursuit planes dive at 725 miles an hour, the limit of a pilot's physical abilities are very nearly reached. No detail which may increase the flyer's comfort or contribute in any way to his efficiency can be overlooked. Up to now cockpits have been built in accord with general notions of the size and proportions of the men who use them. With the Randall-Borkland figures as guides, it will be possible not only to have mass production of planes, but also to have their fittings practically tailor-made for the pilot.






Subscribers in the armed services who notify us of change of address are requested to give us the key symbols appearing on the wrapper in which the magazine is received.

DELTA PROJECT LIBRARY

Over 300 Selected Outstanding Projects with all necessary photographs and working drawings segregated and typed into 9 convenient volumes

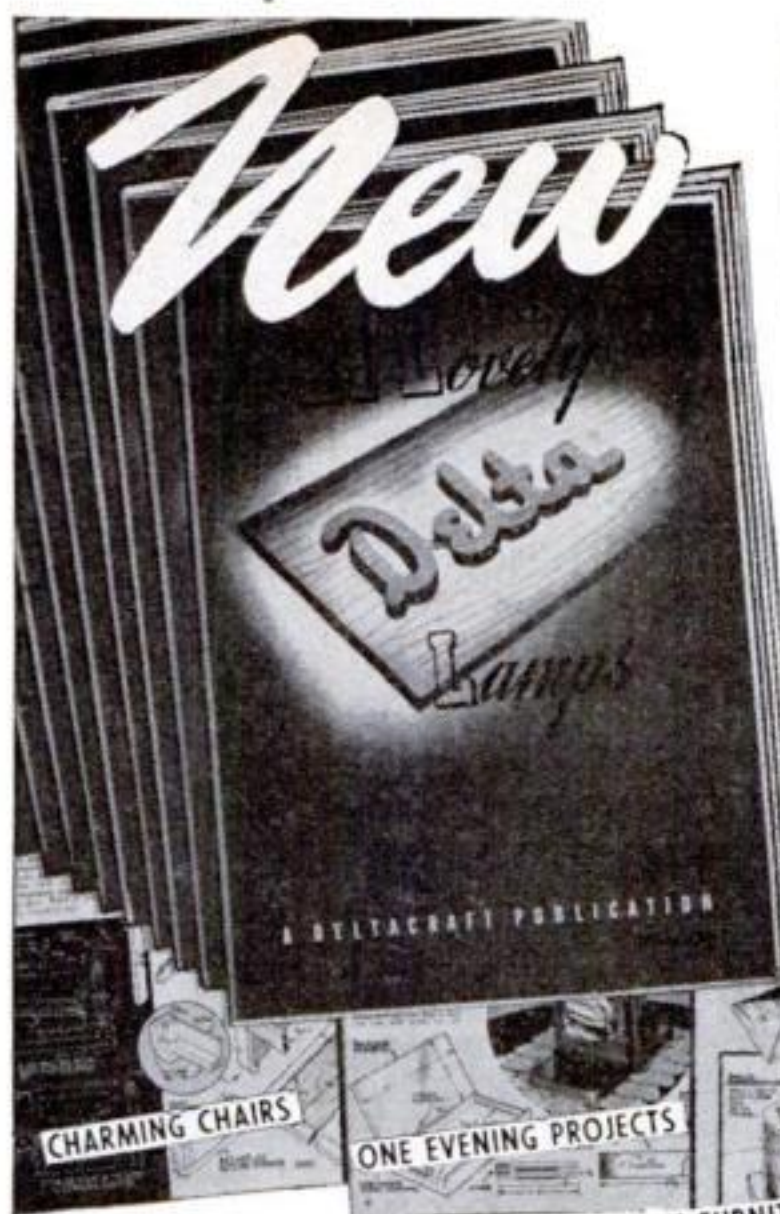

See BIRD HOUSES for Spring

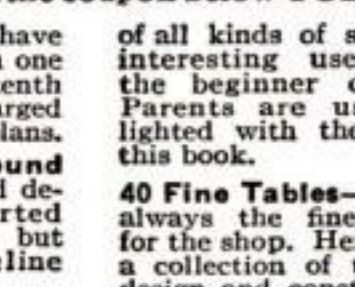

FREE—Extra Gift

With every order for the Delta Project Library we include a Free copy of "How to Make Money with Delta Tools". Extremely valuable. Gives numerous examples of successful money-making plans.



One of the greatest project library values ever offered—over 300 "cream of the crop" selections from past issues of the Deltagram—segregated in 9 convenient books, with each book devoted to a specific type of project. No more searching through dozens of books to find the exact project you want. Photographs, working drawings and complete directions on each project. Every item shop-tested. In addition, you get the valuable "Practical Finishing Methods"—a gold mine of information on latest finishing methods. Examine this remarkable value on our "no-risk" offer. Mail the coupon below TODAY.

21 Lovely Lamps—popular, pleasing designs for lamps of all kinds. Shows how to wire and connect. Many modern designs.

19 Charming Chairs—simplified, easily followed instructions, clear photographs show how to make chairs of all kinds.

One Evening Projects—a collection of dandy novelties—easy to build projects that "look like a million" but take a minimum of time to build.

Garden Furniture and

Novelties—here you have the latest designs, all in one convenient book at one-tenth the price usually charged for this number of plans.

Toys, Games, Playground Equipment—ideas and designs that have started many men on a small but highly profitable sideline business.

Furniture Designs—Desks, beds, wardrobes, larger pieces of fine furniture. Many original designs are contained in this book.

Novelties—An assortment

of all kinds of small interesting useful things the beginner can make. Parents are usually delighted with the things in this book.

40 Fine Tables—Tables are always the finest projects for the shop. Here you have a collection of the best in design and construction.

Small Furniture Designs—Footstools, magazine racks, sewing cabinets, mirror frames are but a few of the better pieces shown in this new book.

NOVELTIES

FINE TABLES

SMALL FURNITURE DESIGNS

PLUS "Practical Finishing Methods"

The book that every shopman has been waiting for. Tells in simple easily followed instructions how to do every possible finishing operation—how to prepare the work—how to stain—fill varnish—lacquer, etc. Shows proper use of spray gun and brush. Tells how to mix your own low cost materials. Silk screen process—how to finish metal—make decorations. In fact, it's a complete guide on every practical finishing operation giving secret methods developed over many years.

Examine This Library at our risk!

You can inspect the Delta Library without risking a penny. Simply fill out and mail coupon today. When the complete library, plus the FREE extra gift book arrives, postpaid, inspect it thoroughly. If you aren't fully satisfied in every way—you can return the library—and every penny you have paid, including return postage, will be promptly refunded—without question. The Delta Mfg. Co., 682CE, Vienna Ave., Milwaukee, Wis.

THE DELTA MANUFACTURING COMPANY
682CE E. Vienna Ave., Milwaukee, Wis.

Gentlemen: I enclose \$2 for which please send me complete Delta Project Library, Postpaid, plus FREE Gift Book. It is understood that if I am not fully satisfied—I can return the library and you will refund every penny I paid, including return postage.

Name.....


Address.....

City.....State.....

DELTA MILWAUKEE

ATKINS

**I Don't Like
to Crow,
but...**

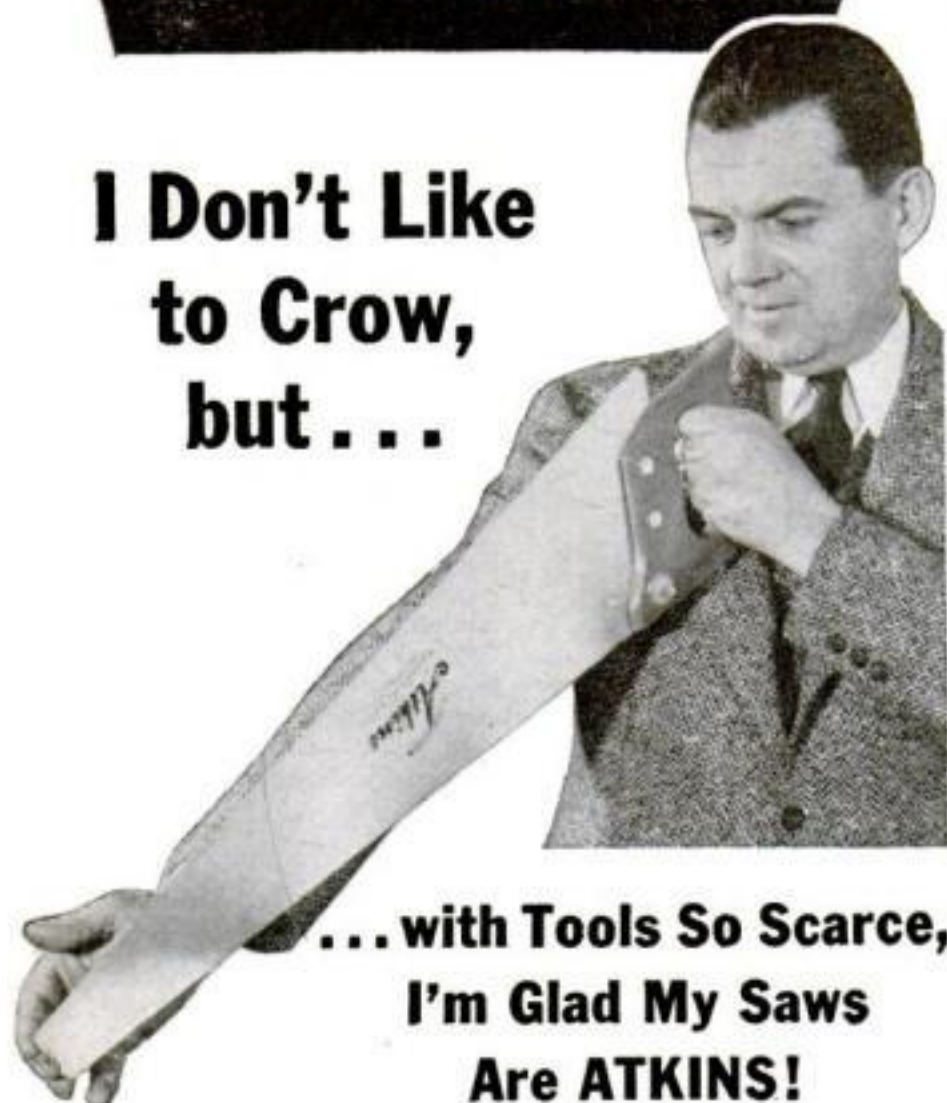

**...with Tools So Scarce,
I'm Glad My Saws
Are ATKINS!**


Yes, the owner of quality saws like Atkins has every right to congratulate himself. Given reasonable care, his Atkins Saws will serve him faithfully for the duration—and a good many years after. Accurate, effortless cutting . . . less filing to keep the tough teeth keen . . . these are the rewards of choosing the famous "Silver Steel" brand.

REMEMBER—wherever a priority is required, it's just as easy to get one for the best grade as for ordinary saws.

Send 10c Coin for How-To-Do-It Book.

E. C. ATKINS AND COMPANY
428 S. Illinois St. • Indianapolis, Indiana

Silver Steel **SAWS**

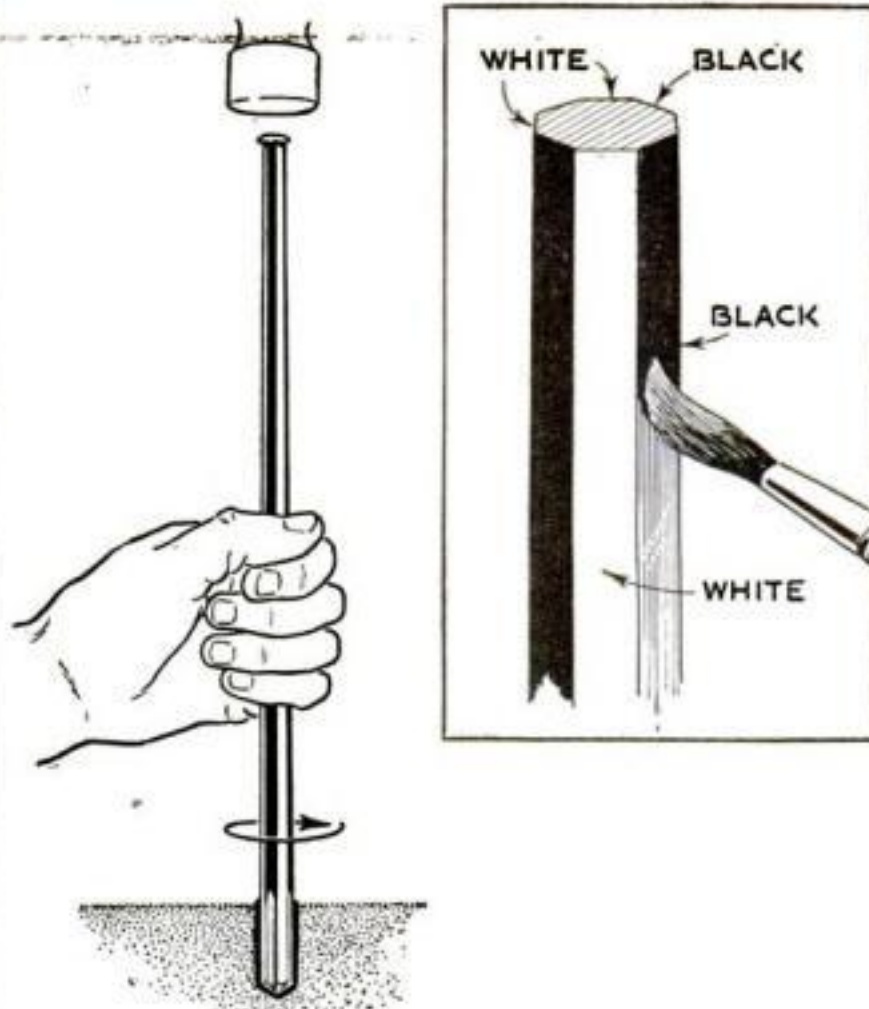



Striped Shank for Star Drill

AN EASY way to insure giving star drills the proper amount of rotation with each hammer blow, in order to produce the maximum depth of cut, is to paint the shank with alternate vertical stripes of black and white. This will provide a means of telling how much the drill is turned each time. Although the one shown is of octagonal stock, round ones may be marked in the same way.—J. MODROCH.

Old Spring Dresses Grinder

PIECES of an old phonograph or clock spring cut about 6" long are useful for dressing grinding wheels. Hold such a piece about 1" or less from its tip in a pair of pliers and place it against the revolving wheel, making sure your eyes are adequately protected. This will produce a fine chatter which will sharpen your grinding wheel and dress it perfectly round.—J. P. DIRKS.

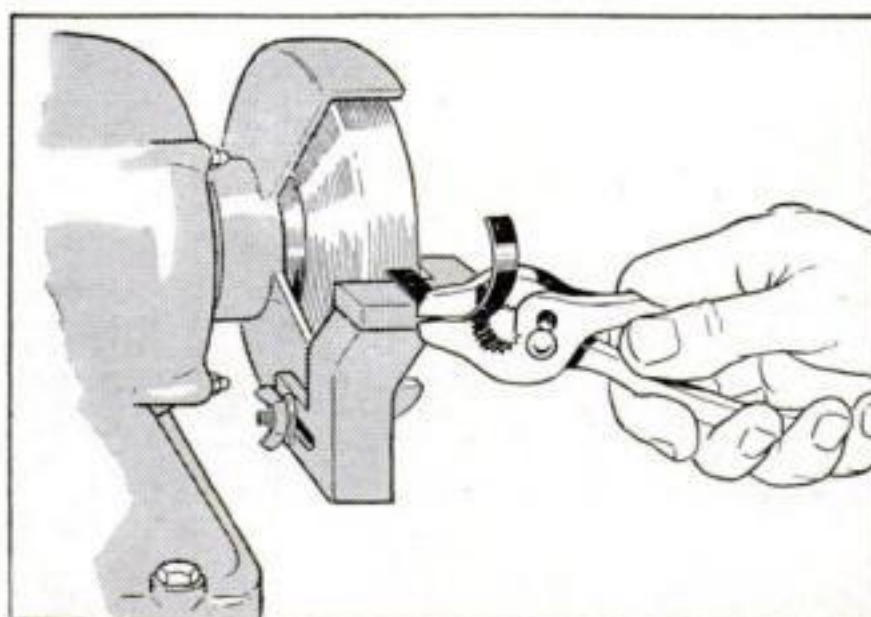

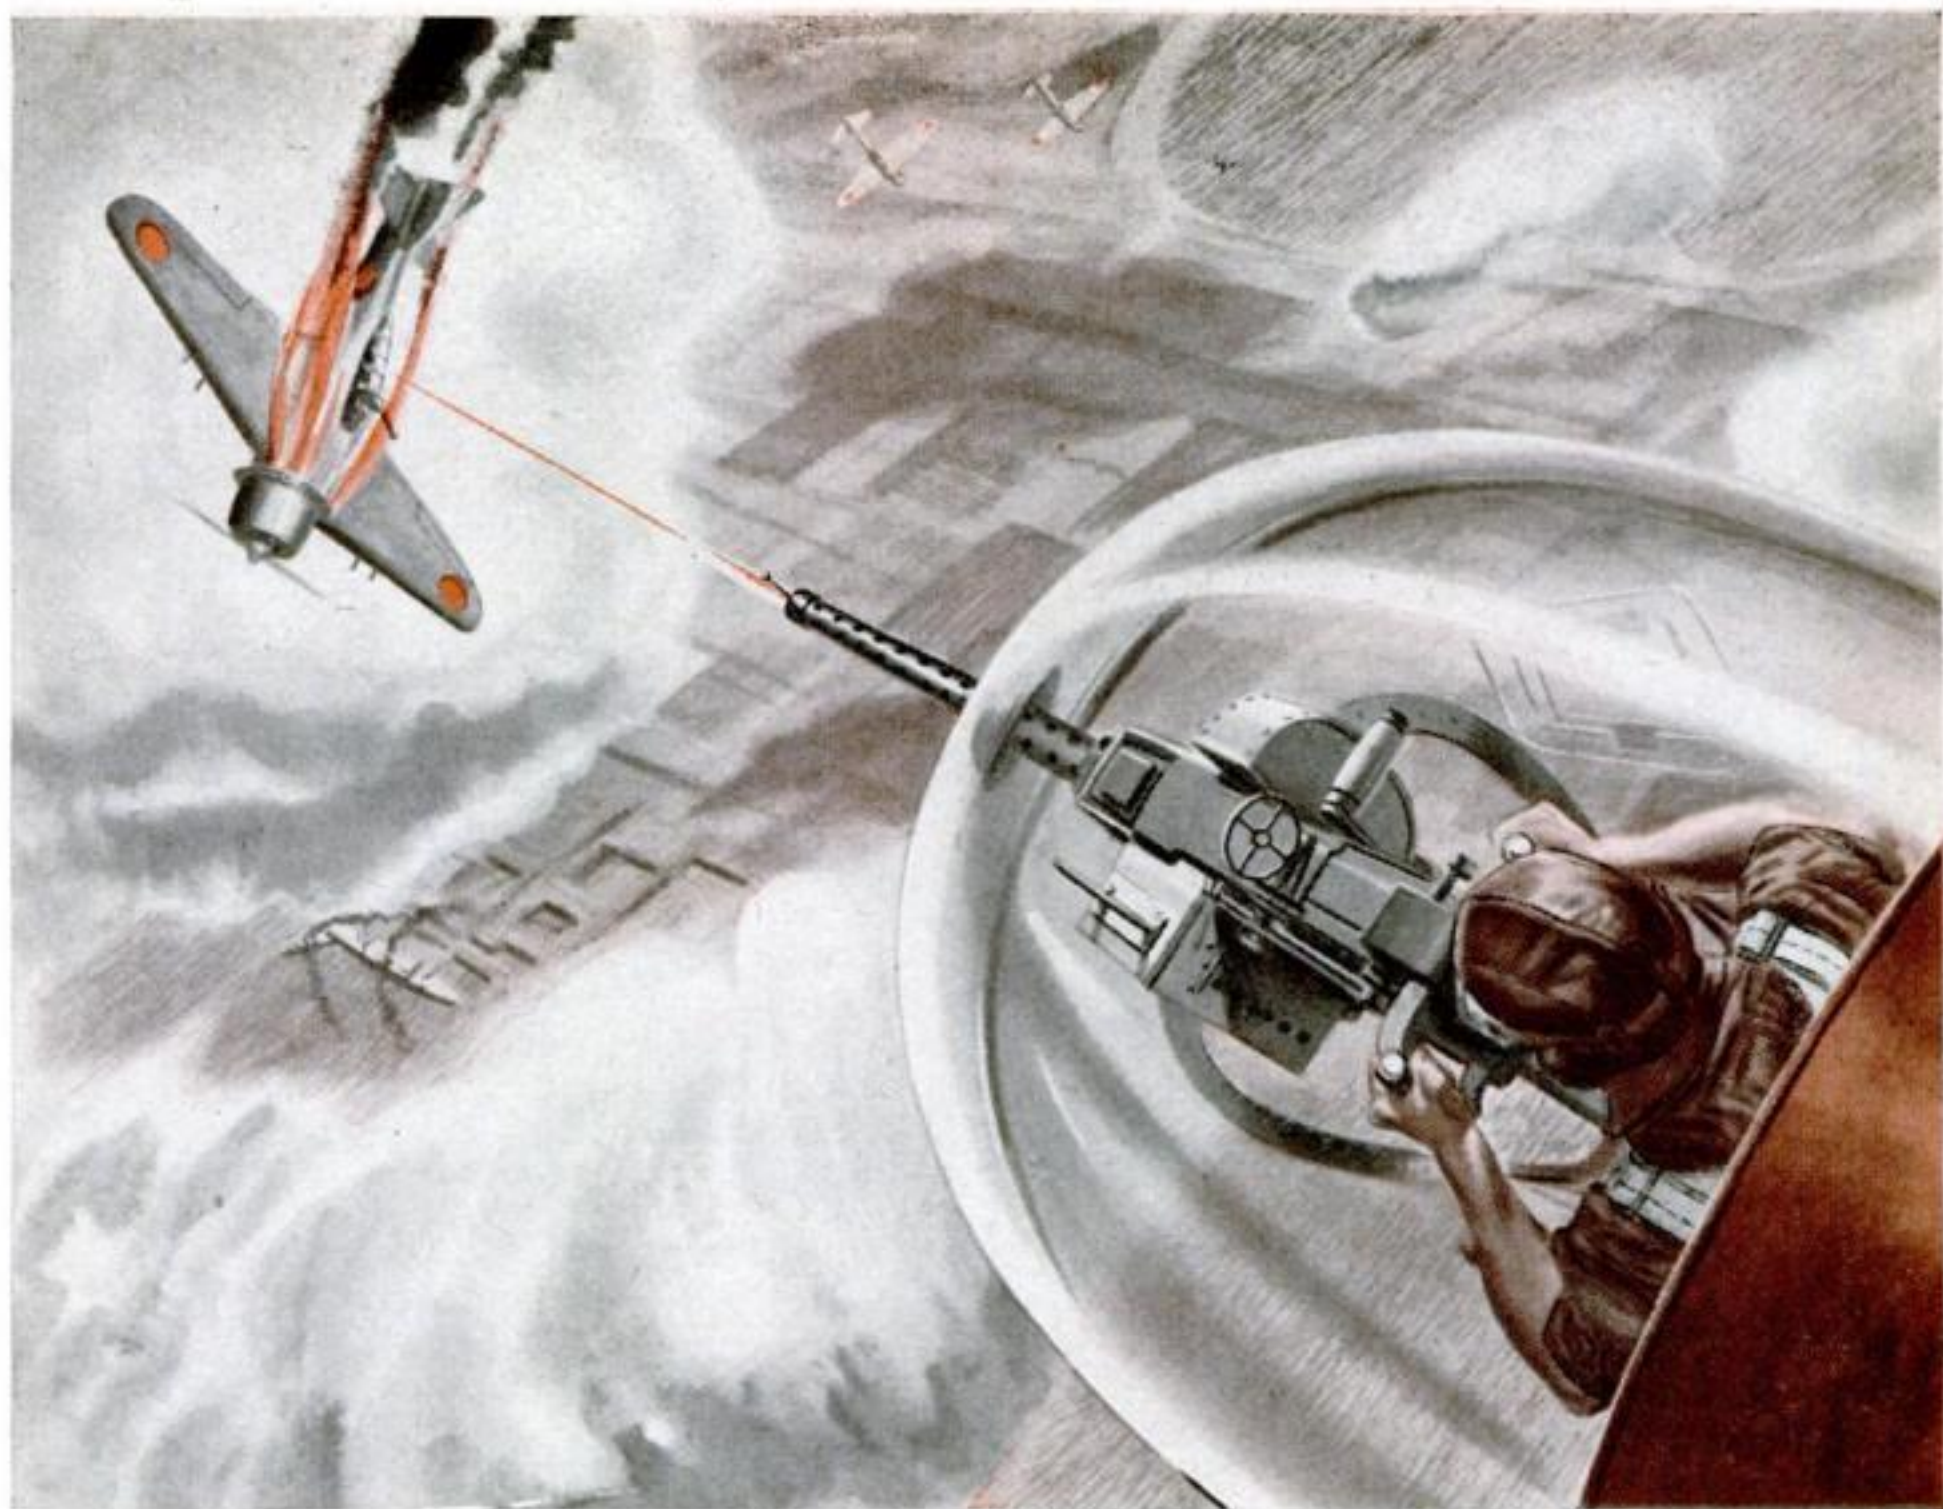

More fire power to 'em!

Our fighting men are showing the world the stuff of which America is made.

It's our job to back them with arms worthy of their skill and courage. So, for over a year, huge quantities of Savage-built Browning aircraft machine guns, Thompson submachine guns, and military rifles have moved in a steady stream to our forces on world-wide battle fronts. We're glad that the arms experience and

technical skills in our organization made it possible to get large quantities of military equipment into production quickly. Savage Arms Corporation, Utica, N. Y.



It was because of high achievement in production of War equipment that the Army-Navy Production Award was bestowed on the Utica Plant of the Savage Arms Corporation.

SAVAGE




SAVAGE MODEL 99

"Hammerless," streamlined — this famous rifle has been the dependable companion of big game hunters the world over. After Victory, it will continue to be the ideal, high-power hunting rifle.



WHY YOU SHOULD KEEP SMOOTH-ON HANDY

In wartime it's hard . . . often impossible for you to replace cracked or leaking furnaces, boilers, radiators, piping and automobile parts. But, you can *repair* household and auto equipment quickly . . . easily . . . lastingly . . . with SMOOTH-ON No. 1. This many-purpose iron repair cement has been used for more than forty-five years by professional repair men to fix cracks, leaks and loose parts. They keep SMOOTH-ON handy . . . just as you should do . . . ready for emergencies that may come at any time.



Stops Leaks



Tightens Loose Parts

Buy SMOOTH-ON in 1 3/4 oz., 7 oz., and larger cans from your dealer or if necessary from us. For your protection, insist on genuine SMOOTH-ON.

EASY TO USE

Anyone can make lasting repairs with SMOOTH-ON. All you do is mix SMOOTH-ON with a little water and apply like putty. No heat, no special tools, are required and you don't have to dismantle any parts.

A FEW CENTS WORTH SAVES MANY DOLLARS

A few cents worth of SMOOTH-ON will save you many hard earned dollars. Unused SMOOTH-ON does not deteriorate. You can keep it handy for years.

FREE

40-Page Repair Handbook chock full of practical repair hints that will help you to keep household, car, and shop equipment in good condition and enable you to repair what you can't replace. Your copy sent free on request.


MAIL THE COUPON

Smooth-On Manufacturing Co., Dept. 58
570 Communipaw Ave.,
Jersey City, N. J.

Name.....

Address.....

3-43.....

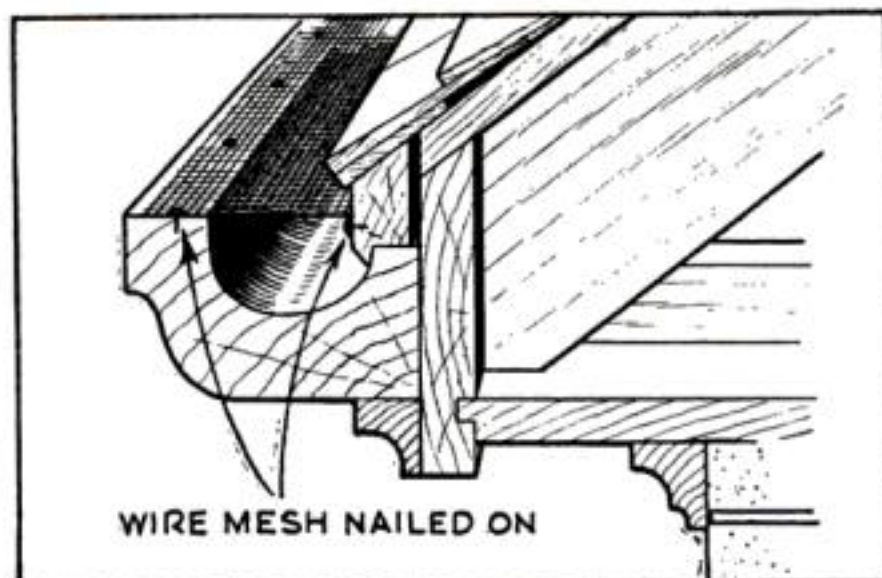

Mesh Keeps Roof Gutters Clear


WHERE a house is surrounded by large trees, the gutters and leaders are likely to become clogged with wind-blown leaves. This difficulty can be overcome by covering the gutter with 1/4" galvanized wire mesh.

If the gutter is of the metal type, cut the mesh into strips 1/2" wider than the distance from the outer top edge of the gutter to the cornice board and turn the extra 1/2" to form a right-angle lip. Nail this lip to the wood cornice and snap the other edge into the ridge at the top of the gutter. The wind will keep the top of the screening clear of leaves. Attach wire mesh to wooden gutters as shown above.—ARTHUR H. MARTINI

Making Springs by Hand

COMPRESSION and expansion springs can be wound on a rod with the help of a notched pipe having an inside diameter the size of the spring to be made. Clamp the end of a length of piano wire with the rod in a vise so that the wire is held at an upward angle. Saw a V-shaped notch in the end of the pipe, with one side parallel to the pipe axis. This should be the rear side of the notch as the pipe is turned.

Engage the wire in the notch, and turn it with the pipe, keeping the pressure uniform throughout. For a compression spring, space the wire; for an expansion type, hold the turns together.—A. H. VON DER OHE.

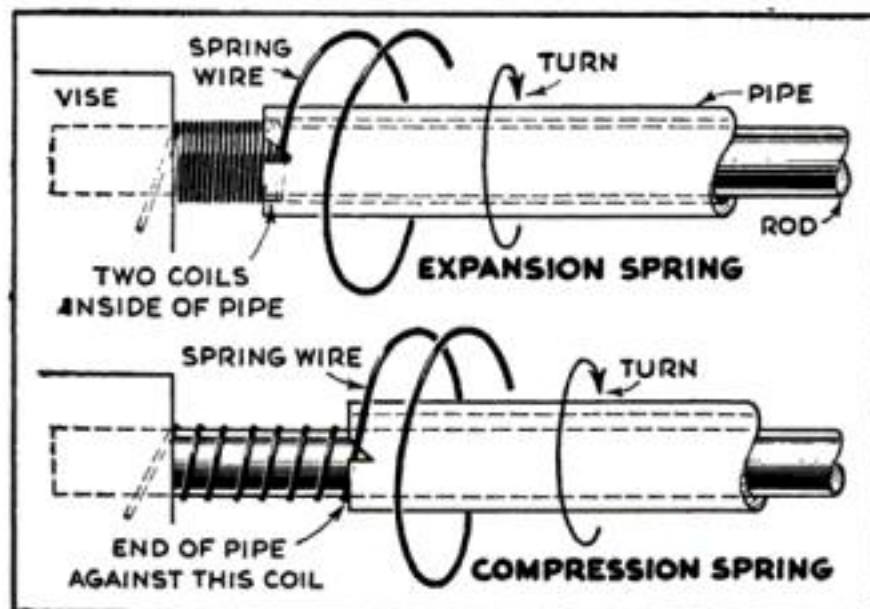

Do it with SMOOTH-ON

WATCH ★ ★ ★ ★ MIDWEST


AFTER THE WAR IS WON ★ ★ ★
FOR SENSATIONAL ADVANCEMENTS
AND FEATURES SUCH AS . . .



*A
MIDWEST
SENSATION IN
1942—BUT WAIT
TILL YOU SEE THE
MIDWEST OF
TOMORROW

OUR ENTIRE PRODUCTION FACILITIES
ARE NOW DEVOTED TO MANUFACTURING
RADIO EQUIPMENT FOR OUR ARMED FORCES
BUT...WHEN VICTORY IS WON

**YOU'LL BE BUYING YOUR MIDWEST RADIO
DIRECT FROM THE FACTORY**



SAVING UP TO **50%**
WILL BE JUST AS POPULAR AS EVER

Yes, Sir. Thousands upon thousands of people all over the U. S. were buying super powerful Midwest Radios direct from our factory until "Pearl Harbor" and if the many letters we are still receiving every day is an indication, the direct-to-user-plan will be more popular than ever after the War is won.

FREE
FOR A
LIMITED
TIME ONLY



A beautiful 12" x 8" "Old Glory" Calendar in full colors, absolutely free if you send 10 cents for a U. S. War Savings Stamp. Just send a dime or 10¢ in postage stamps and your Calendar and War Savings Stamp will be sent promptly.

MIDWEST RADIO CORPORATION
DEPT. 59-A CINCINNATI, OHIO

FRANKLIN
Liquid
Hide
GLUE



MAKE JOINTS
STRONGER
than the
wood itself
NO MIXING
NO HEAT
NO WASTE

Genuine hide glue in liquid, ready-to-use form. No waste from evaporation, souring or hardening. Favorite of furniture factories and fine craftsmen everywhere.

ASK YOUR
HARDWARE DEALER

for Franklin Glue or send 25c for
1/4-pint (Regularly 30c).

THE FRANKLIN GLUE CO.
1143 Cleveland Ave., Columbus, O.



MAKE EXTRA MONEY

with **IDEAL Lawnmower Sharpener**
NO EXPERIENCE NEEDED!

Greater opportunity than ever! With few new lawnmowers available this year, servicing of old mowers becomes more important than ever. Sharpening and servicing lawnmowers is highly profitable full or spare time work. All you do is set mower in the Ideal Sharpener, make a few simple adjustments—the Ideal sharpens any mower to perfect edge in 15 to 20 minutes. Usual charge \$1 to \$1.50 for every job! Customers tell their friends. Remember, **NO EXPERIENCE NEEDED!**



Send for FREE PLAN BOOK ➔

FREE 24-page Plan Book shows you how to get plenty of jobs—how to "open up shop" in your own basement or garage. Profits for either part or full time. **START NOW** when demand for **SERVICE** is greatest in years!



THE FATE-ROOT-HEATH COMPANY

2343 BELL STREET • PLYMOUTH, OHIO

Mechanically Inclined Men **HOME APPLIANCE** **REPAIRING**

Offers Big Money-Independence

America's War Made Industry

Restriction of manufacturing has meant that the men who know Home Appliance Repairing—fixing refrigerators, vacuum cleaners, washing machines, motors, welding, nickel plating, etc. etc. are reaping a steady, daily stream of dollars and building for themselves a permanent profitable business.

No Previous Experience Needed

The ability to hold and use a tool plus an ambition to make money is all that you need to become a successful Repair Shop Owner.

Full Time or Spare Time

Work as many hours as you want. \$5.00—\$6.00 an hour often made.

New Course Tells All

Our new course on Home Appliance Repairing . . . profusely illustrated shows you in simple, easy to understand language how to make all repairs, build tools you need and how to get business to come to you. Price of course is so low that your savings on your own household repairs will quickly pay for it. Send today for complete **FREE** literature on how you too can get started.

CHRISTY SUPPLY CO.,

2835 N. Central Ave.,

Dept. D-201, Chicago

BIG MONEY BUILDING MEAD'S

New Portable OUTBOARD **BOAT**



IN A FEW DAYS AT HOME!

Build this light 50 lb. tough, durable, seaworthy portable **Outboard Ki-Yak!** Take it anywhere by hand or car. Safe, dependable, trouble free. More speed per horsepower, more miles per gallon. MEAD'S perfected metal-ribbed, cut-to-fit construction Kit guarantees successful assembly, quickly, easily, economically. New 69 lb. OK-4 uses oars, sail, motors, 9 h. p. or less. Also 3 "CK" paddle-sail models from 20 lbs. to 45 lbs. Double Paddle or Oars INCLUDED with your Ki-Yak! Write for **FREE** lavishly-illustrated circulars, low Factory-To-You Prices!

MEAD GLIDERS,

15 S. Market St., Dept. D-33
Chicago, U. S. A.

AC & DC GENERATORS



& power plants. 350 to 15,000 watts, self and separately excited. Available for all standard voltages, 2 & 3 wire single phase, 3 phase 4 wire. Special frequencies, 25, 30, 50 and 120. Also rotary converters, frequency changers.

Katolight, 52 Elm St., Mankato, Minn., U. S. A.

FREE BOOK—On Health

To Colon—Chronic Sufferers

Do you suffer pain, torture and broken health of neglected Piles, Fistula or related rectal and colon ailments? Write today for 122-page **FREE BOOK**. Learn facts. The McCleary Clinic, 371 Elms Blvd., Excelsior Springs, Missouri.

ONAN ELECTRIC PLANTS **ALTERNATING AND DIRECT CURRENT**



Used by U. S. ARMY, NAVY, and MARINES on all World Fronts for **HOSPITALS, COMMUNICATION, LIGHTING and EMERGENCY ELECTRIC POWER.**

MANY MODELS from 350 to 35,000 Watts.

Any Voltage—Any Frequency—A. C. or D. C.

Write for Details

D. W. ONAN & SONS

1497 Royalston Ave., Minneapolis, Minn.

Please mention **POPULAR SCIENCE** when writing to advertisers.

Proving Ground FOR YOUR NEW HARLEY-DAVIDSON



BUY WAR BONDS NOW

and be all set to get
a new Harley-Davidson
when peace comes.

On far-flung battle fronts, Harley-Davidson Motorcycles are proving their rugged dependability. Out of today's great wartime experiences will come still better Harley-Davidsons for red blooded Americans to ride when Victory is won!

HARLEY-DAVIDSON MOTOR COMPANY
Department PS MILWAUKEE, WISCONSIN

HARLEY-DAVIDSON MOTORCYCLES

BUILD THE BIGGEST \$1.00 PLANE IN U.S.

New, Redesigned 7-Ft. Super CONDOR Soaring Glider

Stronger, longer flights, more graceful lines, construction simplified. Easier than ever to build. Soars for hours. Kit VE-5019, only..... **\$1.00**



Send 5c for new
No. 40 Catalog

(none
free)

4-Ft. Cleveland Eaglet

New, stronger construction. Unusually good model of a secondary type glider. Patterned after "Baby Bowler". Easily built. Kit VE-5018, only.....



50c

Be Sure to Build These Six New Big 3-foot Famous War Models

Kit T74—Messerschmitt ME-109; Kit T76—Bell Airacobra P-39; Kit T77—Curtiss P-40 "Warhawk"; Kit T85—P-38 "Lightning"; Kit T78—Hawker "Hurricane"; Kit T91—P-51 "Mustang".

Each Only \$1.50



If your dealer can't supply you, order direct. Enclose 15c extra on orders for less than \$1.00.

● CLEVELAND MODEL & SUPPLY CO., INC., 4508C26 Lorain Ave., Cleveland, Ohio

Know Your Arc Welding!

● Bring yourself up-to-date on Arc Welding methods, procedures, techniques and equipment with this sensational 1942 manual. Hundreds of pages of illustrations and diagrams "show you how" . . . and the text tells you in clear, concise, style. For experts and beginners alike. It'll be worth a hundred times its cost to you.

\$2.00

Postpaid

Write Today! HOBART Bros., Box P-33, Troy, Ohio

Complete
Manual and
Ready-Reference
Text. 516 pages
512 Illustrations
... Easy to read
and understand.



Send for Your Copy Today!

Once you look it over you'll want it always at your fingertips. Remember, it can make the best operator even better.

Ask about FREE enrollment in the HOBART Trade School. One of the finest in America.



5 Days FREE Inspection

● Most Valuable Book on Welding ever published!

DRAFTSMEN NEEDED

NOW



Industry is clamoring for more draftsmen for the job can't start until plans are drawn. Buildings, airplanes, machines, guns, tanks, bridges, all start on the drafting board, so it's no wonder that every good draftsman has a fine job. Yes, more draftsmen are needed NOW. The pay is good and the opportunities for advancement great.

Learn at Home in Spare Time

Begin now to turn spare hours into money. Be a draftsman, the connecting link between a mechanic and an engineer. Enjoy the wonderful opportunities for promotion that exist now. No experience or artistic talent is needed. You don't have to leave your present job while learning. Use spare time.

American School, Dept. DD346, Drexel Ave. at 58th Street, Chicago, Ill.

Gentlemen: Send me FREE information covering special training in subjects checked below. No obligation on my part.

- | | |
|--|--|
| <input type="checkbox"/> Drafting and Design for men and women | <input type="checkbox"/> Electrical Engineering |
| <input type="checkbox"/> Cost Accounting for Manufacturing | <input type="checkbox"/> Diesel Engineering |
| <input type="checkbox"/> Architecture and Building | <input type="checkbox"/> High School Course |
| <input type="checkbox"/> Automotive Engineering | <input type="checkbox"/> Plastics |
| <input type="checkbox"/> Business Management | <input type="checkbox"/> Mechanical Engineering |
| | <input type="checkbox"/> Aviation <input type="checkbox"/> Radio |
| | <input type="checkbox"/> Shipbuilding |

Name.....

Address.....

Not everyone
does as well
as Charles—
for he



**TOOK IN \$217
in 10 DAYS
WASHING WALLS**

● Newly invented machine washes walls 6 times faster and better than by hand.

Charles Stelle took in \$217 first 10 days. We want more men to go into business for themselves. Customers everywhere. Homes, schools, offices, stores, churches, lodges, hotels, all have walls that need washing. You don't have to rent a store for you operate this business from your home. Dozens of men have written of large earnings for specific periods in their busiest seasons. They don't do this every day, every week, or every month, and allow a small amount for materials, but you can see how easy it is to get into this wonderful business.

Harold Jones writes: "I landed a \$40 job the first day."

E. C. Traber says: "Made \$400 in two weeks."

C. Irons got a \$905 school job. This is a repeat order.

L. Bach says: "First two jobs netted me \$26."



Easy Payments

It takes only a small amount to get started in this money-making business. No experience necessary. Any ambitious man who wants to be in business for himself with wonderful opportunities for big earnings should get started NOW.

SEND FOR FREE INFORMATION

There is No Obligation.

VON SCHRADER

783 Pl., Racine, Wis.

Please mention POPULAR SCIENCE when writing to advertisers.

Test-O-Lite the MODERN TROUBLE SHOOTER



THE NEON GLOW

... LOCATES TROUBLE

INSTANTLY in electric circuits, fuses, cut-outs, motors, radios, appliances. Tests everything electrical from 100 to 550 volts. Indicates hot or grounded wires. Tells AC from DC. Far superior to ordinary clumsy test bulb.


PUTS "FINGER" ON THE TROUBLE SPOT - QUICKLY

Saves precious time. Indispensable in shop or home. Has patented safety features. Vest pocket size with clip. Lifetime guarantee. List \$1.50

L. S. BRACH MFG. CORP.

55 Dickerson St.

Newark, N. J.



FUSES



MOTORS



OUTLETS

DO YOU

WANT a permanent business profession of your own? Then become a foot correctionist. Earnings of men and women in this greatly needed profession

run as high as \$50.-\$100. weekly after a few weeks home training—not medical or chiropody—easy terms, no further capital needed, no goods to buy. 47th year. Write for free booklet.

Stephenson System of Foot Correction, 62 Back Bay, Boston, Mass.



★ WITTE has been serving America for 73 years.

WAR VOLUNTEERS

WITTE Log Saws and Engines have gone to war—WITTE is pledged to 100% war production until victory is attained. After victory, WITTE Log Saws and Engines will again be available to make money for everyone.

WITTE ENGINE WORKS
Kansas City, Mo.



WITTE LOG SAWS and ENGINES



AMERICA'S BEST KNOWN SHOES

W. L. Douglas Shoes
W. L. DOUGLAS SHOE CO., BROCKTON, MASS.



FOR YOUR CLUB!

Beautifully Styled—Low Prices!

Make your members more conscious of their membership. Write for free catalog. Shows 300 styles, sterling and gold plate on sterling. Choose a design suitable for your group. No order too small. Quality leader for 48 years. Write today!

BASTIAN BROS. Dept. 96, Rochester, N. Y.

Help Kidneys If Back Aches

Do you feel older than you are or suffer from Getting Up Nights, Backache, Nervousness, Leg Pains, Dizziness, Swollen Ankles, Rheumatic Pains, Burning, scanty or frequent passages? If so, remember that your Kidneys are vital to your health and that these symptoms may be due to non-organic and non-systemic Kidney and Bladder troubles—in such cases Cystex (a physician's prescription) usually gives prompt and joyous relief by helping the Kidneys flush out poisonous excess acids and wastes. You have everything to gain and nothing to lose in trying Cystex. An iron-clad guarantee assures a refund of your money on return of empty package unless fully satisfied. Don't delay. Get Cystex (Siss-tex) from your

Cystex
Helps Flush Kidneys

druggist today. Only 35c.

**AFTER
THE
WAR**

WILL YOU BE FISHING FOR FUN OR FISHING FOR FOOD?



If we should lose this war, it **COULD** be that you'll be fishing for food instead of for fun. And it might be food for somebody else.

Freedom from want, freedom from fear, freedom to follow our chosen pursuits — these are the things we are all fighting for. And these are the things that move men, money and management to turn out more and more of better fighting equipment.

It is our business normally to help you "fish for fun." We can't help you to do so now because the Johnson plant, home of Sea-Horse Outboard Motors, is given over to war work—one hundred percent. "Sea-Horse precision" is now applied to war products. Johnson management and men are working harder at this job than any at which they have ever worked before. All to the end that none of us will ever have to "fish for food."



JOHNSON MOTORS

500 Pershing Rd., Waukegan, Ill.
Johnson Motors of Canada, Peterboro, Can.

JOHNSON SEA-HORSES for *DEPEND* ability

New Accurate 10" Slide Rule

Magnifying Indicator

Instruction Book
FREE



**SPECIAL
COMBINATION OFFER**

Slide Rule and Instruction Book; Pocket Calculator for adding and subtracting up to 999,999; 6" Transparent Protractor and Graph Rule graduated in centimeters and inches

—ALL 3 for \$1.00 cash (\$1.10 Foreign) Postpaid.

50¢

Enables you to do difficult calculations instantly without paper or pencil—multiplying, proportions, division, extracting roots, etc. Accurate, white composition face. Has standard A, B, C, D, CI and K scales.

For complete outfit, including slide rule, 28-page illustrated instruction book, carrying case, send 50c (60c Foreign). Mailed Postpaid. Satisfaction guaranteed or money refunded. (See Special Combination Offer) **Order NOW!**

HEWIG CO., Box 143-T, Grand Central Annex, New York City

**Popular
HOME
CRAFT**

Homecrafters! "Home Cabinet-Makers"!

No more laborious drudgery measuring and sealing. With these **FULL-SIZE** patterns you mark the wood in a jiffy, and the job's half done! Hairline accuracy absolutely true. Simply lay on wood or trace thru carbon paper and it's ready to cut. No more slow "scaling from squares" on jig-saw jobs.

NO EXTRA COST—FULL INSTRUCTIONS

Popular Homecraft **WORK-SIZE** Patterns sell at same price range as other types. Each includes Bill of Materials and full step-by-step instructions.

WORK-SIZE Patterns Speed "Output"!

**27 BRAND NEW
SUBJECTS**

You can make any of the pieces shown in illustrations and do the job **FASTER, BETTER!** Order by circling numbers in coupon.

20% Off if order over \$2.00

**Subscription
OFFER**

Full year subscription to Popular Homecraft Magazine (six big issues) worth 35c each and your choice any **WORK-SIZE** pattern all for only \$2.00

Popular Homecraft, 919 N. Michigan Ave., Chicago, Ill.

Enclosed find \$... ☐ Please send patterns circled.

No.	Pattern	Size	Price	No.	Pattern	Size	Price
50	Nautical Corner Whatnot	22x34	50c	60	Two Drawer Wall Shelf	17x22	35c
51	Clown Sweater Holder	22x34	50c	61	Mirror Wall Shelf	17x22	35c
52	Two Tier Table	22x34	50c	62	Door Chimes Case	22x34	50c
53	Three Tier Whatnot Shelf	22x34	50c	63	Colonial Mirror	22x34	50c
54	Hanging Wall Shelf	22x34	50c	64	6 Lawn Figures	22x34	50c
55	Cathedral Wall Bracket	22x34	50c	65	3 Jig-Saw Garden	17x22	35c
56	Colonial Open Shelf Book Case	17x22	35c	66	Hose Holders	17x22	35c
57	Cocktail Serving Tray	22x34	50c	67	Doll Cradle	17x22	35c
58	Salt & Pepper Rack	22x34	50c	68	2 Designs in Weather Vanes	22x34	50c
59	French Colonial Whatnot	22x34	85c	69	Swan & Rabbit Rockers	22x34	50c
60	Jig-Saw Puzzle Game	17x22	35c	70	Scroll Sawed Magazine Rack	17x22	35c
61	Wall Rack in the Chippendale Manner	17x22	35c	71	Duck Decoys	17x22	35c
62	Combination Whatnot and Magazine Rack	17x22	35c	72	Bird Wall Bracket	17x22	35c
					Unique Sewing Outfit		
					Wooden Clock Movement (Two Sheets)		75c

☐ Please send me Popular Homecraft for 1 Year PLUS pattern marked.

Name.....

Address..... City..... State.....

Calling all "hands"
to faster production

In the hands of skilled workmen, "Yankee" Fine Mechanics' Tools meet and match the need for speed in this year of America's supreme effort. In their very design, these tools are streamlined for action. They get things done . . . done fast and done right. On the production lines of a nation at war, they are "Yankee" clippers of vital minutes in the battle of production. "Yankee" Tools have had a half century's service in the shops and homes of America. They were ready for their big test when war came. And when war ends, they will again serve the needs of peace with unexcelled performance the world over.

"YANKEE" SPIRALS



Simple. Compact. Strong. A size for every purpose.

"YANKEE" TOOLS

make good mechanics better
North Bros. Mfg. Co., Phila., U. S. A.
Established 1880

Makers, also, of "Yankee-Handyman" Tools



Wood

only
10c

workers: Here it is! Harold
No. 14 wood catalog! Latest **UP-TO-DATE**
IDEAS for experts and amateurs; **SPECIAL**
BARGAINS in rare woods, veneers, and
ALL kinds of supplies. 124 pages—12 of
rare woods in color. Get posted! Send
only 10c to
CRAFTSMAN WOOD SERVICE CO.
2729 S. Mary St., Dpt. B-31, Chicago, Ill.

DRILL PRESS OWNERS!

HERE'S 1 TOOL WITH 5 DISTINCT USES



THE BARRON MULTI-PURPOSE ROTARY WOOD PLANER

PLANES & SURFACES • PANELS & BEADS
ROUTS & GROOVES • RABBETS • TENONS **\$7.50** COMPLETE

Converts ANY drill press in-
to a time saving, low cost planer,
paneler, tenoner, etc. Surface finishes
all types of tough grained and knotty
surfaces to agree smoothness. Safe!
Guaranteed harmless to drill press.
Thousands now in use. **SOLD ON**
MONEY BACK GUARANTEE. Full re-
fund on 5 day trial. Shipped prepaid
on receipt of \$7.50—or C.O.D. **YOU**
RISK NOTHING. Free literature.

BARRON TOOL CO., INC.
370 Architects Bldg., Detroit, Mich.

STEEL TOP AUXILIARY DRILL PRESS TABLE

Has 300 sq. in. smooth work-
ing surface. Equipped for
shaper and many other
important workshop
uses—a real buy at **\$5.95**



Cushman

is speeding the
VICTORY PROGRAM



3 MODELS

Despite more than 800 %
increase in production the
last 2 years, Cushman's
capacity is taxed by Army,
Navy, Air Forces and the
great defense plants—to
speed up the war effort.

And what a job they are doing—saving countless steps . . .
priceless time! Ten times as fast as walking—up to 35 miles
per hour! Cheapest transportation—100 miles per gallon! Most
convenient—stop and park anywhere. Earning their service
stripes by carrying officers and key men for inspection and
check-up of bases, camps, forts and defense plants—delivering
orders, mail, prints, repairs, supplies, parts.

Cushman has extended its experimental and research work to per-
fect an even better machine—sturdier, more reliable, more com-
fortable—to meet severe war needs. So, though you cannot buy one
today, without a high priority, you are assured an even finer Cushman
—an even greater value—when they are again available!

Your present Cushman must serve you for the duration—so pro-
tect it! Lubricate and service it regularly—care for it. Follow your
instruction book religiously. If you need a new copy, see your Cushman
dealer or write us for a free copy.

CUSHMAN MOTOR WORKS, Dept. S-3, Lincoln, Nebr.

NEW Grinding Attachment

For 8" to 16" Metal Lathes. Build It Yourself.

At last, a precision grinder within your means. You save
2/3 by finishing our semi-machined castings, on your own
lathe. HURON handles both internal and external grinding.
Accuracies to .00025". Mirror finish easily obtained. Grinds
valves, pistons, bushings, shafts, hard or soft, holes, lathe
centers. Sharpens reamers, milling cutters. Does eccentric
drilling; laps; polishes; scores of other uses, for home
workshops, garages, machine shops. Write for **FREE**
illustrated folder and price list of supplementary items.
Mention your lathe.



Semi-
Machined
Castings

Huron Machine & Tool Co., Dept. C-3, Yale, Mich. Only \$6.45

EVERYTHING IN RADIO!

FOR REPLACEMENT PARTS AND RADIO BOOKS
Send Your Orders To Allied

NEW—Allied's Radio Formula & Data Book—**10c**

ALLIED RADIO CORP.
833 W. JACKSON BLVD., DEPT. 7-C-3, CHICAGO

★ ALLIED RADIO ★

FOR YOUR CONVENIENCE

it has been arranged so that you can call
Western Union from your home and the
charge for the telegram will appear on your
next telephone bill. Call from coin box also,
if you wish.

don't WORRY

Why put up with years of
needless discomfort and
worry? Try a Brooks Auto-
matic Air Cushion. This
marvelous appliance per-
mits the opening to close,
yet holds reducible rupture
securely, comfortably—day



and night. Thousands report amazing results.
Light, neat-fitting. No hard pads or stiff springs
to chafe or gouge. Made for men, women and
children. Durable, cheap, **Sent on trial** to prove it.
Never sold in stores. Beware of imitations. Write for
Free Book on Rupture, no-risk trial order plan, and
proof of results. All correspondence confidential.
BROOKS COMPANY, 160-B State St., Marshall, Mich.

GORMON-RUPP COMPANY

Selects

WITTE DIESEL ENGINES for Dependable, Low Cost Power


In the many instances where these famous WITTE Diesel Engines have been used as power units in connection with other manufacturer's pumping equipment, they have always added to the dependability, efficiency and long-life, low-cost service of the complete equipment.

Today, WITTE Diesel Engines, as well as WITTE Dieselectric Plants, are being produced exclusively for America's war effort and are serving freedom's cause in many parts of the world. But certain victory for America is ahead, and then these tested and proved power units will again be available for all.

WITTE ENGINE WORKS

2223 OAKLAND AVENUE, KANSAS CITY, MISSOURI
LARGEST BUILDER OF SMALL DIESELS

9 H. P. Centrifugal Pump Produced by GORMON-RUPP CO., Mansfield, Ohio—Powered with WITTE DIESEL ENGINE—(Below) Another example of how pumping equipment manufacturers depend on WITTE Diesel Engines for dependable, low-cost power.

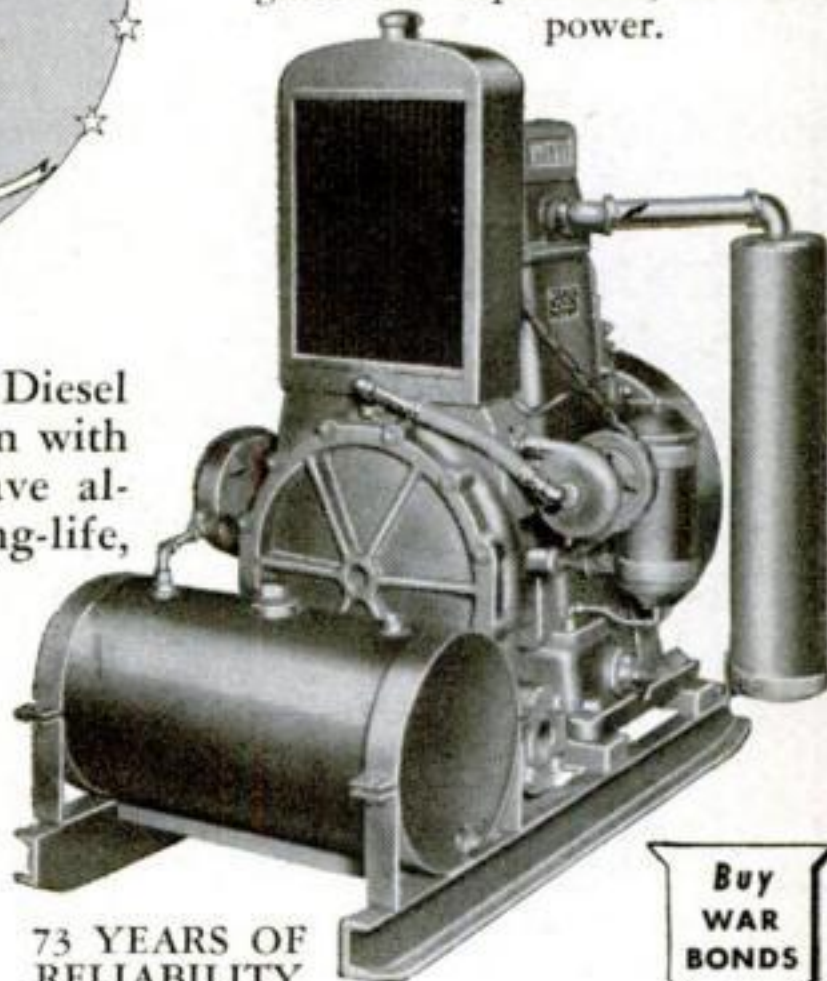

73 YEARS OF
RELIABILITY

Buy
WAR
BONDS

AMAZING NEW DISCOVERY FOR WOODWORKERS

A MIRACULOUS new discovery in electro-chemistry now opens up untold possibilities for the home craftsman . . . **Metalized Wood!** By an easy, simple three-step process, you can now permanently protect and artistically beautify any and every wood object with a heavy lifetime covering of actual metal. Copperclad Ashtrays, Burnished-Gold Cigarette Boxes, Antiqued-Bronze Book Ends, Gleaming Silver Airplane and Ship Models are but a few examples—*every one a genuine work of art*, a masterpiece in metal-and-wood you'll be proud to show your family, relatives and friends!

UNLIMITED DECORATIVE POSSIBILITIES! Solid Surfaces, Beautiful Inlay Effects!

Nothing you've seen or ever tried compares with this! By means of an altogether new *electrolytic* method of applying and binding metal to wood, you can achieve remarkable results the very first time . . . **A Layer of Metal So Strong You Can Machine Buff It If Desired!** Rich Burnished Effects, Dull Satin Contrasts, Gleaming Silver and Gold Overlays of Initials, Flowered Designs, on Fine Filigree Work and Intricate Carving.

COMPLETE INSTRUCTIONS SENT FREE!

Here is a fascinating sparetime hobby that can be profitable as well. *Just think!* . . . At a cost of a few cents you can transform an ordinary box into a Jewel Case that would sell in stores for as much as five dollars! So why not be first in your neighborhood? *Don't delay!* WRITE TODAY FOR FREE INSTRUCTIONS!

WARNER RESEARCH LABORATORIES, Dept. W-5
215 W. OHIO STREET • CHICAGO, ILLINOIS

Thompson
BEATS
the World
on **BOATS**



**Better Built
Lower Prices**

Canoes
\$75
and up



All popular models, canvas covered. Light, swift, safe, strong and durable. Many color combinations.

Rowboats
\$48
and up



Most complete line ever offered, at real money-saving prices.

Outboard
Boats
\$48
and up



**THOMPSON BOATS HAVE FULL LENGTH
SPRAY RAILS. KEEP PASSENGERS PER-
FECTLY DRY AT HIGH SPEEDS**

SEVEN MOST POPULAR SAIL BOATS

12 ft. OLYMPIC . . .	\$160
15 ft. SNIPE . . .	\$230
16 ft. COMET . . .	\$305
17 ft. NATIONAL . . .	\$350
18 ft. SEA GULL . . .	\$475
19 ft. LIGHTNING . . .	\$525
21 ft. RED HEAD . . .	\$670

These boats are complete, with sail, mast and rigging at prices quoted above.

CATALOG FREE—SAVE MONEY—PROMPT SHIPMENT
Please state the kind of boat you are interested in (112)

→ TWO LARGE FACTORIES ←
THOMPSON BROS. BOAT MFG. CO.
219 Ann St. Write to 119 Elm St.
PESHTIGO, WIS. [Either Place] CORTLAND, N. Y.



RADIO

Basic principles of all radio OPERATION RECEPTION

Radio is more important NOW than ever. Thousands will be needed in aviation, army, navy, and commercial work. Our latest course gives you basic instruction in radio operation and reception. Airway Weather Service, Aeronautic Radio, Servicing, Frequency Modulation are all covered.

Complete HOME TRAINING in spare time

Make use of spare time to master the principles of this interesting and profitable profession. Fit yourself for an important part in the tremendous affairs now taking place. Help to win this war quicker. Learn all about our plan, send for this bulletin—it's FREE. American School, Dept. R346, Drexel at 58th St., Chicago

SEND FOR THIS BULLETIN FREE

American School, Dept. R346, Drexel Ave. at 58th St., Chicago, Ill.

Gentlemen: Send me FREE bulletin covering special training in subjects checked below. No obligation on my part.

- | | | |
|--|---|---|
| <input type="checkbox"/> Radio | <input type="checkbox"/> Aviation | <input type="checkbox"/> Electrical Engineering |
| <input type="checkbox"/> Drafting and Design | <input type="checkbox"/> For Men and Women | <input type="checkbox"/> Diesel Engineering |
| <input type="checkbox"/> Cost Accounting | <input type="checkbox"/> For Manufacturing | <input type="checkbox"/> High School Course |
| <input type="checkbox"/> Architecture and Building | <input type="checkbox"/> Automotive Engineering | <input type="checkbox"/> Shipbuilding |
| | | <input type="checkbox"/> Mechanical Engineering |
| | | <input type="checkbox"/> Plastics |
| | | <input type="checkbox"/> Refrigeration |

Name.....

Address.....

SUPER JU JITSU

NOW—
YOU CAN DESTROY Your Enemy Quick!

BE A ONE-MAN BLITZ! Strike with Commandolightning! You don't need ox-like muscles to use Super Ju Jitsu, most powerful of all defense and attack methods. **Technique** is the deadly secret. Brains count—not size, not strength. Almost miraculously efficient.

Gain Self-Confidence

KNOW how YOU can lick brutes twice your size with your bare hands only, even when they are ARMED with gun, knife, club. Get ready now for any emergency—protect your loved ones. Amazing self-study course teaches you double-quick. No boring exercises needed.

Send for Exciting Details—Free!

FREE Startling Low Price. Satisfaction Guaranteed or your money back. Mail coupon now.

NELSON CO., 500 Sherman Street DEPT. C-503, CHICAGO, ILL.

Please rush me free the hard-hitting details about "Super Ju Jitsu." No obligation on my part.

NAME.....

ADDRESS.....



WHEN THIS HAPPENS TO YOU...

DO THIS

OR DO THIS

Please mention POPULAR SCIENCE when writing to advertisers.



No More Damage from Condensation or Sweating Pipes, Water Softeners, Tanks, Walls, Ceilings and Air Ducts

NO Drip A SURE CURE . . .

This sensational plastic cork coating prevents condensation drip from metal, concrete, brick, wood, plaster or composition surfaces. Permanently protects metal against rust and corrosion, thus prolonging life of pipes, tanks, etc. Forms a moisture-proof, insulation type coating. Apply with brush, trowel or spray. Stucco-like finish requires no maintenance and can be painted any color. A gallon covers about 30 feet of 1" O.D. pipe. Comes in 1, 5 and 55 gallon drums.

Get at Hardware, Plumbing, Mill Supply Dealers or send \$1.90 for 1 gal. prepaid. Write for Free Handbook.

J. W. MORTELL CO., 534 Burch St., Kankakee, Ill.

Burn Your Name On Tools Electro Name Etcher

PROTECT valuable tools from thieves and tool borrowers! Electro Etcher BURNS your name, any design, permanently on tools, instruments, dog collars, any metal. Easy! Simple as writing with pen or pencil. Rush order today—supply limited—no more when these are gone! **SEND NO MONEY!** Pay postman \$1.00 plus few cents postage on delivery. Use 5 days—money back if not delighted. Electro Etcher, Dept. K-603, Strader Ave., Cincinnati, O.



IT'S FUN TO MAKE THINGS OF WOOD



CONSTANTINE'S MANUAL TELLS HOW TO DO IT

Beginner or expert will find many helpful hints and tips on veneering, woodfinishing, cabinet making, carpentry, etc. Describes and illustrates over 100 different kinds of wood and 980 different items for you. **ALL AT MONEY SAVING PRICES.** Includes identification panel and chart of over 60 rare woods in natural color. A source of supply for anything in wood regardless of quantity. Send only 25c in stamps or coin, 25c refunded or credited on first order so Manual costs you nothing.

ALBERT CONSTANTINE & SON, INC.
793K E. 135th St. New York, N. Y.

FIX Your TIRES

So-Lo SAVES RUBBER

Use "plastanoid" SO-LO to fix cuts, bruises, worn spots in tires. SO-LO also mends shoes, raincoats, boots—anything of rubber, leather, cloth.

MEND the HOLE for 1¢
SPREADS ON like butter. Dries tough overnight. Flexible. Non-skid. Waterproof. Won't come off—guaranteed.
So-Lo AT HARDWARE & 10c STORES

Tired Kidneys Often Bring Sleepless Nights

Doctors say your kidneys contain 15 miles of tiny tubes or filters which help to purify the blood and keep you healthy. When they get tired and don't work right in the daytime, many people have to get up nights. Don't neglect this condition and lose valuable, restful sleep.

When disorder of kidney function permits poisonous matter to remain in your blood, it may also cause nagging backache, rheumatic pains, leg pains, loss of pep and energy, swelling, puffiness under the eyes, headaches and dizziness.

Don't wait! Ask your druggist for Doan's Pills, used successfully by millions for over 40 years. They give happy relief and will help the 15 miles of kidney tubes flush out poisonous waste from your blood. Get Doan's Pills.

TOOLS to "Keep 'em Rolling"



Our modern army rolls up to battle in motorized equipment—jeeps, trucks, tanks, combat cars of every description. To build them, and to keep them in service in the field takes *Tools*, millions of them.

Stanley, "The Tool Box of the World", is supplying a large share of this unprecedented demand. Stanley Tools for normal use are necessarily restricted. Buy them only for *essential* use. Stanley Tools, Division of The Stanley Works, New Britain, Connecticut.

1843 **STANLEY** 1943

STANLEY TOOLS
"The Tool Box of the World"

POWERFUL VISION—LONG RANGE TELESCOPE 20 days free trial \$2.19 Postpaid or C.O.D.



Objects 500 yards away appear as 100 yards distant, 5 miles as 1 mile! Telescope closed is less than 1 foot. Persons who seem 1 inch high to the naked eye, will appear 5 inches high. Scientifically ground 33mm lens. Handsome case included! Try for 20 days—if not satisfied return for full refund.

Vogue Telescope Co., 7759 S. Halsted, Dept. P-414, Chicago.



48 PLANS

\$100

48 complete plans of toys, ash trays, garden ornaments, Dutch boys and girls, what-not shelves, and many other interesting projects. Finest selection available. Novel method allows you to make finished project any size desired. **PLUS FREE** Deluxe Plan of corner shelves. Send only \$1 to Jackson Studio, Dept. PS3, Shorewood, Wis.

Build This Scale Model JEEP



Overall Length 9 3/4"

\$1.25
Post Paid

Here's the model of the hour! An authentic 1" to 1' scale replica of the U.S. Army Jeep. There's nothing more fascinating to assemble; nothing you'll be more proud to display. No special tools necessary. Kit contains everything—Full size, step-by-step plan. Completely Finished wood parts. Detailed printed parts in Color. Five finished scale wheels. Glue, Paint, Etc. Get your Jeep Kit today. Send check or money order to...

H. F. Auler Co., 1743 Fond du Lac Ave., Milwaukee, Wis.

Please mention POPULAR SCIENCE when writing to advertisers.



RADIO OPERATORS WANTED

Be a "key" man. Learn how to send and receive messages in code by telegraph and radio. Army, Navy and Commerce needs thousands of men. Good pay, adventure, interesting work. Learn at home quickly through famous Candler System. Write for FREE BOOK.

CANDLER SYSTEM CO.

Dept. 6-C, Denver, Colo., U. S. A.

LEATHER Craft

HEADQUARTERS

Make Belts, Purses, Gloves—many useful things with leather. Easy to assemble. Prompt shipments. Send 10 cents for 16-page catalog. Write today.

J. C. LARSON & CO.

180 No. Wacker Drive, Dept. 180-S, Chicago, Ill.

HEAR A WORLD OF SOUND THROUGH THIS TINY MAICO



MAICO
Vacuum Tube
Hearing Aid

Small as a pocket watch, yet enables hard of hearing person to carry on normal conversation at 20 feet—to hear even a whisper with loud noises cushioned.

Send name of relative, friend or your own name for a new experience in hearing. No obligation. Address Maico Co., Inc., Dept. 40-K, 2632 Nicollet Avenue, Minneapolis.

A product of the Maico Company which provides 90% of America's precision hearing test equipment. Choice of ear physicians, hospitals, universities, clinics, airlines, U. S. Army and Navy.

One Sure Way to Save Gas and Oil

Make your gas and oil go farther. Stretch your ration card with Burd 3-Way Reconditioning Service: (1) Have Burd Piston Rings installed. They are self-lubricating, non-scoring, requiring no run-in period. (2) At the same time put in Burd "Kureslap" Piston Expanders. They are flexible, yet force piston to conform to cylinder shape. (3) Complete the job with Burd Valve Packing. Keeps valve stem lubricated, and seals combustion chamber. For "all-out" motor economy—go all the way with Burd 3-Way Reconditioning.

BURD
3-Way
RECONDITIONING
SERVICE

Burd Piston Ring Co.
Rockford, Ill.
Associate Co.,
Liberty Foundries Co.,
Mfrs. of HaDees Heaters

3
BURD
SKIRT
EXPANDERS

1
BURD
"Graf-Flok"
PISTON
RINGS

2
BURD
VALVE
PACKING

COUPON BRINGS HANDBOOK FREE

Burd Piston Ring Co., Dept. 113-C, Rockford, Ill.
Please send information on advantages and economies of Burd 3-Way Motor Reconditioning Service. Also copy of "Auto Serviceman's Handy Handbook."

Name.....
Address.....
City..... State.....

Now \$9.95
Only

REAL ENGINE VALUE



The G. H. Q. is a miniature gasoline engine that really operates. Over 15,000 sold in the last year. Now is your chance to buy the New Improved 1943 model for \$9.95. ABSOLUTELY COMPLETE with coil, condenser, plug, instructions, etc. Fully bench tested and ready to run. For boats, planes, midget cars, etc. Send only \$1—Shipped Collect C.O.D. same day. Send for Free circular or 6c for Jumbo catalog of hundreds of plane, boat and hobby items.

GHQ MOTORS, Dept. SX, 40 East 21 St., New York, N.Y.

NEW KIND OF CLAMP FOR HOBBYISTS!

**100-LB. GRIP...
QUICK AS A FLASH**

**NO CRITICAL MATERIALS
NO PRIORITIES NEEDED**

At last a glue-clamp as swift, simple and easy to use as closing your hand. No screwing or unscrewing—nothing to go haywire. Just press it on and it holds like grim death on any surface. Yet doesn't mar work. PRICES: 4" opening—50c; 6"—60c; 8"—75c; 10"—\$1; 12"—\$1.25. ORDER NOW—F. J. Moncey Co., Dept. G-1, 209 S. State St., Chicago. **MONEY-BACK GUARANTEE**

2 Bushels of Ripe TOMATOES from ONE VINE



2 or 3 vines will produce enough tomatoes for the average family.

THE NEW BURGESS CLIMBING TRIP-L-CROP

TOMATO rapidly grows to a height of 10 to 12 feet—often as high as 16 to 20 feet. Grow on trellis, on side of home, barn or anywhere. Can be grown as a bush in garden. Beautiful, large, crimson, solid, meaty fruits of best quality. The most productive of all tomatoes. Trial packet 10c-3 for 25c, postpaid.

CASH PRIZE CONTEST

Send for FREE Garden Book giving full details about CASH PRIZES to growers of this new tomato.

BURGESS SEED & PLANT CO.
207 C. T., GALESBURG, MICH.



TRAILER BUILDERS' PARTS CATALOG

We'll save you money on everything. Largest and most complete trailer builders' supply house in the United States. Member TRAILER COACH MFRS'. ASSOC. Send 10c for parts catalog. **NATIONAL TRAILER EQUIPMENT CO.** Milwaukee, Wis.
Complete Plans and Building Instructions 25c 719 N. Seventh St.



ITALIAN ACCORDIONS

HAND MADE. Very best. Lowest prices. Buy direct from Factory and save money. Send name and address for FREE catalog.

ITALIA & P. SOPRANI ACC. MFG. CO.
323 W. POLK ST. DEPT. PS-3 CHICAGO, ILL.



MILLIONS of WAR WORKERS NEED THESE WORK GARMENTS

MAKE GOOD MONEY EVEN IN YOUR SPARE TIME

Huge demand for MASTER fine work garments. You be our local dealer. Take orders in spare time. Big selection of good-looking industrial clothing. Advertising embroidered on garments great sales feature. Some single orders bring our men as much as \$75. No experience necessary. We supply everything. Write immediately for FREE Outfit. **GEO. MASTER GARMENT CO.** Dept. D-83, Ligonier, Indiana.

BUILD ARC WELDER FROM OLD GENERATOR

For Light or Heavy Work. 30-200 amperes. Complete PLANS 35c. Send today and we'll include FREE our BIG Catalog. **LEJAY Mfg. Co., 1323 Lejay Bldg., Minneapolis, Minn.**



How to Run a Metal-Cutting Lathe

This manual will enable you to understand the modern metal-cutting lathe, its parts and their functions... to teach the proper care of a lathe... to explain the grinding of cutters; modern lathe tools and how they should be set-up; methods of holding work, and the performance of the basic lathe operations. This manual is exceptionally complete in its tool grinding charts. Only

50c



The Care
and Operation
of a Lathe

50c

SHELDON
MACHINE CO., Inc.
4268 N. Knox Ave.
CHICAGO
ILLINOIS

Send for LATHE CATALOG

Get this Handy **OHMITE** Ohm's Law Calculator!

10¢



**Figures Ohms, Watts,
Volts, Amperes—
Quickly, Easily!**

Solves any Ohm's Law Problem with one setting of the slide. Requires no slide rule knowledge. All values are direct

reading. Scales on two sides cover the range of currents, resistances, wattages and voltages commonly used in Radio and Electrical Work. Size 4 1/8" x 9".

Send only 10c in coin to cover cost of handling.
OHMITE MFG. CO., 4944 Flournoy St., Chicago, Ill.

U. S. ARMY VEHICLES GO ANYWHERE

HULL STREAMLINE COMPASSES

are among the reliable guides used on these mechanized units, which meet all opposition and traverse the most difficult terrain. Military requirements have stopped the manufacture of Hull Compasses for civilians for the duration.

HULL MANUFACTURING CO., P. O. Box 246-E3, WARREN, O.

Print Your Own

Cards, stationery, circulars, tags, labels, advertising, etc. Save money. **Print for Others, Big Profits;** easy rules sent. Will do popular Raised Printing with any Kelsey Press. Junior outfits \$8.25. Senior Outfits from \$17.38. Send for free catalog and all details. **KELSEY, INC., Y-33, Meriden, Conn.**

HIGH BLOOD PRESSURE A DANGER SIGNAL

Often associated with Hardening of the Arteries, a Stroke, Paralysis, Heart Trouble, Kidney Disease, and other grave complications. Resultful treating methods of the Ball Clinic have proven dependable for nearly a quarter of a century. Send for **FREE** Blood Pressure Book today. No obligation.

BALL CLINIC, Dept. 5160, Excelsior Springs, Mo.

\$100 MONTHLY FOR SICKNESS AND ACCIDENTS

**Plus Hospital Benefits--Pays Up
To \$1000 If Killed!**

We have just issued a **NEW** sickness—accident—hospital policy that costs as little as 3c a day!

It pays up to \$100 a month for disability from sickness or accident—and hospital benefits in addition!

It pays your beneficiary up to \$1,000 if you are killed.

And *most important*—It covers **ALL** accidents from the very first day . . . **ALL** sickness from the very first day, except those specifically excluded in the policy. No waiting period of 7 or 14 days, as so many policies require.

It has other benefits—you will see them all *for yourself* when you send for a regular policy on **FREE inspection** without obligation. You can judge this important value for yourself!

Postal now is offering this protection, if desired, on a monthly payment plan of only \$1.00 a month—or on quarterly, semi-annual or annual payments.

BUT SEND NO MONEY. Write for policy on free inspection. No agents will call—no medical examination.

Don't delay—write today! Send full name, address, age, occupation, and name of beneficiary to Postal Life & Casualty Insurance Company, 468 Postal Life Building, Kansas City, Mo.



**5
DAYS
Free
inspection**

ARC WELDING!

**516 Pages, 512 Illustrations. A New
DAILY GUIDE for operators and
managers doing vital war work.
Explains NEWEST TECHNIQUES, METHODS,
PROCEDURES and MATERIALS.**
With charts, diagrams, tables to
show you best methods for metals
and positions involved.

**\$2.00
POSTPAID**


**Order Your Copies
at Once!**

This Complete and Authoritative book
ANSWERS your every welding
question.

You'll actually use it as a daily guide because it's chucked full of valuable last minute welding information. It'll put you straight, in words and pictures, on **EVERY** welding operation.

192 pages of Arc Welding Lessons
This one section is a gold-mine within itself. Shows student correct methods of present day applications. Brings the expert up-to-date. You can't afford to waste a day, so get your copy **NOW!**

HOBART Bros., Box P-331, Troy, Ohio
"One of the World's Largest Builders of Arc Welders"

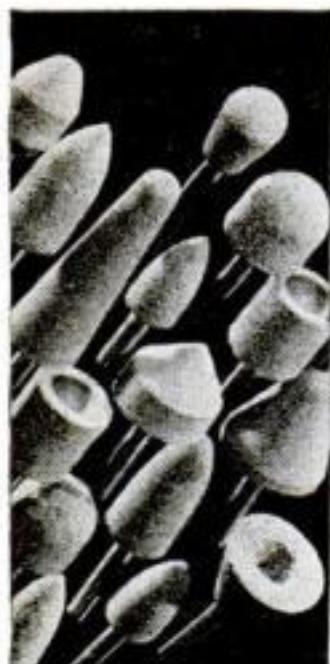

FINISH THE JOB RIGHT

Like setting the last rivet as the plane comes off the production line—burring, finishing and polishing to minute specifications mean the job is right.

CHICAGO MOUNTED WHEELS

Famous since their introduction 45 years ago for quality and long life. There is a "just right" Chicago Mounted Wheel for every operation.

PROMPT DELIVERIES—We are working 24 hours a day and due to our central location, can make prompt shipment on all Mounted Points and Grinding Wheels 3" in diam. and under. With the approval and endorsement of WPB, all our facilities are concentrated on these smaller sizes, enabling us to give the most potent service to the war program.

HANDEE TOOL OF 1001 USES and HI-POWER GRINDERS have gone to war—available to all who have priorities.

FREE Catalog, shows actual sizes and colors of largest line of Mounted Wheels made.

CHICAGO WHEEL & MFG. CO.
America's Headquarters for Mounted Wheels
115 S. Aberdeen St., Chicago, Ill.



EARN MONEY PAINTING PORTRAITS

• No previous training or talent necessary. Unique Stuart System teaches you, by mail, in 10 simple, easy-to-follow lessons, to make excellent charcoal and oil likenesses. Detailed guidance for your every step. Send for free book today.

STUART STUDIOS,
121 Monument Circle, Room 283, Indianapolis, Ind.
Please send me free book and outline of lessons.

Name _____
Street _____
City _____ State _____

DIE-LESS DUPLICATING

Many small parts can be formed without dies, to duplicated accuracy of .001" with DI-ACRO Precision Machines.—Benders, Brakes, Shears—saving Man Hours and Critical Materials. Ask for catalog, "Metal Duplicating Without Dies" on your business letterhead, or indicate if employed in War production.

O'NEIL-IRWIN MFG. CO. 342 8th Ave. S. Minneapolis, Minn.



WORLD'S LOWEST PRICED ADDING MACHINE

IDEAL FOR INCOME TAX GUARANTEED ACCURATE. Not a toy. Operates with only a finger flick. Adds, subtracts, multiplies, divides. Counts up to ten million. Pays for itself over and over. **IDEAL GIFT**—for Business, Income Tax and School use. **MONEY BACK GUARANTEE.** Send name and address. Pay Postman only \$2.50 plus postage. (Send full cash if outside U.S.) Money back in 10 days if not delighted. **AGENTS WRITE.**

CALCULATOR MACHINE COMPANY (Mfrs.)

DEPT. 428, P. O. BOX 1118

CHICAGO, ILLINOIS

Please mention POPULAR SCIENCE when writing to advertisers.

READYCUT HOMES

Still Available

Really need a home? You can get one—now—in many areas, necessary equipment included! We'll show you how to get government permission, and save \$500 average, on a modern production method home, easily assembled. Information on FHA financing. If you plan to build now or later—send 25c now for Sterling Homes Catalog showing 75 modern low priced home plans; full color; and get on your way for government priority. Complete building plans ready now for filing with application at moderate cost.



NEW COLOR CATALOG FOR ONLY 25c

Write Dept. P.S.-33 INTERNATIONAL MILL & TIMBER CO. Bay City, Mich.

3 in 1 RADIO TUNER

Only \$1.00 Postpaid



1. Aerial Eliminator
2. Antenna Tuner
3. Wave Trap

Eliminates hums, clicks caused by static, rain, wind, etc. Replaces old, ineffective outside aerials. Move your radio anywhere. The 3 in 1 improves the reception of weak stations, separates interfering stations, gives you greater volume and distance. Uses no power, lasts life of radio. **Also works on battery radios.** Takes minute to connect. **15 DAY FREE TRIAL. SEND NO MONEY.** Simply pay Postman \$1.00 plus few cents postage or we will send postpaid for one dollar bill. **Vogue Eliminator Co., 7759 S. Halsted, Dept. E-454, Chicago.**

ANYONE CAN DO THIS IF

THEY HAVE OUR CHART

Blue Print 27" x 36" shows how to find length of any rafter, find any angle in degrees, frame any polygon 3 to 16 sides, read board foot and brace tables, octagon scale, rafter tables and many other uses. Can be scaled down for model work as well as full scale framing. Also chart changing pitches to degrees for use with Radial Saws. Send 50c coin. No stamps.

MASON & PARRISH ENGINEERS
2105-S N. Burdick St. Dept. B Kalamazoo, Michigan

SPECIAL OFFER FOR AGENTS



WINN'S NEW IDEA HOME LABORATORY CHEMICAL KITS

For High School & College Students. Send 5c for Literature and Retail Supply Catalog.
J. H. WINN MFG. CO., Dept. 103
124 W. 23 St. New York, N. Y.

GRAY HAIR VITAMIN

No dyes—No drugs—Hair grew out in Natural Color in almost nine out of ten test cases just adding Calcium Pantothenate Vitamin to regular diet.

WHY PAY \$3.50 TO \$5.00

NOW \$1.95
Pay No More

for the famous "Gray Hair Vitamin" when you can buy 100—10 mg. tablets of genuine Calcium Pantothenate—same as used in National tests—by mail for \$1.95. **SEND NO MONEY.** Just send name and address on penny postcard. We will ship 100—10 mg. tablets C O D for \$1.95 plus few cents postage. If not completely satisfied with quality return package within ten days for immediate refund of your money. Address

Lilee Products Co., 2017 S. Michigan, Dept. 163, Chicago

FREE! HOW TO MODERNIZE WITH LOW COST POWER TOOLS



also SAWS • JOINTERS • LATHES • BAND SAWS

WRITE FOR NEW 1943 COMPLETE CATALOG

BOICE-CRANE CO. DEPT. 233 TOLEDO, OHIO

0.000000

0.000000

This One



W7TK-QPE-1WDH

MOTORISTS *Wanted!*

TO MAKE THIS *UNIQUE TEST...*

of GAS SAVINGS



Car Owners: You are invited to make a gas saving road test with the Vacu-matic on your own car, with the absolute understanding that unless it proves to you that it will save you up to 30% on gas and improve your car performance, the test will cost you nothing. Investigate this remarkable discovery that trims dollars off gasoline bills—gives you worthwhile gas savings—more power—quicker starting—more miles on less gas.

Automatic Supercharge Principle

Vacu-matic is *entirely different!* It operates on the supercharge principle by automatically adding a charge of extra oxygen, drawn free from the outer air, into the heart of the gas mixture. It is entirely automatic and allows the motor to "breathe" at the correct time, opening and closing *automatically* to save dollars on gas costs.

Proven By Test

In addition to establishing new mileage records on cars in all sections of the country, the Vacu-matic has proven itself on thousands of road tests and on dynamometer tests which duplicate road conditions and record accurate mileage and horse power increases.

Fits All Cars—Easy to Install

Vacu-matic is constructed of six parts assembled and fused into one unit, adjusted and *sealed at the factory*. Nothing to regulate. Any motorist can install in ten minutes. The free offer coupon will bring all the facts. Mail it today!

The Vacu-matic Co., Wauwatosa, Wis.

Sworn Proof of Gas Savings

This certifies that I have carefully read 300 original letters received from Vacu-matic users testifying to gas savings up to 30%, many reporting added power, smoother running, and quicker pick-up. These letters are just a small part of the larger file of enthusiastic user letters that I saw at the company offices.

Signed

Marion J. Planty
Notary Public

AGENTS Get Yours FREE For Introducing

Vacu-matic offers a splendid opportunity for unusual sales and profits. Every car, truck, tractor, and motorcycle owner a prospect. Valuable territories now being assigned. If you help us introduce it to a friend, you can obtain your own free. Check and mail coupon today.

SEND THIS *Free Offer* COUPON

THE VACU-MATIC COMPANY

7617-777 W. State St., Wauwatosa, Wis.

Please send full particulars about VACU-MATIC, also how I may obtain one for my own car FREE. This does not obligate me in any way.

Name

Address

City..... State.....

☐ Check here if interested in Agency Proposition.



These women, machining precision parts on South Bend Lathes in a vital war plant, are typical of thousands of women who are doing their part to win the battle of production.

With eager hearts and nimble fingers, thousands of American women are working shoulder to shoulder with men in vital war industries—replacing those who have left their machines to defend their country. And they are doing a fine job of filling men's shoes, for they know that the battle of production must be won to keep their men at the front supplied with the guns, planes, tanks, bullets, and thousands of other things an army must have to be victorious.

Women learn to operate South Bend Lathes in a surprisingly short time. Not that just any girl can become an expert machinist or toolmaker over night. But on certain classes of work—the kind of work you would expect a beginner to do—women are highly successful.

Quick to appreciate quality, women like South Bend Lathes. They like the fully enclosed design—the smooth op-

eration of conveniently placed controls and the dependable precision that enables them to turn out maximum production. And, most of all, they appreciate the ease of operation which reduces fatigue to a minimum and seemingly shortens the work-day by hours.

South Bend Engine Lathes and Toolroom Lathes are made in four sizes, 9" to 16" swings. South Bend Turret Lathes are available in three sizes. Write for information.

TRAINING HELPS

South Bend training helps—books, sound films, wall charts, and bulletins on the care and operation of a lathe—are available for training new operators. Write for a copy of Bulletin No. 21-C.



SOUTH BEND LATHE WORKS
SOUTH BEND, INDIANA LATHE BUILDERS FOR 36 YEARS

JUST OUT! 4th Issue



World's Newest WARPLANES

Brand New

**GLIDERS—AUTOGIROS
LIGHTER-THAN-AIR CRAFT**

**A Necessity for Air-Raid
Wardens and Spotters; a
Valuable Handbook for Every-
one Interested in Aviation!**

HERE'S the brand-new Fourth Issue of the AIRCRAFT SPOTTERS' GUIDE, packed with up-to-date information on the latest types of planes now being used in the war. Bigger, heavier-load American and English bombers! Faster fighters and pursuit planes, both Allied and Axis types! New types of gliders, autogiros, lighter-than-air craft! Just the information you need to be prepared in today's emergency. If you are an air-raid warden, "spotter," or other civilian volunteer, you will want to become thoroughly familiar with these newest types of aircraft. And in any case you should have this knowledge as a guide to correct action in case trouble comes.


This new Fourth Edition of THE AIRCRAFT GUIDE is new from cover to cover. It is edited by Harold E. Hartney, Lieut. Colonel (inactive) Army of the U. S., formerly Chief of Training, U. S. Air Corps. It includes the latest available Army and Navy information.

Shows All Recognizable Characteristics

This valuable 96-page book describes and illustrates 15 new type British war planes, 13 German planes, 9 Japanese planes, 30 American planes, 9 Italian planes, 6 French planes, 6 Russian planes, and 2 Spanish planes. Not only are you shown exact, authoritative photographs of all these aircraft, but you are given specifications, markings, and other information to assist you in positive identification either when viewed in the air or on the ground. Silhouette views show each plane from three different angles. A quick-reference index is included.

THE AIRCRAFT SPOTTERS' GUIDE is in a convenient handbook size, measuring 5 3/4 by 9 inches, with rounded corners. It can easily be carried in coat pocket or supply bag. It also belongs on the desk of every air-raid warden post, every civilian training headquarters, every school warden, and wherever alertness is the watchword. Rush your order for a copy today.

THIS book will be an authoritative, up-to-date guide for everyone interested in aviation, whether as a hobby or a study, as a part or full-time career. Perhaps you like to build model planes. Perhaps you are looking forward to the coming opportunities in the airplane industry, as a mechanic, flyer, maintenance man. Perhaps you are now employed in aircraft production, or want to qualify for military aviation—this Guide will provide you with many helpful ideas and much up-to-date and useful information.

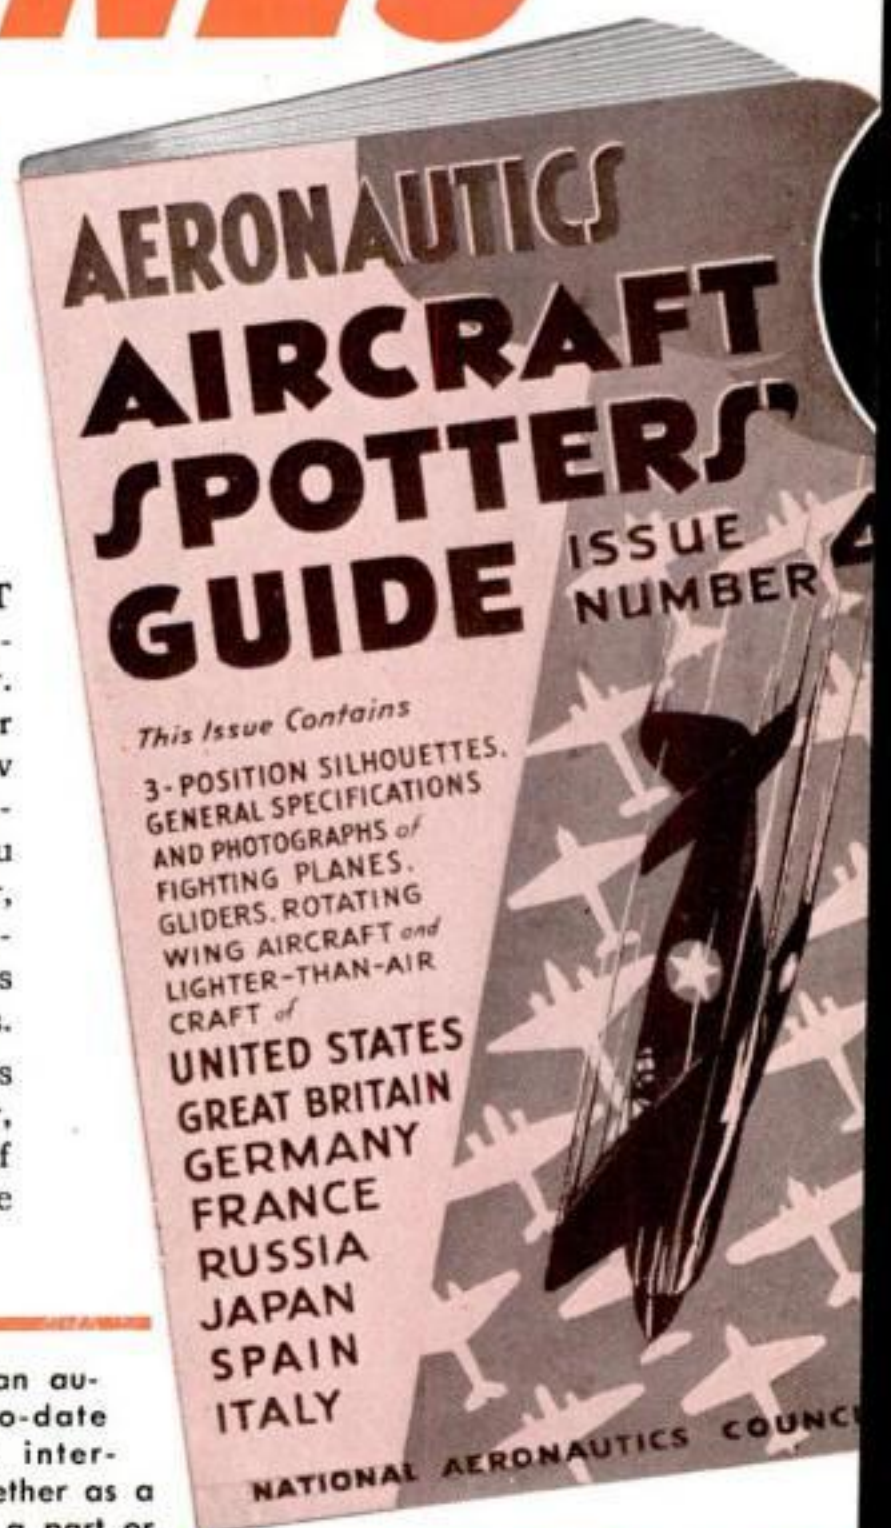

RUSH ORDER-FORM & LABEL AT RIGHT

Cut out ORDER FORM and SHIP LABEL at the right. Fill in (preferably print) your name and ADDRESS ON EACH. On the ORDER FORM will see a Handy Coin Holder. Simply open the perforated lines in the center of the circle and slip a quarter under the flap thus formed. Then on the SHIPPING LABEL affix a 3 cent stamp in the space provided. Fold as directed, place in envelope and mail at once! National Aeronautics Council, Inc., 37 West 47th Street, New York, N. Y.



IT'S THE NEW Curtiss "Hell-diver," designed to carry a bigger bomb-load than any naval dive-bomber in existence. At the controls in this test dive (above) is Barton T. Hulse, who learned his flying in the Navy...smokes the Navy man's favorite—Camel.

"There's just one cigarette for me—**CAMEL**—they suit my throat and my taste to a 'T' "

says

"RED" HULSE

VETERAN NAVY FIGHTER PILOT AND CHIEF TEST PILOT OF THE NAVY'S NEW CURTISS DIVE-BOMBER

THEY can meet the most exacting laboratory tests on the ground, but the final proving ground of an airplane is in the air...when you fly it.

It's the same with cigarettes. The final test of any brand is in the smoking.

Test pilot "Red" Hulse (right) could tell you convincing things about Camels and their remarkable freedom from irritating qualities, but your own throat and taste...your "T-Zone"...can tell you even more convincingly.



Camel

FIRST IN THE SERVICE

The favorite cigarette with men in the Army, Navy, Marines, and Coast Guard is Camel. (Based on actual sales records in Post Exchanges, Sales Commissaries, Ship's Service Stores, Ship's Stores, and Canteens.)

R. J. Reynolds Tobacco Co., Winston-Salem, N. C.



THE ZONE

—where cigarettes are judged

The "T-ZONE"—Taste and Throat—is the proving ground for cigarettes. Only your taste and throat can decide which cigarette tastes best to you...and how it affects your throat. For your taste and throat are individual to you. Based on the experience of millions of smokers, we believe Camels will suit your "T-ZONE" to a "T."